TEST REPORT

Applicant:	ShenZhen Sdeeq Technology Co.,Ltd
Address of Applicant:	301,D Building,HongYongFa Industrialpsrk ,No.460 XiangShanRoad, LuoTian YanLuo BaoAn ShenZhen City
Manufacturer:	ShenZhen Sdeeq Technology Co.,Ltd
Address of Manufacturer:	301,D Building,HongYongFa Industrialpsrk ,No.460 XiangShanRoad, LuoTian YanLuo BaoAn ShenZhen City
Product Name:	Laptop Computer
Model No.:	HL110YP
Trade Mark:	N/A
FCC ID:	2BPFC-HL110YP
Applicable standards:	FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of Test:	Apri.22, 2025-May.08, 2025
Date of report issued:	May.09, 2025

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:	Reviewed by:	Approved by:
Project Engineer	Project Manager	Authorized Signature

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen ETR Standard Technology Co., Ltd.

Report Revision History		
Report No.	Description	Issue Date
ET-25041130E03	Original	May.09, 2025

Contents

Page

1 TEST SUMMARY 4

1.1 MEASUREMENT UNCERTAINTY 4

2 GENERAL INFORMATION 5

2.1 GENERAL DESCRIPTION OF EUT 5
2.2 TEST MODE 7
2.3 DESCRIPTION OF SUPPORT UNITS 8
2.4 DEVIATION FROM STANDARDS 8
2.5 ABNORMALITIES FROM STANDARD CONDITIONS 8
2.6 TEST FACILITY 8
2.7 TEST LOCATION 8
2.8 ADDITIONAL INSTRUCTIONS 8

3 TEST INSTRUMENTS LIST 9

4 TEST RESULTS AND MEASUREMENT DATA 10

4.1 ANTENNA REQUIREMENT 10
4.2 CONDUCTED EMISSIONS 11
4.3 DUTY CYCLE 14
4.4 CONDUCTED OUTPUT POWER 18
4.5 BANDWIDTH 99% OCCUPY BANDWIDTH 20
4.6 POWER SPECTRAL DENSITY 31
4.7 BAND EDGE 39
4.7.1 Conducted test Method 39
4.8 SPURIOUS EMISSION 46
4.8.1 Radiated Emission Method 46
4.8.2 Conducted Emission Method 56
4.9 FREQUENCY STABILITY 63

5 TEST SETUP PHOTO 69

6 EUT CONSTRUCTIONAL DETAILS 69

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna requirement	15.203	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Jason Huang
Conducted Output Power	15.407 (a)(1)/(a)(3)	Pass	Kara Wu
26dB Bandwidth and 99% Occupied Bandwidth	15.407 (a)(12)	Pass	Kara Wu
6dB Bandwidth	15.407 (e)	Pass	Kara Wu
Power Spectral Density	15.407(a)(1)/(a)(3)	Pass	Kara Wu
Band Edge	15.407(b)(1)/(b)(4)	Pass	Kara Wu
Spurious Emission	15.205/15.209 15.407(b)(1)/(b)(4)/(b)(8)	Pass	Jason Huang
Frequency Stability	15.407(g)	Pass	Kara Wu

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*
3. *Note: Compliance determination rules*

1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacturer. If measurement uncertainty is taken into account, the applicant/manufacturer will bear all possible risks of non-compliance.

2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

1.1 Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Duty cycle	±0.05%	(1)
Occupied Channel Bandwidth	0.55%	(1)
RF output power, conducted	±0.57 dB	(1)
Power Spectral Density, conducted	±0.61 dB	(1)
Unwanted Emissions, conducted	±0.64 dB	(1)
AC Power Line Conducted Emission	± 2.55 dB	(1)
Radiated emissions 9K-30MHz	±3.79 dB	(1)
Radiated emissions 30M- 1GHz	± 4.24 dB	(1)
Radiated emissions 1GHz-18GHz	± 4.26 dB	(1)
Radiated emissions 18GHz-40GHz	±4.17 dB	(1)
Frequency error	Uc=1X10-7	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.		

2 General Information

2.1 General Description of EUT

Product Name:	Laptop Computer
Model No.:	HL110YP
Difference of model(s)	N/A
Test Model:	HL110YP
Hardware Version:	REV31
Software Version:	1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	☒5180-5240MHz for 802.11a/n(HT20)/ac20(VHT20); 5190-5230MHz for 802.11n(HT40)/ac40(VHT40); 5210MHz for 802.11 ac80(VHT40); ☒5745-5825 MHz for 802.11a/n(HT20)/ac20(VHT20); 5755-5795 MHz for 802.11n(HT40)/ac40(VHT40); 5775MHz for 802.11 ac80(VHT40);
Channel numbers:	☒4 channels for 802.11a/n20(HT20)/ac20(VHT20) in the 5180-5240MHz band; 2 channels for 802.11 n40(HT40)/ac40(VHT40) in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210(VHT80)MHz band ; ☒5 channels for 802.11802.11a/n20(HT20)/ac20(VHT20) in the 5745-5825MHz band ; 2 channels for 802.11 n40(HT40)/ac40(VHT40) in the 5755-5795MHz band ; 1 channels for 802.11 5210(VHT80) in the 5775MHz band
Channel bandwidth:	802.11a/802.11n(HT20)/ 802.11ac(VHT20): 20MHz 802.11n(HT40)/ 802.11ac(VHT40) : 40MHz 802.11ac(VHT80) : 80MHz
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT/20/40/80):NSS1, MCS0-MCS9
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM) with BPSK/QPSK/16QAM/64QAM/256QAM
Antenna Type:	FPC Antenna
Antenna gain:	4.72 dBi(Declare by applicant) Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.
Battery	DC 7.7V 3200mAh
Power supply:	DC 14.8V From Battery or DC 18V From Adapter
Adapter Model:	Model: M120300-A078 Input:100-240V 50/60Hz 0.8A Output: DC 12V 3A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	40	5200MHz	42	5210MHz
44	5220MHz	46	5230MHz	48	5240MHz	/	/
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	/	/
165	5825MHz	/					

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	**Frequency (MHz)**		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40)	802.11ac(VHT80)
Lowest channel	5180	5190	5210
Middle channel	5200		
Highest channel	5240	5230	

Test channel	**Frequency (MHz)**		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40)	802.11ac(VHT80)
Lowest channel	5745	5755	5775
Middle channel	5785		
Highest channel	5825	5795	

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode(or with a duty cycle ≥ 98%)
Remark: For battery operated equipment, the EUT was performed using a new DC 7.7V battery.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pretest Mode	Description
Mode 1	802.11a / n 20/ ac 20 CH36/ CH40/ CH 48 802.11a /n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40/ac 40 CH38/ CH 46 802.11n 40/ac 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	/
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20/ ac 20 CH36/ CH40/ CH 48 802.11a /n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40/ac 40 CH38/ CH 46 802.11n 40/ac 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	/

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	monitor	SKYWORTH	2BU1	/
2	mouse	DELL	MS116	/
3	keyboard	DELL	KB216t	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392

2.8 Additional Instructions

Test Software	MPTool.EXE(v10.00)
Power level setup	Default

3 Test Instruments list

Conducted Emission

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI3	100605	2025.3.06	2026.3.05
2	Artificial power network	schwarabeck	NSLK8127	8127483	2025.3.06	2026.3.05
3	Artificial power network	ETS	3186/2NM	1132	2025.3.06	2026.3.05
4	10dB attenuator	HUBER+SUHNER	10dB	/	2025.3.06	2026.3.05
5	Cable 4	HUBER SUNNER	3M	/	2025.3.06	2026.3.05
6	Absorbing Clamp	schwarabeck	MDS21	D69250	2025.3.06	2026.3.05

Radiated Emission &RF Conducted test:

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101032	2025.3.06	2026.3.05
2	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.26	2026.3.25
3	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.22	2026.3.21
4	Amplifier	EMtrace	RP01A	50117	2025.3.06	2026.3.05
5	Amplifier	Space-Dtronics	EWLAN0118G-P40	19113001	2025.3.06	2026.3.05
6	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2025.3.06	2026.3.05
7	Power detector meter	MWRFtest	MW100-PSB	MW201020JYT	2025.3.06	2026.3.05
8	Signal generator	Agilent	N5182A	MY49060455	2025.3.06	2026.3.05
9	Spectrum analyzer	Rohde&schwarz	FSU40	1166.1660K43	2025.3.06	2026.3.05
10	Amplifier	SKET	LNPA_1840-50	SK2019040302	2025.3.06	2026.3.05
11	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.22	2026.3.21
12	Loop antenna	schwarabeck	FMZB 1519 B	1519	2024.3.22	2026.3.21
13	Cable 6	HUBER SUNNER	0.5M	/	2025.3.06	2026.3.05
14	Cable7	HUBER SUNNER	2.0M	/	2025.3.06	2026.3.05
15	Cable8	HUBER SUNNER	6.0M	/	2025.3.06	2026.3.05
16	Filter	Xin bo	XBLBQ-GTA29	210410-3-2	2025.3.06	2026.3.05
17	Power Sensor	Keysight	U2021XA	MY54111006	2025.3.06	2026.3.05
18	Temp. & Humidity Chamber	Jiecheng Instrument	QA-LP-80	20160705001	2025/3/07	2026/3/06

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: *An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.*	
E.U.T Antenna:	
The antennas are FPC Antenna, the best case gain of the antennas are 4.72dBi, reference to the appendix II for details	

4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:

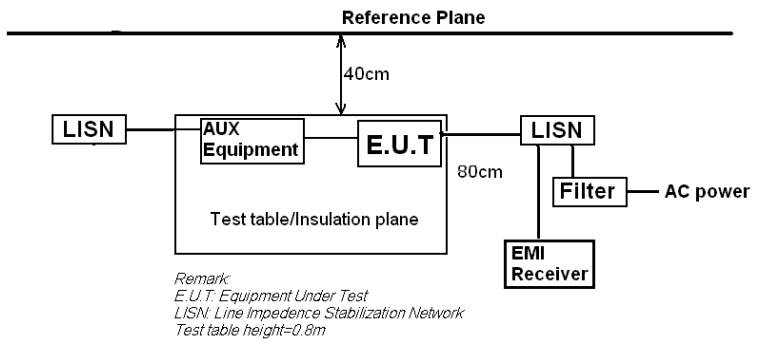

Test procedure:

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	25.7°C	Humid.:	58%	Press.:	1012mbar
Test voltage:	AC 120V 60Hz					
Test results:	Pass					

Remark:
1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode (802.11a 5180MHz)

Measurement Result

Line:

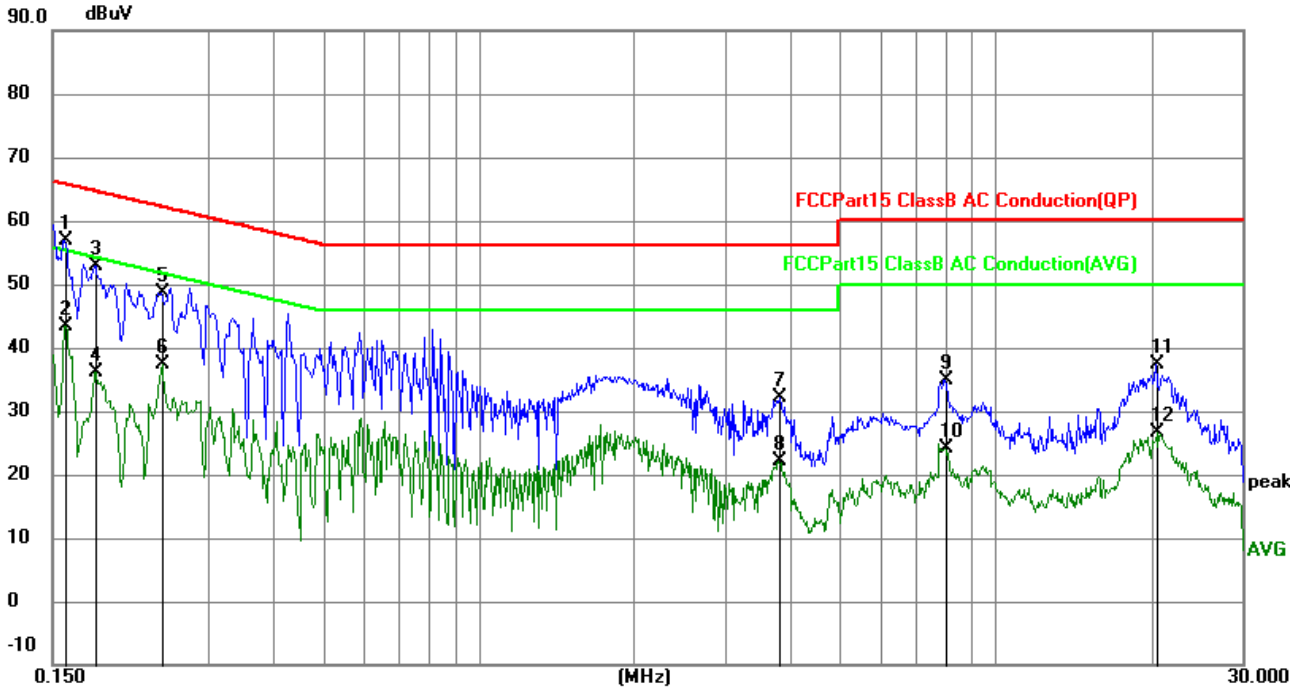

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1590	47.03	9.80	56.83	65.52	-8.69	QP
2	0.1590	33.67	9.80	43.47	55.52	-12.05	AVG
3	0.1814	43.11	9.81	52.92	64.42	-11.50	QP
4	0.1814	26.38	9.81	36.19	54.42	-18.23	AVG
5	0.2444	38.75	9.82	48.57	61.95	-13.38	QP
6	0.2444	27.63	9.82	37.45	51.95	-14.50	AVG
7	3.7995	22.19	9.84	32.03	56.00	-23.97	QP
8	3.7995	12.34	9.84	22.18	46.00	-23.82	AVG
9	8.0022	25.13	9.84	34.97	60.00	-25.03	QP
10	8.0022	14.33	9.84	24.17	50.00	-25.83	AVG
11	20.5395	27.72	9.65	37.37	60.00	-22.63	QP
12	20.5395	16.87	9.65	26.52	50.00	-23.48	AVG

Neutral:

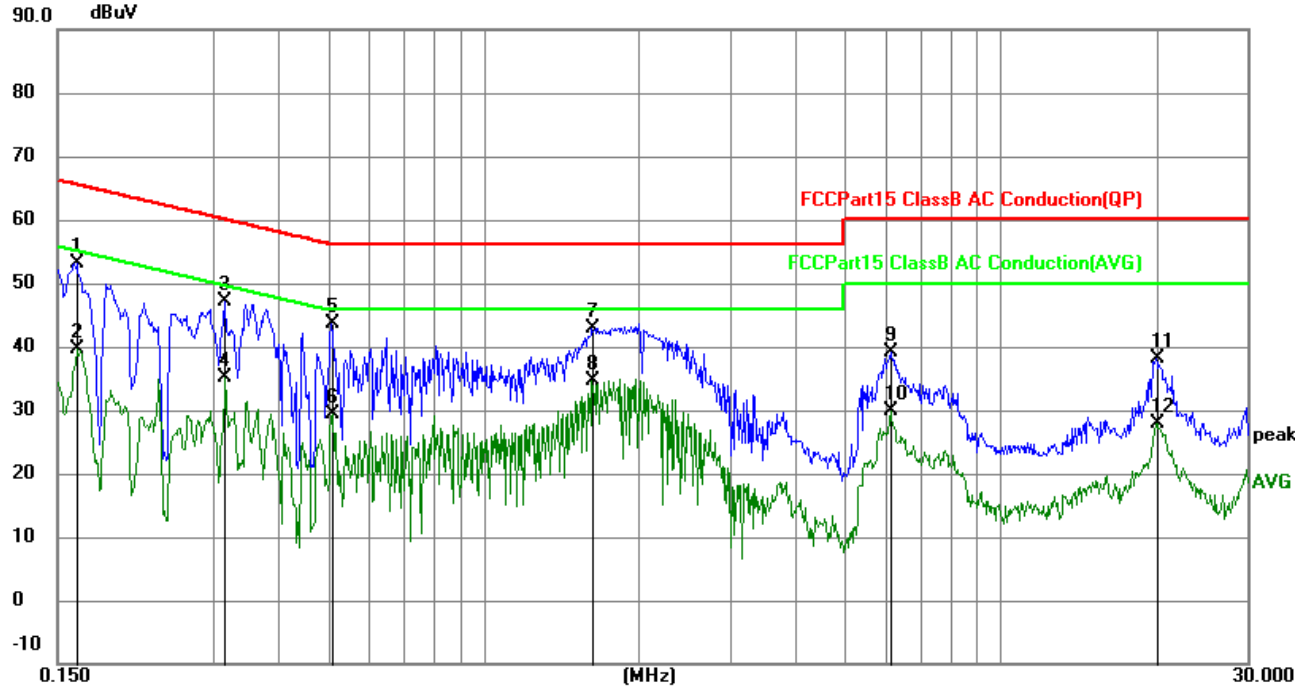

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1635	43.45	9.80	53.25	65.28	-12.03	QP
2	0.1635	29.72	9.80	39.52	55.28	-15.76	AVG
3	0.3165	37.18	9.87	47.05	59.80	-12.75	QP
4	0.3165	25.17	9.87	35.04	49.80	-14.76	AVG
5	0.5100	33.76	9.94	43.70	56.00	-12.30	QP
6	0.5100	19.41	9.94	29.35	46.00	-16.65	AVG
7	1.6255	33.02	9.90	42.92	56.00	-13.08	QP
8	1.6255	24.77	9.90	34.67	46.00	-11.33	AVG
9	6.1528	29.30	9.83	39.13	60.00	-20.87	QP
10	6.1528	20.12	9.83	29.95	50.00	-20.05	AVG
11	20.0085	28.59	9.66	38.25	60.00	-21.75	QP
12	20.0085	18.23	9.66	27.89	50.00	-22.11	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

4.3 Duty cycle

Test Method :	ANSI C63.10:2013	
Limit:	/	
Test setup:	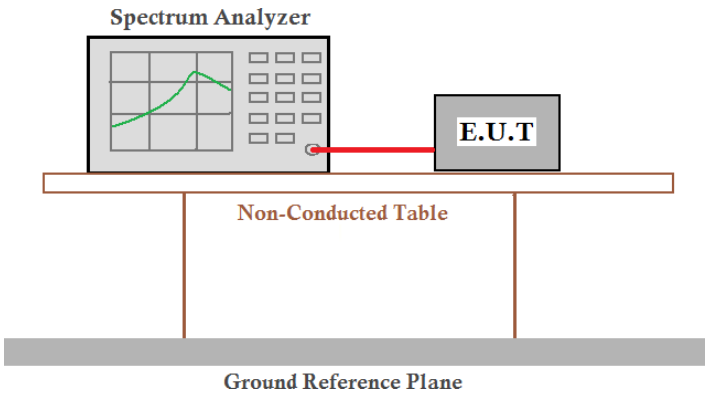	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	84.21	0.75
TX 802.11n20 Mode	93.89	0.27
TX 802.11ac20 Mode	84.77	0.72
TX 802.11n40 Mode	91.67	0.38
TX 802.11ac40 Mode	93.76	0.28
TX 802.11ac80 Mode	89.75	0.47

5745-5825 MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	85.42	0.68
TX 802.11n20 Mode	82.61	0.83
TX 802.11ac20 Mode	84.44	0.73
TX 802.11n40 Mode	91.25	0.40
TX 802.11ac40 Mode	94.05	0.27
TX 802.11ac80 Mode	88.89	0.51

Test plot

5180-5240MHz

(802.11a) plot

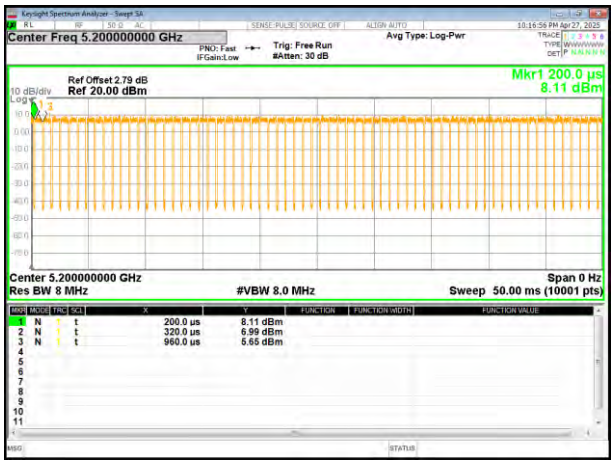

(802.11 n20) plot

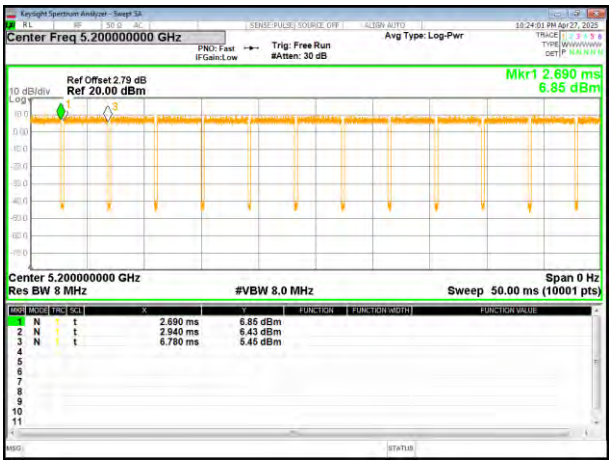

(802.11ac20) plot

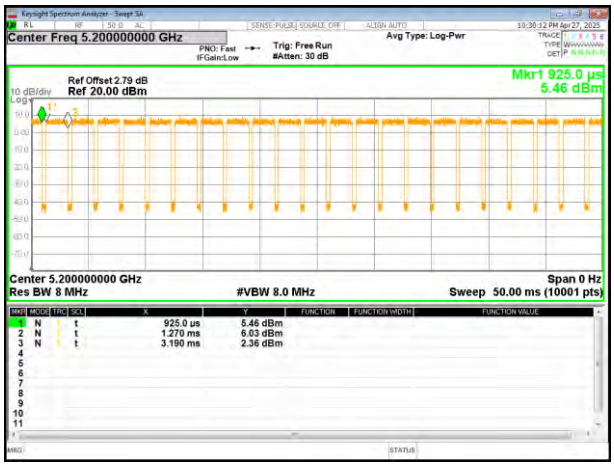

(802.11 n40) plot

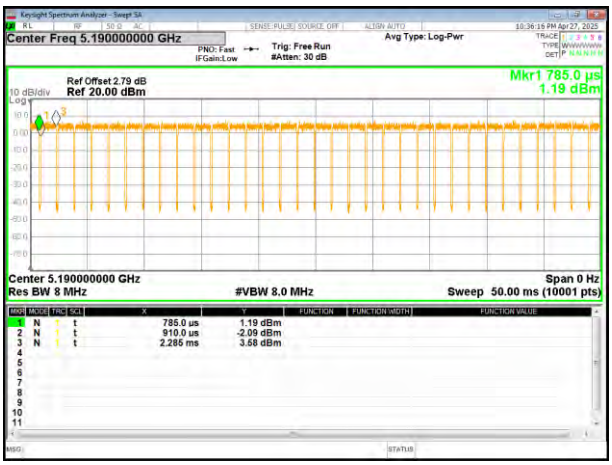

(802.11ac40) plot

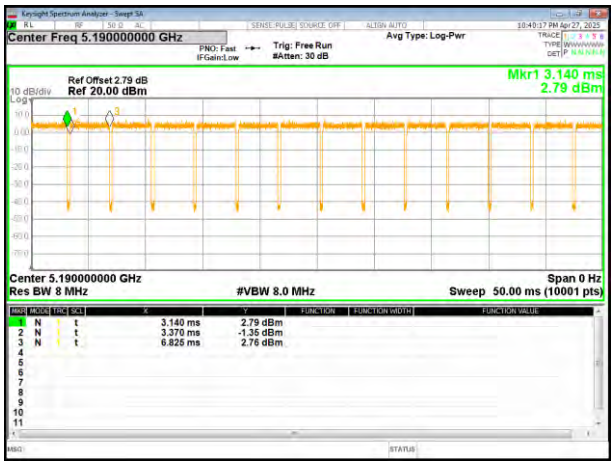

(802.11ac80) plot

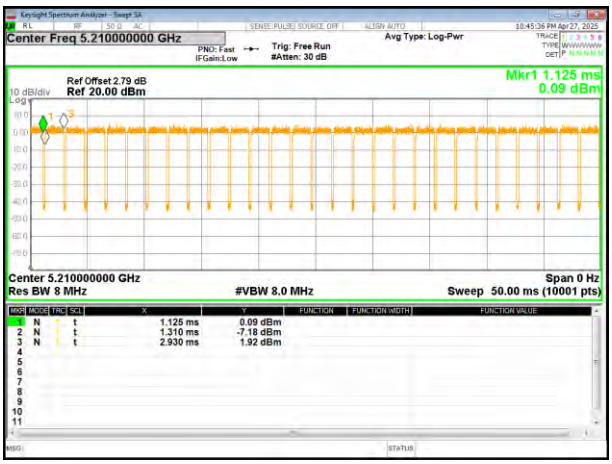

5745-5825 MHz

(802.11a) plot

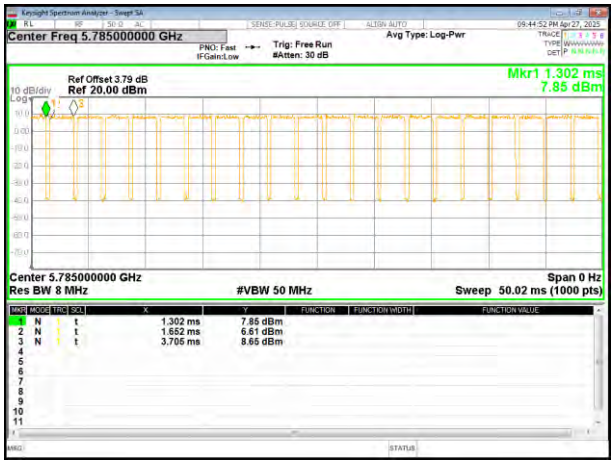

(802.11 n20) plot

(802.11ac20) plot

(802.11 n40) plot

(802.11ac40) plot

(802.11ac80) plot

4.4 Conducted Output Power

Test Requirement:	FCC Part15 E Section 15.407 (a)(1)/(a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	5150-5250MHz : 250mW 5725~5850MHz : 1W	
Test setup:	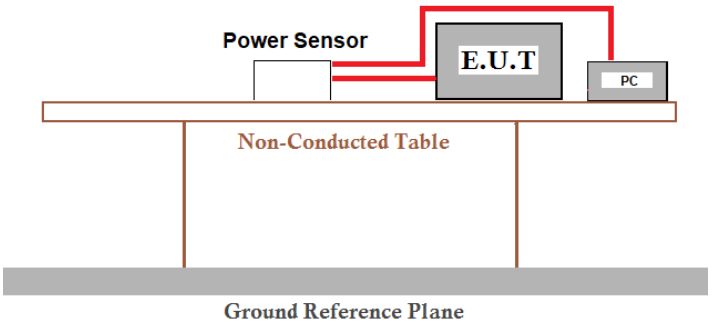	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Measurement Result

5180-5240MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	0.75	6.64	7.39	23.98	Pass
CH40	5200	0.75	6.60	7.35	23.98	Pass
CH48	5240	0.75	6.35	7.10	23.98	Pass
TX 802.11 n20 Mode						
CH36	5180	0.27	6.96	7.23	23.98	Pass
CH40	5200	0.27	6.93	7.20	23.98	Pass
CH48	5240	0.27	6.65	6.92	23.98	Pass
TX 802.11 ac20 Mode						
CH36	5180	0.72	6.21	6.93	23.98	Pass
CH40	5200	0.72	6.46	7.18	23.98	Pass
CH48	5240	0.72	6.31	7.03	23.98	Pass
TX 802.11 n40 Mode						
CH38	5190	0.38	6.59	6.97	23.98	Pass
CH46	5230	0.38	6.58	6.96	23.98	Pass
TX 802.11 ac40 Mode						
CH38	5190	0.28	6.97	7.25	23.98	Pass
CH46	5230	0.28	6.89	7.17	23.98	Pass
TX 802.11 ac80 Mode						
CH42	5210	0.47	6.61	7.08	23.98	Pass

5745-5825 MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH149	5745	0.68	6.66	7.34	30	Pass
CH157	5785	0.68	6.38	7.06	30	Pass
CH165	5825	0.68	6.63	7.31	30	Pass
TX 802.11 n20 Mode						
CH149	5745	0.83	6.15	6.98	30	Pass
CH157	5785	0.83	6.17	7.00	30	Pass
CH165	5825	0.83	6.39	7.22	30	Pass
TX 802.11 ac20 Mode						
CH149	5745	0.73	6.24	6.97	30	Pass
CH157	5785	0.73	6.43	7.16	30	Pass
CH165	5825	0.73	6.67	7.40	30	Pass
TX 802.11 n40 Mode						
CH151	5755	0.4	6.70	7.10	30	Pass
CH159	5795	0.4	6.78	7.18	30	Pass
TX 802.11 ac40 Mode						
CH151	5755	0.27	6.91	7.18	30	Pass
CH159	5795	0.27	6.77	7.04	30	Pass
TX 802.11 ac80 Mode						
CH155	5775	0.51	6.73	7.24	30	Pass

4.5 Bandwidth &99% Occupy Bandwidth

Test Requirement:	FCC Part15 E Section 15.407(a)(12)&15.407(e)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.	
Test setup:	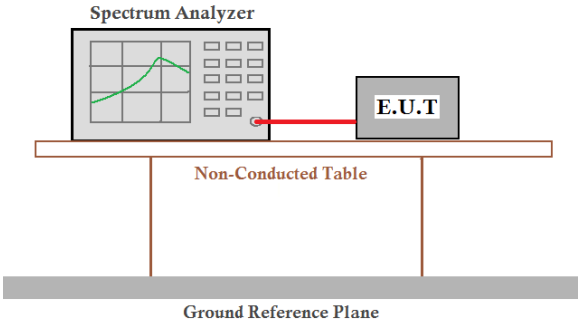	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Measurement Result

5180-5240MHz

Test CH	-26dB Channel Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)	
Lowest	23.88	21.72	24.49	41.52	41.97	--	Pass
Middle	23.45	21.86	24.66	--	--	80.23	
Highest	23.45	22.20	24.30	41.42	41.25	--	

Test CH	99% Occupy Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)	
Lowest	16.661	17.727	17.830	36.363	36.409	--	Pass
Middle	16.692	17.720	17.879	--	--	74.972	
Highest	16.697	17.733	17.829	36.332	36.291	--	

Test plot -26dB Channel Bandwidth

(802.11a) plot on channel 36

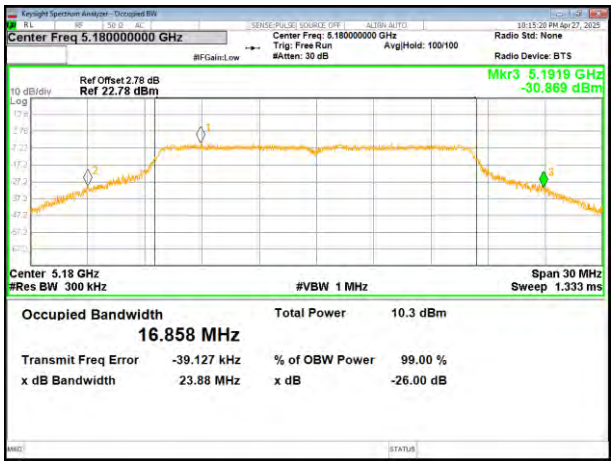

(802.11 n20) plot on channel 36

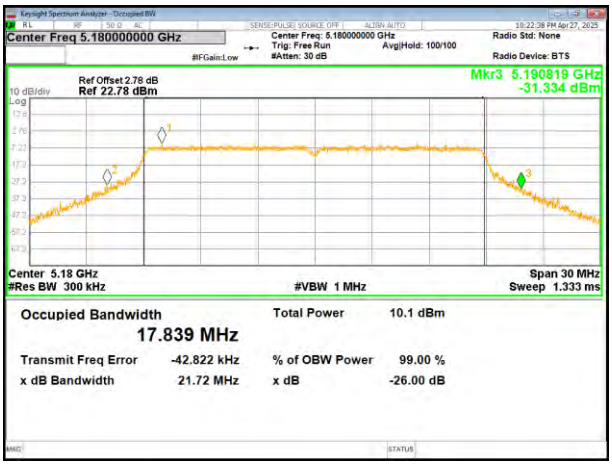

(802.11a) plot on channel 40

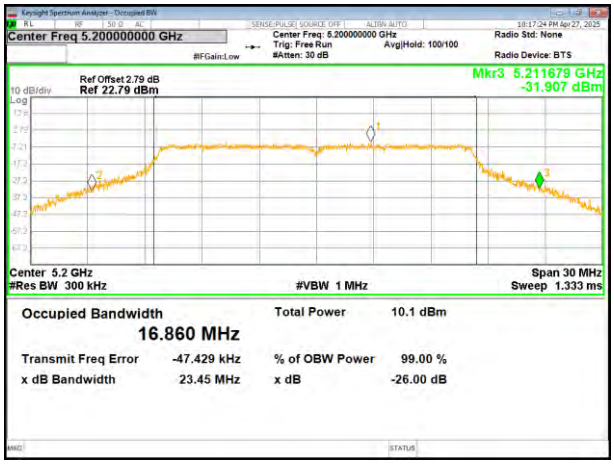

(802.11 n20) plot on channel 40

(802.11a) plot on channel 48

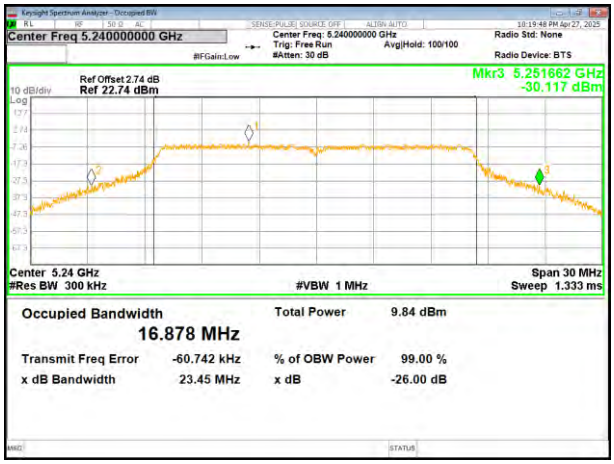

(802.11 n20) plot on channel 48

Test plot

(802.11ac20) plot on channel 36

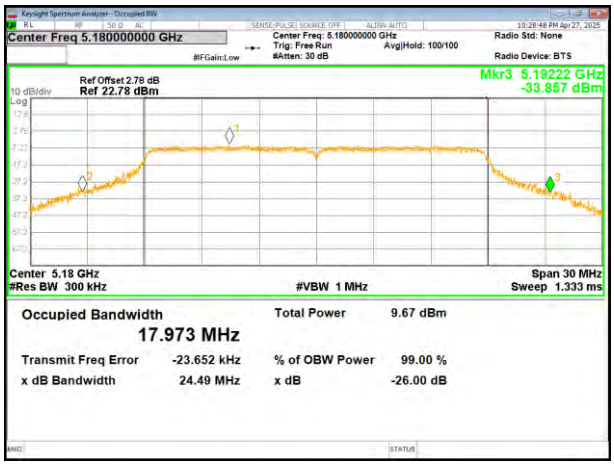

(802.11 n40) plot on channel 38

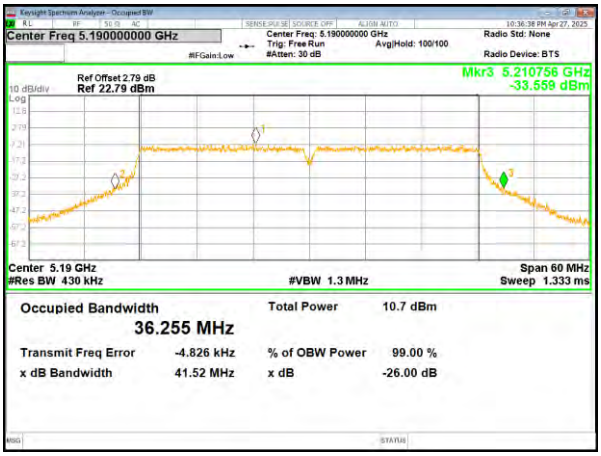

(802.11ac20) plot on channel 40

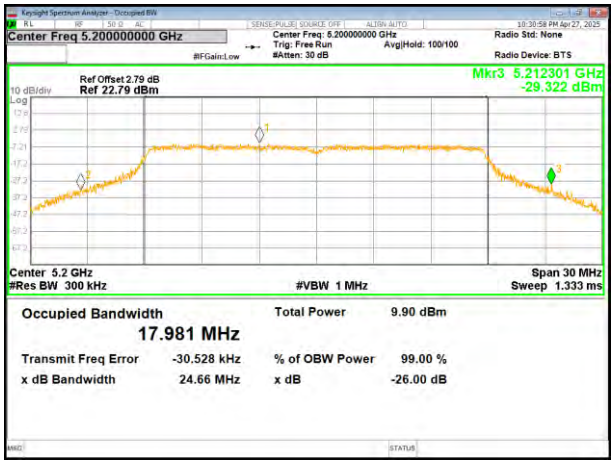

(802.11 n40) plot on channel 46

(802.11ac20) plot on channel 48

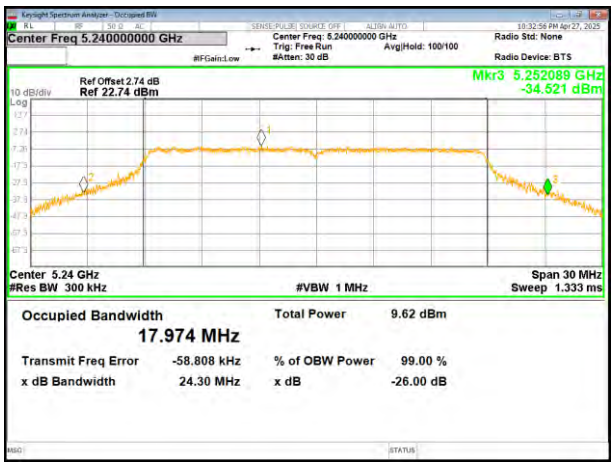

Test plot

(802.11ac40) plot on channel 38

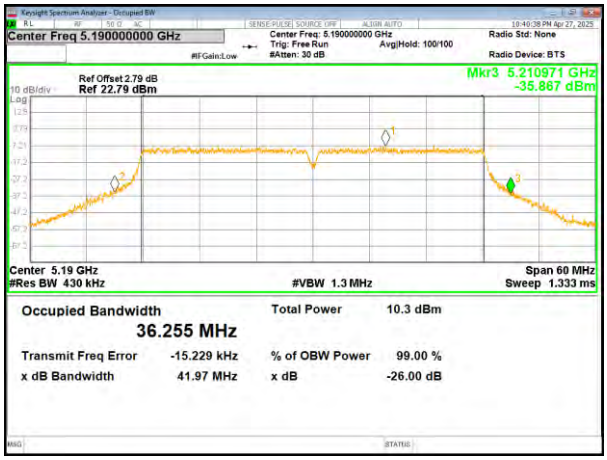

(802.11ac80) plot on channel 42

(802.11ac40) plot on channel 46

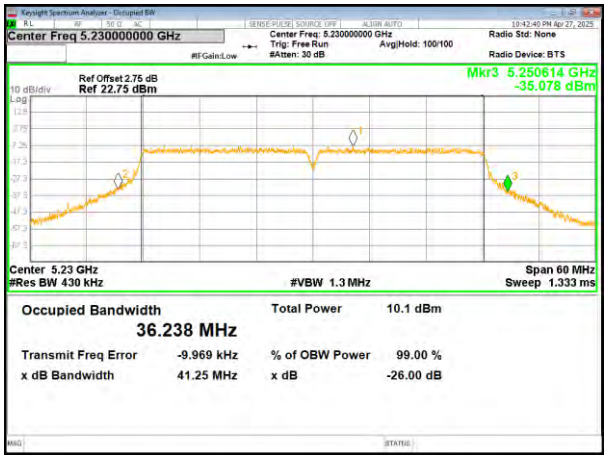

Test plot 99% Occupy Bandwidth

(802.11a) plot on channel 36

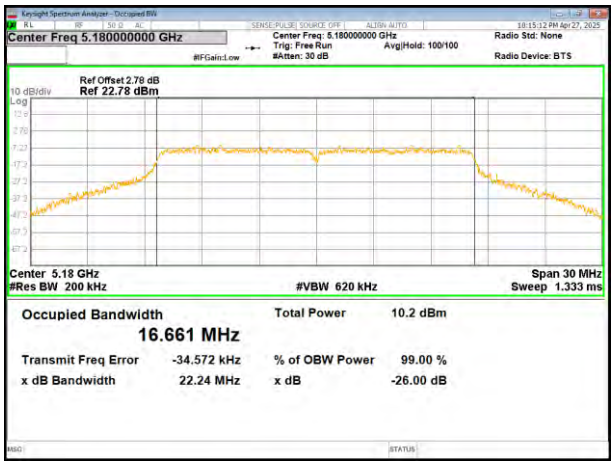

(802.11 n20) plot on channel 36

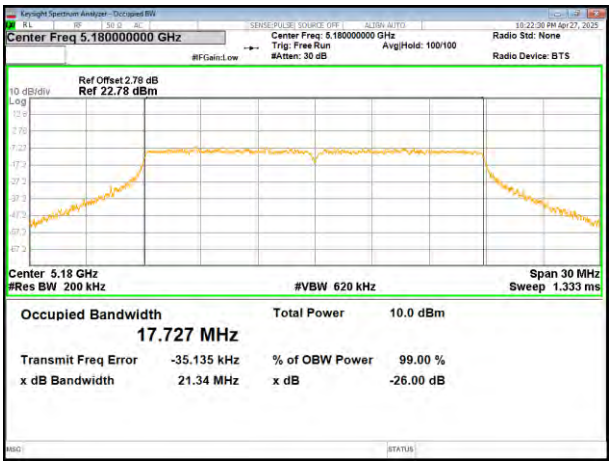

(802.11a) plot on channel 40

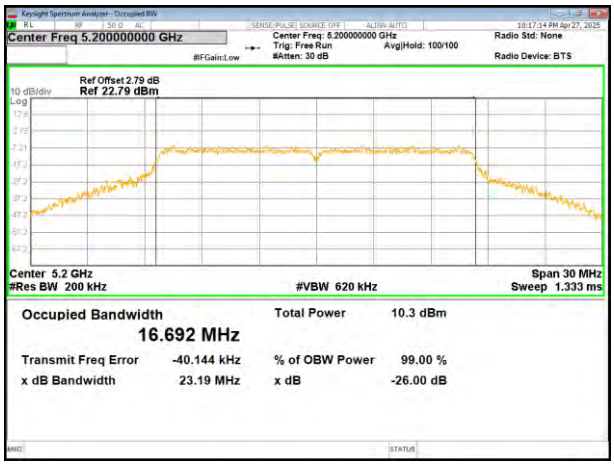

(802.11 n20) plot on channel 40

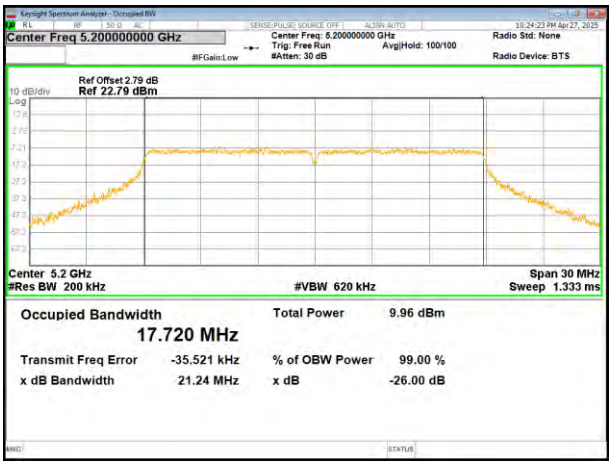

(802.11a) plot on channel 48

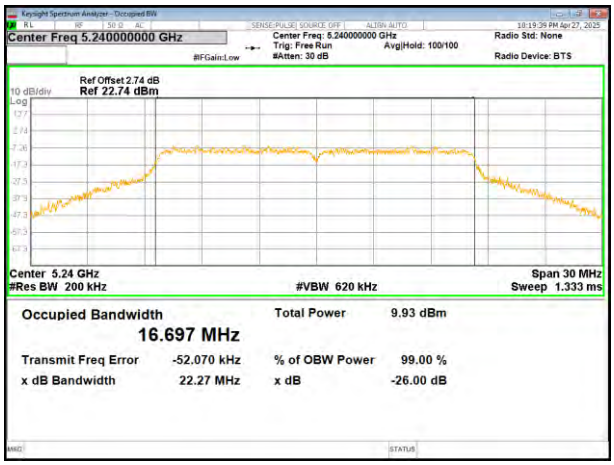

(802.11 n20) plot on channel 48

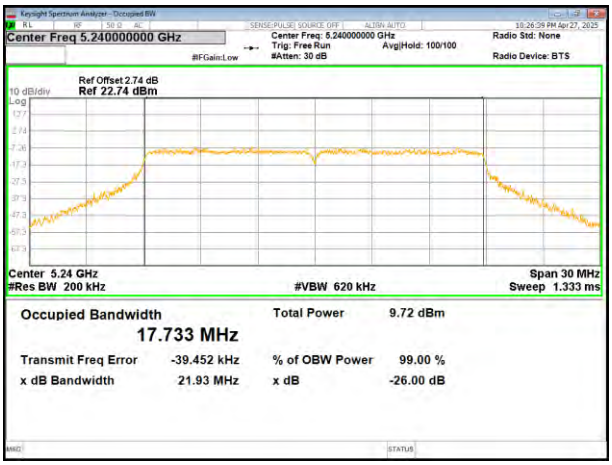

Test plot

(802.11ac20) plot on channel 36

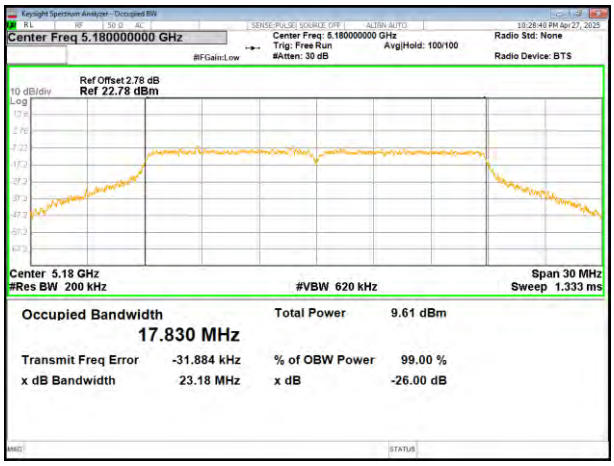

(802.11 n40) plot on channel 38

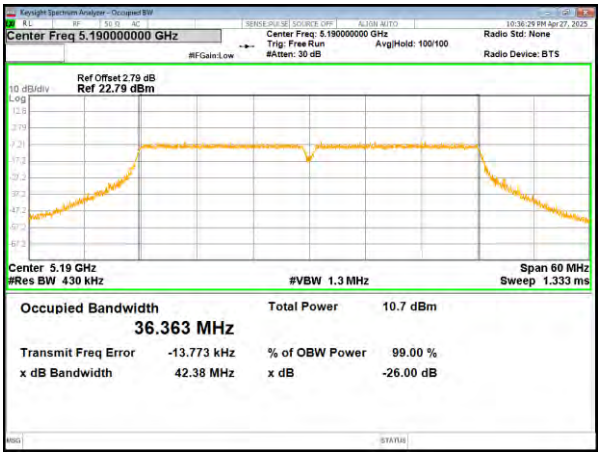

(802.11ac20) plot on channel 40

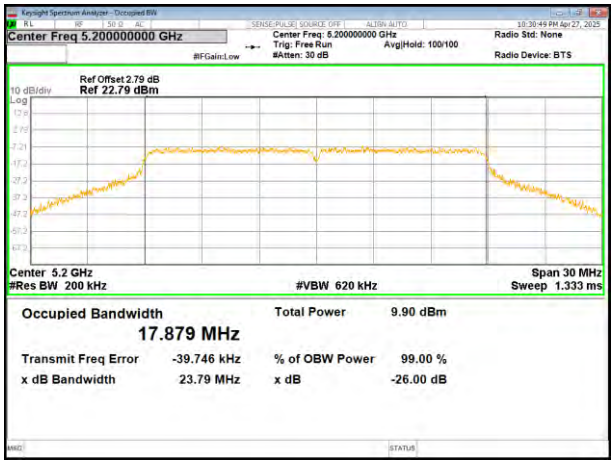

(802.11 n40) plot on channel 46

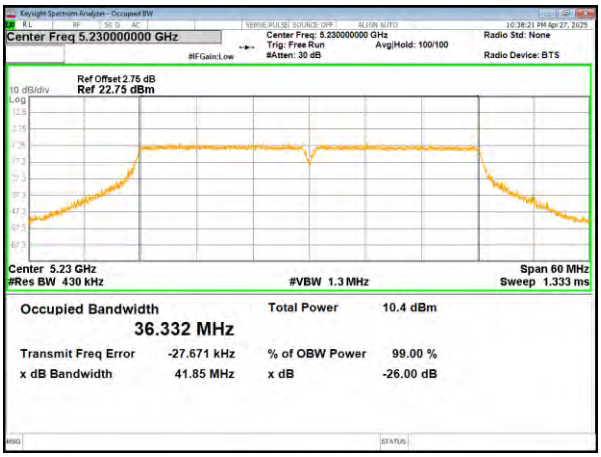

(802.11ac20) plot on channel 48

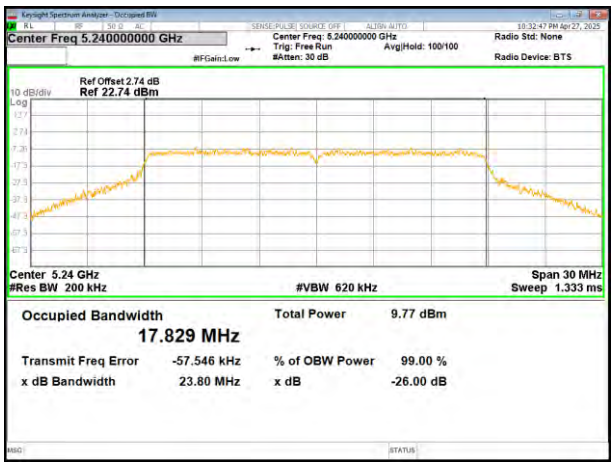

Test plot

(802.11ac40) plot on channel 38

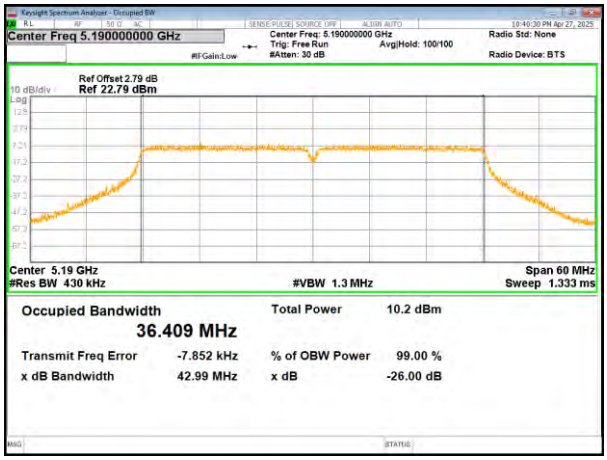

(802.11ac80) plot on channel 42

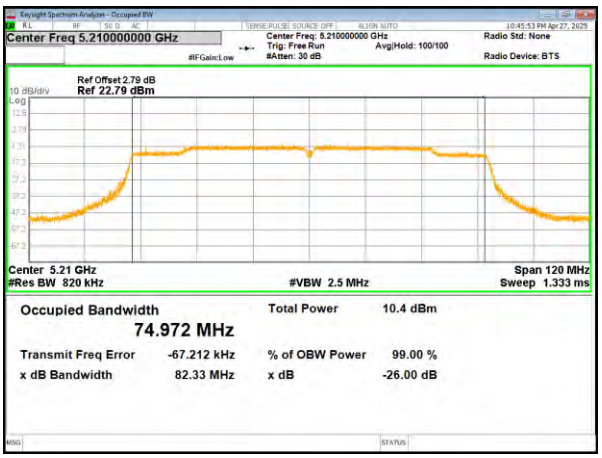

(802.11ac40) plot on channel 46

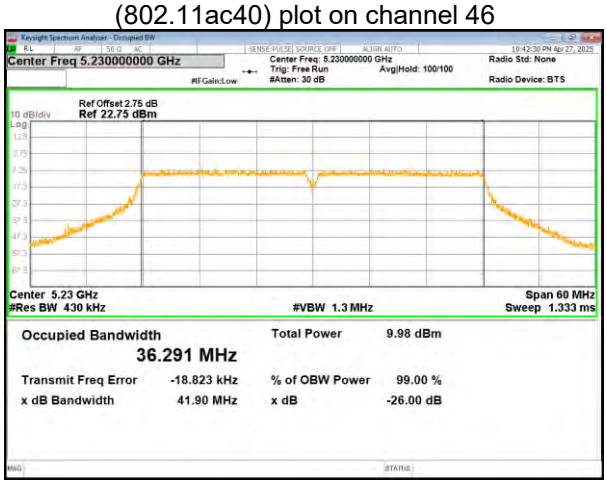

5745-5825MHz

Test CH	-6dB Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)		
Lowest	16.30	17.61	17.60	36.38	36.14	--	>500	Pass
Middle	16.34	17.63	17.54	--	--	75.04		
Highest	16.31	17.60	17.43	36.37	36.36	--		

Remark: “---“is not applicable

Test plot

(802.11a) plot on channel 149

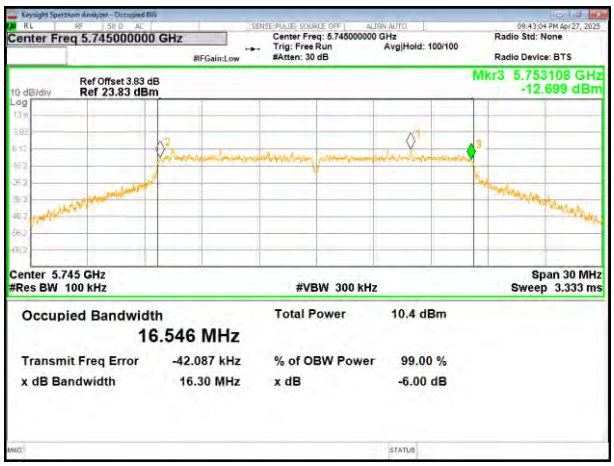

(802.11 n20) plot on channel 149

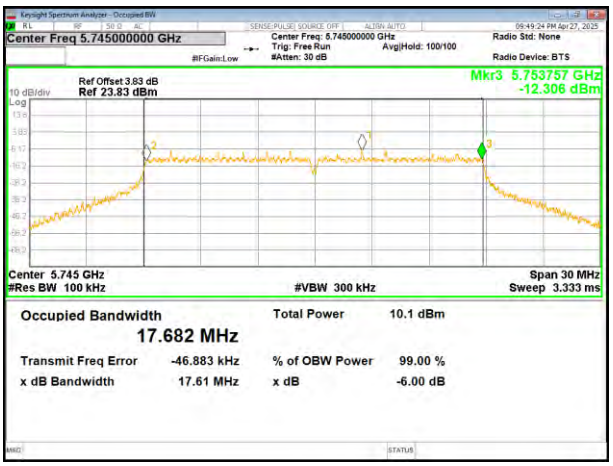

(802.11a) plot on channel 157

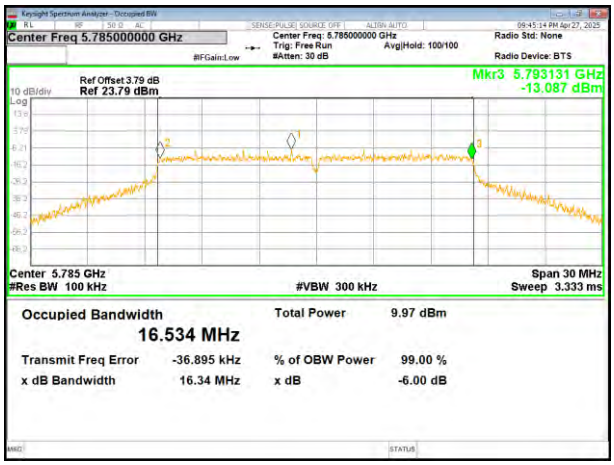

(802.11 n20) plot on channel 157

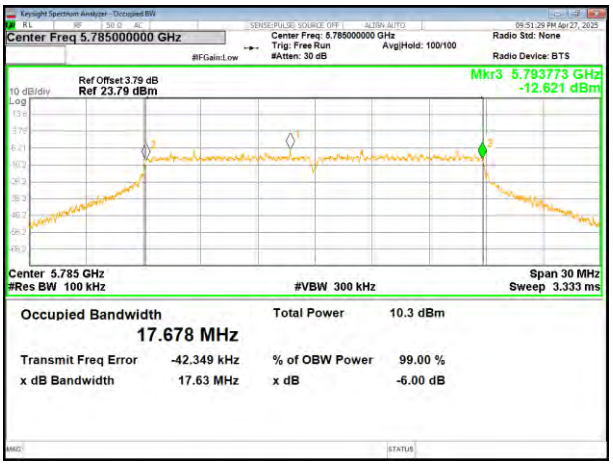

(802.11a) plot on channel 165

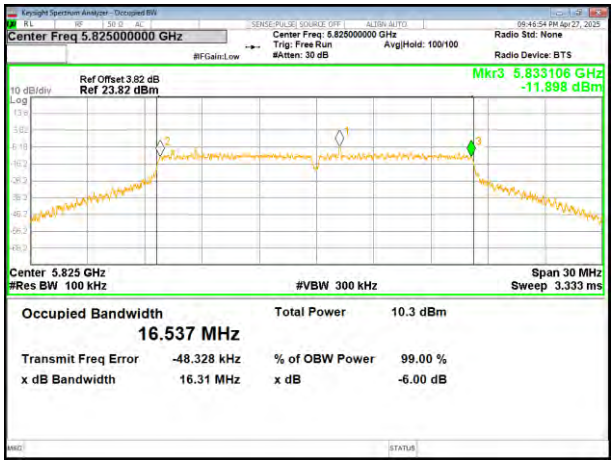

(802.11 n20) plot on channel 165

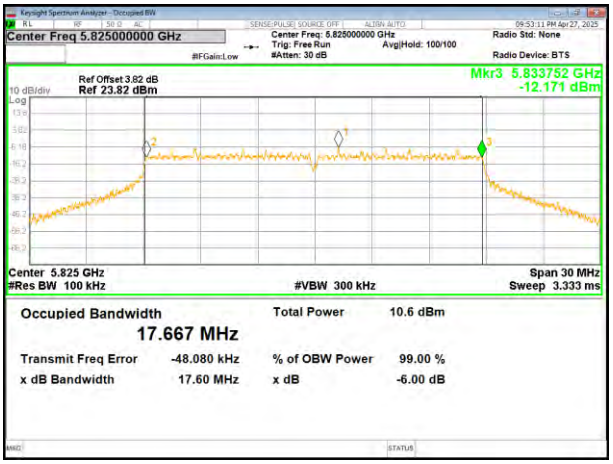

Test plot

(802.11ac20) plot on channel 149

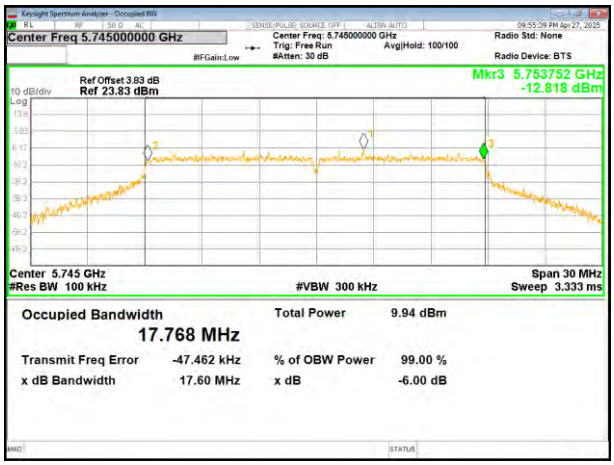

(802.11 n40) plot on channel 151

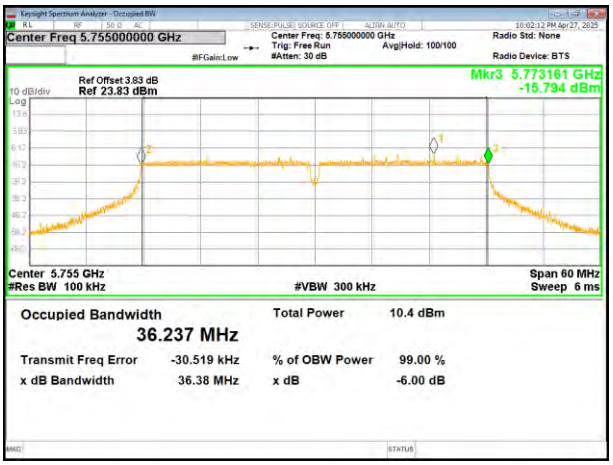

(802.11ac20) plot on channel 157

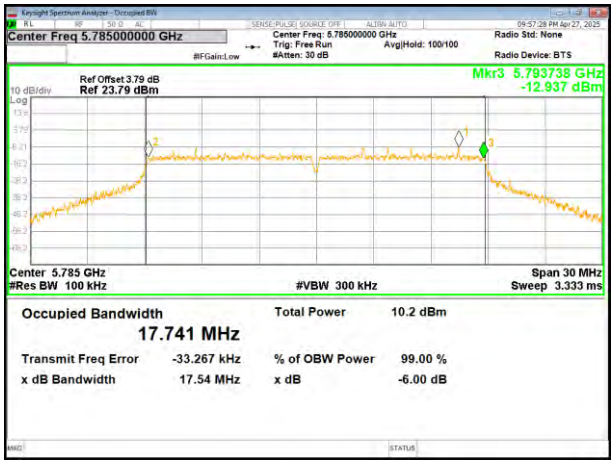

(802.11 n40) plot on channel 159

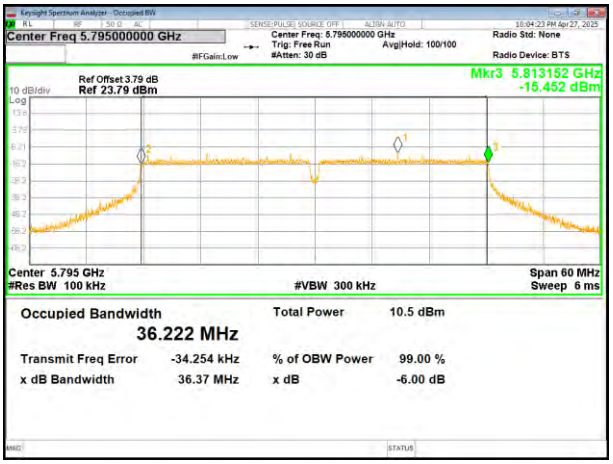

(802.11ac20) plot on channel 165

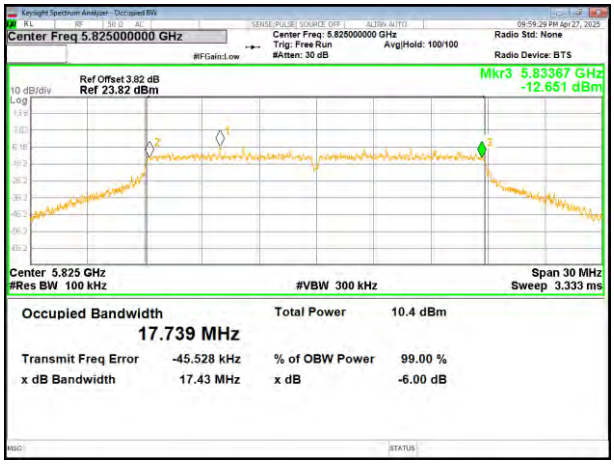

Test plot

(802.11 ac40) plot on channel 151

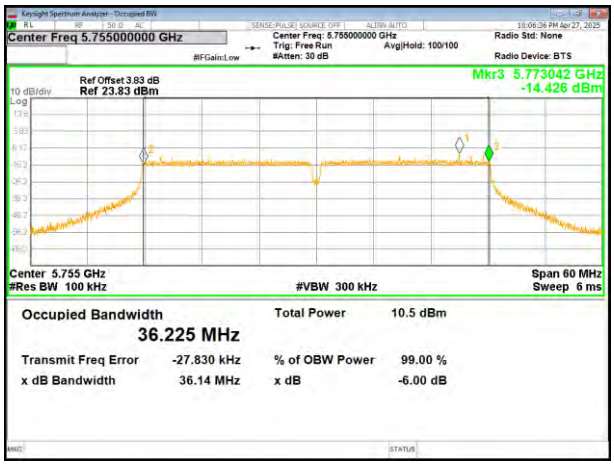

(802.11 ac80) plot on channel 155

(802.11 ac40) plot on channel 159

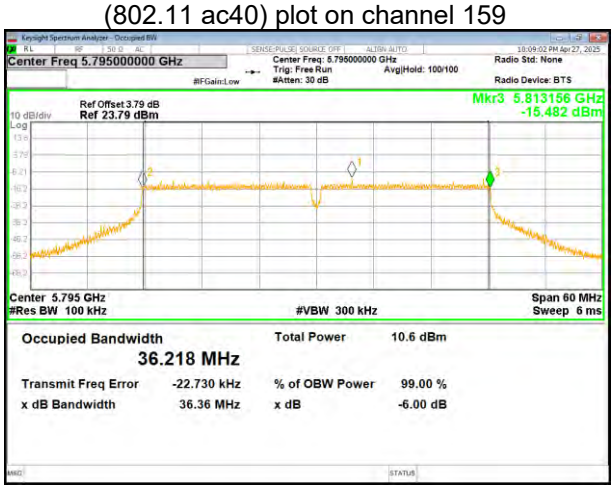

4.6 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407(a)(1)/ (a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	

Frequency band (MHz)	Limit
5150-5250	≤17dBm/1MHz for master device
	≤11dBm/1MHz for client device
5250-5350	≤11dBm/1MHz for client device
5470-5725	≤11dBm/1MHz for client device
5725-5850	≤30dBm/500kHz

Test setup:

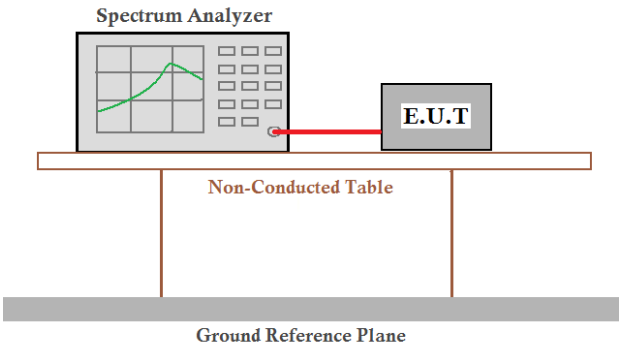

Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Frequency	Measured Power Density (dBm/MHz)	Correction Factor (dB)	Total Measured Power Density (dBm/MHz)	Limit (dBm/MHz)
802.11 a	5180 MHz	1.674	0.750	2.424	11
	5200 MHz	1.468	0.750	2.218	11
	5240 MHz	1.315	0.750	2.065	11
802.11 n20	5180 MHz	1.311	0.270	1.581	11
	5200 MHz	1.052	0.270	1.322	11
	5240 MHz	1.687	0.270	1.957	11
802.11 ac20	5180 MHz	0.901	0.720	1.621	11
	5200 MHz	1.401	0.720	2.121	11
	5240 MHz	0.623	0.720	1.343	11
802.11 n40	5190 MHz	-0.842	0.380	-0.462	11
	5230 MHz	-0.687	0.380	-0.307	11
802.11 ac40	5190 MHz	-1.196	0.280	-0.916	11
	5230 MHz	-0.892	0.280	-0.612	11
802.11 ac80	5210 MHz	-3.837	0.470	-3.367	11

(802.11a) PSD plot on channel 36

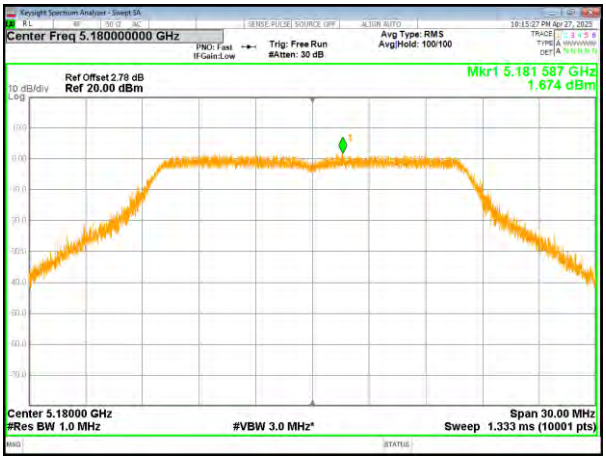

(802.11n20) PSD plot on channel 36

(802.11a) PSD plot on channel 40

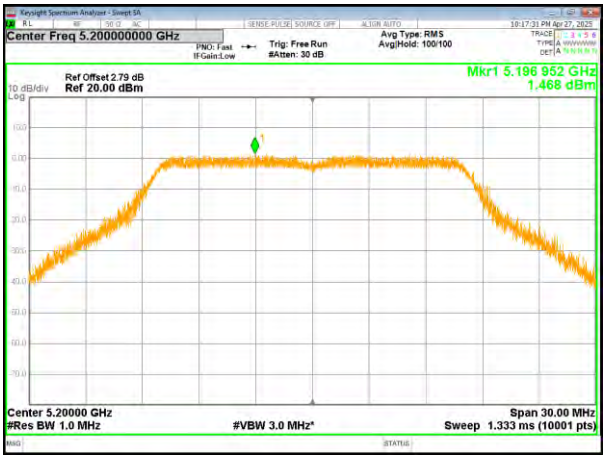

(802.11n20) PSD plot on channel 40

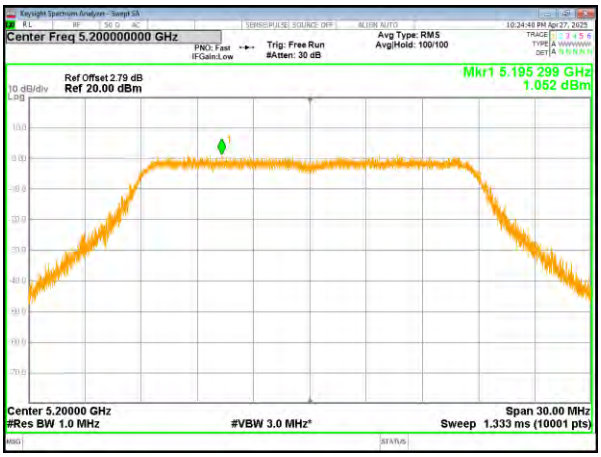

(802.11a) PSD plot on channel 48

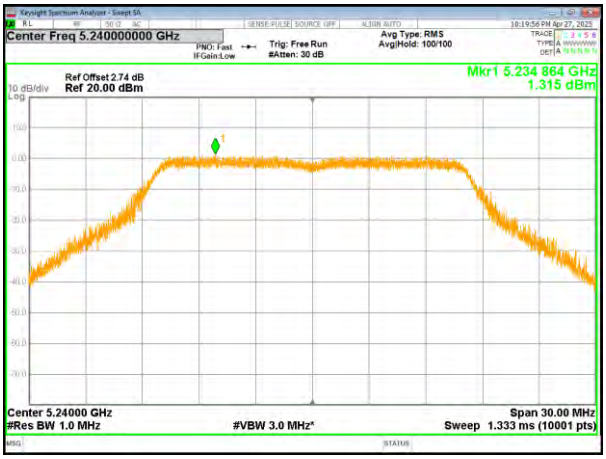

(802.11n20) PSD plot on channel 48

(802.11ac20) PSD plot on channel 36

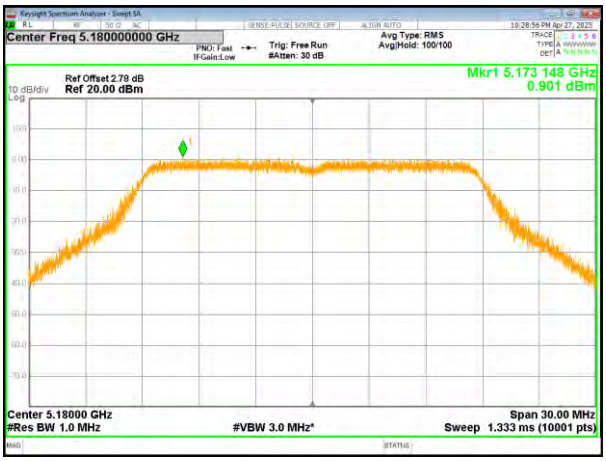

(802.11n40) PSD plot on channel 38

(802.11ac20) PSD plot on channel 40

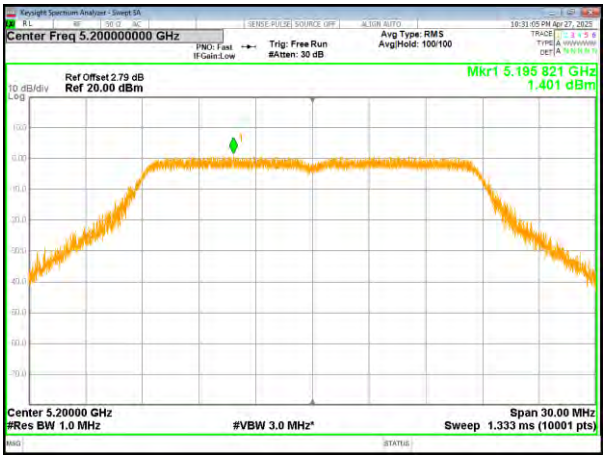

(802.11n40) PSD plot on channel 46

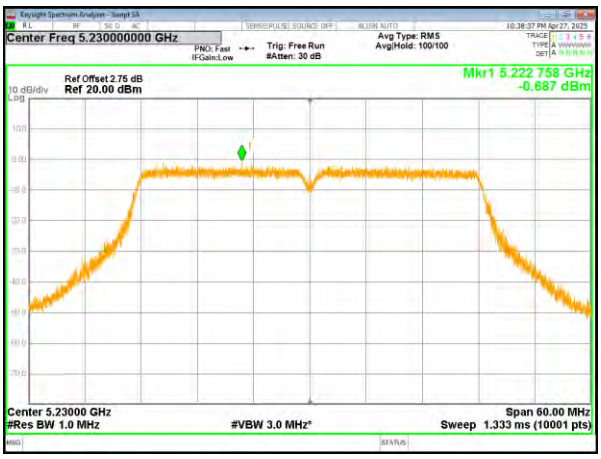

(802.11ac20) PSD plot on channel 48

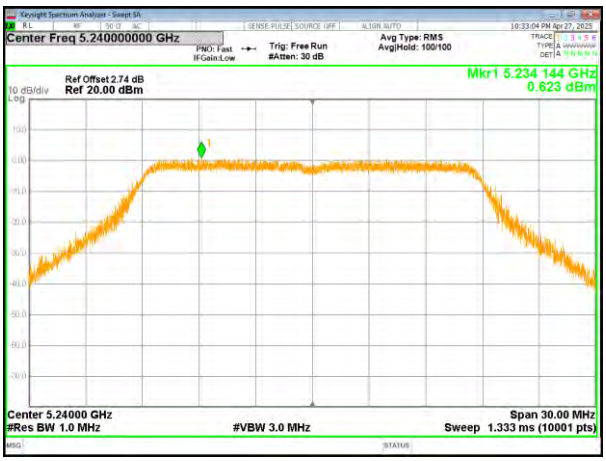

(802.11ac40) PSD plot on channel 38

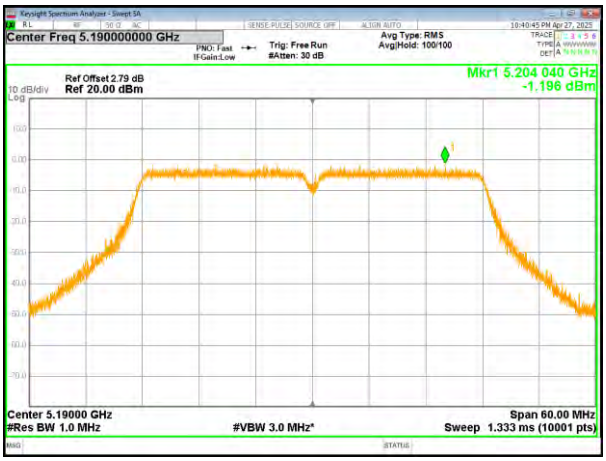

(802.11ac80) PSD plot on channel 42

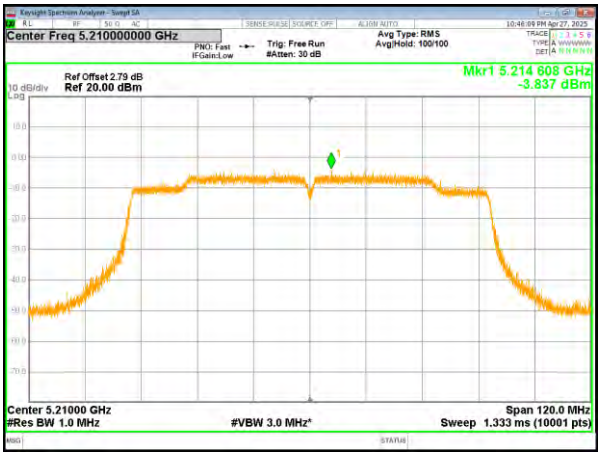

(802.11ac40) PSD plot on channel 46

Mode	Frequency	Measured Power Density (dBm/510KHz)	Measured Power Density (dBm/500KHz)	Correction Factor (dB)	Total Measured Power Density (dBm/500KHz)	Limit (dBm/MHz)
802.11 a	5745 MHz	-2.150	-2.236	0.680	-1.556	30
	5785 MHz	-2.392	-2.478	0.680	-1.798	30
	5825 MHz	-2.367	-2.453	0.680	-1.773	30
802.11 n20	5745 MHz	-1.667	-1.753	0.830	-0.923	30
	5785 MHz	-1.671	-1.757	0.830	-0.927	30
	5825 MHz	-1.640	-1.726	0.830	-0.896	30
802.11ac20	5745 MHz	-3.122	-3.208	0.730	-2.478	30
	5785 MHz	-1.686	-1.772	0.730	-1.042	30
	5825 MHz	-1.894	-1.980	0.730	-1.250	30
802.11 n40	5755 MHz	-3.999	-4.085	0.400	-3.685	30
	5795 MHz	-4.393	-4.479	0.400	-4.079	30
802.11ac40	5755 MHz	-4.853	-4.939	0.270	-4.669	30
	5795 MHz	-4.499	-4.585	0.270	-4.315	30
802.11ac80	5775 MHz	-7.298	-7.384	0.510	-6.874	30

Note: 1. If the measurement is X dBm/510kHz, thus X dBm/510kHz = $(10^{X/10})$*(500 / 510) dBm/500kHz

2. Correction Factor (dB)= duty cycle factor

(802.11a) PSD plot on channel 149

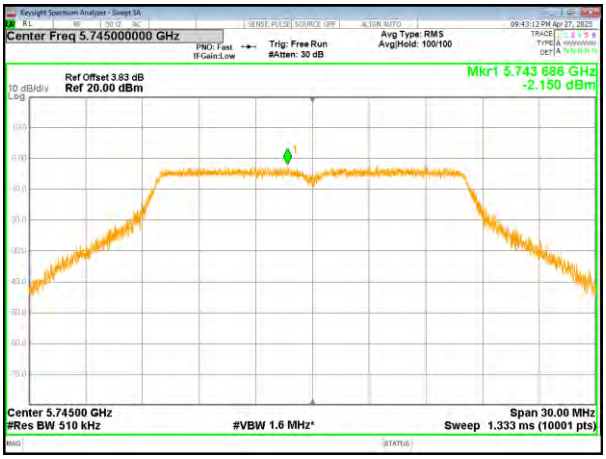

(802.11n20) PSD plot on channel 149

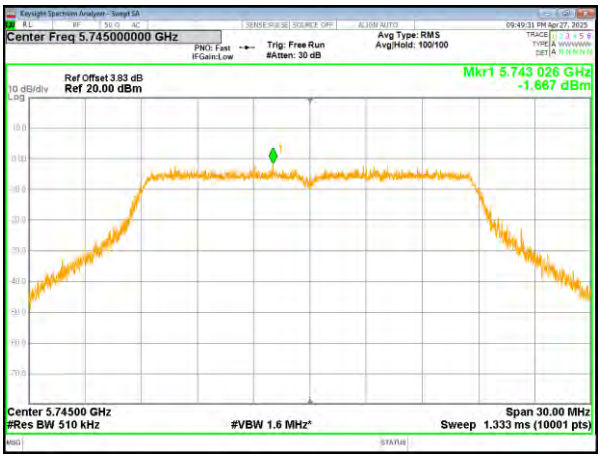

(802.11a) PSD plot on channel 157

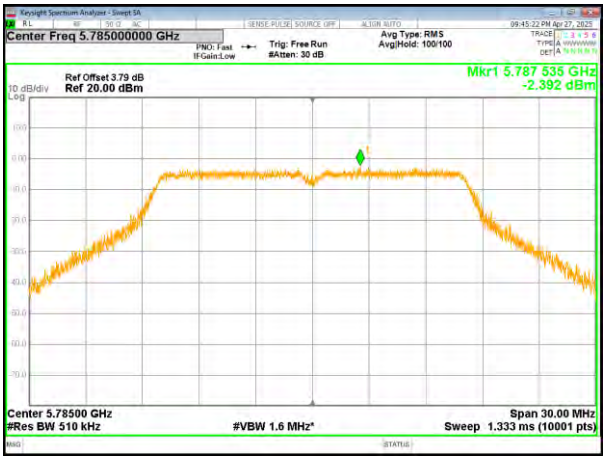

(802.11n20) PSD plot on channel 157

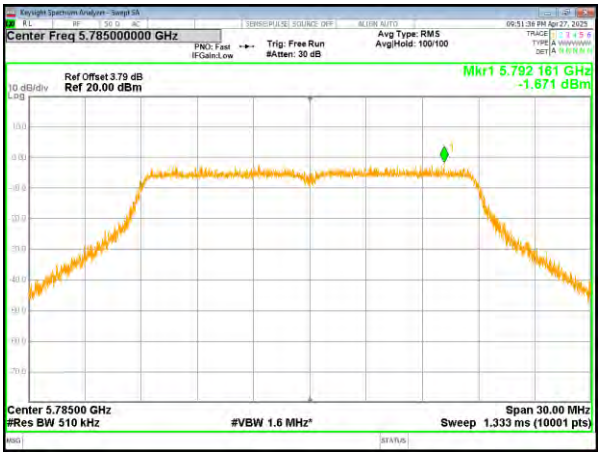

(802.11a) PSD plot on channel 165

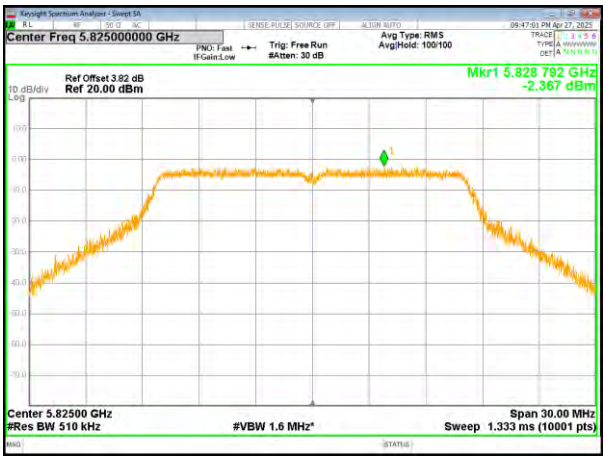

(802.11n20) PSD plot on channel 165

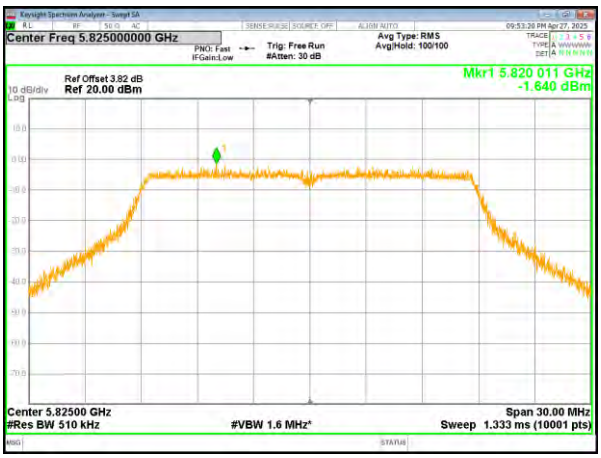

(802.11ac20) PSD plot on channel 149

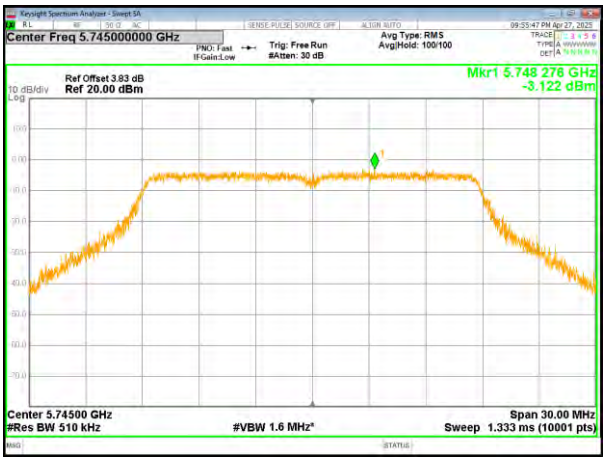

(802.11n40) PSD plot on channel 151

(802.11ac20) PSD plot on channel 157

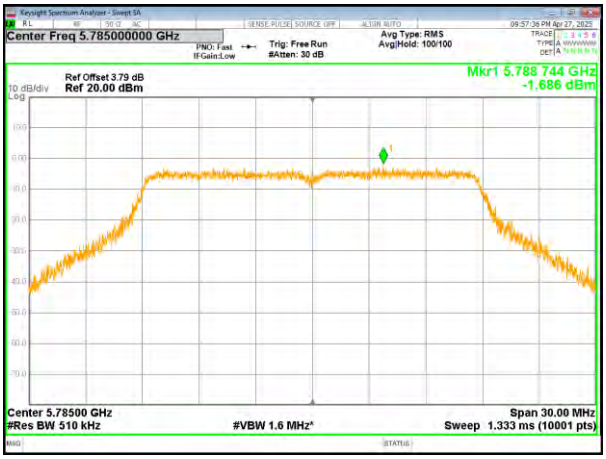

(802.11n40) PSD plot on channel 159

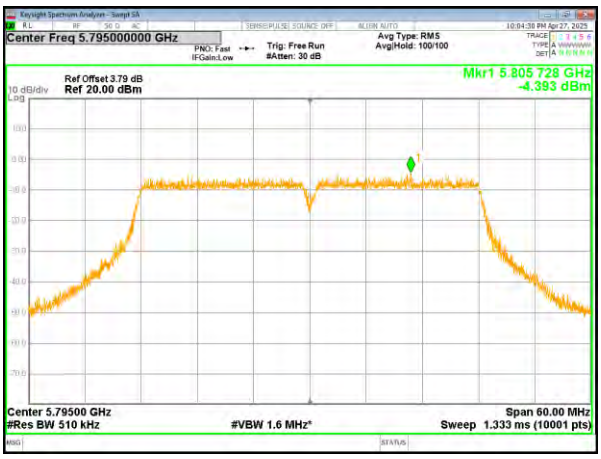

(802.11ac20) PSD plot on channel 165

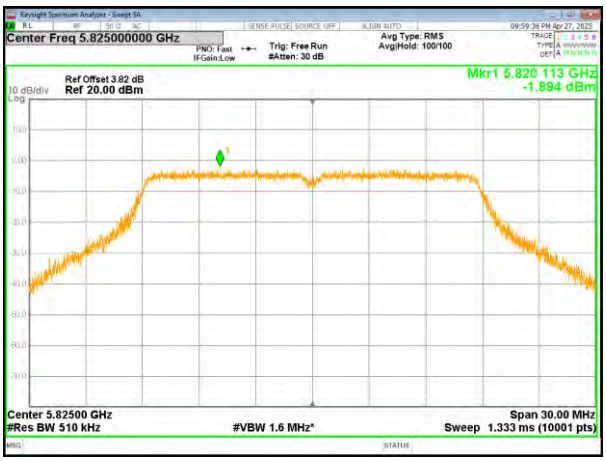

(802.11ac40) PSD plot on channel 151

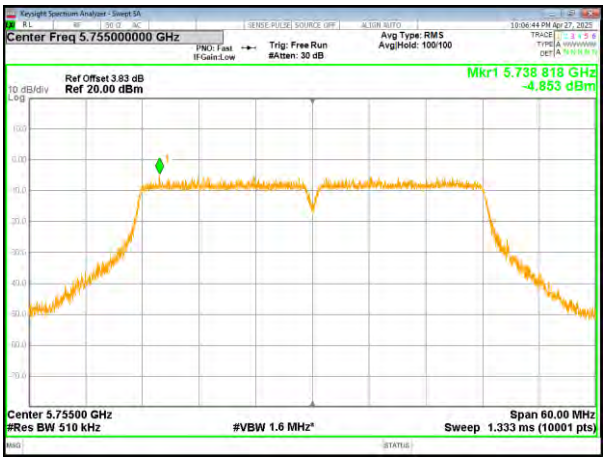

(802.11ac80) PSD plot on channel 155

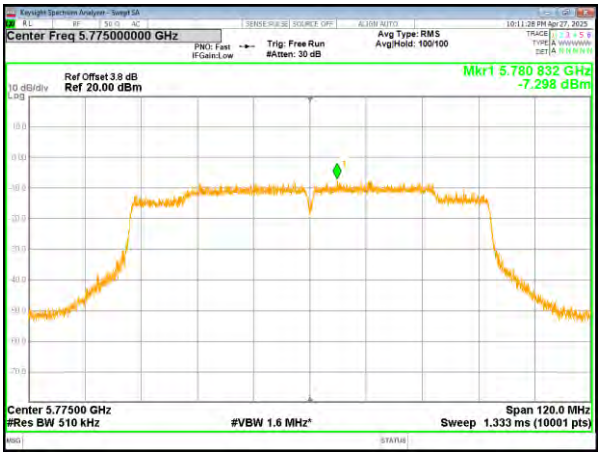

(802.11ac40) PSD plot on channel 159

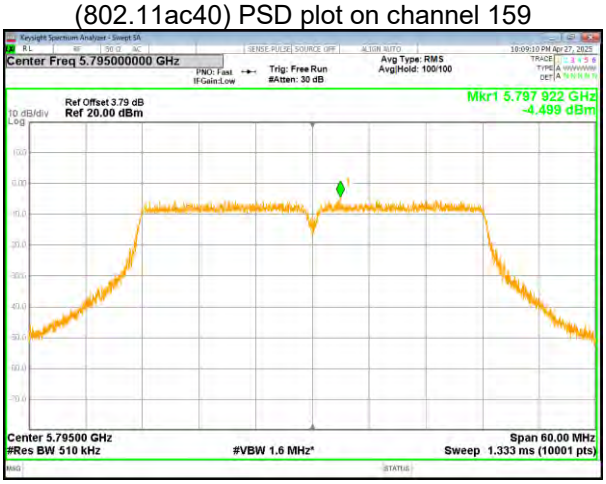

4.7 Band edge

4.7.1 Conducted test Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205	
Test Method:	ANSI C63.10: 2013	
Limit:	All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	
Test setup:	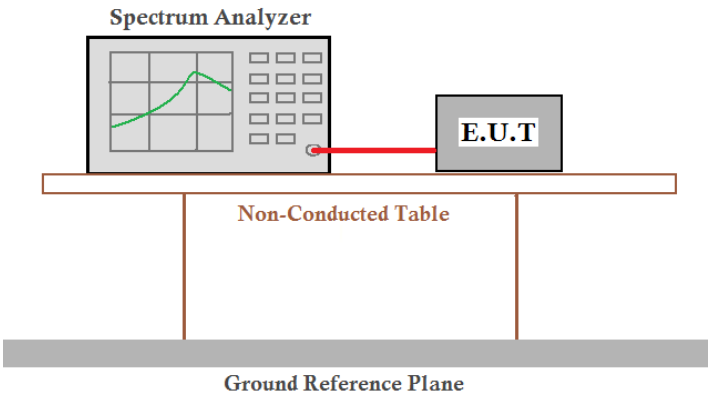	
Test Procedure:	1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. 3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span. 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete..	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Remark: Due to the margin value of the sideband test being greater than the antenna gain value, the test meets the requirements

5.180~5.240 GHz

(802.11a) Band Edge, Left Side

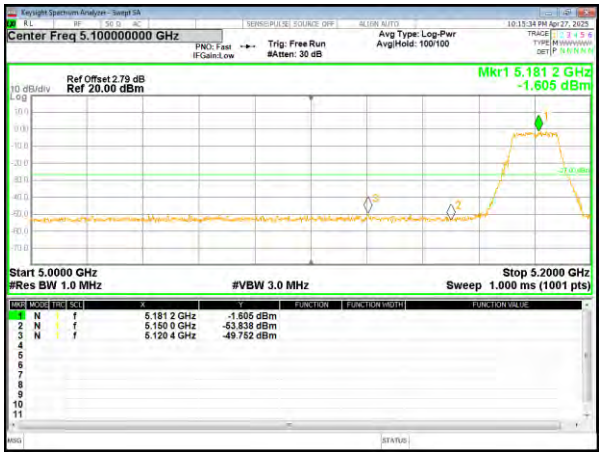

(802.11n20) Band Edge, Left Side

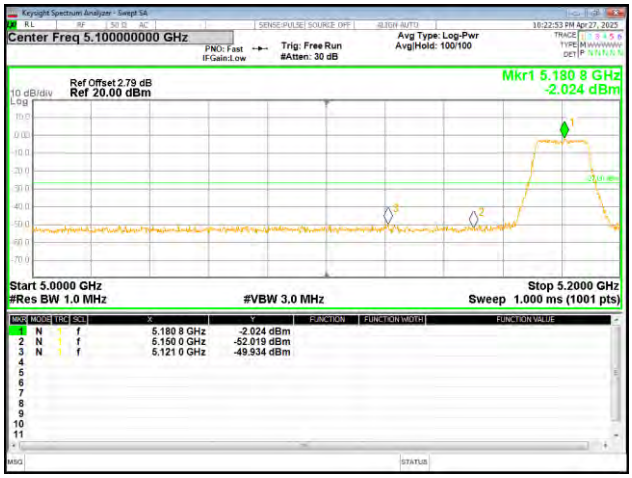

(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

(802.11ac20) Band Edge, Left Side

(802.11n40) Band Edge, Left Side

(802.11ac20) Band Edge, Right Side

(802.11n40) Band Edge, Right Side

Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

(802.11ac40) Band Edge, Left Side

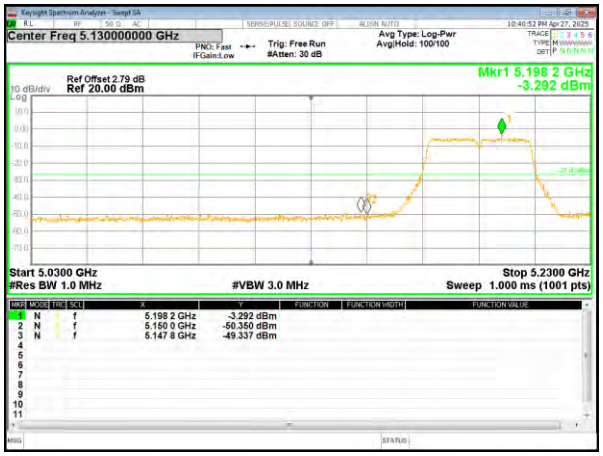

(802.11ac80) Band Edge

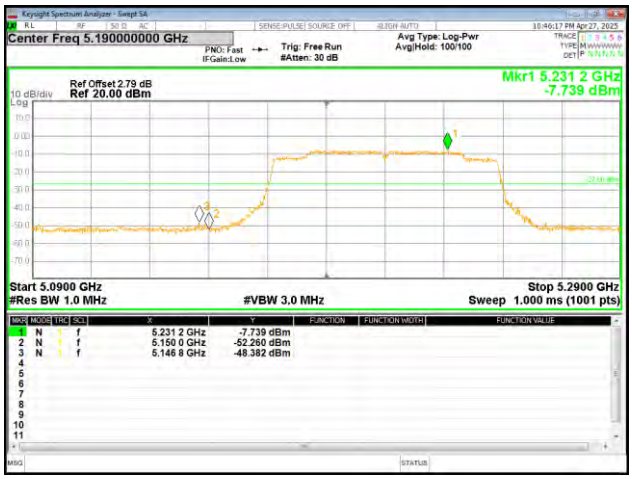

(802.11ac40) Band Edge, Right Side

Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

5.745~5.825 GHz

(802.11a) Band Edge, Left Side

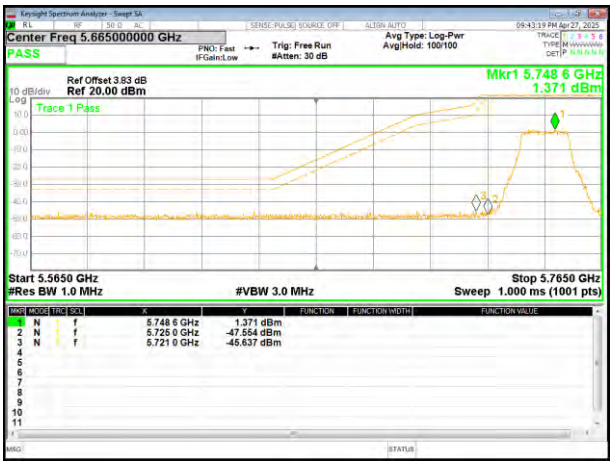

(802.11n20) Band Edge, Left Side

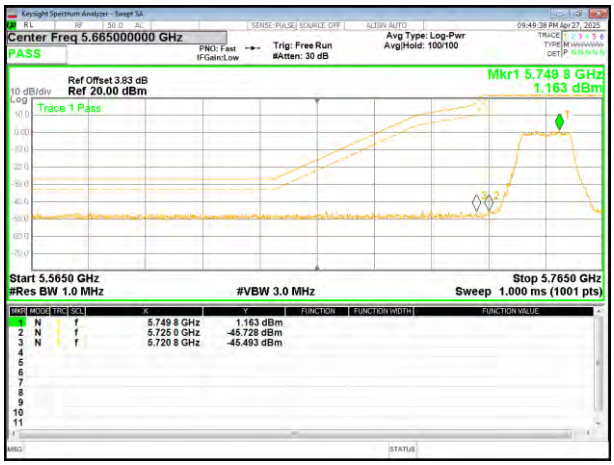

(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

Remark: Antenna gain and cable loss data included in Offset.

(802.11ac20) Band Edge, Left Side

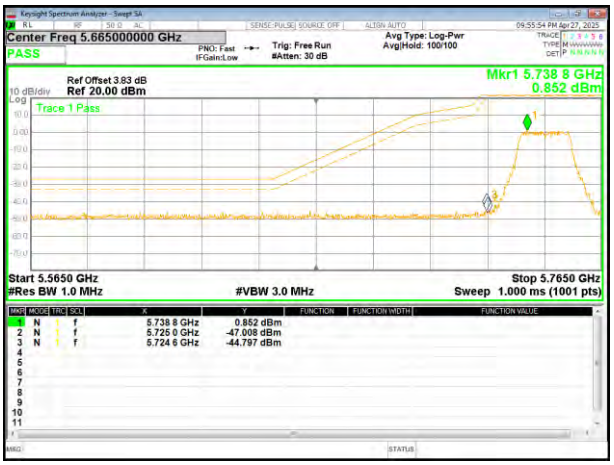

(802.11n40) Band Edge, Left Side

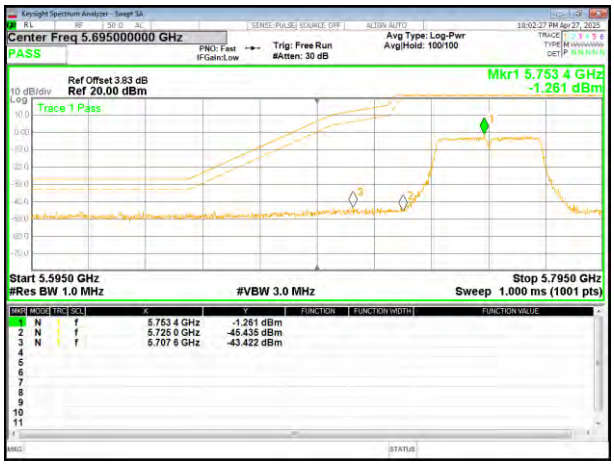

(802.11ac20) Band Edge, Right Side

(802.11n40) Band Edge, Right Side

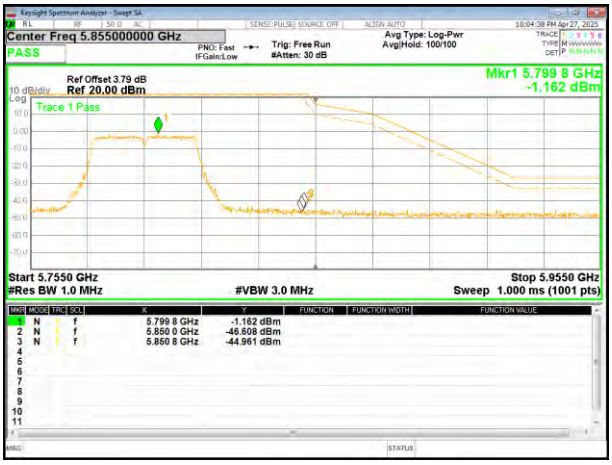

Remark: Antenna gain and cable loss data included in Offset.

(802.11ac40) Band Edge, Left Side

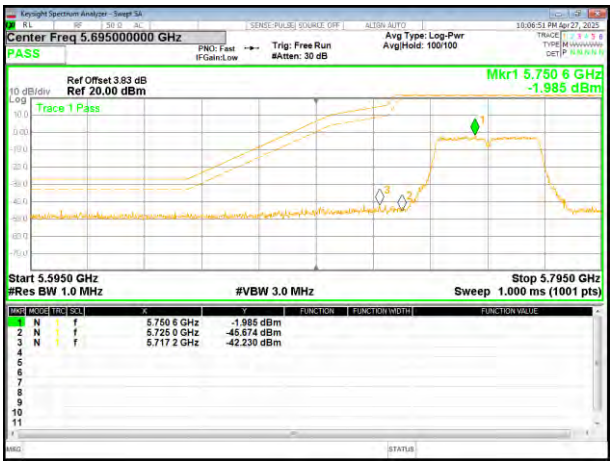

(802.11ac80) Band Edge

(802.11ac40) Band Edge, Right Side

Remark: Antenna gain and cable loss data included in Offset.

4.8 Spurious Emission

4.8.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 40GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	AV	1MHz	3MHz	Average Value

Limit:

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	300m
1.705MHz-30MHz	30	QP	30m
30MHz-88MHz	100	QP	3m
88MHz-216MHz	150	QP	
216MHz-960MHz	200	QP	
960MHz-1GHz	500	QP	

Frequency	Limit (dBm/MHz)	Remark
Above 1GHz	-27.0	Peak Value

Test setup:

For radiated emissions from 9kHz to 30MHz

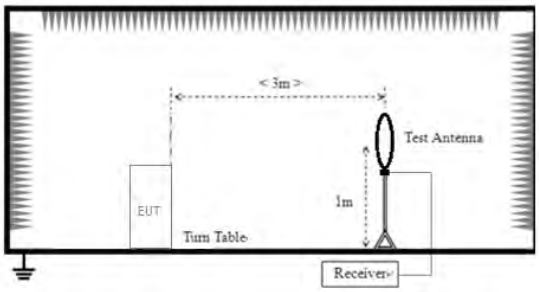

For radiated emissions from 30MHz to1GHz

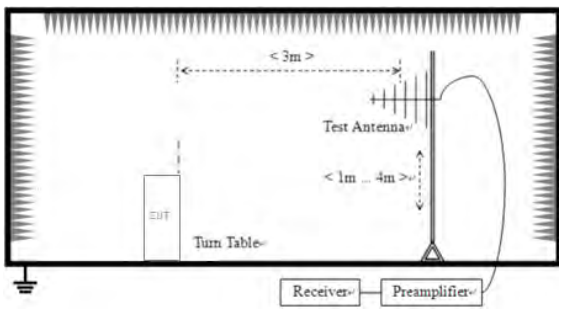

For radiated emissions above 1GHz

	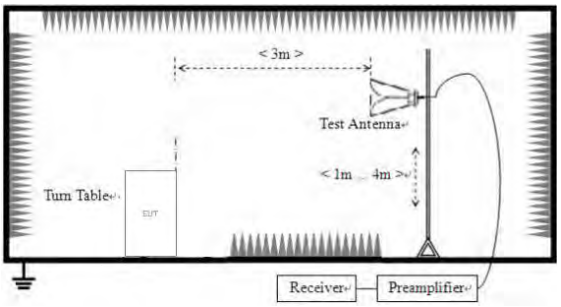
Test Procedure:	1. Place the EUT on a rotating table on a horizontal surface. Rotate the table 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remarks:

1. *The report only shows the worst mode.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement Data:

9 kHz ~ 30 MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Below 1GHz

Remark: The test data shows only the worst case 802.11a mode.

Temperature:	23.1℃	Relative Humidity:	64%
Pressure:	101.2kPar	Test Voltage :	DC 7.7V From Battery
Test Mode :	5.2G TX- 802.11a(5180MHz)		

Horizontal:

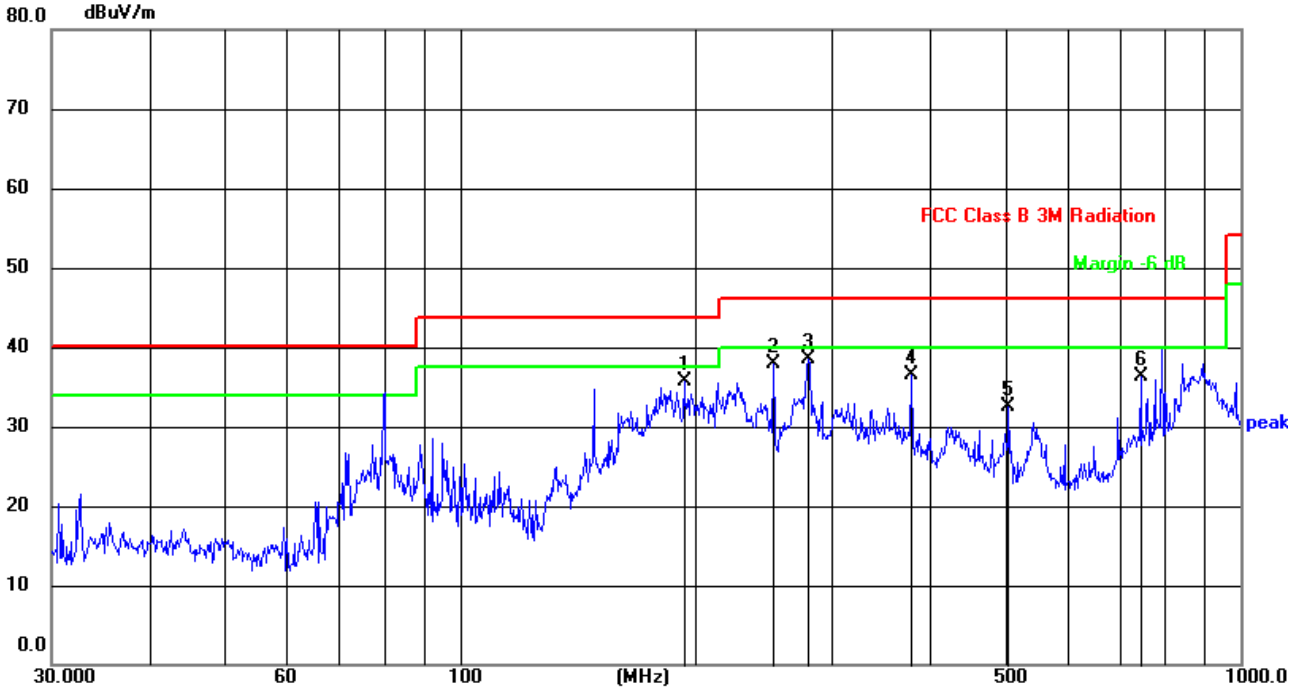

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	193.7726	58.83	-23.21	35.62	43.50	-7.88	QP
2	252.0627	60.11	-22.23	37.88	46.00	-8.12	QP
3	280.0237	59.77	-21.36	38.41	46.00	-7.59	QP
4	378.5842	54.50	-18.03	36.47	46.00	-9.53	QP
5	504.7062	46.55	-14.08	32.47	46.00	-13.53	QP
6	744.8659	44.60	-8.21	36.39	46.00	-9.61	QP

Vertical:

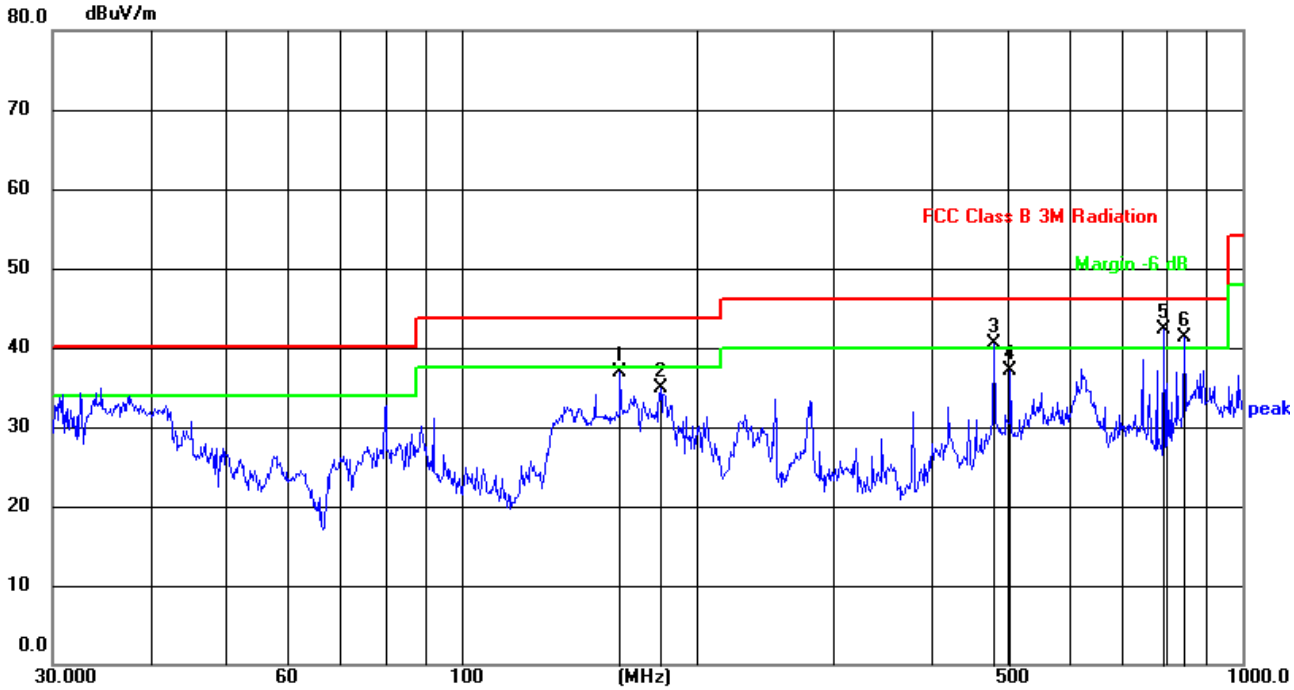

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	159.7844	57.52	-20.58	36.94	43.50	-6.56	QP
2	180.0164	57.43	-22.53	34.90	43.50	-8.60	QP
3	480.5276	55.78	-15.24	40.54	46.00	-5.46	QP
4	504.7062	51.13	-14.08	37.05	46.00	-8.95	QP
5	793.3958	49.09	-6.71	42.38	46.00	-3.62	QP
6	842.1295	47.51	-6.30	41.21	46.00	-4.79	QP

Remarks:
1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11a mode

Above 1GHz:

Remark: The test data shows only the worst case 802.11a mode.

Temperature:	23.1℃	Relative Humidity:	64%
Pressure:	101.2kPar	Test Voltage :	DC 7.7V From Battery
Test Mode :	5.2G TX- 802.11a		

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
Low Channel:5180MHz									
V	10360.00	44.00	46.20	8.27	38.50	44.57	68.20	-23.63	PK
V	10360.00	39.14	46.20	8.27	38.50	39.71	54.00	-14.29	AV
V	15540.00	48.84	46.30	10.35	38.70	51.59	74.00	-22.41	PK
V	15540.00	37.63	46.30	10.35	38.70	40.38	54.00	-13.62	AV
V	20720.00	54.63	57.40	11.93	37.80	46.96	68.20	-21.25	PK
V	20720.00	49.88	57.40	11.93	37.80	42.21	54.00	-11.79	AV
V	25900.00	51.11	56.50	13.45	39.70	47.76	68.20	-20.44	PK
V	25900.00	45.57	56.50	13.45	39.70	42.22	54.00	-11.78	AV
V	31080.00	47.93	56.10	16.12	41.60	49.55	68.20	-18.65	PK
V	31080.00	42.93	56.10	16.12	41.60	44.55	54.00	-9.45	AV
V	36260.00	44.84	56.80	18.29	42.80	49.13	68.20	-19.07	PK
V	36260.00	39.81	56.80	18.29	42.80	44.10	54.00	-9.91	AV
H	10360.00	43.43	46.20	8.27	38.50	44.00	68.20	-24.20	PK
H	10360.00	38.59	46.20	8.27	38.50	39.16	54.00	-14.84	AV
H	15540.00	48.61	46.30	10.35	38.70	51.36	74.00	-22.64	PK
H	15540.00	38.04	46.30	10.35	38.70	40.79	54.00	-13.21	AV
H	20720.00	54.40	57.40	11.93	37.80	46.73	68.20	-21.47	PK
H	20720.00	48.95	57.40	11.93	37.80	41.28	54.00	-12.72	AV
H	25900.00	51.09	56.50	13.45	39.70	47.74	68.20	-20.46	PK
H	25900.00	45.98	56.50	13.45	39.70	42.63	54.00	-11.37	AV
H	31080.00	47.14	56.10	16.12	41.60	48.76	68.20	-19.44	PK
H	31080.00	41.72	56.10	16.12	41.60	43.34	54.00	-10.66	AV
H	36260.00	44.71	56.80	18.29	42.80	49.00	68.20	-19.20	PK
H	36260.00	40.31	56.80	18.29	42.80	44.60	54.00	-9.40	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:5200MHz									
V	10400.00	43.42	46.20	8.27	38.50	43.99	68.20	-24.22	PK
V	10400.00	38.99	46.20	8.27	38.50	39.56	54.00	-14.44	AV
V	15600.00	48.32	46.30	10.35	38.40	50.77	74.00	-23.23	PK
V	15600.00	37.27	46.30	10.35	38.40	39.72	54.00	-14.28	AV
V	20800.00	54.39	57.40	11.93	37.80	46.72	68.20	-21.48	PK
V	20800.00	49.14	57.40	11.93	37.80	41.47	54.00	-12.53	AV
V	26000.00	51.24	56.50	13.45	39.80	47.99	68.20	-20.21	PK
V	26000.00	45.77	56.50	13.45	39.80	42.52	54.00	-11.48	AV
V	31200.00	47.25	56.10	16.12	41.60	48.87	68.20	-19.33	PK
V	31200.00	42.09	56.10	16.12	41.60	43.71	54.00	-10.30	AV
V	36400.00	44.84	56.80	18.29	42.80	49.13	68.20	-19.07	PK
V	36400.00	40.32	56.80	18.29	42.80	44.61	54.00	-9.39	AV
H	10400.00	43.90	46.20	8.27	38.50	44.47	68.20	-23.73	PK
H	10400.00	39.69	46.20	8.27	38.50	40.26	54.00	-13.74	AV
H	15600.00	50.07	46.30	10.35	38.40	52.52	74.00	-21.48	PK
H	15600.00	39.16	46.30	10.35	38.40	41.61	54.00	-12.39	AV
H	20800.00	55.43	57.40	11.93	37.80	47.76	68.20	-20.44	PK
H	20800.00	49.87	57.40	11.93	37.80	42.20	54.00	-11.80	AV
H	26000.00	49.02	56.50	13.45	39.80	45.77	68.20	-22.43	PK
H	26000.00	36.06	56.50	13.45	39.80	32.81	54.00	-21.19	AV
H	31200.00	47.10	56.10	16.12	41.60	48.72	68.20	-19.48	PK
H	31200.00	41.70	56.10	16.12	41.60	43.32	54.00	-10.68	AV
H	36400.00	44.56	56.80	18.29	42.80	48.85	68.20	-19.35	PK
H	36400.00	39.41	56.80	18.29	42.80	43.70	54.00	-10.30	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:5240MHz									
V	10480.00	42.03	46.20	8.27	38.60	42.70	68.20	-25.50	PK
V	10480.00	37.36	46.20	8.27	38.60	38.03	54.00	-15.97	AV
V	15720.00	44.07	46.30	10.35	38.40	46.52	74.00	-27.48	PK
V	15720.00	34.30	46.30	10.35	38.40	36.75	54.00	-17.25	AV
V	20960.00	50.98	57.40	11.93	37.50	43.01	68.20	-25.19	PK
V	20960.00	46.07	57.40	11.93	37.50	38.10	54.00	-15.90	AV
V	26200.00	46.97	56.50	13.45	40.10	44.02	68.20	-24.18	PK
V	26200.00	42.80	56.50	13.45	40.10	39.85	54.00	-14.15	AV
V	31440.00	44.17	56.10	16.12	41.30	45.49	68.20	-22.71	PK
V	31440.00	39.37	56.10	16.12	41.30	40.69	54.00	-13.31	AV
V	36680.00	41.24	56.80	18.29	43.10	45.83	68.20	-22.37	PK
V	36680.00	37.11	56.80	18.29	43.10	41.70	54.00	-12.30	AV
H	10480.00	41.22	46.20	8.27	38.60	41.89	68.20	-26.31	PK
H	10480.00	36.42	46.20	8.27	38.60	37.09	54.00	-16.91	AV
H	15720.00	45.40	46.30	10.35	38.40	47.85	74.00	-26.15	PK
H	15720.00	35.25	46.30	10.35	38.40	37.70	54.00	-16.30	AV
H	20960.00	51.72	57.40	11.93	37.50	43.75	68.20	-24.45	PK
H	20960.00	46.40	57.40	11.93	37.50	38.43	54.00	-15.57	AV
H	26200.00	47.40	56.50	13.45	40.10	44.45	68.20	-23.75	PK
H	26200.00	43.48	56.50	13.45	40.10	40.53	54.00	-13.47	AV
H	31440.00	44.40	56.10	16.12	41.30	45.72	68.20	-22.48	PK
H	31440.00	40.38	56.10	16.12	41.30	41.70	54.00	-12.30	AV
H	36680.00	42.25	56.80	18.29	43.10	46.84	68.20	-21.36	PK
H	36680.00	42.03	56.80	18.29	43.10	46.62	54.00	-7.38	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Temperature:	23.1℃	Relative Humidity:	64%
Pressure:	101.2kPar	Test Voltage :	DC 7.7V From Battery
Test Mode :	5.8G TX- 802.11ac		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenn Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Typ
Low Channel:5745MHz									
V	11490.00	48.01	46.10	8.77	39.10	49.78	74.00	-24.22	PK
V	11490.00	38.28	46.10	8.77	39.10	40.05	54.00	-13.95	AV
V	17235.00	44.30	47.60	11.10	38.70	46.50	68.20	-21.70	PK
V	17235.00	38.88	47.60	11.10	38.70	41.08	54.00	-12.92	AV
V	22980.00	56.68	56.90	12.73	37.70	50.21	74.00	-23.79	PK
V	22980.00	46.97	56.90	12.73	37.70	40.50	54.00	-13.50	AV
V	28725.00	48.96	55.60	14.25	40.30	47.91	68.20	-20.29	PK
V	28725.00	43.64	55.60	14.25	40.30	42.59	54.00	-11.41	AV
V	34470.00	44.99	55.90	17.26	42.10	48.45	68.20	-19.75	PK
V	34470.00	40.25	55.90	17.26	42.10	43.71	54.00	-10.29	AV
H	11490.00	48.33	46.10	8.77	39.10	50.10	74.00	-23.90	PK
H	11490.00	37.60	46.10	8.77	39.10	39.37	54.00	-14.63	AV
H	17235.00	42.77	47.60	11.10	38.70	44.97	68.20	-23.23	PK
H	17235.00	37.51	47.60	11.10	38.70	39.71	54.00	-14.29	AV
H	22980.00	59.03	56.90	12.73	37.70	52.56	74.00	-21.44	PK
H	22980.00	47.89	56.90	12.73	37.70	41.42	54.00	-12.58	AV
H	28725.00	48.94	55.60	14.25	40.30	47.89	68.20	-20.31	PK
H	28725.00	44.49	55.60	14.25	40.30	43.44	54.00	-10.56	AV
H	34470.00	45.39	55.90	17.26	42.10	48.85	68.20	-19.35	PK
H	34470.00	41.06	55.90	17.26	42.10	44.52	54.00	-9.48	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:5785MHz									
V	11570.00	48.71	46.10	8.77	39.10	50.48	74.00	-23.52	PK
V	11570.00	38.01	46.10	8.77	39.10	39.78	54.00	-14.22	AV
V	17355.00	44.27	47.60	11.10	38.70	46.47	68.20	-21.73	PK
V	17355.00	39.46	47.60	11.10	38.70	41.66	54.00	-12.34	AV
V	23140.00	56.33	56.90	12.73	37.70	49.86	74.00	-24.14	PK
V	23140.00	46.27	56.90	12.73	37.70	39.80	54.00	-14.20	AV
V	28925.00	48.45	55.60	14.25	40.30	47.40	68.20	-20.80	PK
V	28925.00	44.60	55.60	14.25	40.30	43.55	54.00	-10.45	AV
V	34710.00	44.77	55.90	17.26	42.40	48.53	68.20	-19.67	PK
V	34710.00	39.85	55.90	17.26	42.40	43.61	54.00	-10.39	AV
H	11570.00	49.54	46.10	8.77	39.10	51.31	74.00	-22.69	PK
H	11570.00	39.01	46.10	8.77	39.10	40.78	54.00	-13.22	AV
H	17355.00	42.57	47.60	11.10	38.70	44.77	68.20	-23.43	PK
H	17355.00	38.95	47.60	11.10	38.70	41.15	54.00	-12.85	AV
H	23140.00	59.32	56.90	12.73	37.70	52.85	74.00	-21.15	PK
H	23140.00	47.95	56.90	12.73	37.70	41.48	54.00	-12.52	AV
H	28925.00	48.72	55.60	14.25	40.30	47.67	68.20	-20.53	PK
H	28925.00	45.25	55.60	14.25	40.30	44.20	54.00	-9.80	AV
H	34710.00	46.48	55.90	17.26	42.40	50.24	68.20	-17.96	PK
H	34710.00	41.84	55.90	17.26	42.40	45.60	54.00	-8.40	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:5825MHz									
V	11650.00	47.03	46.10	8.77	39.10	48.80	74.00	-25.20	PK
V	11650.00	37.37	46.10	8.77	39.10	39.14	54.00	-14.86	AV
V	17475.00	43.56	47.90	11.23	38.90	45.79	68.20	-22.41	PK
V	17475.00	38.94	47.90	11.23	38.90	41.17	54.00	-12.83	AV
V	23300.00	54.50	57.10	12.73	37.80	47.93	68.20	-20.27	PK
V	23300.00	49.02	57.10	12.73	37.80	42.45	54.00	-11.55	AV
V	29125.00	48.93	55.80	14.25	40.50	47.88	68.20	-20.33	PK
V	29125.00	43.30	55.80	14.25	40.50	42.25	54.00	-11.75	AV
V	34950.00	43.28	56.30	17.91	42.50	47.39	68.20	-20.81	PK
V	34950.00	39.44	56.30	17.91	42.50	43.55	54.00	-10.45	AV
H	11650.00	49.99	46.10	8.77	39.10	51.76	74.00	-22.24	PK
H	11650.00	38.85	46.10	8.77	39.10	40.62	54.00	-13.38	AV
H	17475.00	41.64	47.90	11.23	38.90	43.87	68.20	-24.33	PK
H	17475.00	37.81	47.90	11.23	38.90	40.04	54.00	-13.96	AV
H	23300.00	53.46	57.10	12.73	37.80	46.89	68.20	-21.31	PK
H	23300.00	49.88	57.10	12.73	37.80	43.31	54.00	-10.69	AV
H	29125.00	49.83	55.80	14.25	40.50	48.78	68.20	-19.42	PK
H	29125.00	45.21	55.80	14.25	40.50	44.16	54.00	-9.84	AV
H	34950.00	47.03	56.30	17.91	42.50	51.14	68.20	-17.06	PK
H	34950.00	37.37	56.30	17.91	42.50	41.48	54.00	-12.52	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.8.2 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)	
Test Method:	ANSI C63.10:2013	
Limit:	-27dBm/MHz	
Test setup:	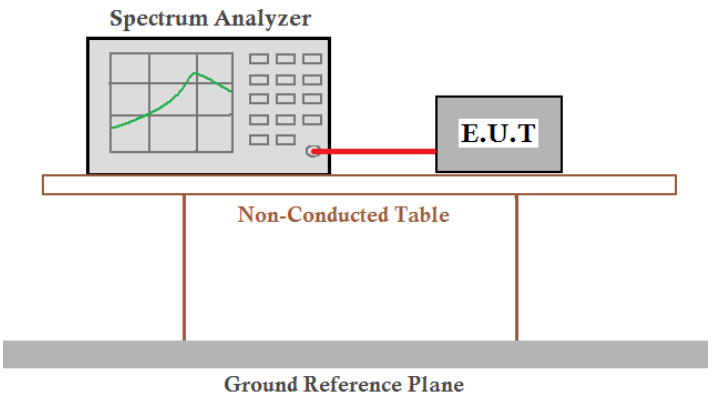	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 64%RH
Test voltage:	DC 7.7V From Battery	
Test results:	Pass	

Remark:

1. Antenna gain and cable loss data included in Offset.

2. We tested 30MHz-40GHz frequency and found 27GHz-40GHz test data was very lower (close to the noise of the spectrum analyzer). The test report only showed data for 30MHz-27GHz.

5180-5240MHz

Test Plot

802.11a on channel 36

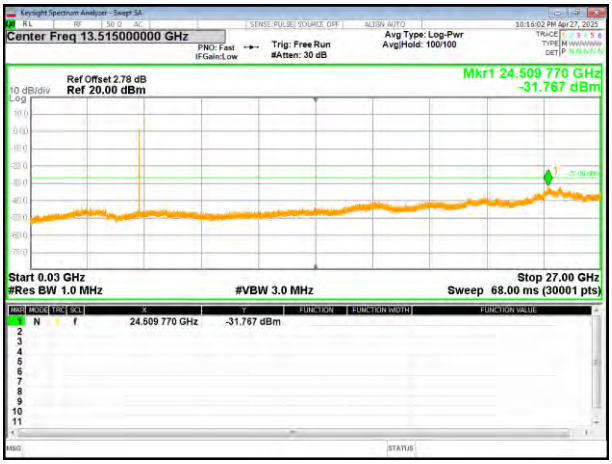

802.11a on channel 40

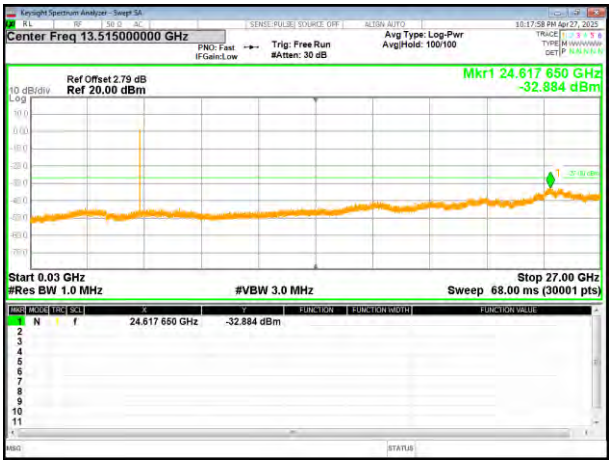

802.11a on channel 48

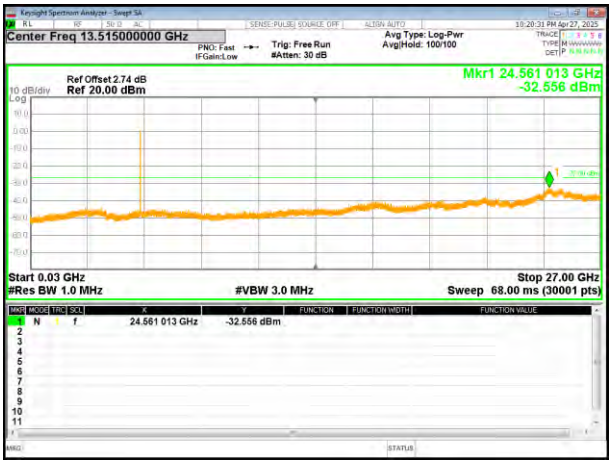

802.11n20 on channel 36

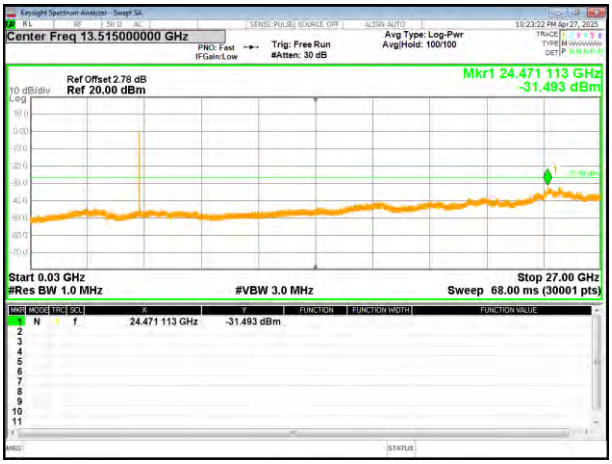

802.11n20 on channel 40

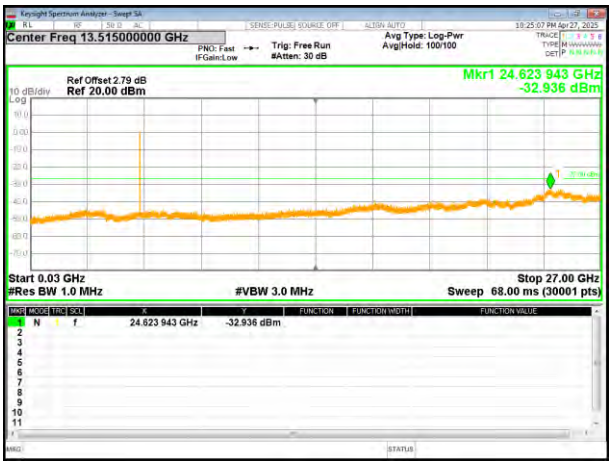

802.11n20 on channel 48

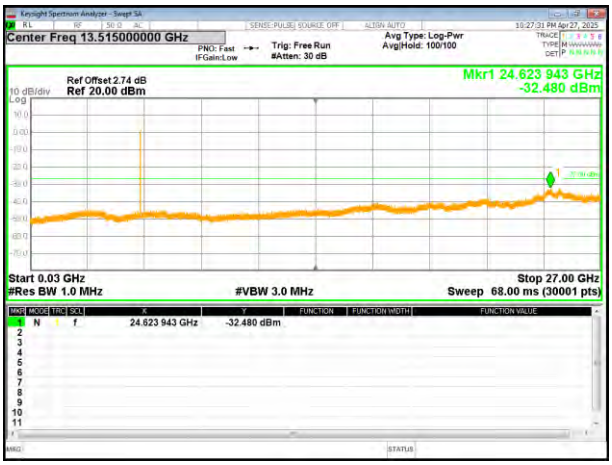

Test Plot

802.11ac20 on channel 36

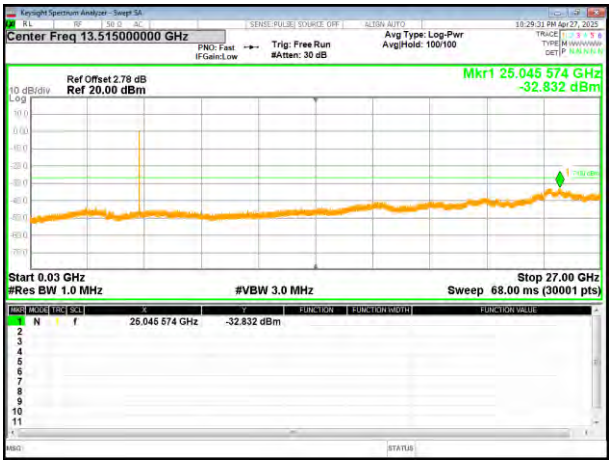

802.11ac20 on channel 40

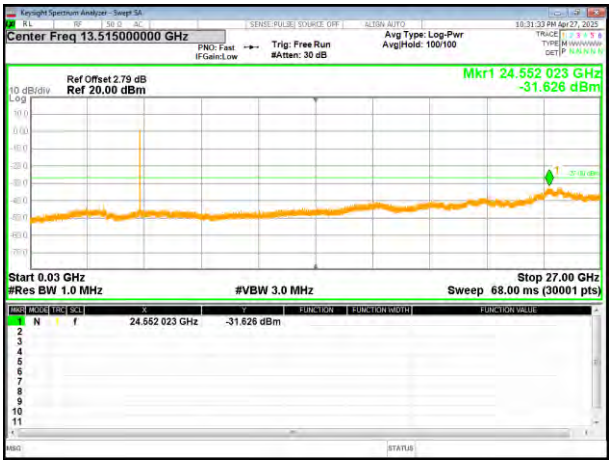

802.11ac20 on channel 48

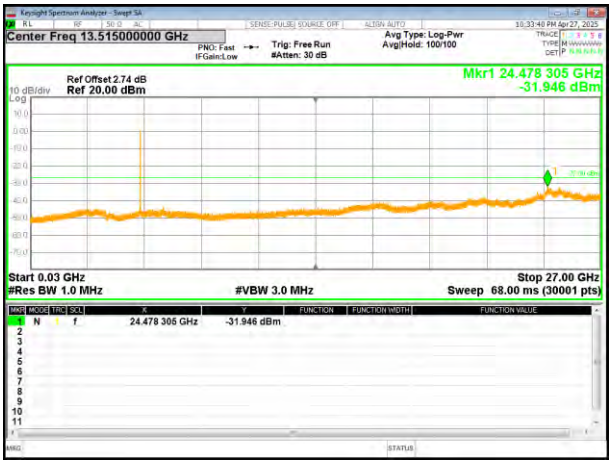

802.11n40 on channel 38

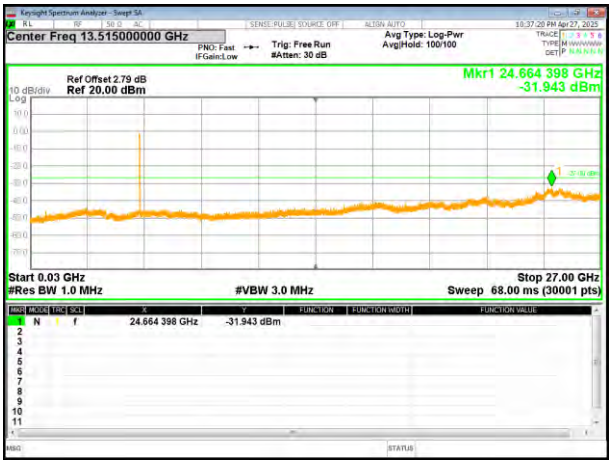

802.11n40 on channel 46

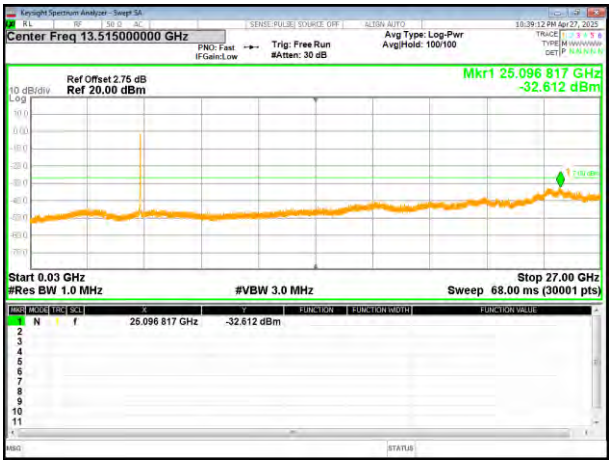

Test Plot

802.11ac40 on channel 38

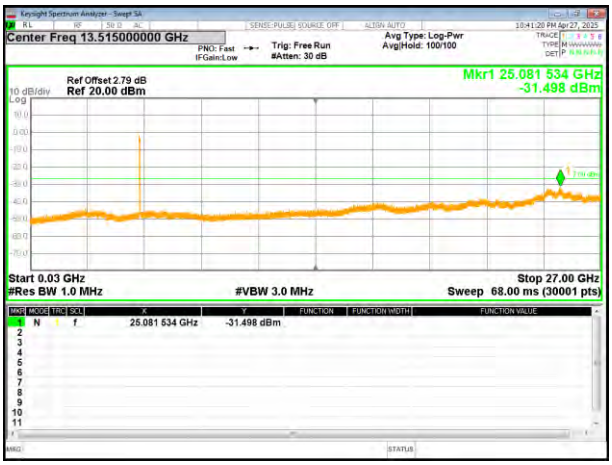

802.11ac40 on channel 46

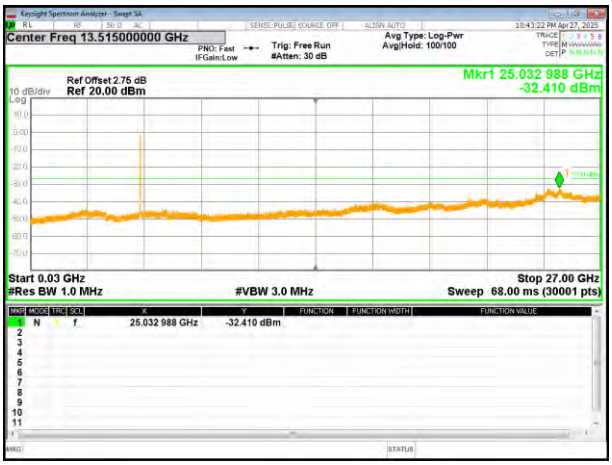

802.11ac80 on channel 42

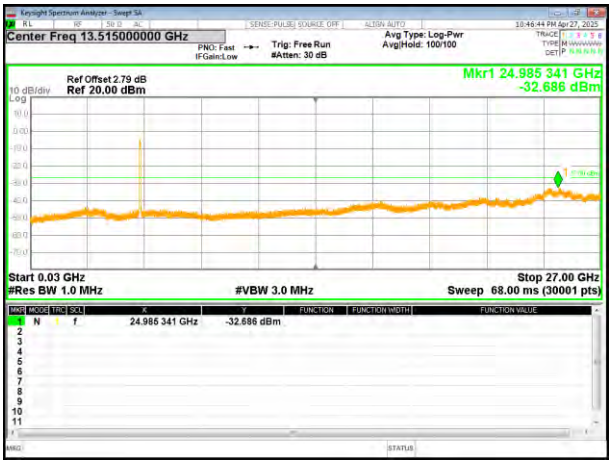

5745-5825MHz

Test Plot

802.11a on channel 149

802.11a on channel 157

802.11a on channel 165

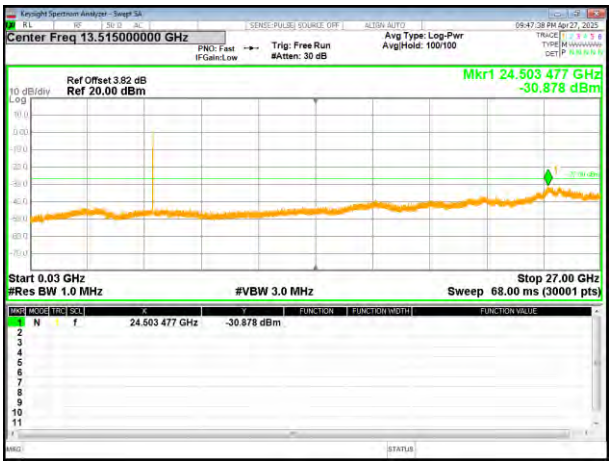

802.11n20 on channel 149

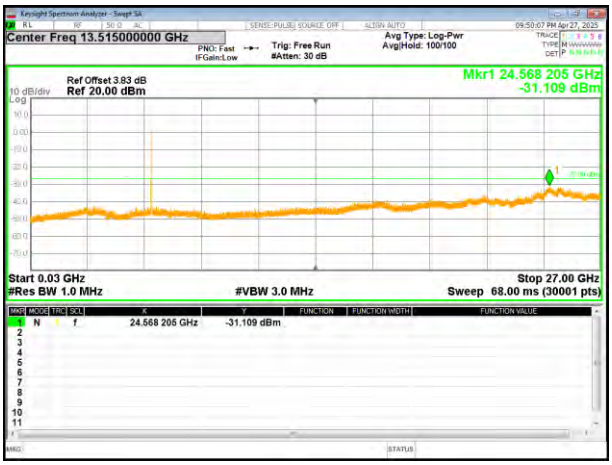

802.11n20 on channel 157

802.11n20 on channel 165

Test Plot

802.11ac20 on channel 149

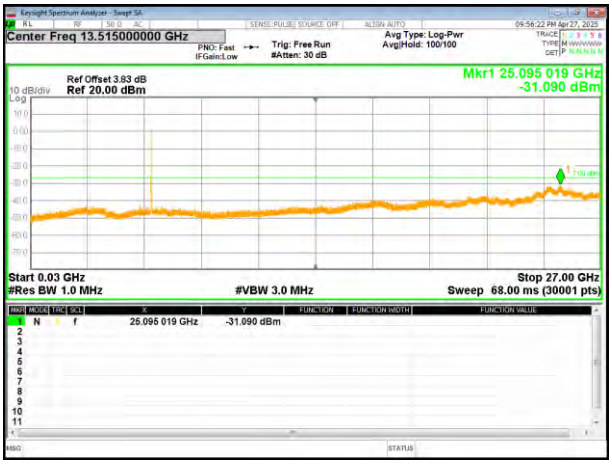

802.11ac20 on channel 157

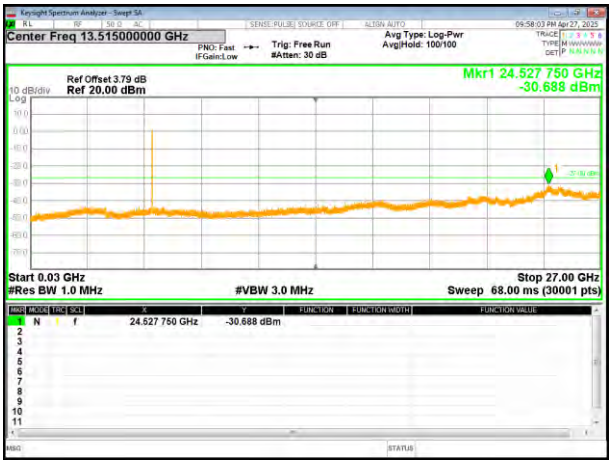

802.11ac20 on channel 165

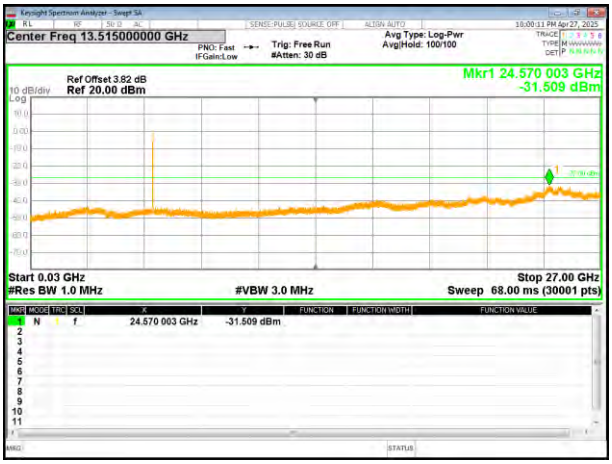

802.11n40 on channel 151

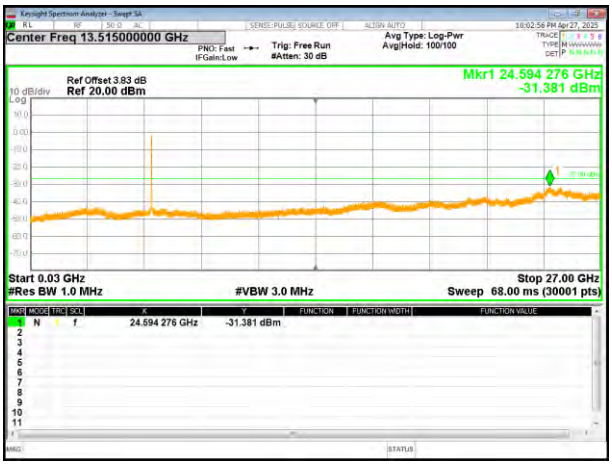

802.11n40 on channel 159

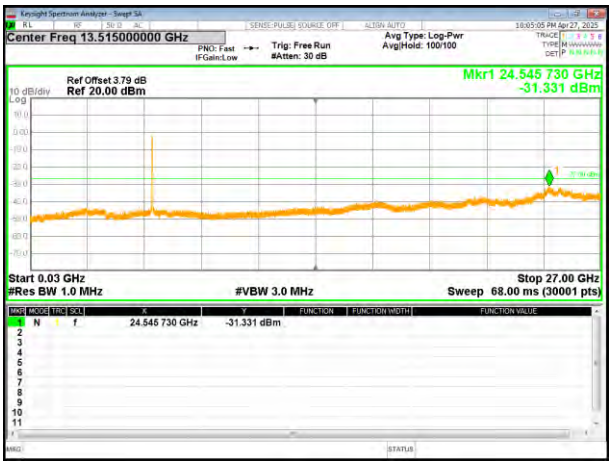

Test Plot

802.11ac40 on channel 151

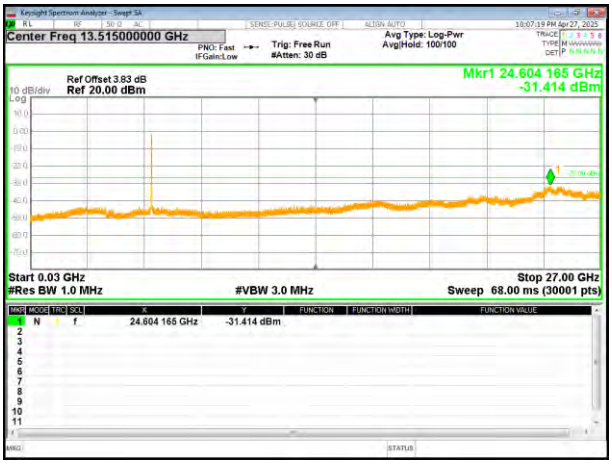

802.11ac40 on channel 159

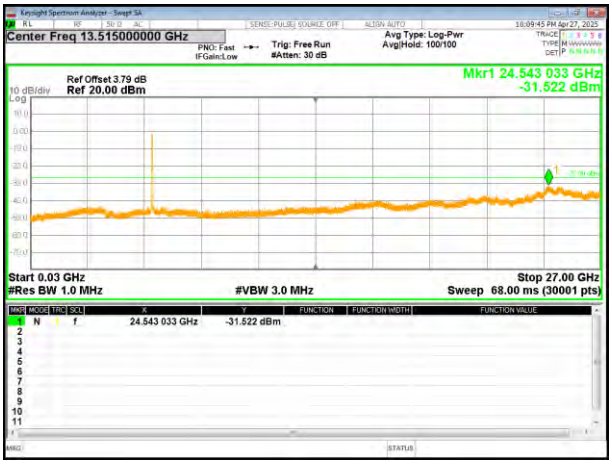

802.11ac80 on channel 155

4.9 Frequency stability

Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minute s. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test setup:	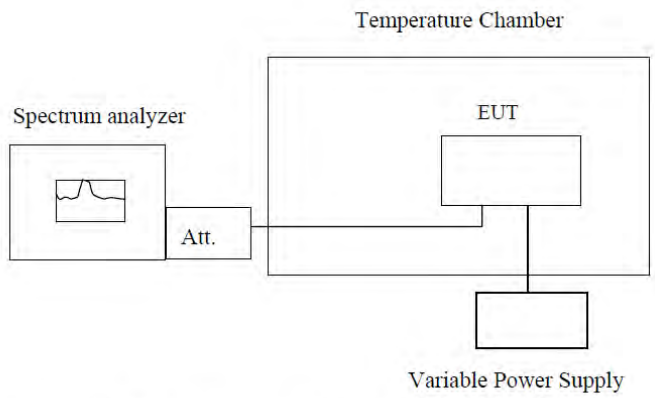 **Note :** Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.					
Power Supply: DC 7.7V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5180	5180.002	5180.003	5180.026	5180.094
	5190	5189.992	5190.033	5190.026	5190.094
	5200	5200.002	5200.053	5200.016	5200.084
	5210	5209.992	5210.033	5300.026	5210.074
	5220	5220.012	5220.033	5220.016	5220.084
	5230	5229.992	5230.053	5230.036	5300.086
	5240	5240.012	5240.043	5240.016	5240.085
-20	5180	5180.012	5180.033	5180.026	5180.044
	5190	5190.012	5190.033	5190.016	5190.074
	5200	5200.002	5200.033	5200.026	5200.104
	5210	5210.012	5300.033	5210.016	5210.084
	5220	5220.002	5220.033	5220.036	5220.074
	5230	5230.002	5230.053	5230.016	5230.105
	5240	5239.972	5240.023	5240.036	5240.095
-10	5180	5179.962	5180.033	5180.026	5180.094
	5190	5189.992	5190.033	5190.016	5190.094
	5200	5200.022	5200.033	5200.026	5200.084
	5210	5210.002	5300.033	5210.016	5210.094
	5220	5219.992	5220.033	5220.036	5220.084
	5230	5230.022	5230.053	5230.016	5230.085
	5240	5240.012	5240.023	5240.036	5240.055
0	5180	5180.002	5180.003	5180.026	5180.094
	5190	5189.992	5190.033	5190.026	5190.094
	5200	5200.002	5200.053	5200.016	5200.084
	5210	5209.992	5210.033	5300.026	5210.074
	5220	5220.012	5220.033	5220.016	5220.084
	5230	5229.992	5230.053	5230.036	5300.086
	5240	5240.012	5240.043	5240.016	5240.085
10	5180	5179.992	5180.033	5180.026	5180.094
	5190	5190.002	5190.033	5190.016	5180.094
	5200	5199.992	5200.033	5200.026	5190.094
	5210	5209.992	5210.033	5210.016	5200.084
	5220	5220.002	5220.053	5220.036	5210.094
	5230	5230.022	5230.023	5230.016	5220.084
	5240	5239.992	5240.043	5240.036	5230.085
20	5180	5180.012	5180.033	5180.026	5180.044
	5190	5190.012	5190.033	5190.016	5190.074

	5200	5200.002	5200.033	5200.026	5200.104
	5210	5210.012	5300.033	5210.016	5210.084
	5220	5220.002	5220.033	5220.036	5220.074
	5230	5230.002	5230.053	5230.016	5230.105
	5240	5239.972	5240.023	5240.036	5240.095
30	5180	5180.012	5180.033	5180.026	5180.044
	5190	5190.012	5190.033	5190.016	5190.074
	5200	5200.002	5200.033	5200.026	5200.104
	5210	5210.012	5300.033	5210.016	5210.084
	5220	5220.002	5220.033	5220.036	5220.074
	5230	5230.002	5230.053	5230.016	5230.105
	5240	5239.972	5240.023	5240.036	5240.095
40	5180	5180.002	5180.023	5180.026	5180.084
	5190	5190.002	5190.033	5190.016	5190.084
	5200	5199.992	5200.023	5200.026	5200.074
	5210	5300.003	5210.033	5210.016	5300.086
	5220	5219.992	5220.033	5220.036	5220.074
	5230	5230.012	5230.053	5230.016	5230.095
	5240	5239.992	5240.023	5240.036	5240.075
50	5180	5179.962	5180.033	5180.016	5180.204
	5190	5189.992	5190.033	5190.026	5200.084
	5200	5200.022	5200.033	5200.016	5200.104
	5210	5210.002	5300.033	5210.016	5210.084
	5220	5219.992	5220.033	5220.026	5220.104
	5230	5230.022	5230.053	5230.046	5230.095
	5240	5240.012	5240.023	5240.016	5240.105

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
DC 6.54V	5180	5180.002	5180.023	5180.036	5180.094
	5190	5189.992	5190.033	5190.036	5190.074
	5200	5200.002	5200.023	5200.026	5200.074
	5210	5210.012	5210.033	5210.036	5210.094
	5220	5219.992	5220.033	5220.026	5220.084
	5230	5229.992	5230.053	5230.026	5230.095
	5240	5180.132	5180.043	5180.026	5180.074
DC 7.7V	5180	5200.002	5190.033	5190.016	5190.084
	5190	5200.032	5200.033	5200.026	5200.074
	5200	5210.002	5210.043	5210.016	5210.074
	5210	5220.022	5220.043	5220.036	5220.084
	5220	5230.012	5300.043	5230.016	5230.105
	5230	5240.022	5240.043	5240.036	5240.085
	5240	5180.132	5180.043	5180.026	5180.074
DC 8.86V	5180	5180.012	5180.043	5180.016	5180.074
	5190	5190.012	5190.043	5190.026	5190.084
	5200	5200.002	5200.033	5200.016	5200.074
	5210	5210.012	5210.043	5210.016	5210.074
	5220	5220.002	5220.043	5220.026	5220.084
	5230	5230.002	5230.033	5230.046	5230.105
	5240	5239.972	5240.013	5240.016	5240.075

Frequency stability versus Temp.					
Power Supply: DC 7.7V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5745	5745.027	5745.022	5744.647	5745.065
	5755	5744.977	5755.032	5755.037	5755.085
	5775	5754.998	5775.032	5775.037	5775.095
	5785	5775.008	5785.032	5785.037	5785.086
	5795	5784.998	5795.042	5795.017	5795.096
	5825	5795.008	5825.032	5825.017	5825.106
-20	5745	5744.997	5745.022	5745.027	5745.085
	5755	5755.018	5755.032	5755.027	5755.115
	5775	5774.998	5775.032	5775.037	5775.105
	5785	5785.008	5785.032	5785.027	5785.096
	5795	5795.008	5795.042	5795.017	5795.086
	5825	5825.018	5825.032	5825.027	5825.016
-10	5745	5744.997	5745.032	5745.017	5745.155
	5755	5755.008	5755.032	5755.037	5744.715
	5775	5774.998	5775.052	5775.017	5755.105
	5785	5784.988	5785.032	5785.027	5775.105
	5795	5794.998	5795.022	5795.027	5785.106
	5825	5824.928	5825.032	5825.037	5795.086
0	5745	5744.997	5745.032	5745.017	5745.085
	5755	5755.008	5755.032	5755.027	5755.075
	5775	5775.028	5775.022	5775.047	5775.085
	5785	5784.998	5785.022	5785.017	5785.096
	5795	5794.998	5795.022	5795.017	5795.116
	5825	5824.998	5824.952	5825.017	5825.106
10	5745	5744.987	5745.042	5745.017	5745.095
	5755	5755.008	5755.042	5755.037	5755.115
	5775	5775.008	5775.042	5775.017	5775.095
	5785	5785.008	5785.032	5785.027	5785.086
	5795	5795.018	5795.022	5795.027	5795.076
	5825	5824.998	5825.032	5825.037	5825.117
20	5745	5745.007	5745.052	5745.027	5745.085
	5755	5755.028	5755.022	5755.047	5755.105
	5775	5775.008	5775.052	5775.027	5775.085
	5785	5784.998	5785.052	5785.017	5785.116
	5795	5794.988	5795.042	5795.007	5795.106
	5825	5825.028	5825.052	5825.047	5825.117
30	5745	5744.987	5745.042	5745.017	5745.095
	5755	5755.008	5755.042	5755.037	5755.115
	5775	5775.008	5775.042	5775.017	5775.095
	5785	5785.008	5785.032	5785.027	5785.086
	5795	5795.018	5795.022	5795.027	5795.076
	5825	5824.998	5825.032	5825.037	5825.117
40	5745	5745.007	5745.032	5745.017	5745.085
	5755	5755.018	5755.042	5755.037	5755.105
	5775	5775.018	5775.042	5775.017	5775.085

	5785	5785.008	5785.032	5785.027	5785.096
	5795	5794.998	5795.042	5795.027	5795.096
	5825	5825.008	5825.042	5825.037	5825.106
50	5745	5744.997	5745.032	5745.017	5745.085
	5755	5755.018	5755.042	5755.027	5755.095
	5775	5774.998	5775.042	5775.017	5775.116
	5785	5785.008	5785.032	5785.007	5785.086
	5795	5795.008	5795.042	5795.017	5795.086
	5825	5825.018	5825.042	5824.947	5825.086

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
DC 6.54V	5745	5744.987	5745.032	5745.017	5745.085
	5755	5755.008	5755.032	5755.037	5755.105
	5775	5775.008	5775.022	5775.037	5775.085
	5785	5785.008	5785.022	5785.017	5785.096
	5795	5795.018	5795.022	5795.037	5795.096
	5825	5824.998	5824.952	5825.037	5825.106
DC 7.7V	5745	5744.987	5745.042	5745.017	5745.095
	5755	5755.008	5755.042	5755.037	5755.115
	5775	5775.008	5775.042	5775.017	5775.095
	5785	5785.008	5785.032	5785.027	5785.086
	5795	5795.018	5795.022	5795.027	5795.076
	5825	5824.998	5825.032	5825.037	5825.117
DC 8.86V	5745	5745.007	5745.052	5745.027	5745.085
	5755	5755.028	5755.022	5755.047	5755.105
	5775	5775.008	5775.052	5775.027	5775.085
	5785	5784.998	5785.052	5785.017	5785.116
	5795	5794.988	5795.042	5795.007	5795.106
	5825	5825.028	5825.052	5825.047	5825.117

5 Test Setup Photo

Reference to the **appendix I** for details.

6 EUT Constructional Details

Reference to the **appendix II** for details.

------END------