


英文正面



尺寸: 420X90 毫米

Wireless Bedwetting Alarm



Model:J013



Introduction to products:




- Switch:** Long press to turn the device on and off.
- Mode :** Short press can switch between alarm modes
Sound + Light / Vibration + Light / Sound + Vibration + Light
- Volume:** Short press can adjust the volume. There are 3 volume levels to choose from.

The method for testing whether the product is working properly


Step 1: Turn on the main unit, set the functions of the main unit according to the requirements, and confirm that the function alarms are normal.




Step 3: Observe whether it is operating normally.



Step 4: Observe whether the main unit is giving normal alarms.

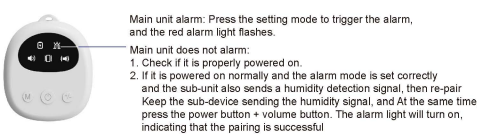

Step 5: Check the sub-unit's battery level



Product Use :



Please wear the product correctly

Please place the sensing sensor clip in an area where urine is likely to get wet

Product Specifications:

	classification	Parameter	Note
Electrical parameters	The rated voltage	3.7V	
	Charging voltage	5V~1A	
	Rated current (DC)	400mAh/90mAh	Host machine+ Child machine
	Rated power (DC)	0.5W / 0.01W	Host machine+ Child machine
Product parameters	Product size	58*47*16 40*30*22	
	Color box package size	110*90*50	
	Product net weight	36g+14g=50g	
	The product gross weight	150g	
	Carton size	61*25.5*34.5cm	

parts list:

Name	Specification	quantity
Host		1
USB Charging cable		1
Hanging rope		1
Instructions		1
Record card		2
Emoji sticker		2

Question: How to charge?

Answer: Use the dedicated charging cable for charging.
When the main unit and the sub-unit are running out of power - the battery level indicator shows a red light.
During charging - the battery level indicator flashes a red light.
When fully charged - the battery level indicator shows a green light.

Question: There is a delay in the alarm system ?

Answer: This is because the signal transmission from the sub-machine and the reception by the main machine take time.
The length of this time varies, which can lead to a delay phenomenon.
The factors causing the delay in the alarm are related to the usage scenario and the distance.

Question: The main unit does not give an alarm?

Answer: Analyzing and identifying the causes fall into the following scenarios:
1. The distance used is too far, exceeding the transmission and reception range of the signal.
2. There are too many obstructions such as sealed areas or walls crossed, resulting in signal loss and failure to receive.
It is recommended to conduct a direct and short-distance test in an open environment to check if the main unit is functioning properly.

Question: Reasons for the absence of alarm from the main unit

Answer: The analysis and troubleshooting of the causes are as follows:
1. If the slave machine fails to detect the humidity signal, check whether the humidity at the detection point is sufficient and whether the slave machine is powered on. Charge it with a charger and test again.
2. If the slave machine detects the humidity signal but the main machine functions normally Please re-pair the main machine and the slave machine again

Question: How to re-pair and re-calibrate the host and the subunit?

Answer: The slave machine will send out a humidity detection signal. Press the power button on the main unit and the music button simultaneously.
Once you hear the "di di" sound or the alarm sound, the pairing process is complete.
Then test if the alarm function is working properly.

FCC Caution :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

