



10.6.2. Test Graphs






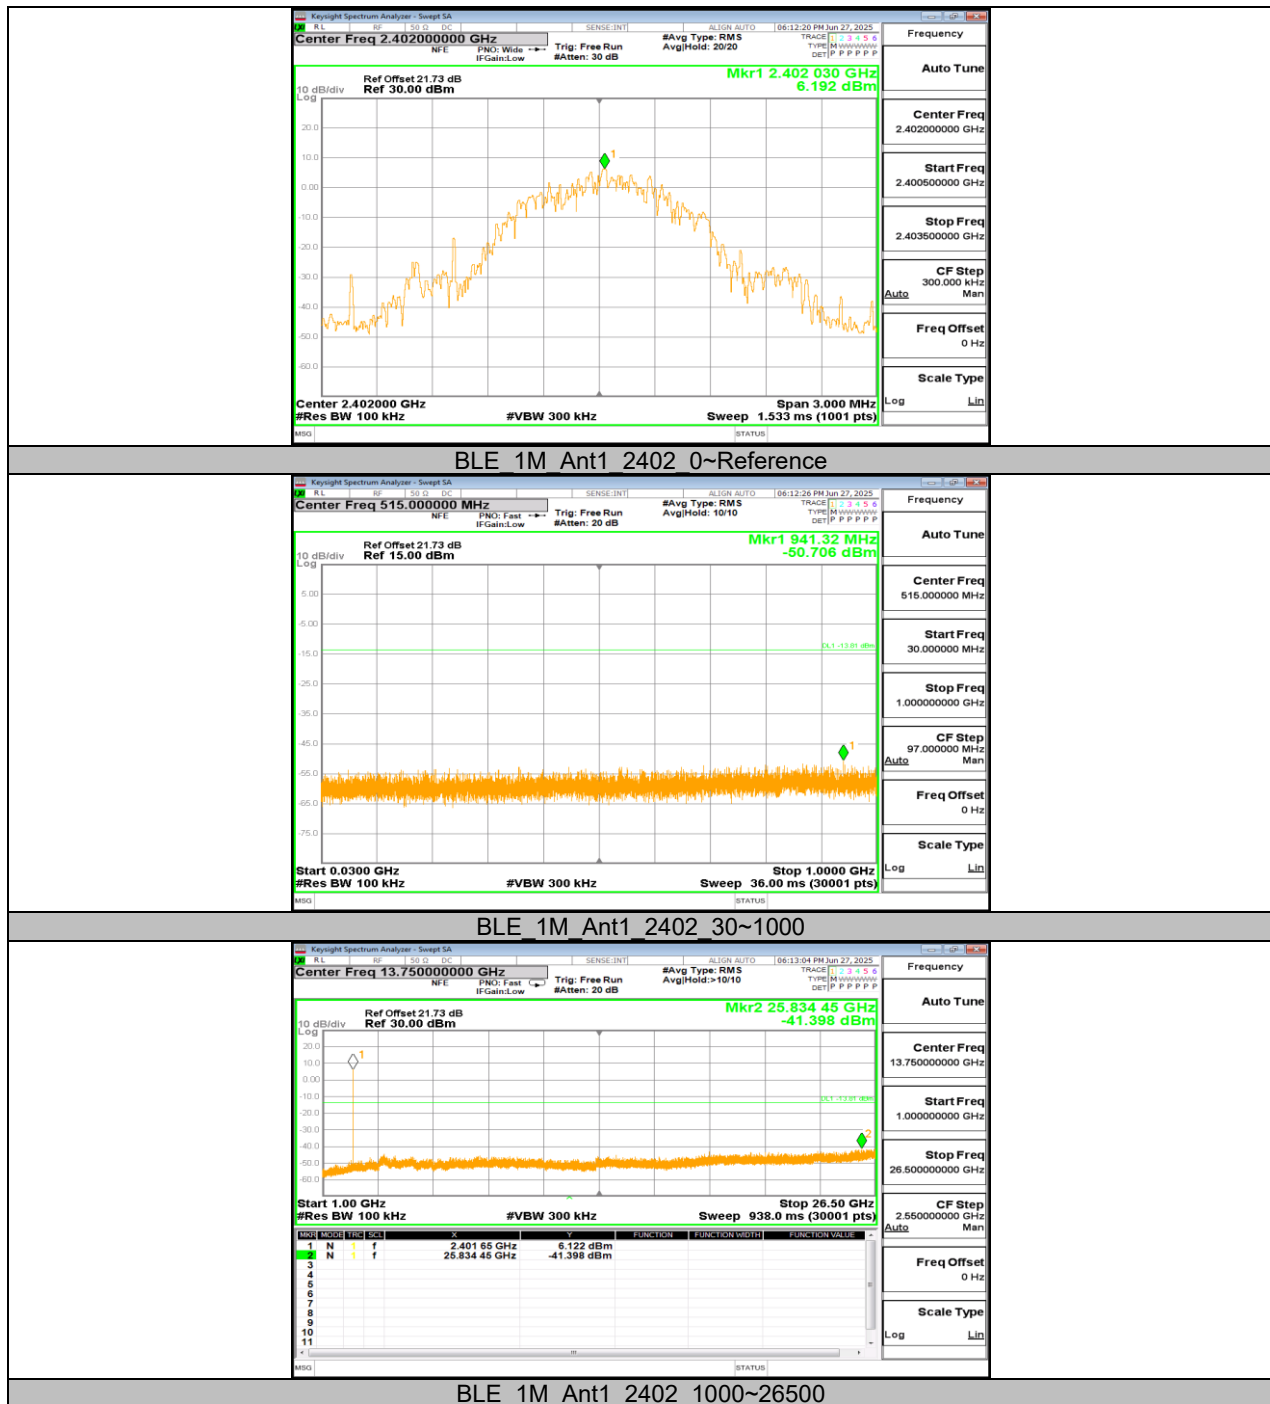

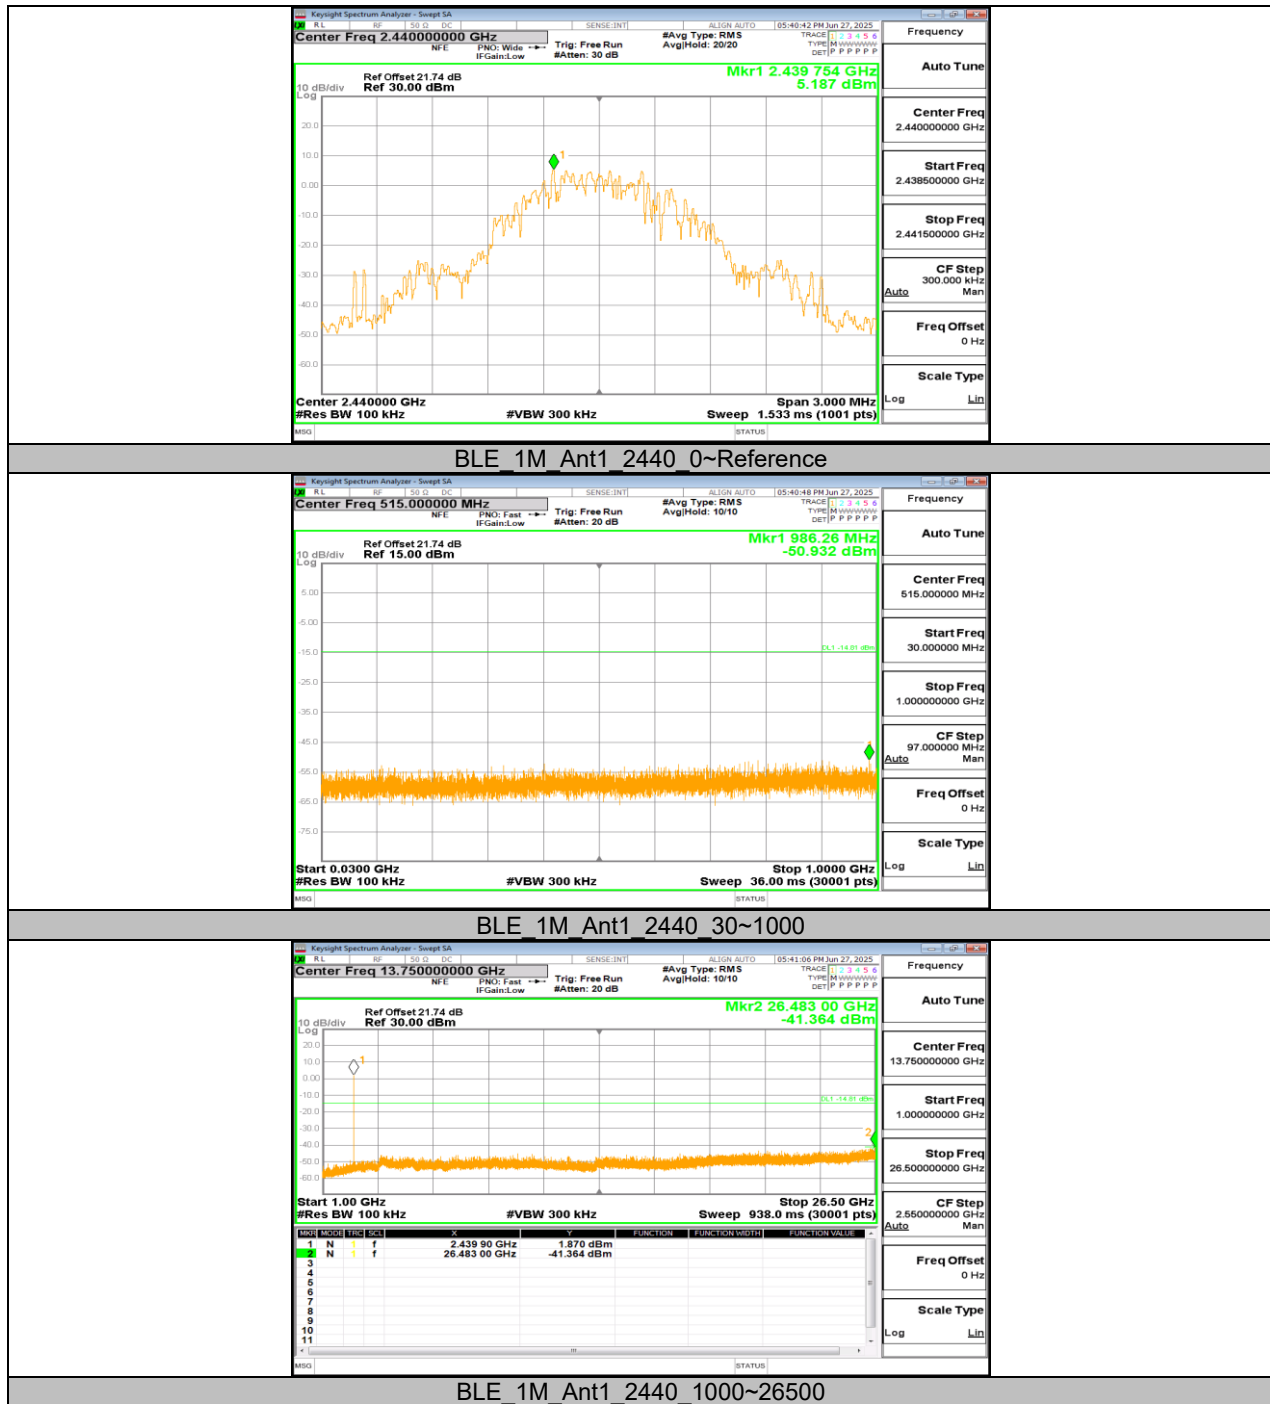








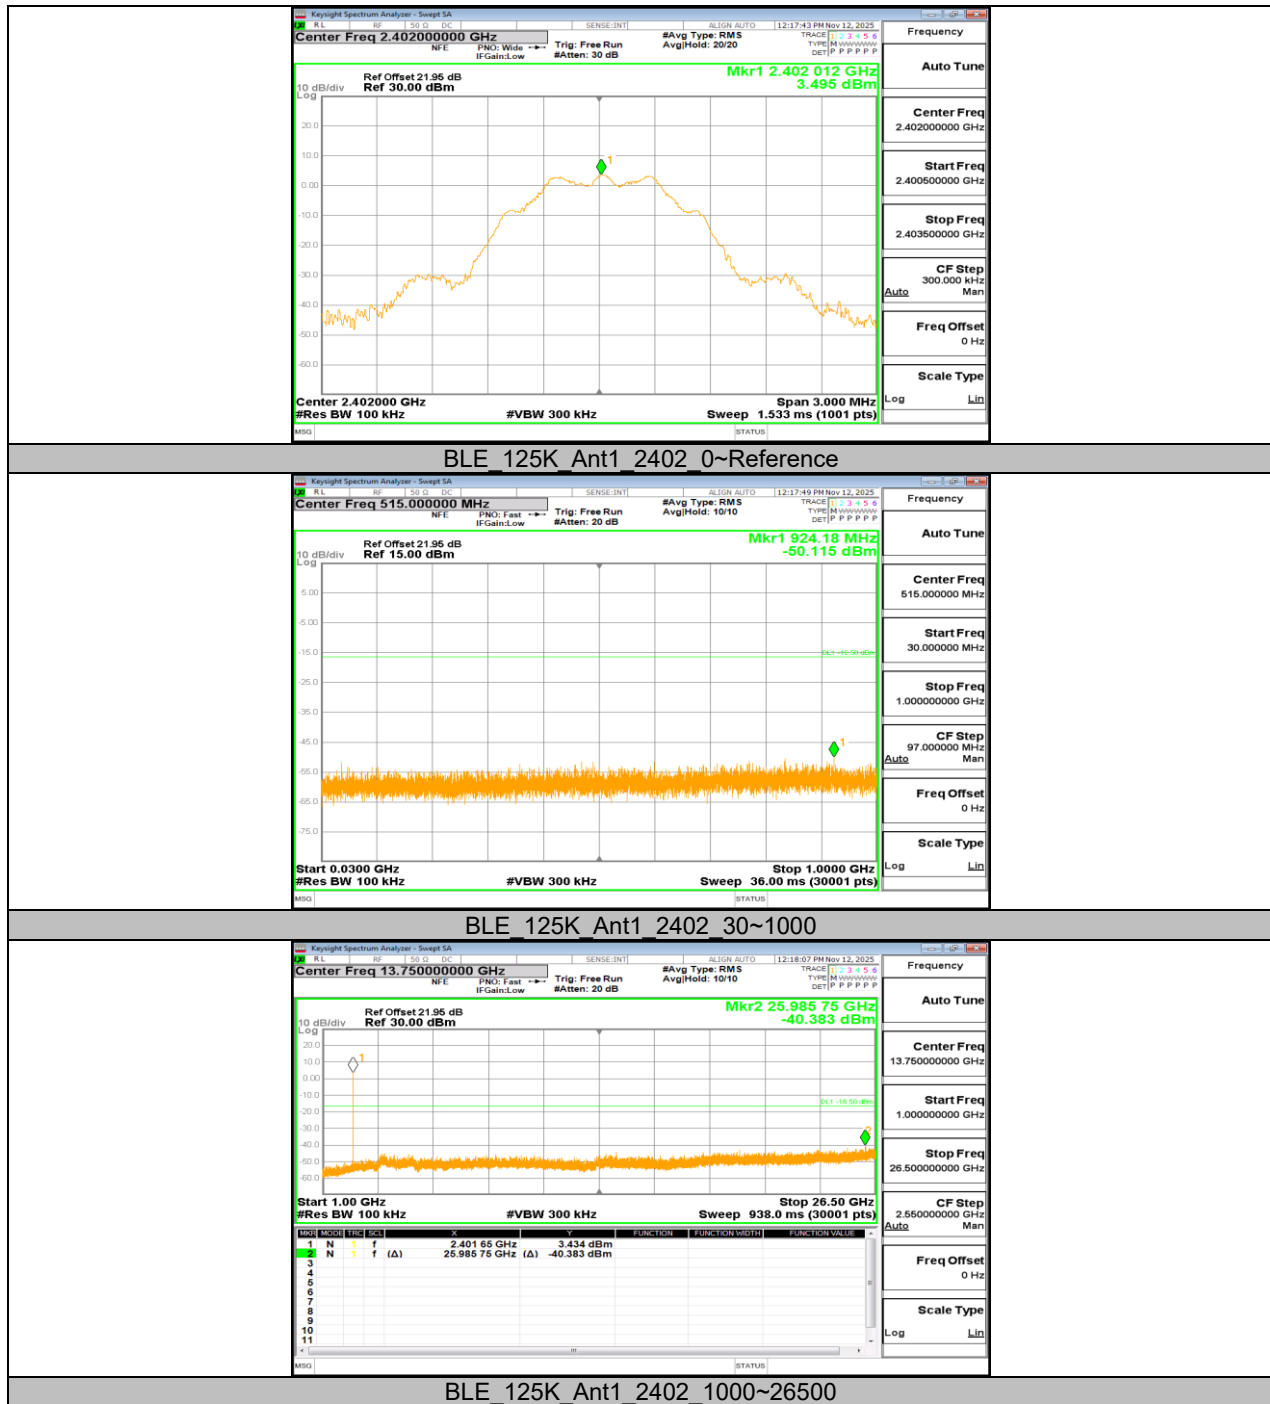




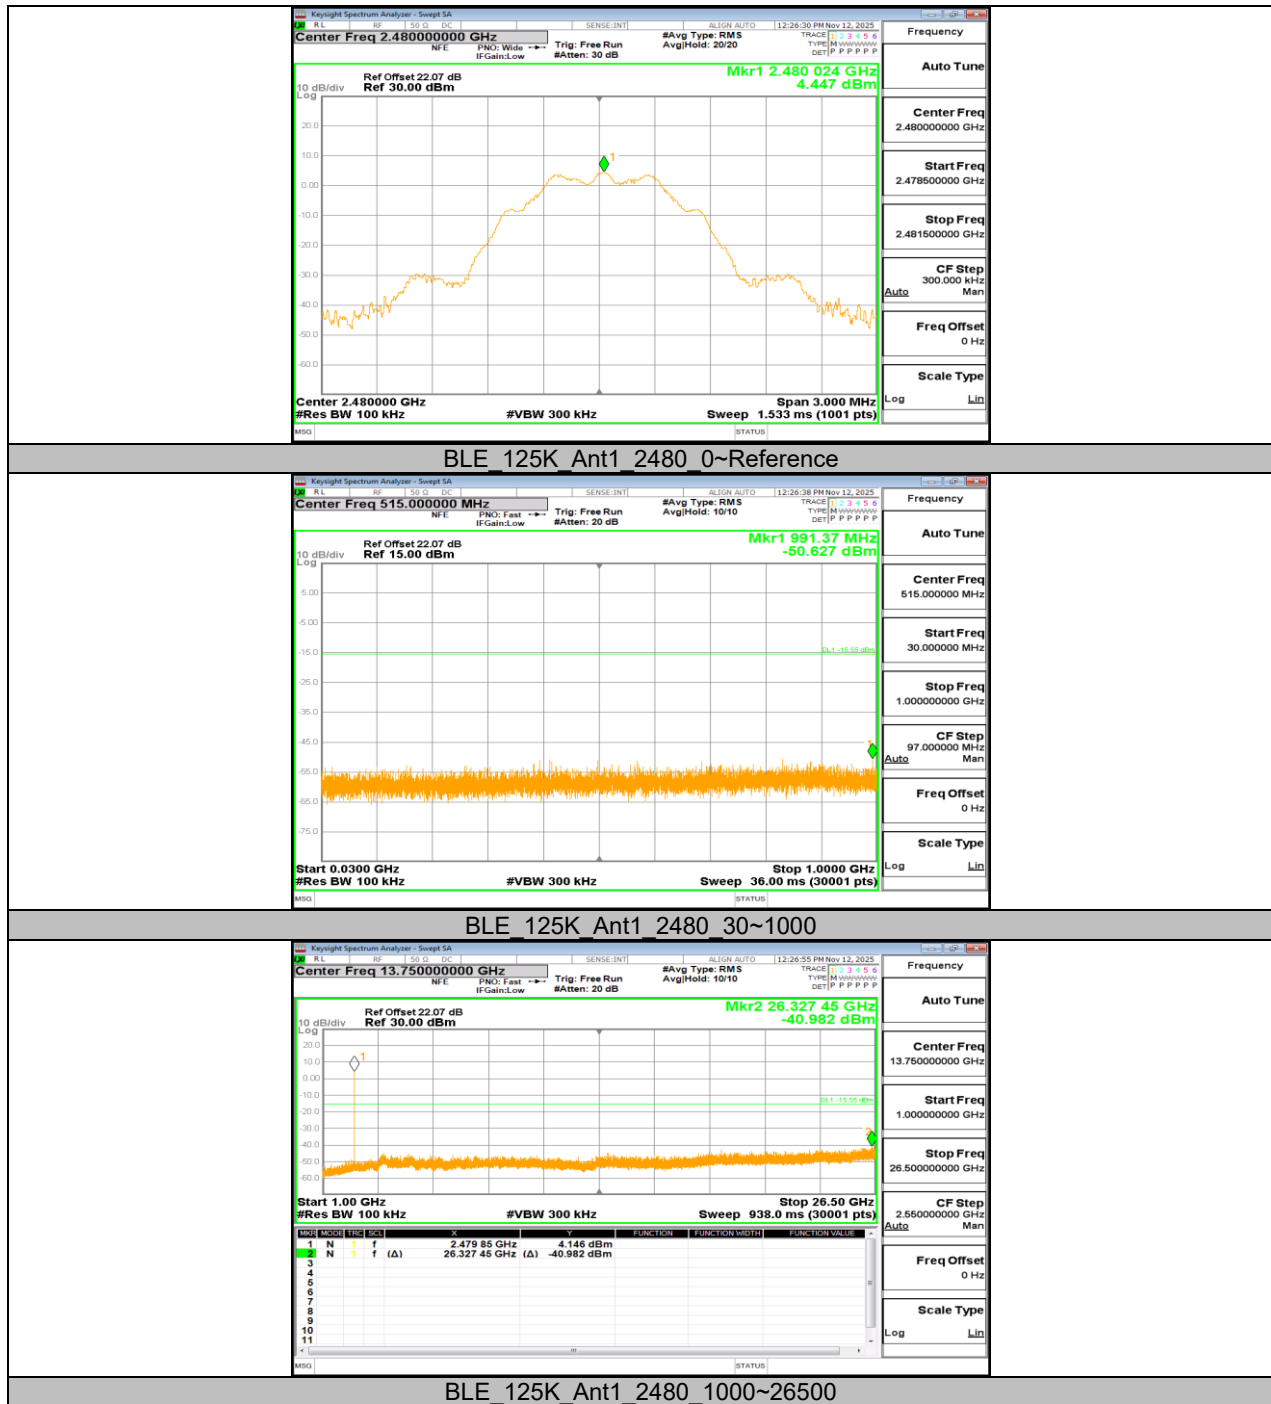

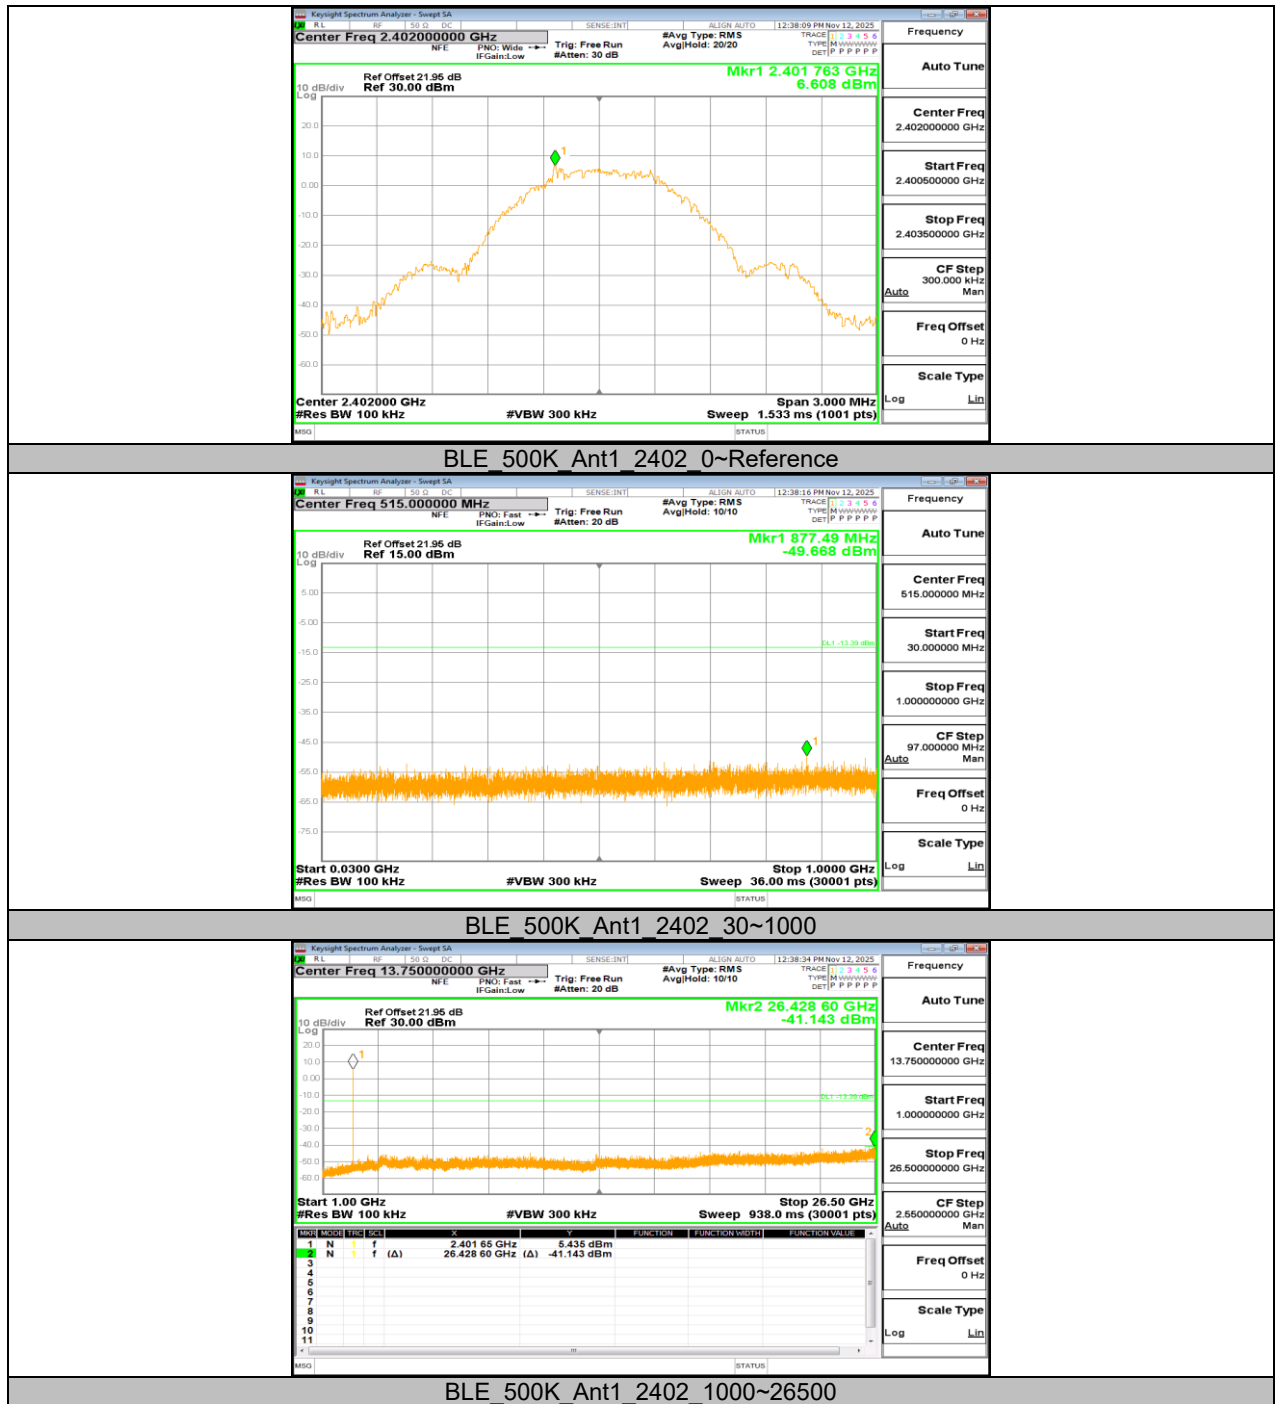

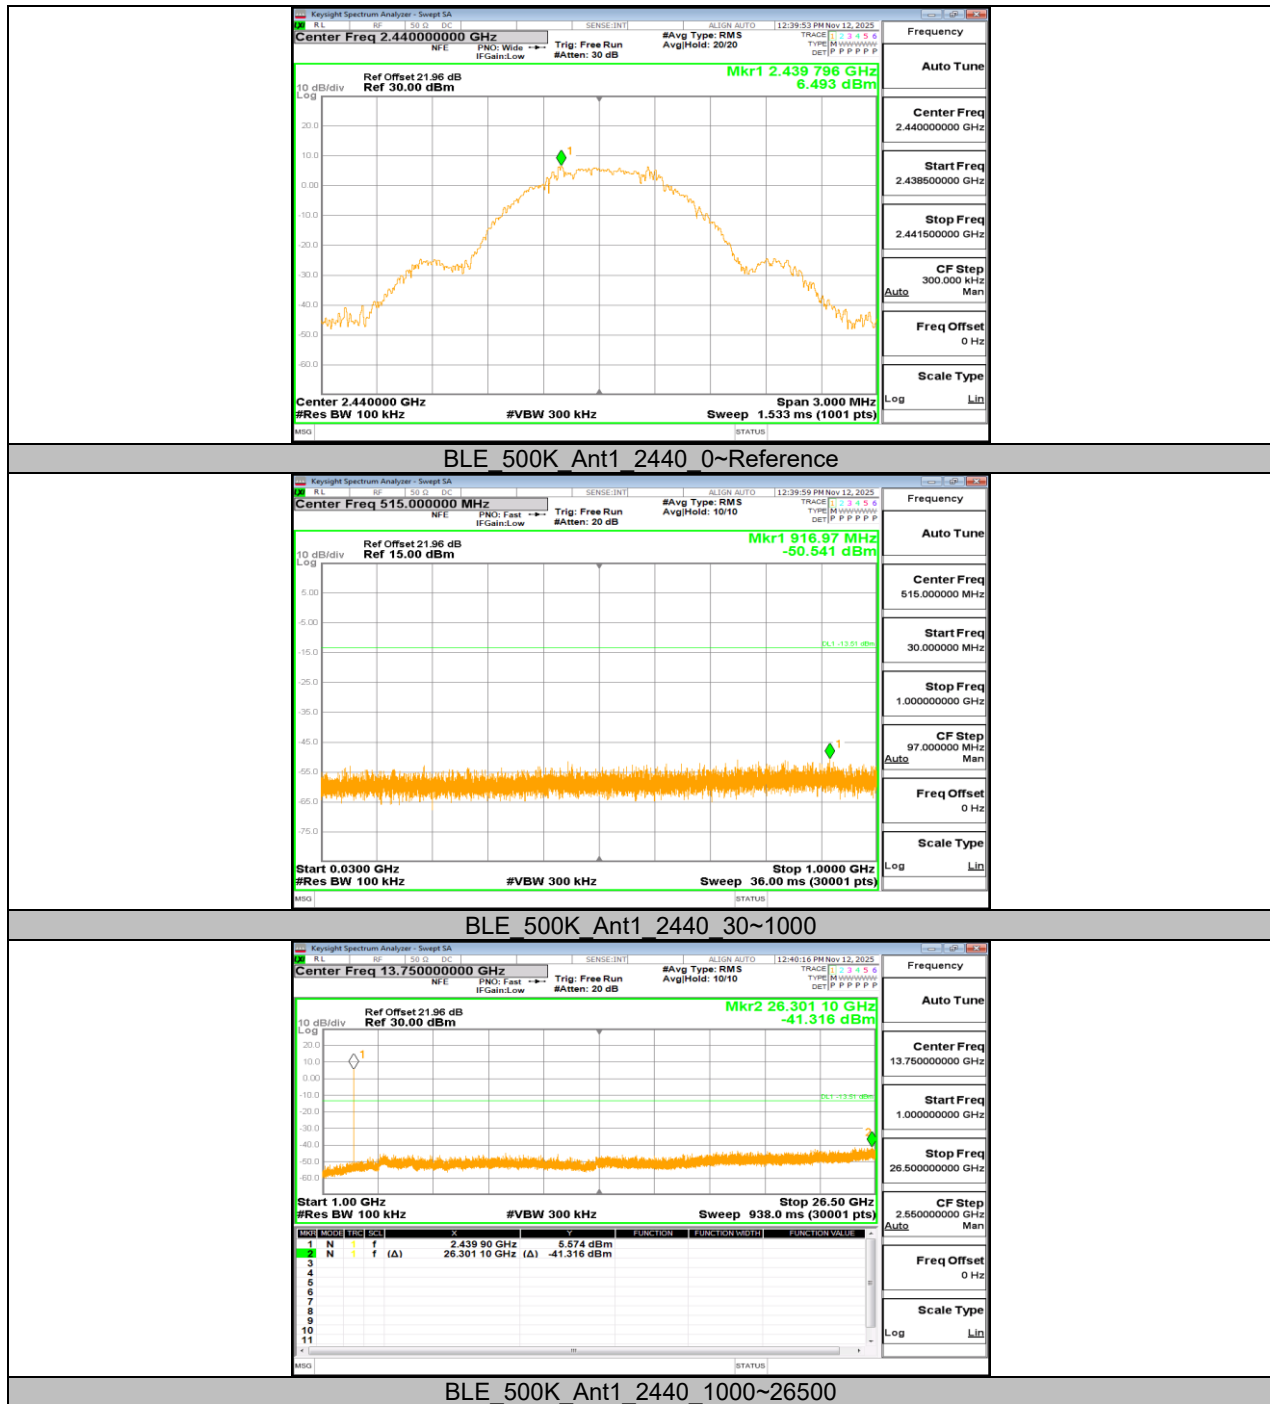

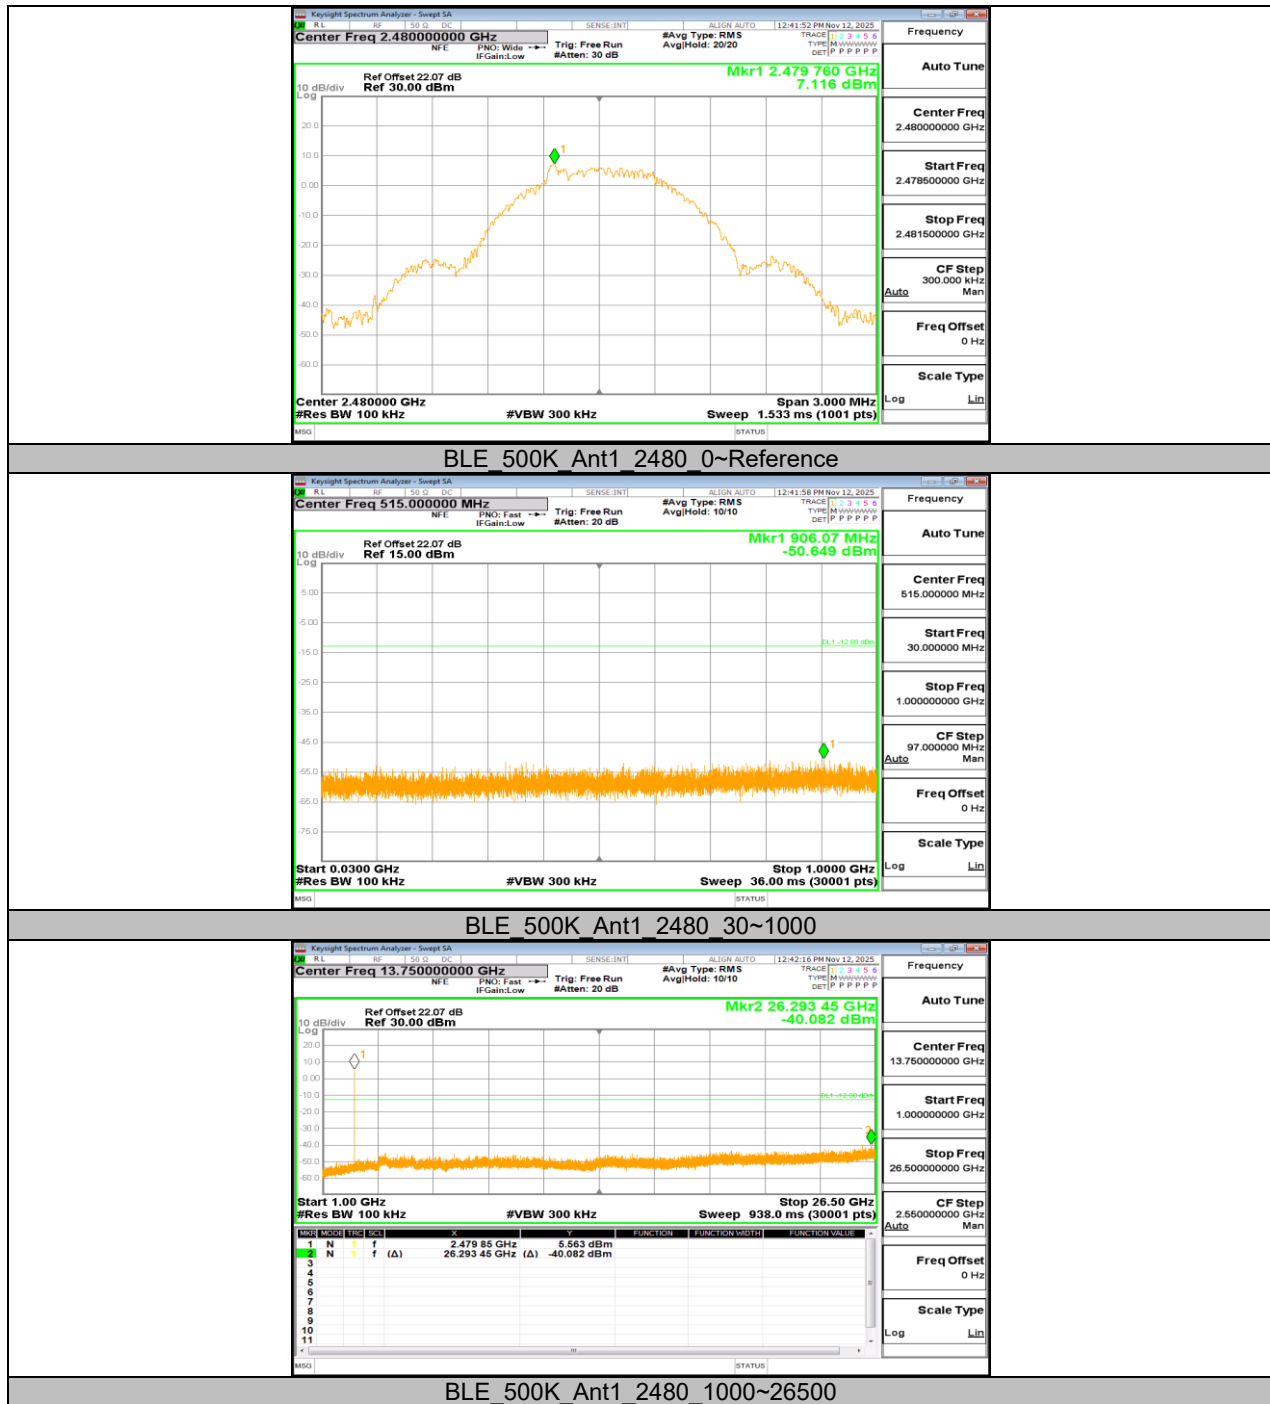

10.7. APPENDIX G: DUTY CYCLE**10.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE_1M	0.38	2.74	0.1387	13.87	8.58	2.63	3
BLE_2M	0.18	2.54	0.0709	7.09	11.50	5.56	6
BLE_125K	100.00	100.00	1.0000	100.00	0.00	0.01	0.01
BLE_500K	100.00	100.00	1.0000	100.00	0.00	0.01	0.01

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

10.7.2. Test Graphs



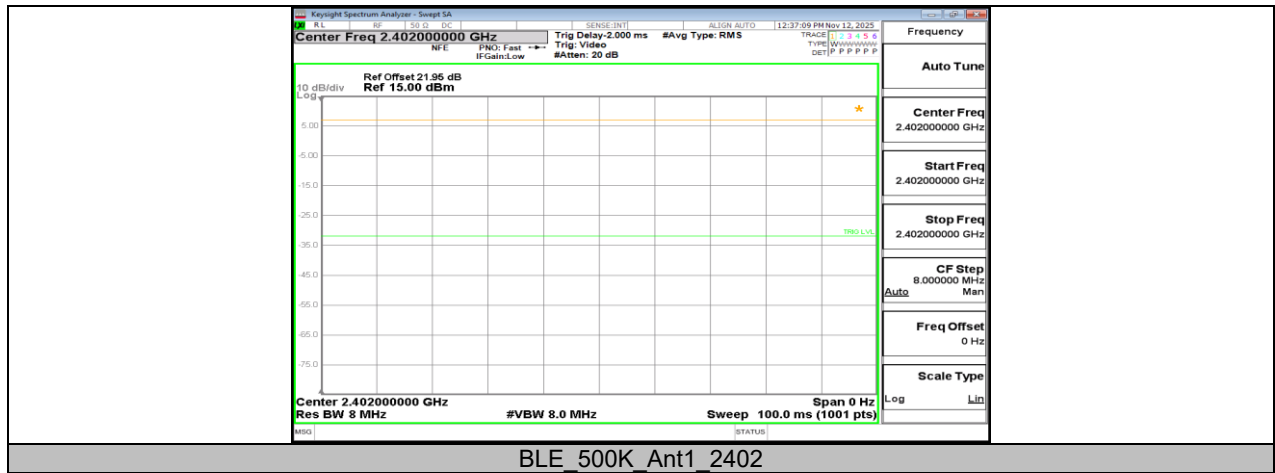

END OF REPORT