



Test Report

Prepared for: Thermaco Inc.

Model: Big Dipper

Serial Number: NA

Project No: p2550002

FCC ID: 2BPIM0037031747

Test Results: Pass

To

FCC Part 15.407

Date of Issue: July 24, 2025

On the behalf of the applicant:

Thermaco Inc
646 Greensboro St.
Asheboro, NC 27203

Attention of:

Jan Fischer
Ph: (336)629-4651
E-mail: janf@thermaco.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p2550002

John Michalowicz
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested

Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
§15.203	Antenna Requirements	Pass	
§15.207 §15.407(b)(6)	Line Conducted Emissions	Pass	
§15.407(a)(3)	Conducted Output Power	Pass	
§15.407(a)(3),(5)	Power Spectral Density	Pass	
§15.403(i) §15.407(e)	6dB Occupied Bandwidth	Pass	
	99% Occupied Bandwidth		
§15.407(b)(4)	Undesirable Emissions	Pass	
§15.205 §15.407(b)(4),(5),(6)	General Field Strength Limits (Restricted Bands and Radiated Emission limits)	Pass	
§15.407(g)	Frequency Stability	NA	
§15.407(f)	RF Exposure	Pass	

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit, *acceptance limit = test limit*.
- Fail - the measured value is above the acceptance limit, *acceptance limit = test limit*.

References	Description
CFR47, Part 15, Subpart B	Unintentional Radiators
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed Nation Information Infrastructure Devices (U-NII)
ANSI C63.10-2020	American National standard for testing Unlicensed Wireless Devices
ANSI C63.4-2009	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ISO/IEC 17025:2005	General requirements for the Competence of Testing and Calibrations Laboratories
KDB 644545 D03	Guidance for IEEE 802 11ac New Rules
KDB 789033 D02	General U-NII Test Procedures New Rules V01
KDB 926956 D01	U-NII Transition Plan

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	July 23, 2025	John Michalowicz	Original Document

Table of Contents

<u>Description</u>	<u>Page</u>
Test Results Summary	2
Standard Test Conditions Engineering Practices	7
Test Setup and Modes of Operation	9
Output Power	10
Transmitter Power Spectral Density	14
Undesirable Emissions Conducted	17
Undesirable Emissions Radiated	23
Occupied Bandwidth	34
A/C Powerline Conducted Emission	36
Test Equipment Utilized	37

ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.



FCC Site Reg. #349717

IC Site Reg. #2044A-2

The applicant has been cautioned as to the following

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
25.7 – 26.7	34.2 – 42.6	964.2 – 971.2

EUT Operation during Tests

Model:	Big Dipper
Serial:	NA
Firmware:	NBGD-v1.0.27-wifiradiotest.hex.
Software:	NBGD-v1.0.27-wifiradiotest.hex
Description:	Commercial Grease Interceptor
Additional Information:	Radio Frequency Range and Operational Info: 5725 – 5850 WiFi 802.11n Usage: Fixed-Use/Mobile
Receipt of Sample(s):	June 10th 2025
EUT Condition:	Visual Damage No State of Development Production/Production Equivalent

EUT Specifications

Equipment Code	NII
Model(s) Tested	Big Dipper
Model(s) covered	NA
Frequency Range	5725 - 5850
Bandwidths	20 MHz
Modulations	OFDM

15.203: Antenna Requirement:

- ☒ The antenna is permanently attached to the EUT
- ☐ The antenna uses a unique coupling
- ☐ The EUT must be professionally installed
- ☐ The antenna requirement does not apply

Test Setup and Modes of Operation

EUT Operation during Tests

The EUT was set into a constant transmit mode using the PuTTY program and manufacturer provided test scripts. 85% duty cycle was attainable with 802.11n mode. A power setting of 15 was entered for all transmissions.

Accessories: NA

Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Ferrite Y/N
1	USB	1	N	Y	N

Modifications to EUT(s) (Y/N): N

Output Power

Engineer: John Michalowicz

Test Date: 7/08/25

Test Requirements

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


Test Procedure

The RF power was calculated using the spectrum analyzers' band power function per Method SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid and high channels of the band.

The Spectrum analyzer was set to the following:

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Sweep time = auto
- Detector = RMS
- 100 traces in power averaging mode

Test Setup





Tuned Frequency (MHz)	Mode of Operation	Measured Value (dBm)	Duty Cycle Corr.	Conducted Power (dBm)	Specification Limit	Result
5745	802.11 ac	9.57	1.41	10.98	1 W (30 dBm)	Pass
5785	802.11 ac	9.93	1.41	11.34	1 W (30 dBm)	Pass
5825	802.11 ac	10.23	1.41	11.64	1 W (30 dBm)	Pass



Duty Cycle Correction formula


$$0.325 \times 46 = 14.95 \text{ ms} = 85\% \text{ duty cycle}$$

$$20 \times \log(.85) = 1.41 \text{ dB}$$

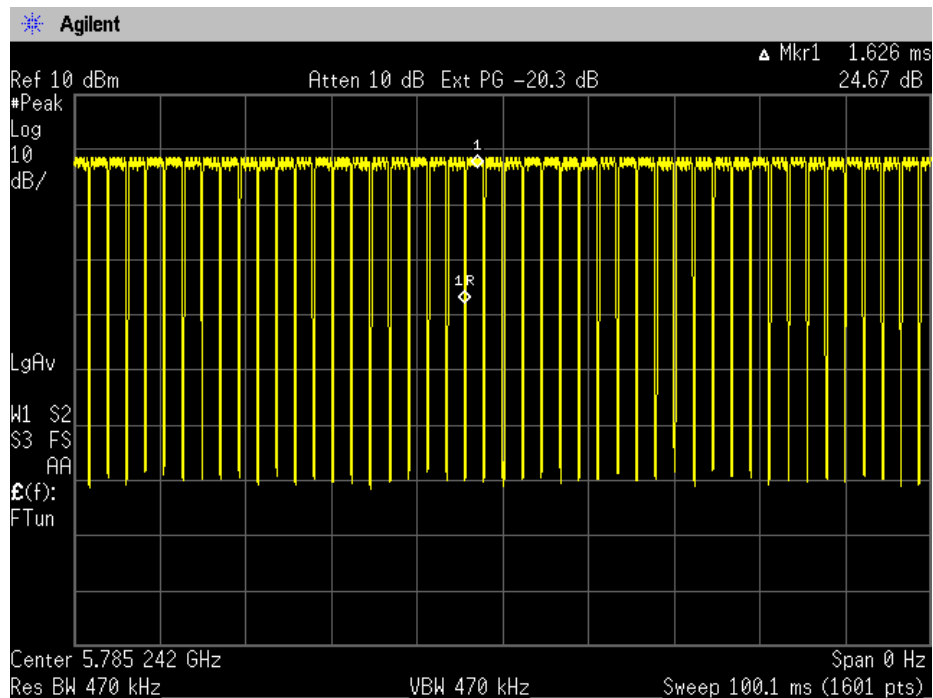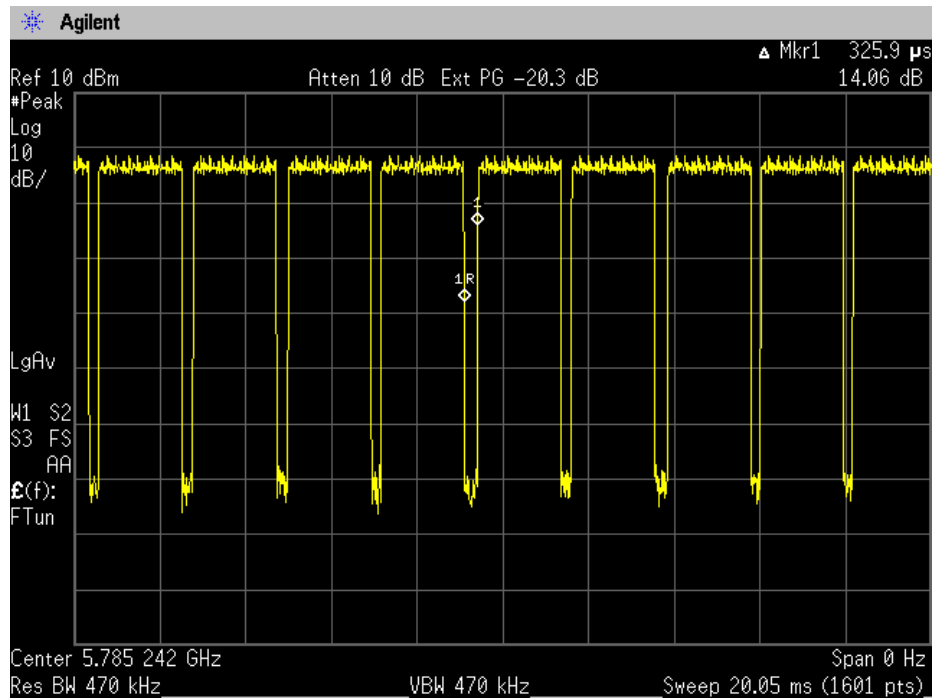

Test Results

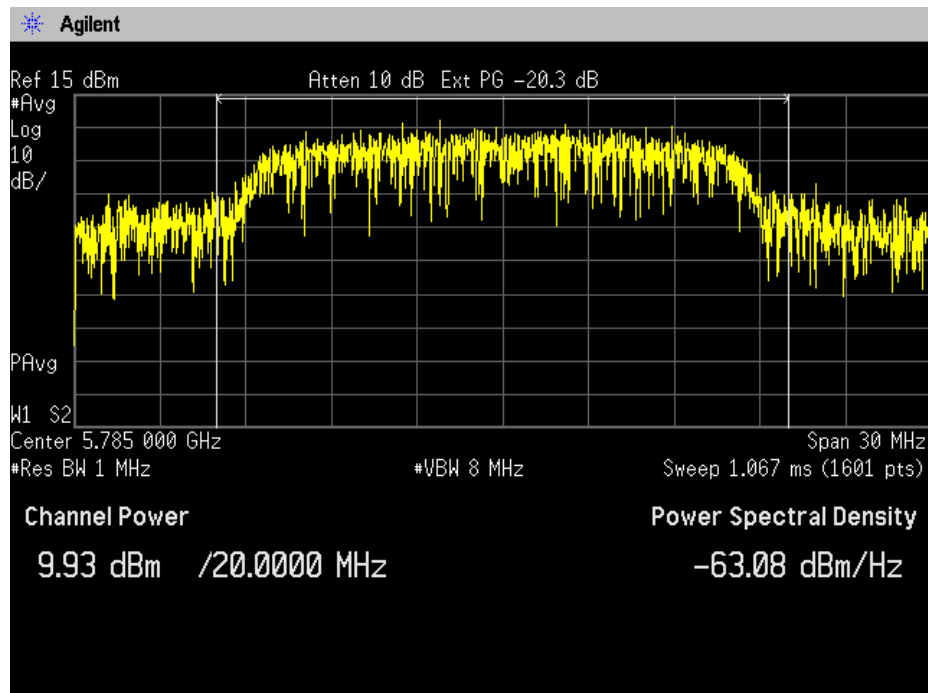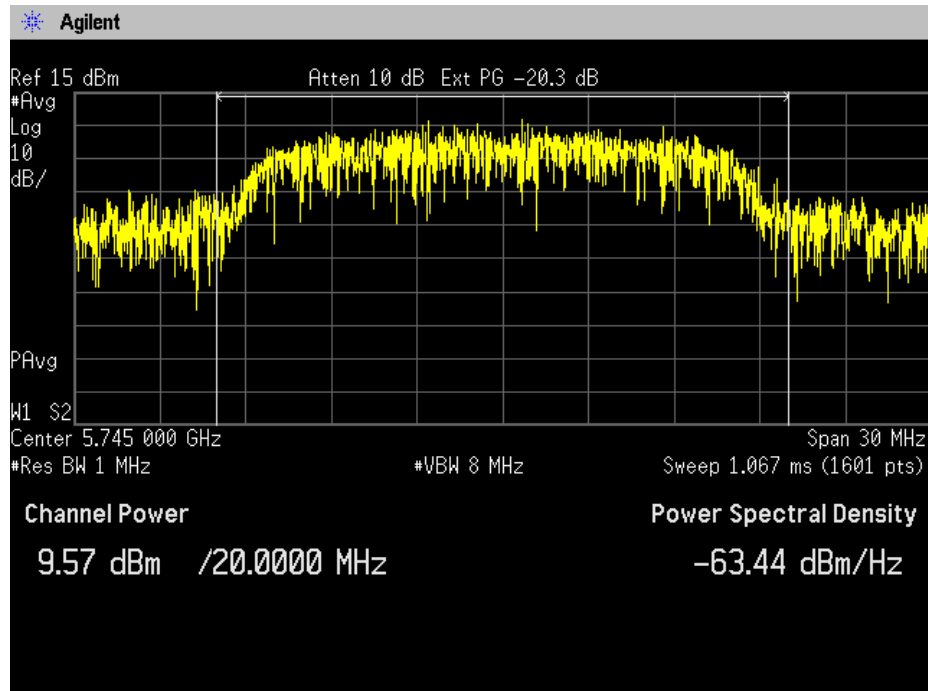

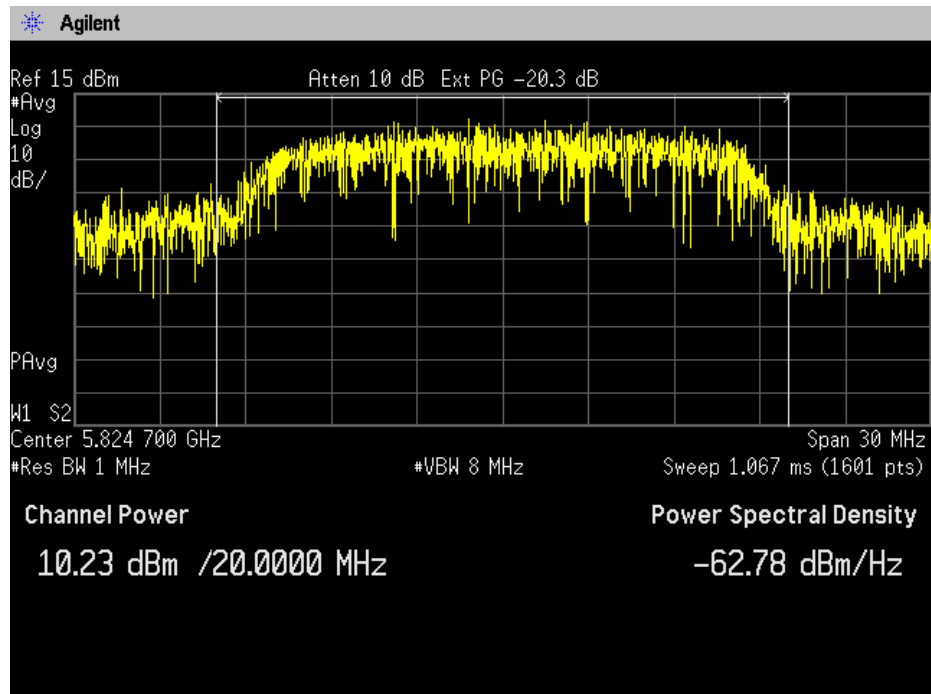

Transmitter Power Spectral Density

Engineer: John Michalowicz

Test Date: 7/08/25

Test Requirements

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in power spectral density.


Test Procedure

The Power Spectral Density was measured using the method per SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid and high channels of the band. The maximum PSD was determine by finding the peak value across the carrier bandwidth.

The Spectrum Analyzer was set to the following:


- RBW = 500 KHz.
- VBW $\geq$ 1500 MHz
- Span $1.5 * BW$
- Sweep time = auto
- Detector = RMS
- 100 traces in power averaging mode

Test Setup




Tuned Frequency (MHz)	Mode of Operation	Measured Value (dBm)	Specification Limit	Result
5745	802.11 ac	4.70	30 dBm	Pass
5785	802.11 ac	5.21	30 dBm	Pass
5825	802.11 ac	5.41	30 dBm	Pass


Test Results

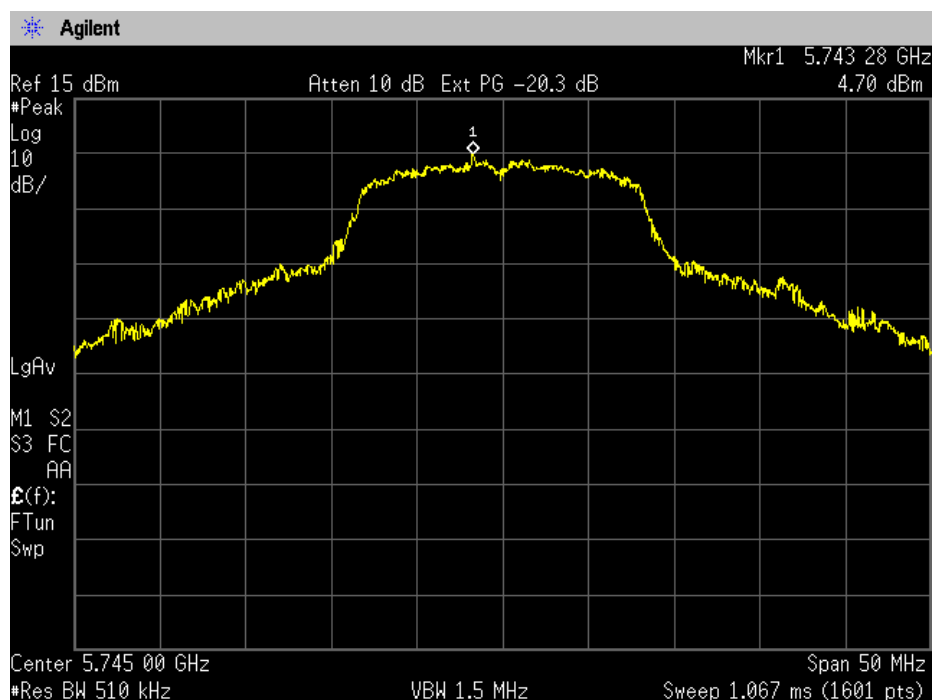

Low Channel PSD

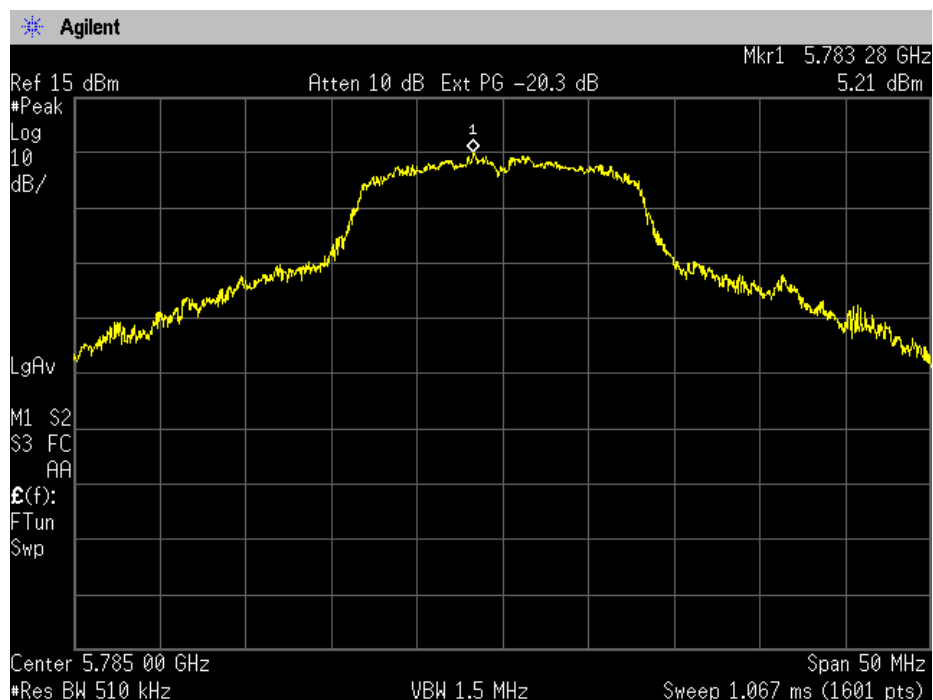

Mid Channel PSD

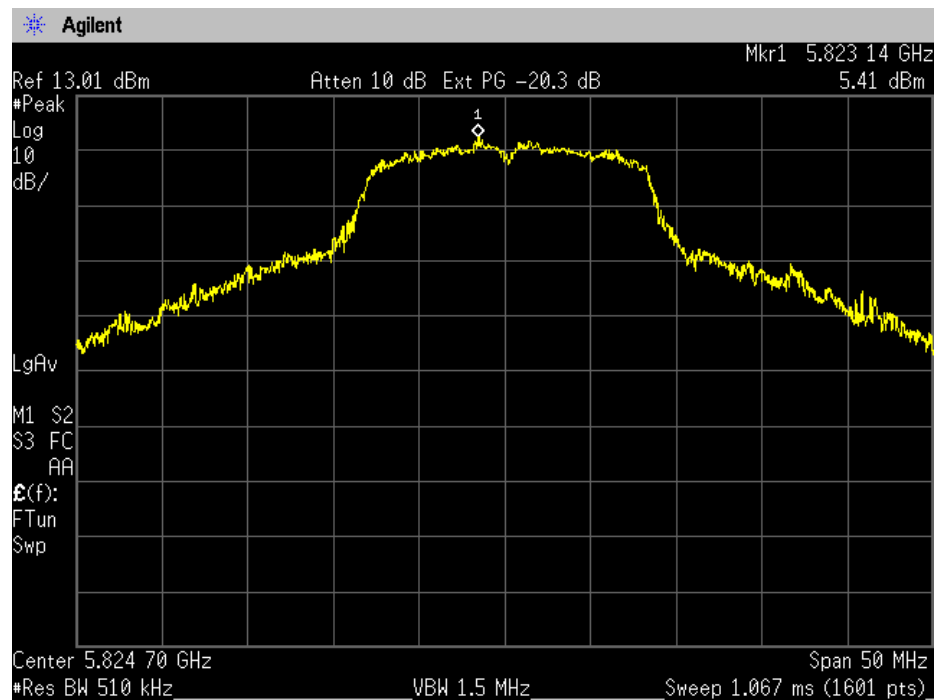

High Channel PSD

Undesirable Emissions Conducted

Engineer: John Michalowicz

Test Date: 7/08/25

Test Requirements

Unwanted Emissions that fall Outside Restricted Bands

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz. The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

The provisions of §15.205 apply to intentional radiators operating under this section.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

For Conducted Unwanted Emissions in the Restricted Bands

For conducted measurements above 1000 MHz, EIRP was determined and then the field strength computed by the following:

$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and $d = 3\text{m}$

$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

Test Procedure

Per KDB 789033 D02 General U-NII Test Procedures New Rules v01 conducted RF port measurements were made in lieu of radiated. In addition, Cabinet Emissions measurements were performed in a semi-anechoic chamber with the antenna port terminated by a matching load. See additional section for Radiated Emissions.

The following criteria were addressed:


The Spectrum Analyzer was set to the following for emissions > 1000MHz:


- a. RBW = 1 MHz
- b. VBW $\geq$ 3 MHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.
 1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW $\leq$ RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

For emissions below 1000MHz the Spectrum Analyzer settings were as follows:


- a. RBW = 100 kHz
- b. VBW $\geq$ 300 kHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.

Test Setup




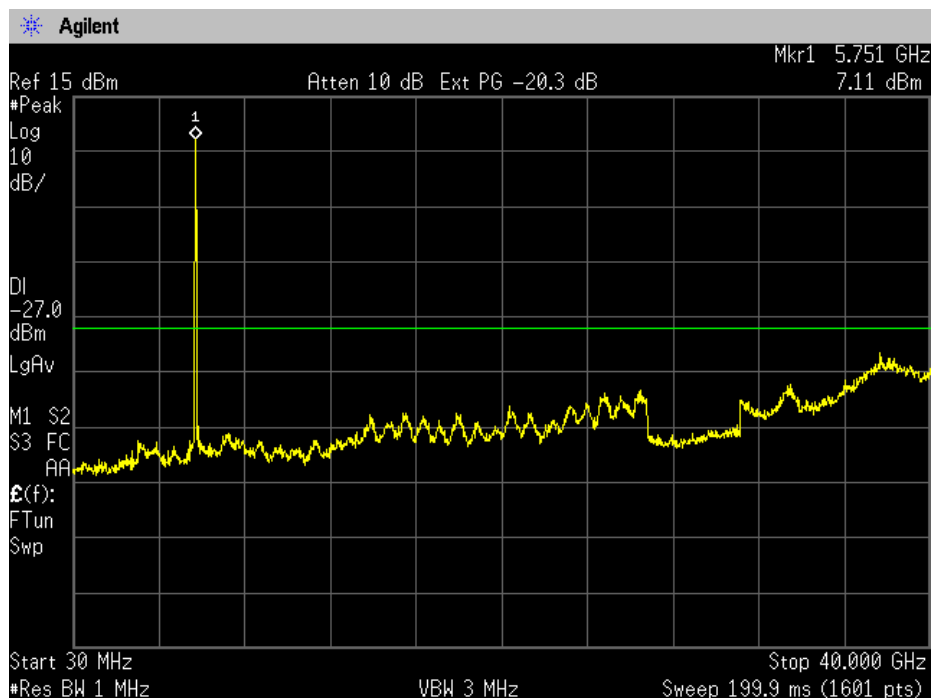


Low Channel 30MHz – 40 GHz

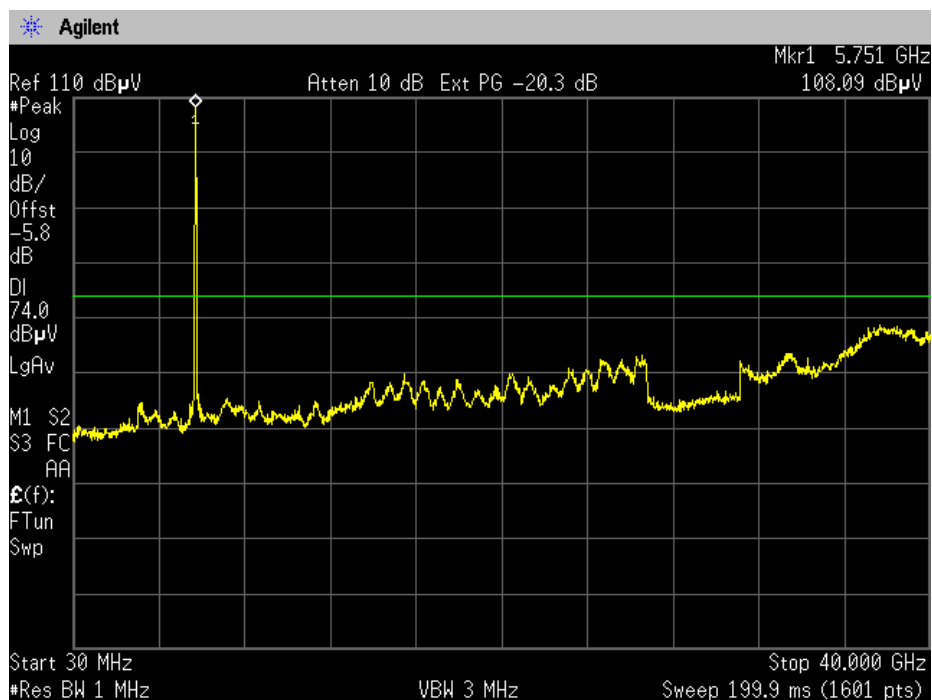


Low Channel Restricted band 30MHz – 40 GHz - Peak

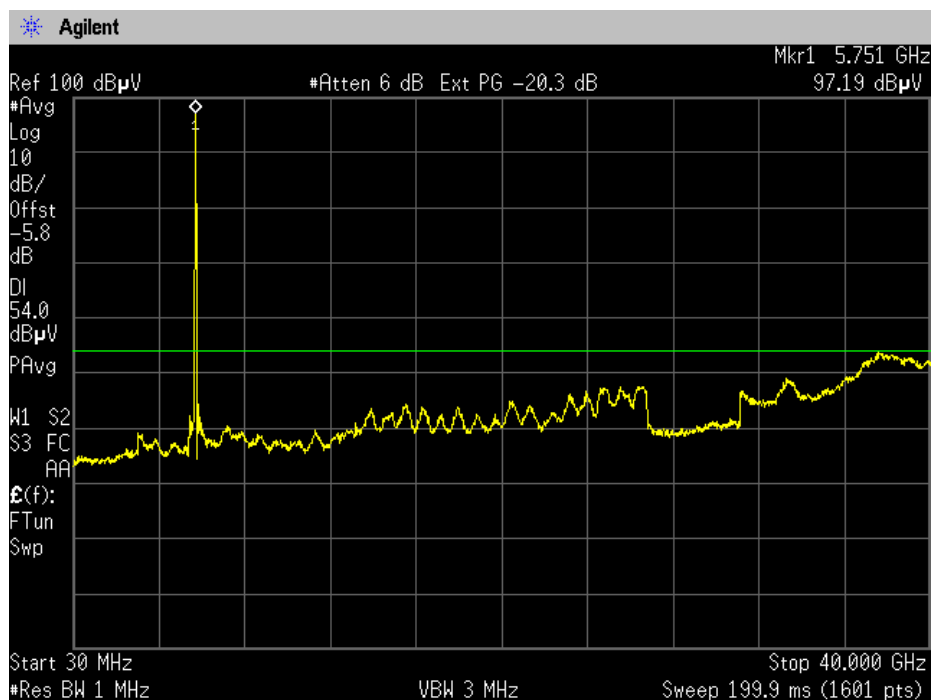


Low Channel Restricted band 30MHz – 40 GHz - AVG

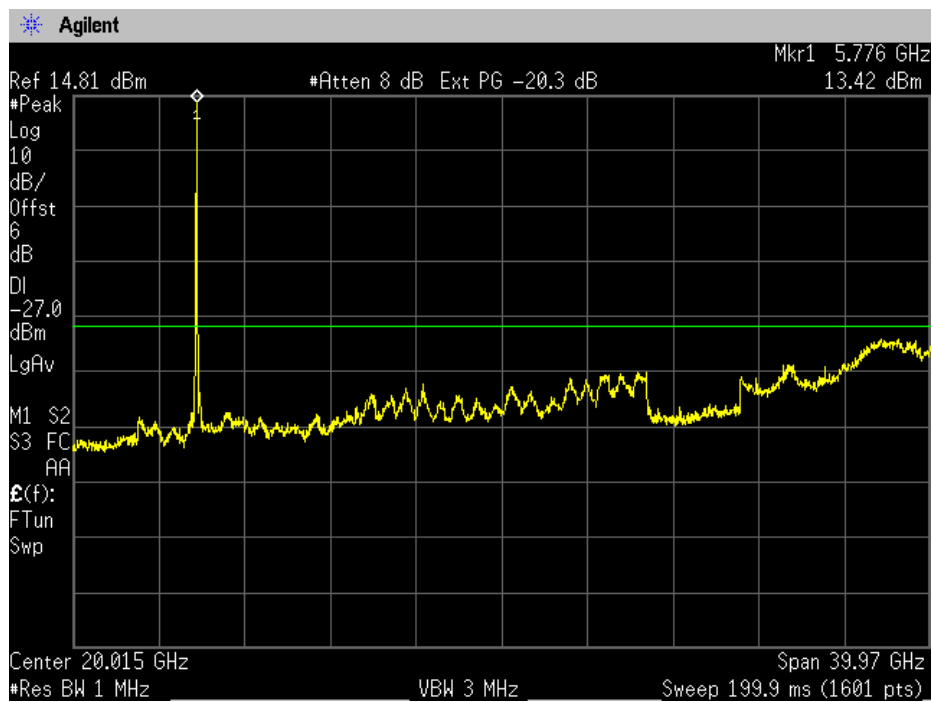


Mid Channel 30MHz – 40 GHz

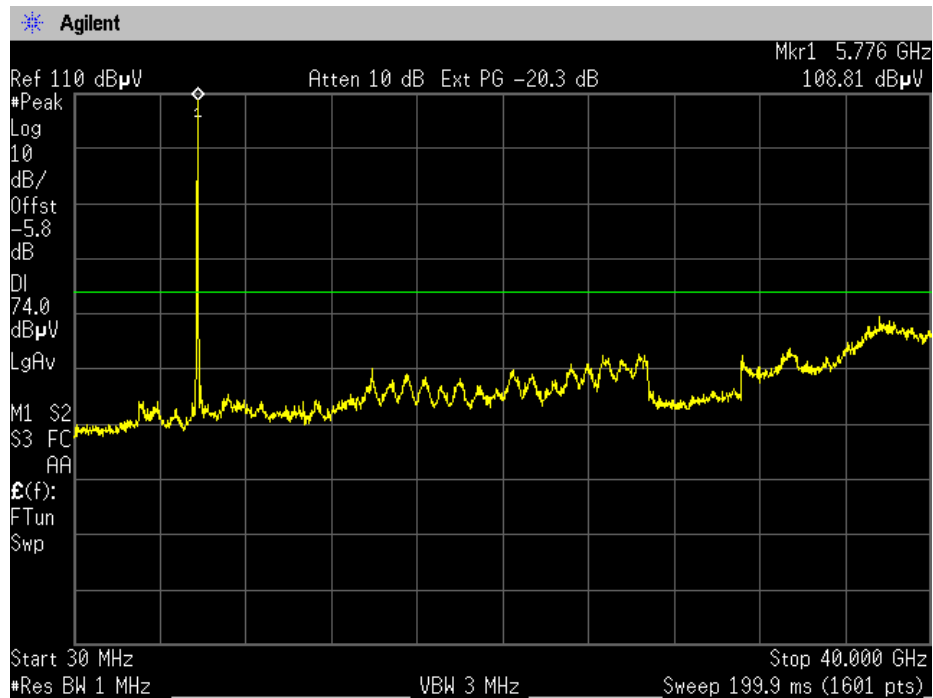


Mid Channel Restricted band 30MHz – 40 GHz - Peak

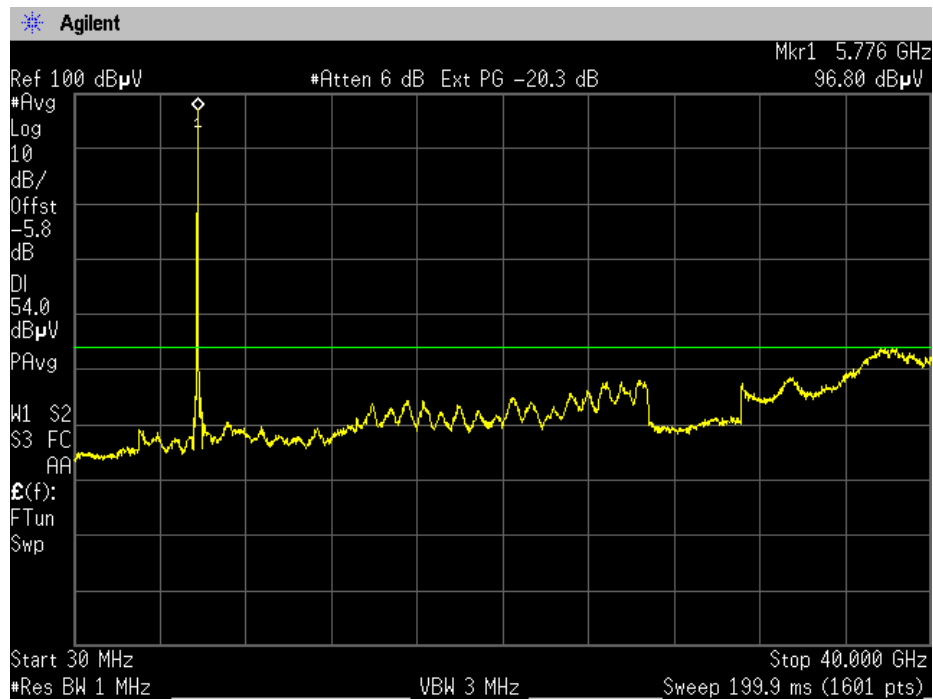


Mid Channel Restricted band 30MHz – 40 GHz – Average

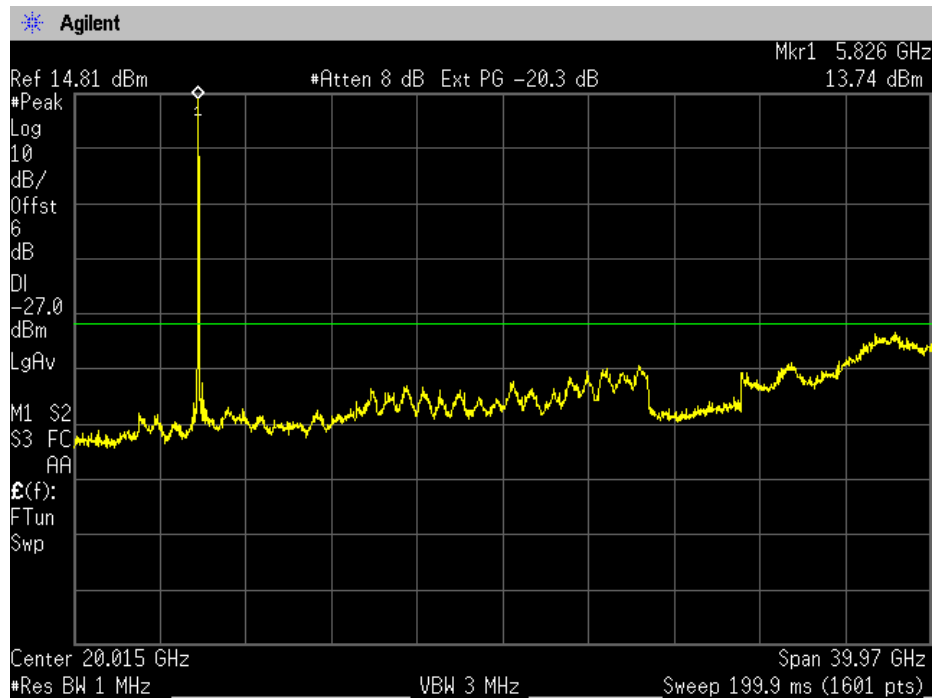


High Channel 30MHz – 40 GHz

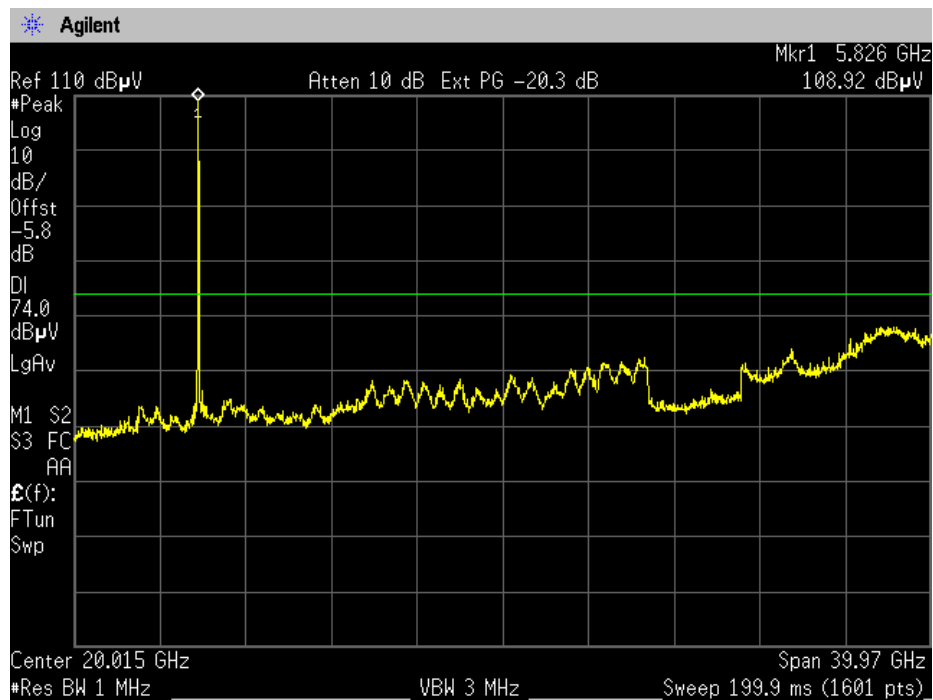

High Channel Restricted band 30MHz – 40 GHz – Peak

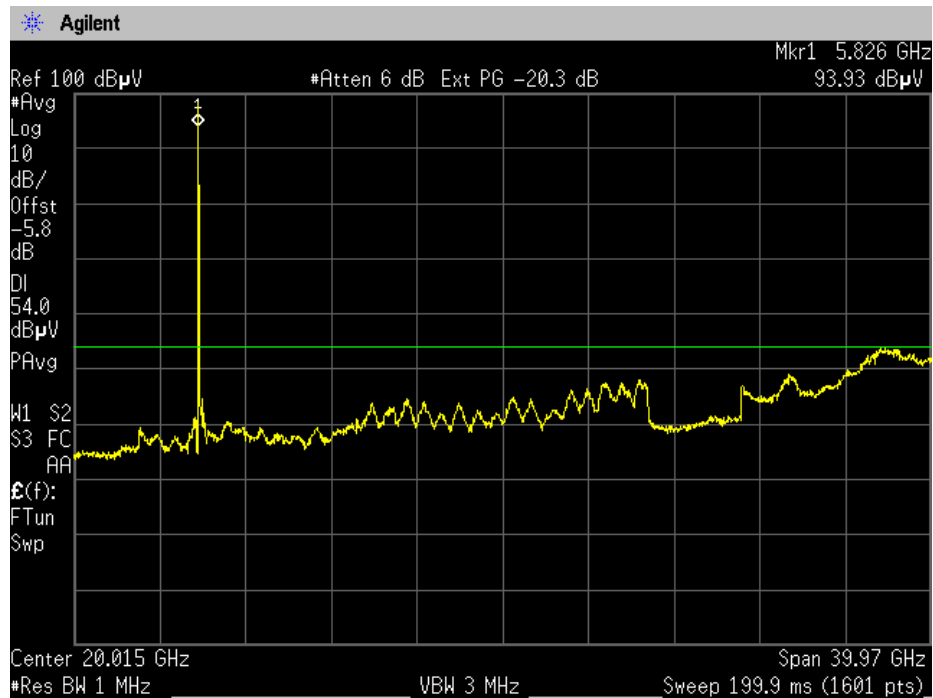

High Channel Restricted band 30MHz – 40 GHz – Average

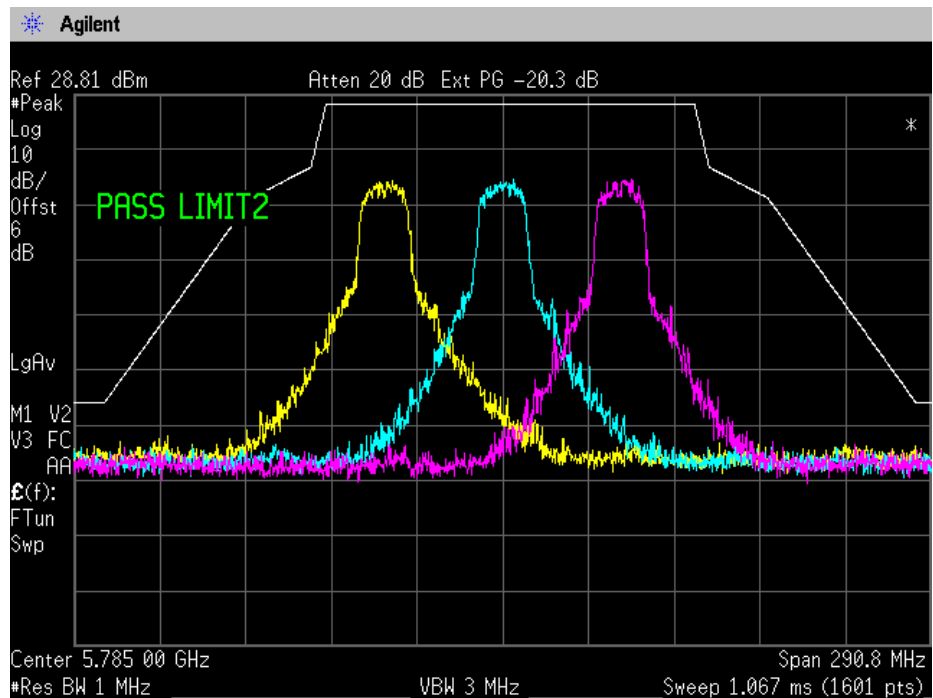

UNII-3 Mask

Undesirable Emissions Radiated

Engineer: John Michalowicz

Test Date: 7/12/25

Test Requirements

The provision of §15.209 were applied. In addition the requirements of §15.205 were also applied.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits

Frequency (MHz)	Frequency (microvolts/meter)	Frequency (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBµV/m) = 20 log E field strength (µV/m)

Test Procedure

The EUT was setup in accordance with ANSI C63.10. 2013 and tested per KDB 789033. The antenna was replaced with non-radiating matched load. The EUT is placed on non-conductive platform at a height of 0.8 meters above the ground plane of the semi-anechoic chambers. The EUT was rotated 360 degrees and the receive antenna raised and lowered to find the maximum emissions from 30MHz to the 10th harmonic of the fundamental. The EUT was set to the maximum power level allowed and the low, mid, and high channels were investigated for emissions.


The Spectrum Analyzer was set to the following for emissions > 1000MHz:

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
 - Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- RBW = 1 MHz
- VBW ≤ RBW/100 (i.e., 10 kHz) but not less than 10Hz


For emissions below 1000MHz the Spectrum Analyzer settings were as follows:

- RBW = 100 kHz
- VBW ≥ 300 kHz
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
 - Note: A quasi peak detector was used for emissions where the peak exceeded that of the average 15.209 emission limits



Test Setup below 1000MHz





Test Setup above 1000MHz

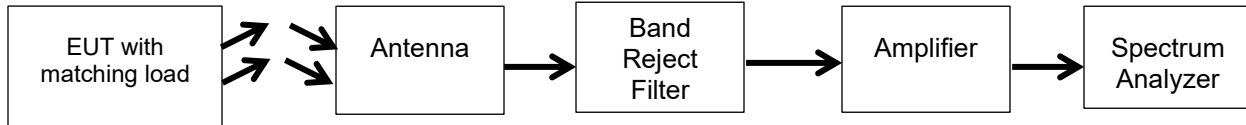



Low Channel 30 – 1000 MHz

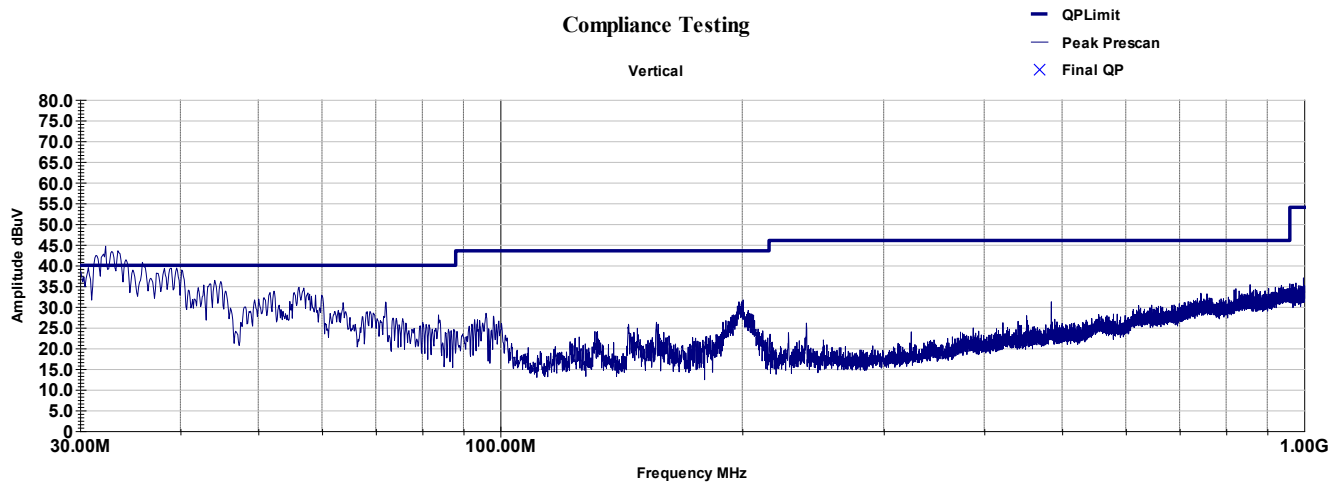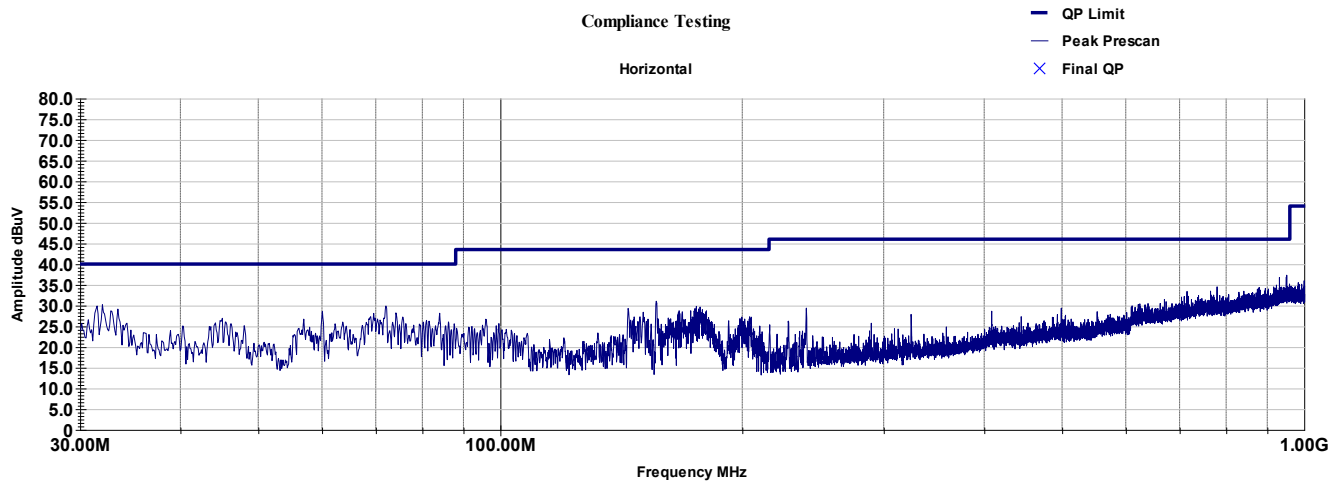



Low Channel 1 – 7 GHz

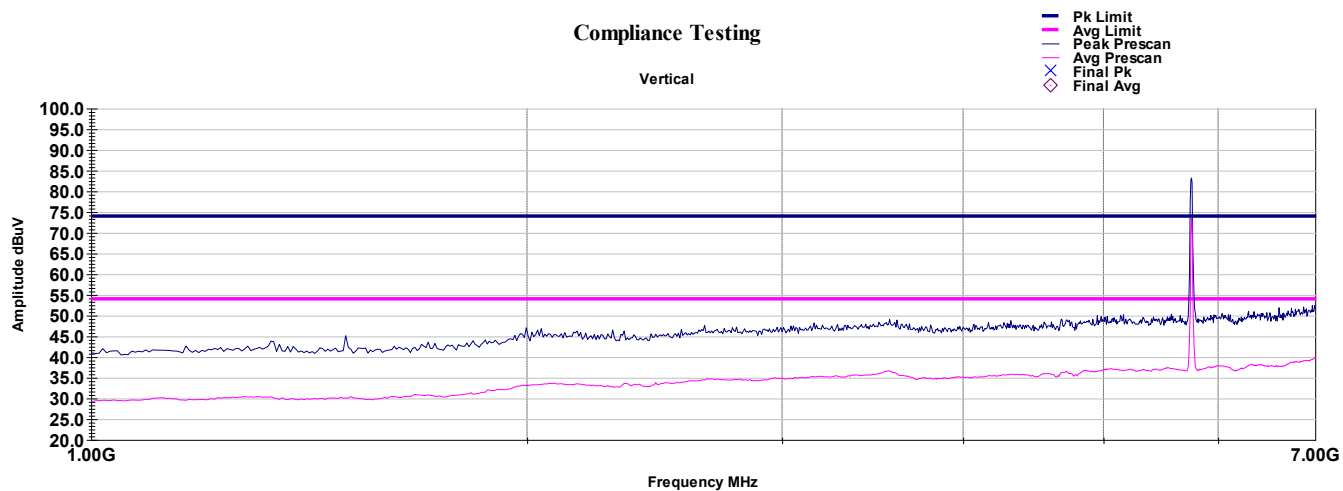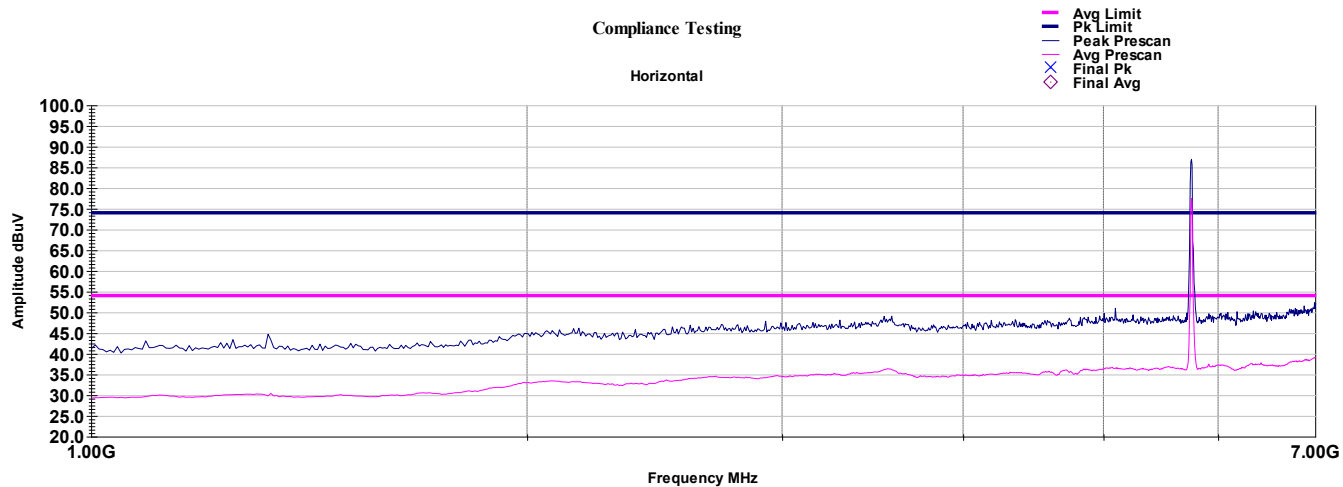



Low Channel 7 – 18 GHz

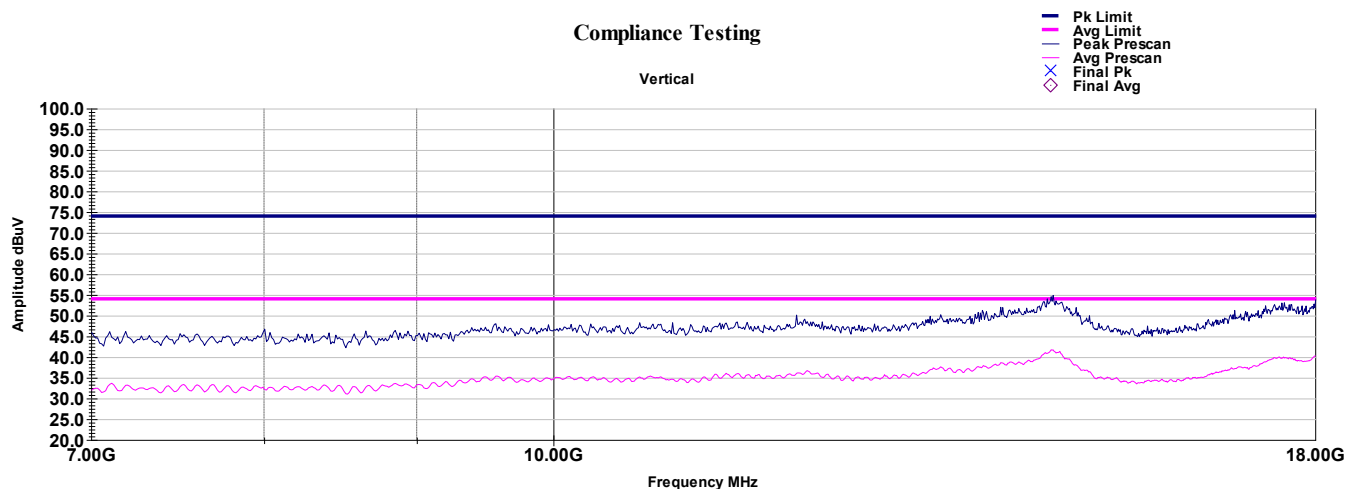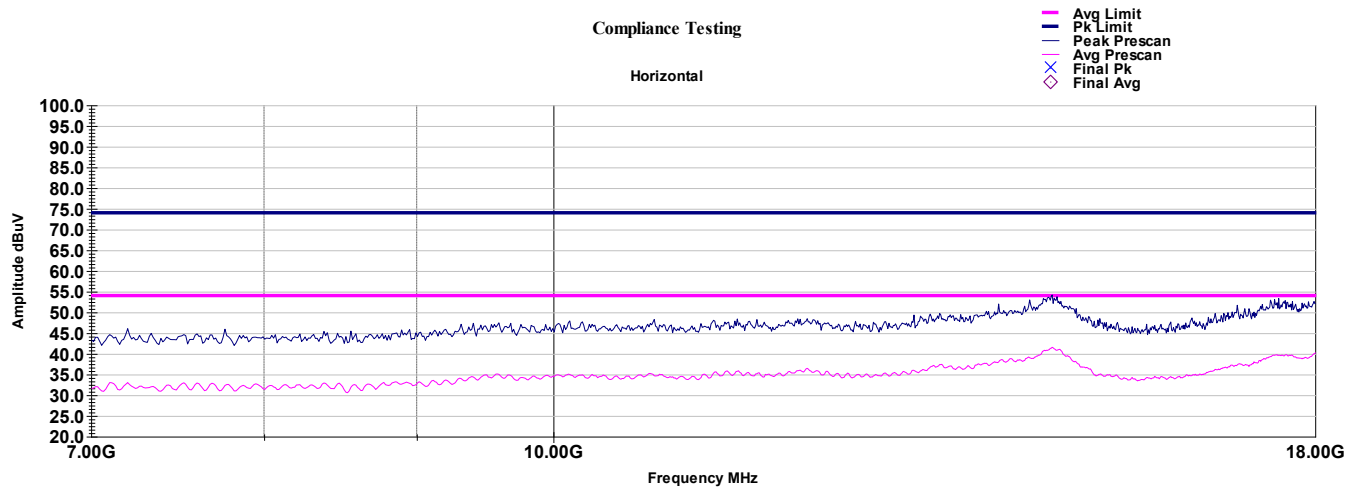



Mid Channel 30 -1000 MHz

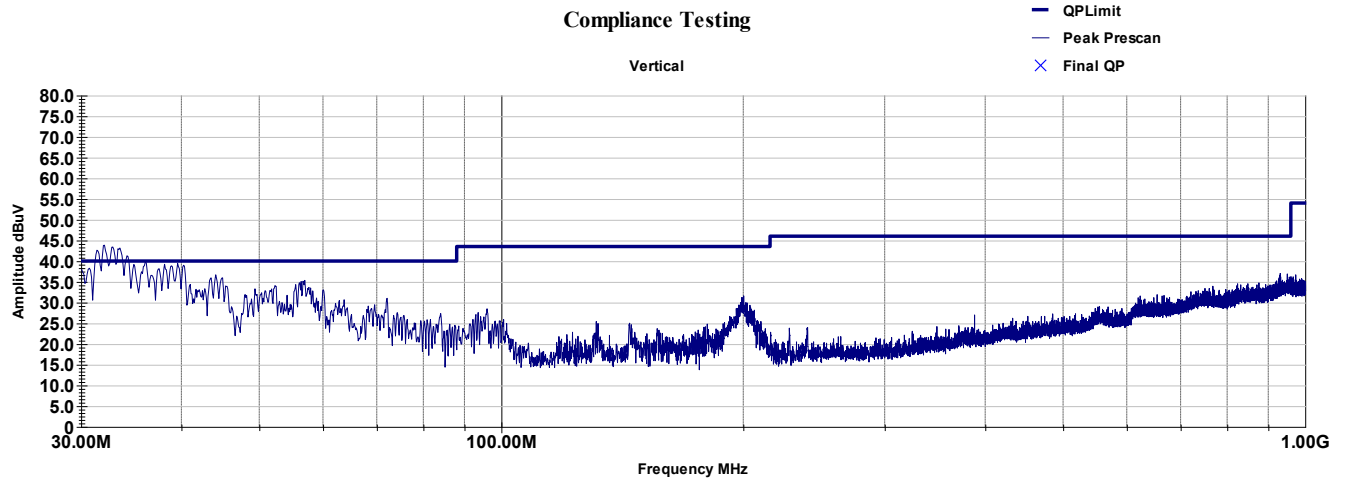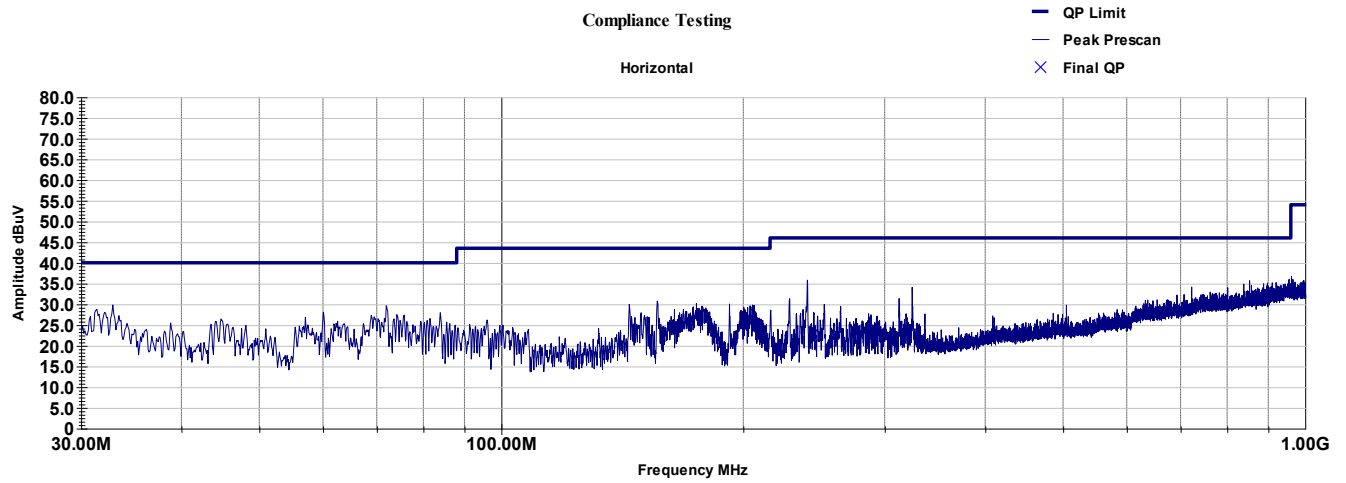



Mid Channel 1 – 7 GHz

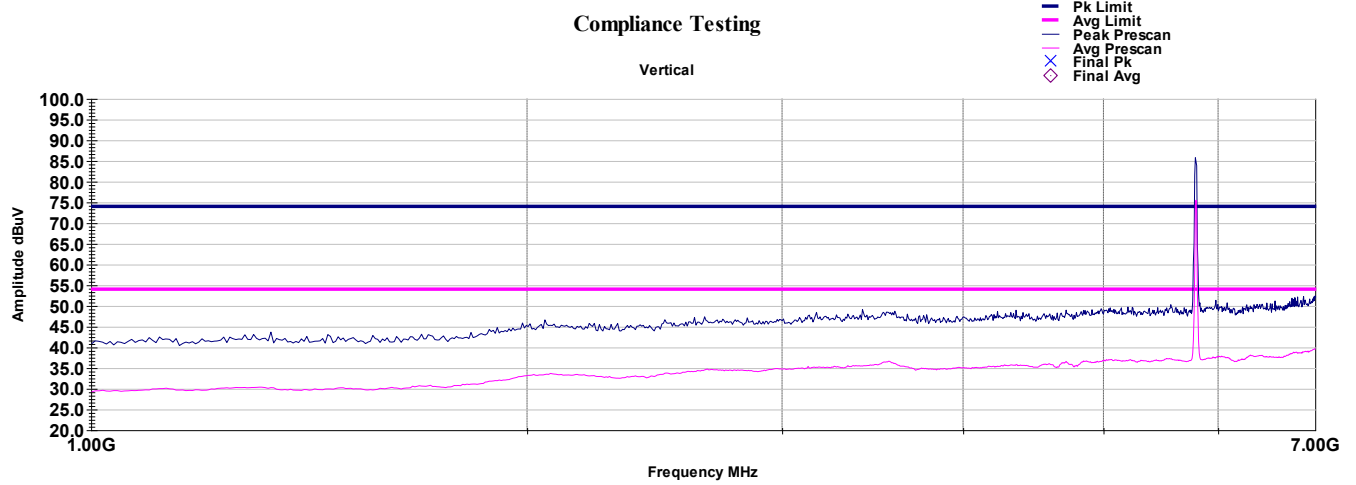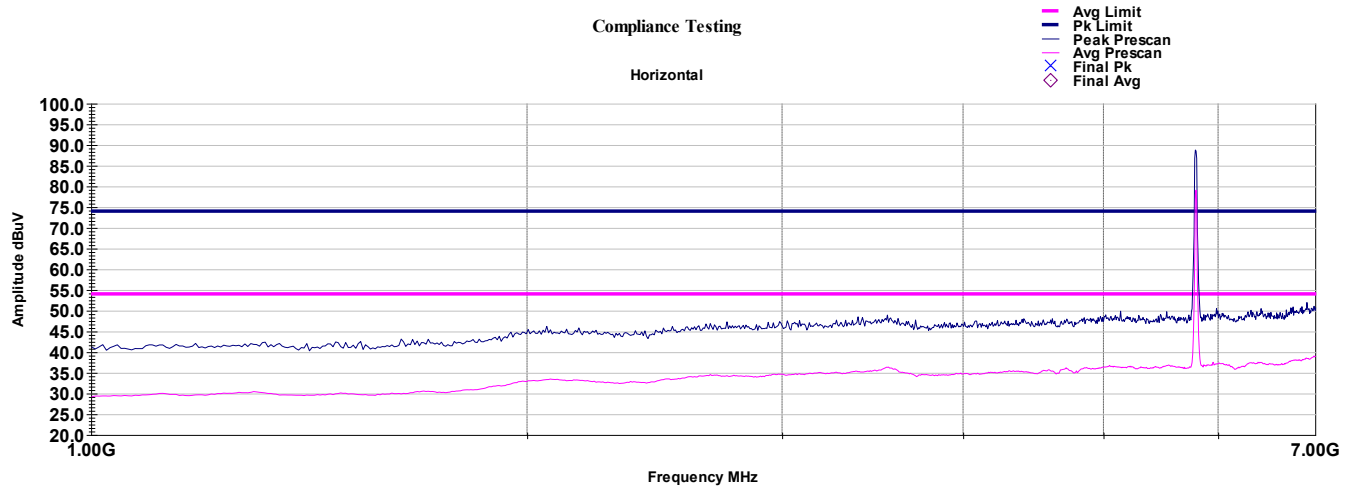



Mid Channel 7 – 18 GHz

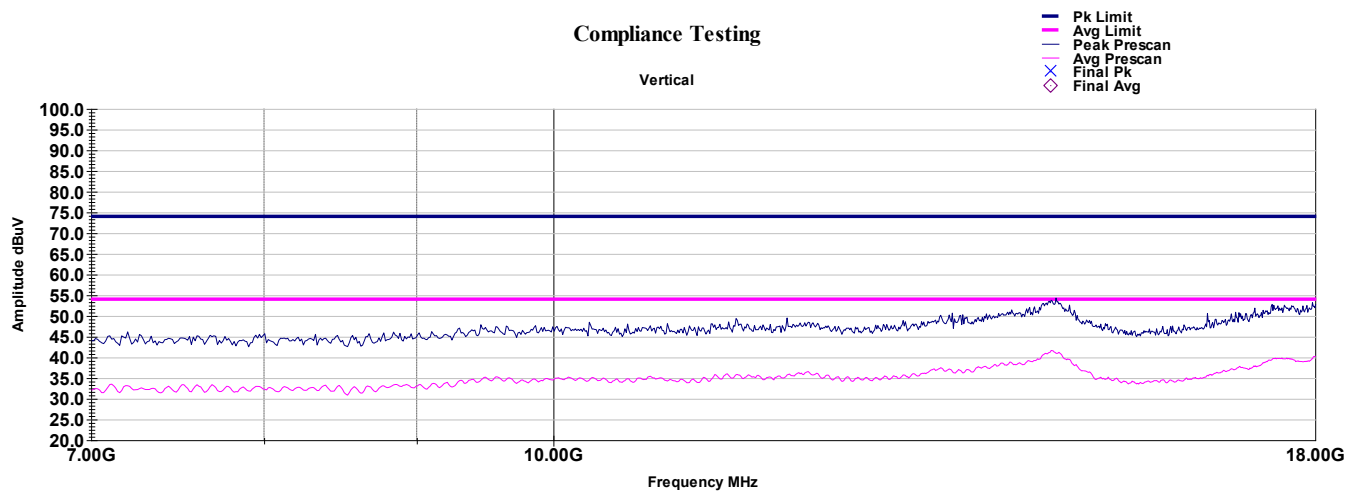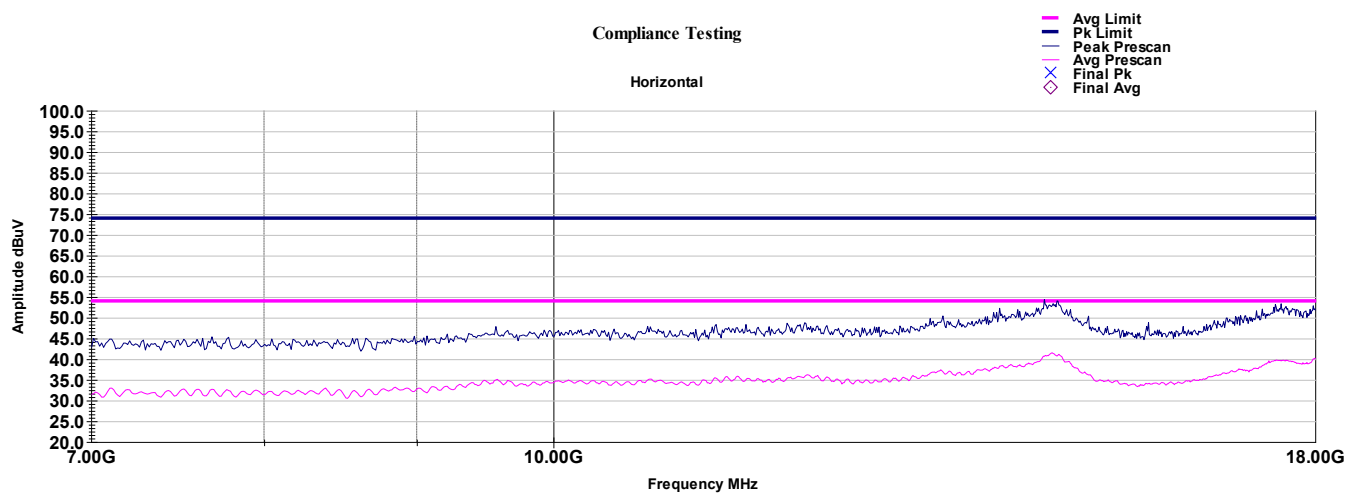



High Channel 30 -1000 MHz

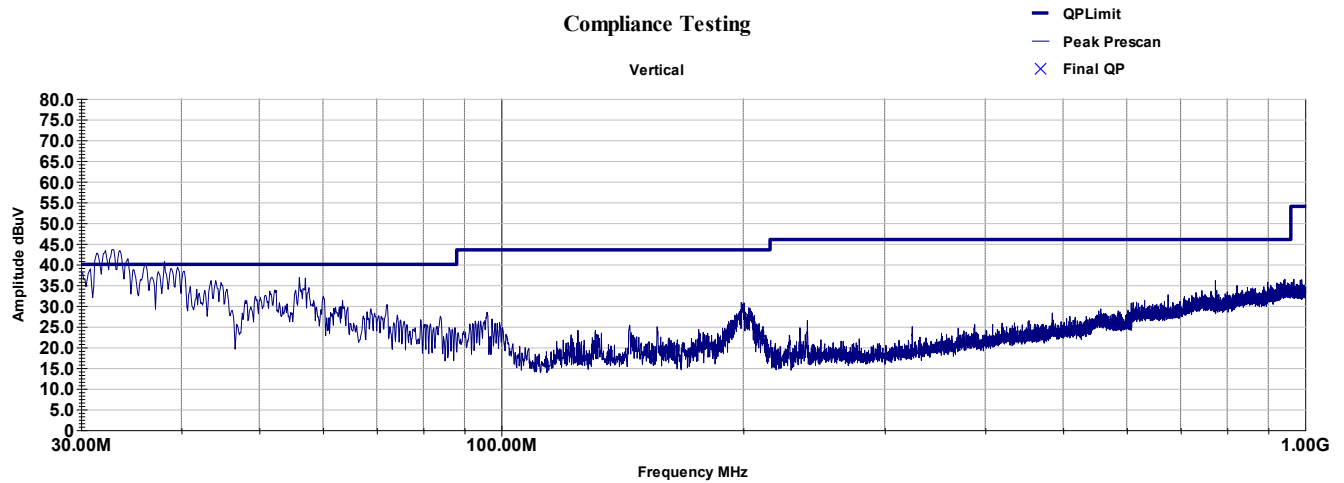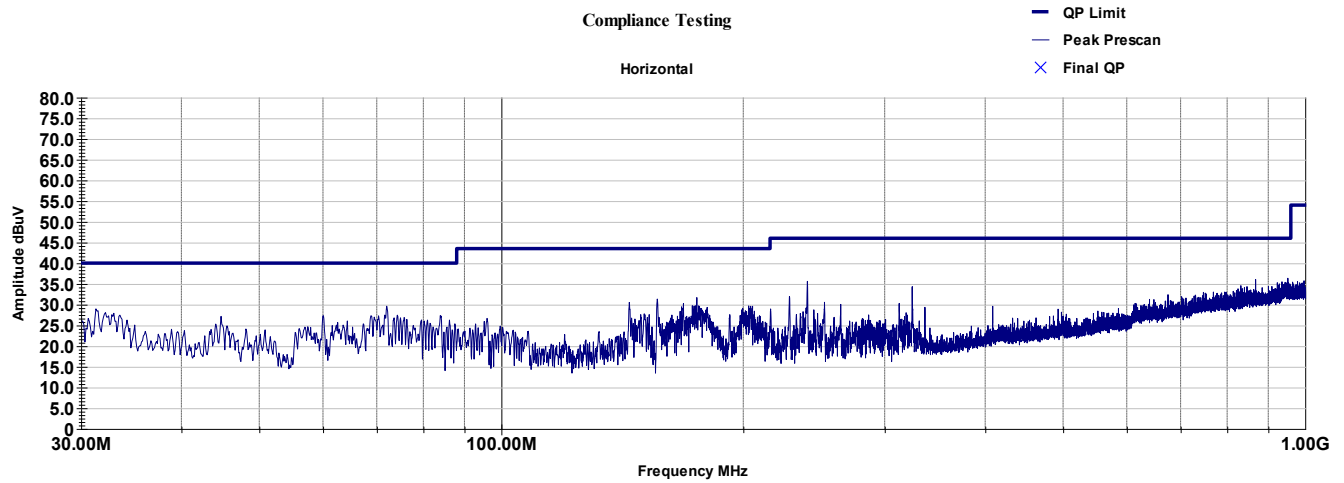



High Channel 1 – 7 GHz

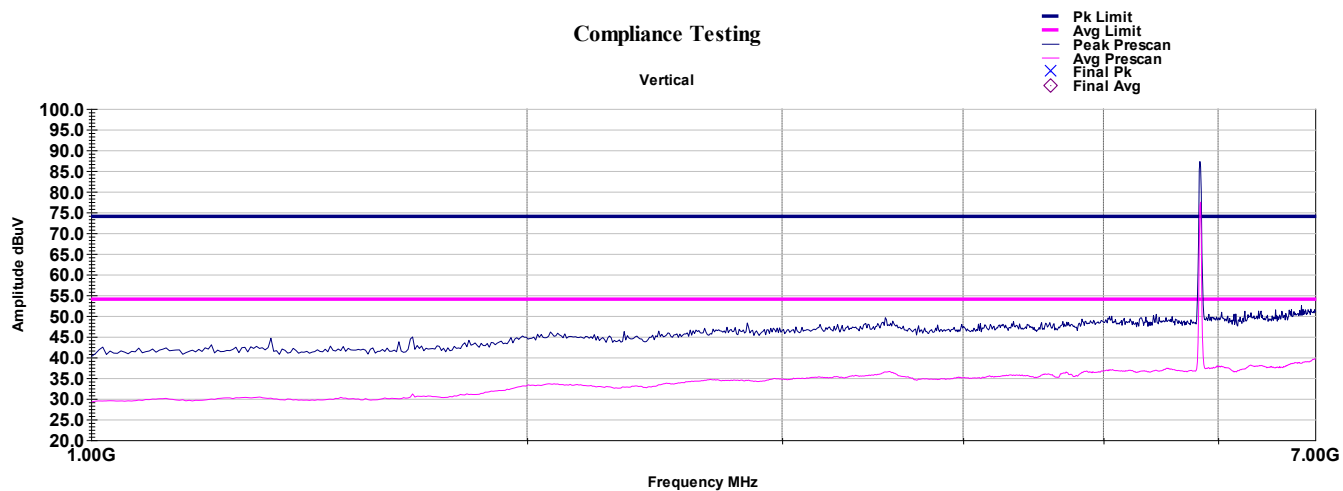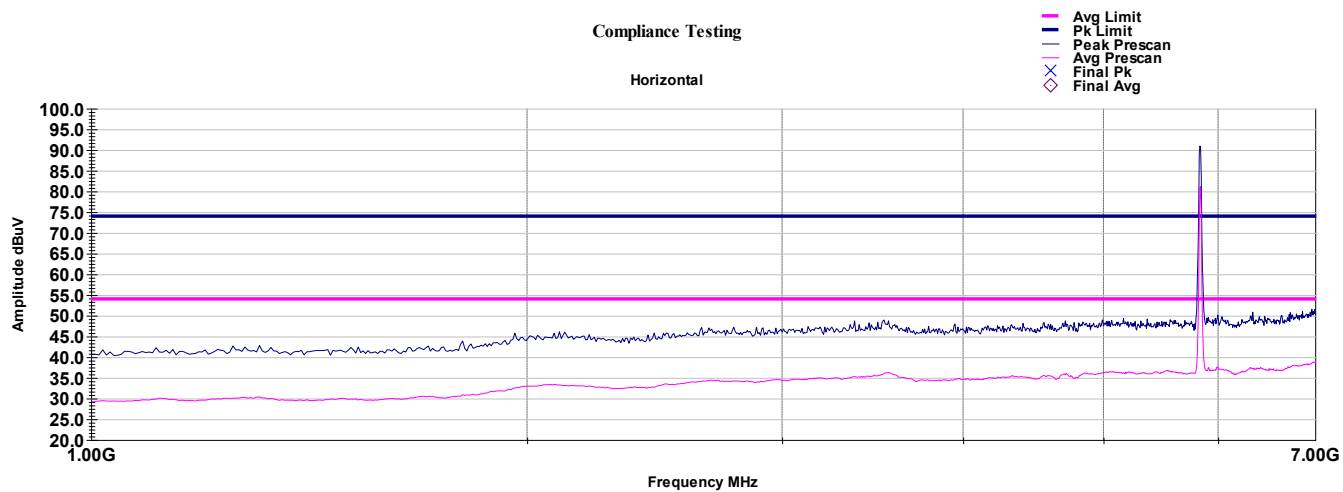

High Channel 7 – 18 GHz

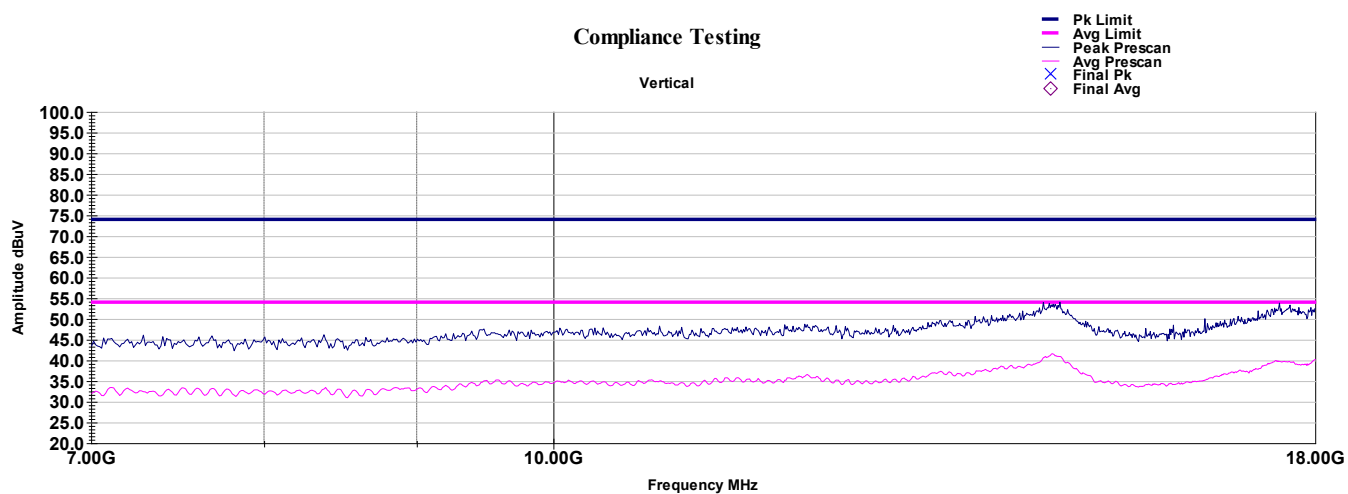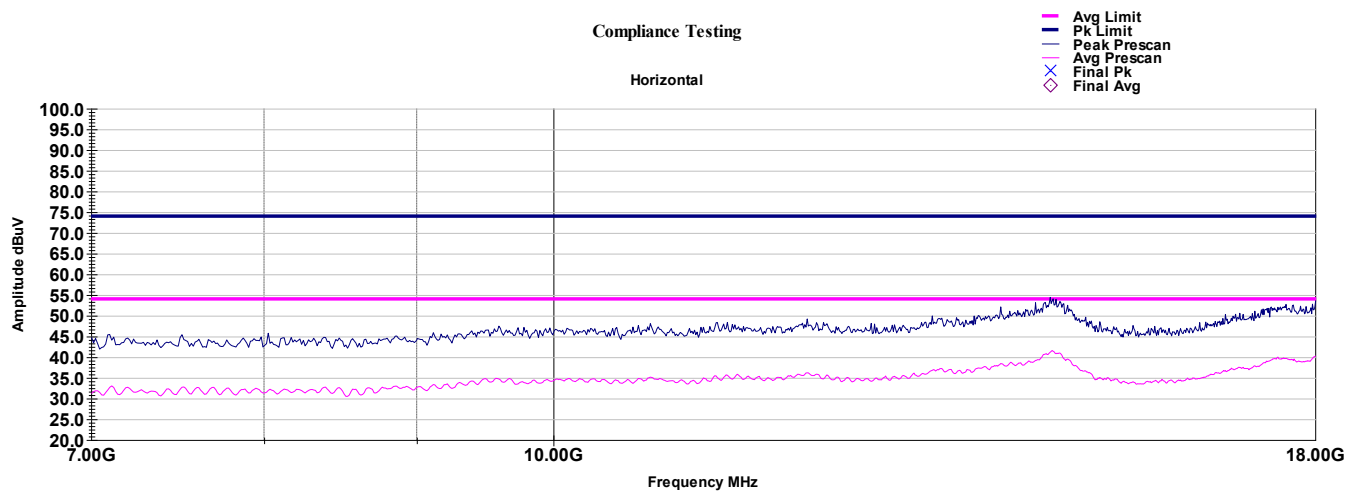

Spurious Emissions above 18 GHz yielded zero emissions

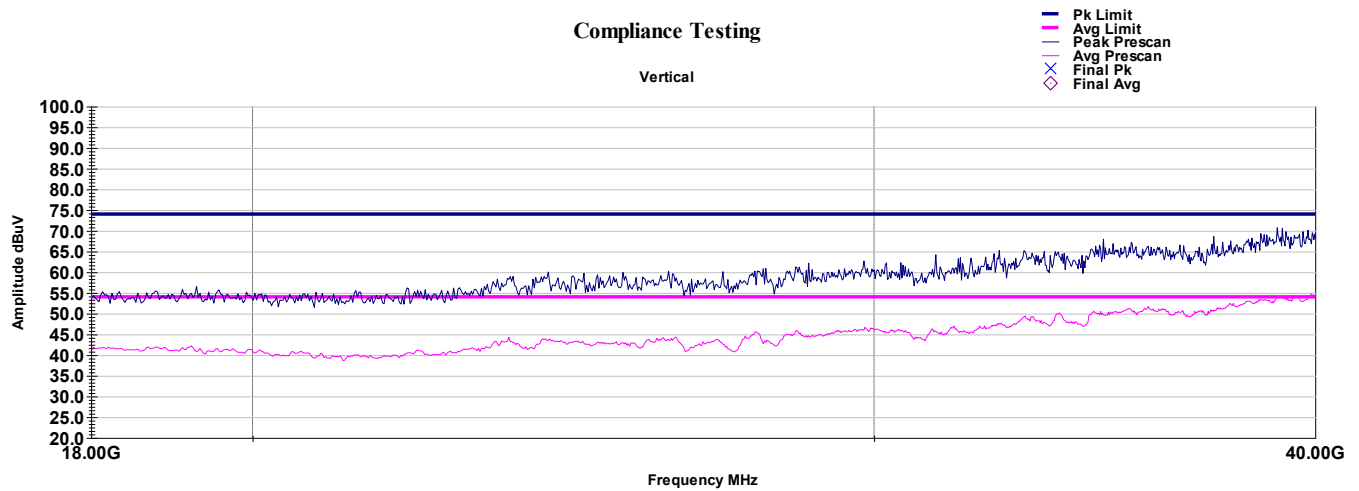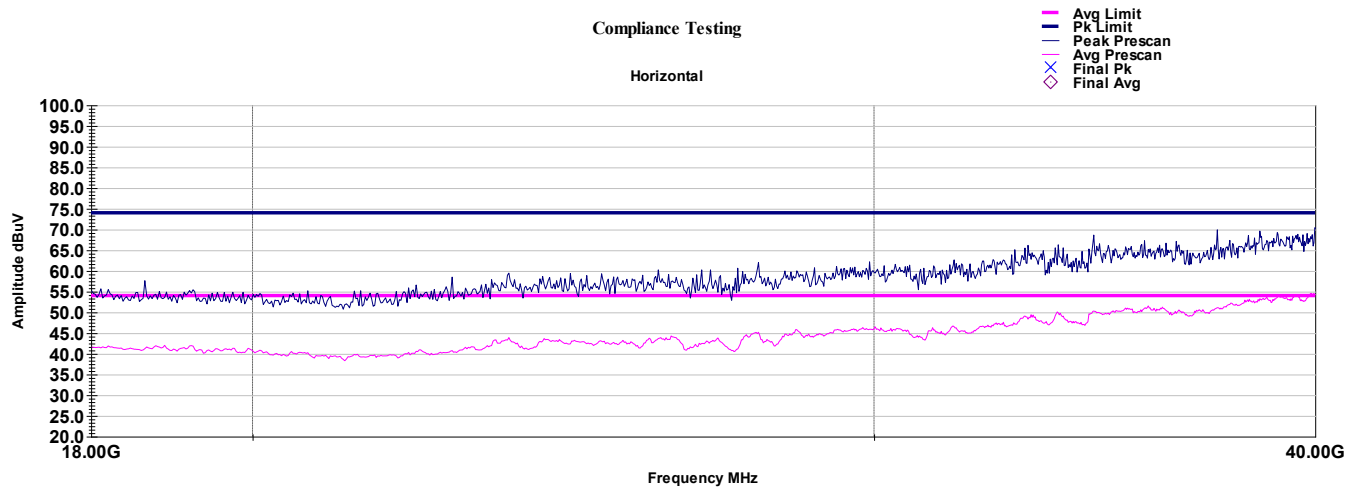

Occupied Bandwidth

Engineer: John Michalowicz

Test Date: 7/08/25

Test Requirement


Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 6 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement

Test Procedure


The Spectrum analyzer was set to the following parameters


- RBW = 100 kHz.
- VBW ≥ 300 kHz
- Detector = Peak.
- Trace mode = max hold.

Test Setup




Tuned Frequency (MHz)	Mode of Operation	Measured Value (MHz)	Specification Limit	Result
5745	802.11 ac	16.31	500 kHz	Pass
5785	802.11 ac	16.28	500 kHz	Pass
5825	802.11 ac	16.29	500 kHz	Pass

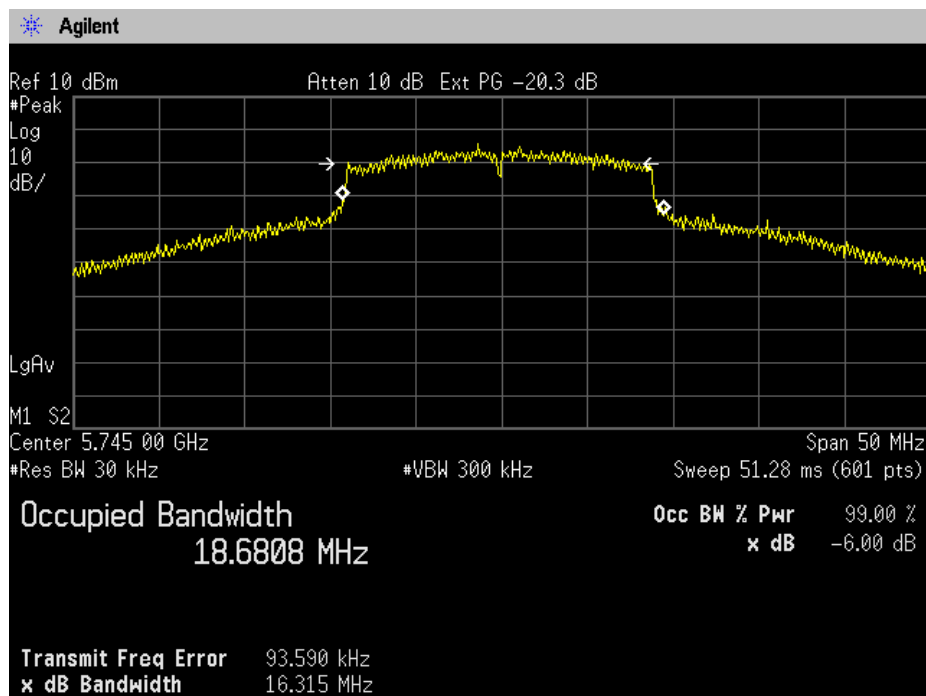

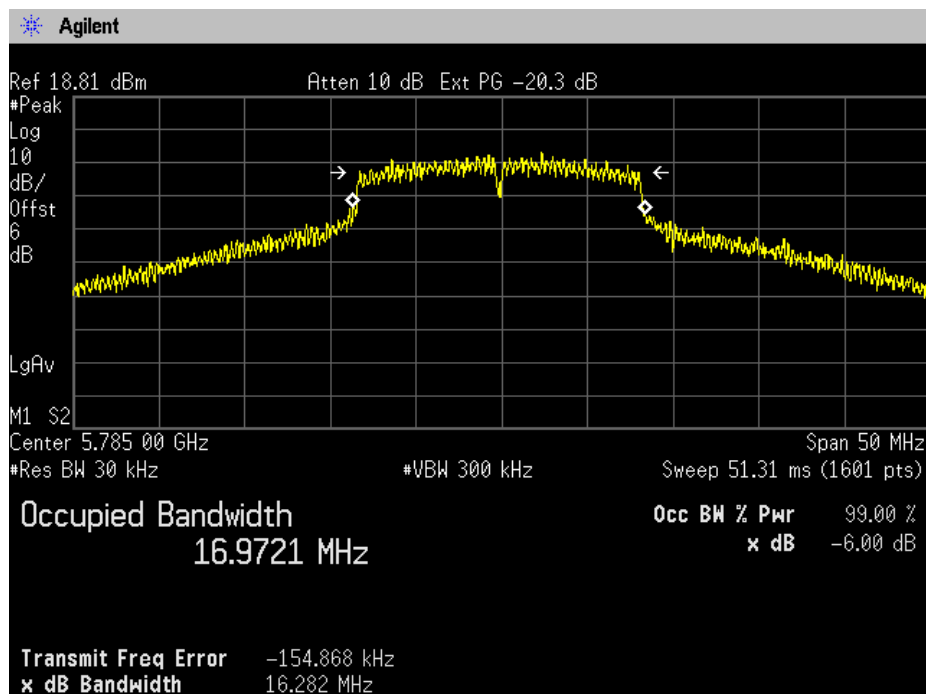

Mid Channel 6dB BW

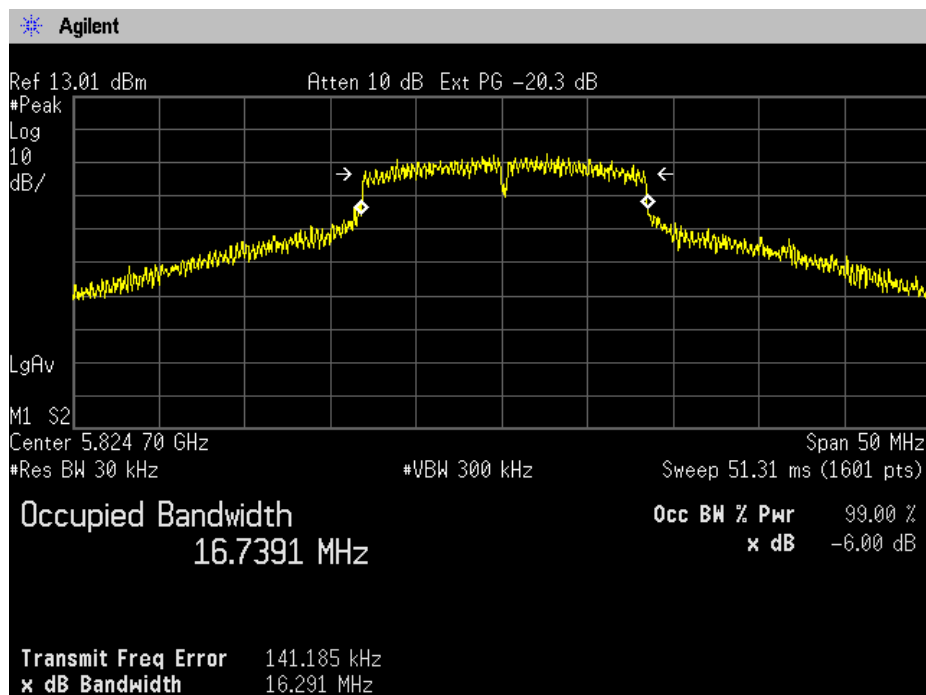

High Channel 6dB BW

A/C Powerline Conducted Emission


Engineer: John Michalowicz

Test Date: 7/22/25


Test Procedure

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.


Test Setup



Compliance Testing Conducted Emissions Line 1

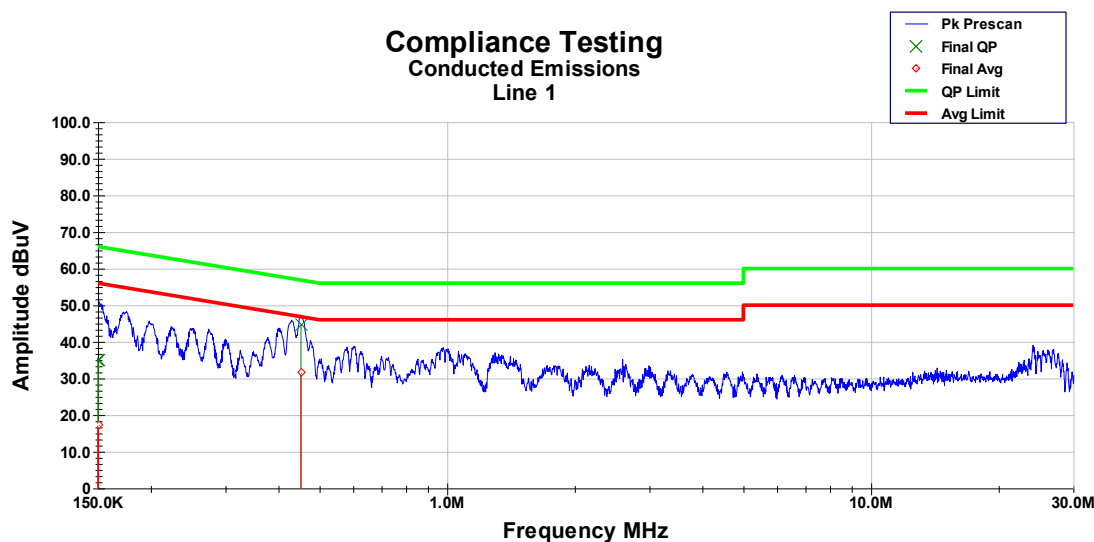

Compliance Testing Conducted Emissions Line 2

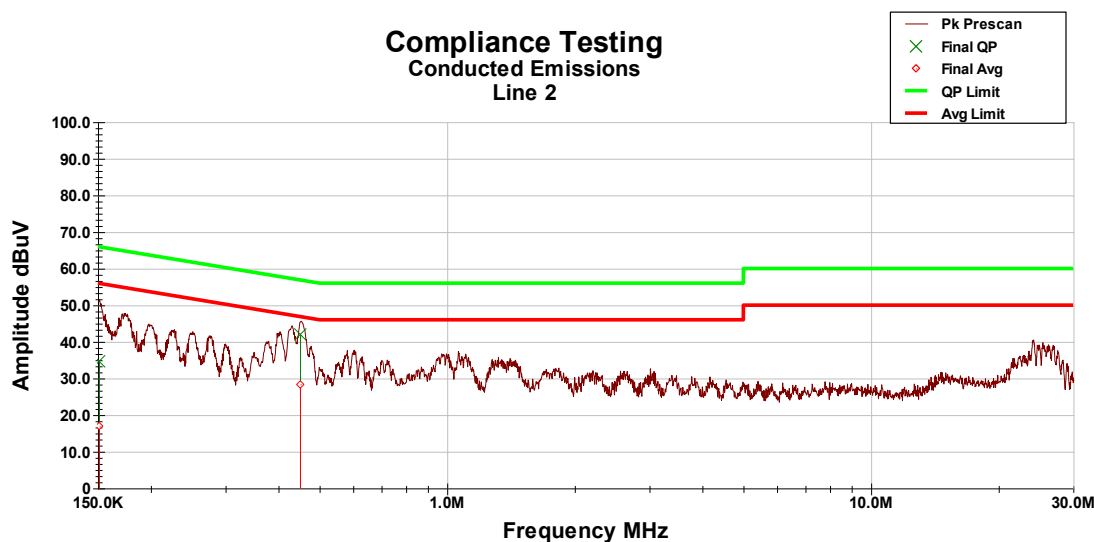

Peak emissions are below the average and quasi-peak limits

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna (18-40GHz)	EMCO	3116	i00085	3/18/25	3/18/27
Temp./humidity/pressure monitor (Main Lab)	Omega Engineering	iBTHX-W-5	i00686	1/25/25	1/25/26
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	7/13/23	7/13/26
44GHz EMI receiver	Keysight	N9038A	i00552	3/17/25	3/17/26
PSA Spectrum Analyzer	Agilent	E4448A	i00688	10/26/24	10/26/25
Bi-Log antenna	Chase	CBL6111C	i00267	3/5/24	3/5/26
Horn Antenna (1-18GHz)	ARA	DRG-118/A	i00271	8/9/24	8/9/26
Preamplifier	COM-Power	PAM-103	i00734	Verified on: 6/27/24	
Preamplifier	Eravant	SBB-0115034019-2F2F-E3	i00722	Verified on: 12/4/24	
EMI Receiver	HP	85462A	i00033	6/25/25	6/25/26
Transient Limiter	Com-Power	LIT-153	i00123	Verified on: PTV	
AC Power Source	Behlman	BL 6000	i00362	NCR	
LISN	COM-Power	LI-125A	i00446	3/18/24	3/18/26
LISN	COM-Power	LI-125A	i00448	3/18/24	3/18/26

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

Measurement Uncertainty

Measurement Uncertainty (U_{lab}) for Compliance Testing is listed in the table below.

Measurement	U_{lab}
Radio Frequency	$\pm 3.3 \times 10^{-8}$
RF Power, conducted	± 1.5 dB
RF Power Density, conducted	± 1.0 dB
Conducted Emissions	± 1.8 dB
Radiated Emissions	± 4.5 dB
Temperature	± 1.5 deg C
Humidity	± 4.3 %
DC voltage	± 0.20 VDC
AC Voltage	± 1.2 VAC

The reported expanded uncertainty $\pm U_{lab}(\text{dB})$ has been estimated at a 95% confidence level ($k=2$)

U_{lab} is less than or equal to U_{ETSI} therefore

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit
- Non-Compliance is deemed to occur if any measured disturbance exceeds the disturbance limit

END OF TEST REPORT