



FCC TEST REPORT

FCC ID:2BPMS-WPB-12

Report Number.....: **ZKT-2605130386E**

Date of Test..... May 13, 2026 to May 20, 2026

Date of issue.....: May 20, 2026

Total number of pages..... 28

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shenzhen Chuangxin Technology Co., Ltd.

Address: 2/F, Building 21#, Tongfu Estate Industrial Zone, Dalang Street,
Longhua District, Shenzhen, China

Manufacturer's name: Shenzhen Chuangxin Technology Co., Ltd.

Address: 2/F, Building 21#, Tongfu Estate Industrial Zone, Dalang Street,
Longhua District, Shenzhen, China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor 1-2023

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-111_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Wireless charging case for iWatch

Trademark: N/A

Model/Type reference.....: WPB-12

Ratings.....: USB-C Input: 5V $\overline{\text{---}}$ 2A
USB-C Output: 5V $\overline{\text{---}}$ 1A
Lightning Input: 5V $\overline{\text{---}}$ 2A
Wireless Charging Output: 5W
Battery: 3.7V, 1500mAh, 5.55Wh



Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





TABLE OF CONTENTS

1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test mode	8
3.3 Block Diagram of EUT Configuration	9
3.4 Test Conditions	10
3.5 Description Of Support Units (Conducted Mode)	10
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. CONDUCTED EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 Test Result	15
5. RADIATED EMISSION MEASUREMENT	17
5.1 Radiated Emission Limits	17
5.2 Anechoic Chamber Test Setup Diagram	18
5.3 Test Procedure	18
5.4 DEVIATION FROM TEST STANDARD	18
5.5 Test Result	19
6. BANDWIDTH TEST	25
7. ANTENNA REQUIREMENT	27
8. TEST SETUP PHOTO	28
9. EUT CONSTRUCTIONAL DETAILS	28



1. VERSION

Report No.	Version	Description	Approved
ZKT-2605130386E	Rev.01	Initial issue of report	May 20, 2026



2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491
Designation Number: CN1431
IC Registered No.: 27033
CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF conducted Spurious Emission	U=2.2dB
7	RF Occupied Bandwidth	U=1.8MHz
8	humidity uncertainty	U=5.3%
-	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless charging case for iWatch
Model No.:	WPB-12
Serial No.:	N/A
Model Difference:	N/A
Hardware version:	N/A
Software version:	N/A
Operation Frequency:	300kHz-350kHz
Modulation type:	ASK
Antenna Type:	loop coil antenna
Antenna gain:	0dBi
Ratings:	USB-C Input: 5V $\overline{\text{---}}$ 2A USB-C Output: 5V $\overline{\text{---}}$ 1A Lightning Input:5V $\overline{\text{---}}$ 2A Wireless Charging Output:5W
Battery Capacity:	3.7V, 1500mAh, 5.55Wh
Test description:	Keep the EUT in continuously wireless charging mode



3.2 Test mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

a. EUT mode of adapter input + wireless charge output:

Test Modes:	Test Coil:	Description:
Mode 1	ANT 1	AC/DC Adapter (5V/2A) + EUT + Watch (Battery Status: <1%)
Mode 2		AC/DC Adapter (5V/2A) + EUT + Watch (Battery Status: 50%)
Mode 3		AC/DC Adapter (5V/2A) + EUT + Watch (Battery Status: >98%)

b. EUT mode of wireless charge output:


Test Modes:	Test Coil:	Description:
Mode 1a	ANT 1	EUT + Watch (Battery Status: <1%)
Mode 2a		EUT + Watch (Battery Status: 50%)
Mode 3a		EUT + Watch (Battery Status: >98%)




3.3 Block Diagram of EUT Configuration

Conducted Emission


Conducted Emission

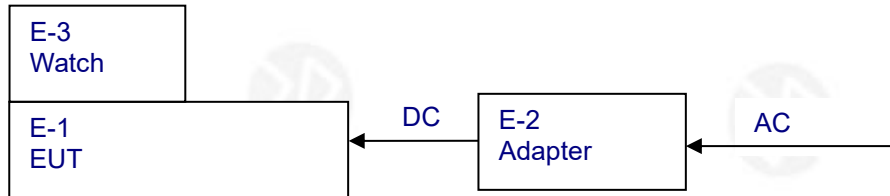

Radiated Emission

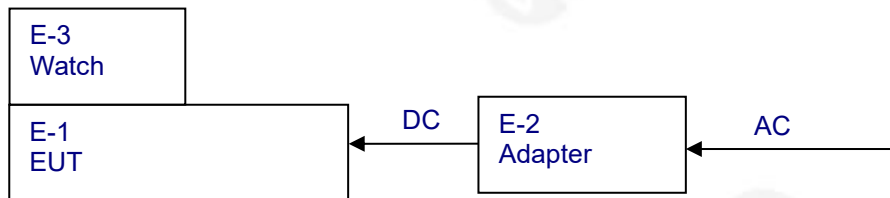

B:





3.4 Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Wireless charging case for iWatch	N/A	WPB-12	N/A	EUT
E2	AC/DC Adapter	N/A	X569	N/A	Auxiliary
E3	Watch	Apple	Watch S11	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 23, 2025	Sep. 22, 2026
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Test Cable	N/A	C-01	N/A	N/A	May. 25, 2025	May. 24, 2026
4	Test Cable	N/A	C-02	N/A	N/A	May. 25, 2025	May. 24, 2026
5	Test Cable	N/A	C-03	N/A	N/A	May. 25, 2025	May. 24, 2026
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 24, 2025	Oct. 23, 2026
7	Triple-Loop Antenna	N/A	RF300	9194	N/A	Sep. 19, 2025	Sep. 18, 2026
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Sep. 23, 2025	Sep. 22, 2026
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May. 25, 2025	May. 24, 2026
12	Test Cable	N/A	R-02	N/A	N/A	May. 25, 2025	May. 24, 2026
13	Test Cable	N/A	R-03	N/A	N/A	May. 25, 2025	May. 24, 2026
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	N/A	RF-01	N/A	N/A	May. 25, 2025	May. 24, 2026
4	Test Cable	N/A	RF-02	N/A	N/A	May. 25, 2025	May. 24, 2026
5	Test Cable	N/A	RF-03	N/A	N/A	May. 25, 2025	May. 24, 2026
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
12	D.C. Power Supply	LongWei	TPR-6405 D	N/A	N/A	\	\
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

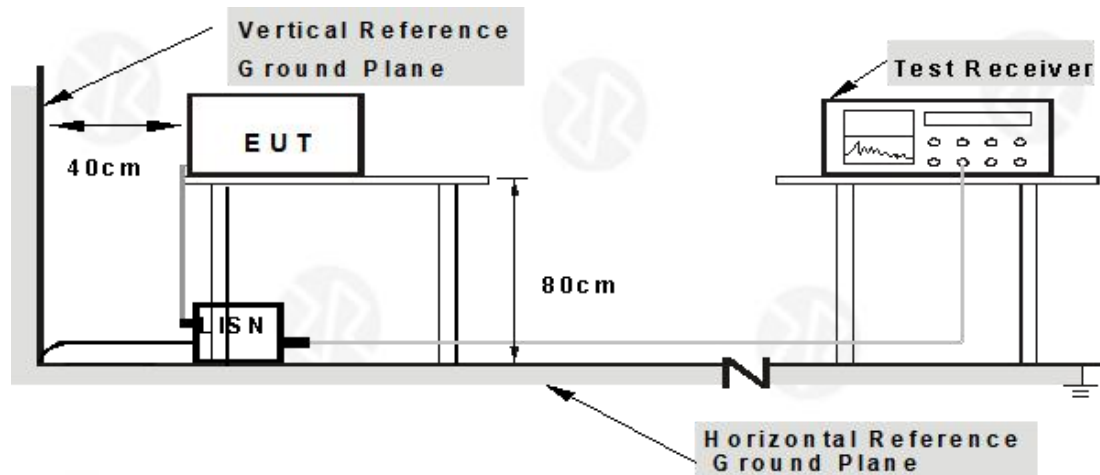

- Note:** 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	DC 5V from adapter input AC 120V/60Hz.	Test Mode:	Mode 1

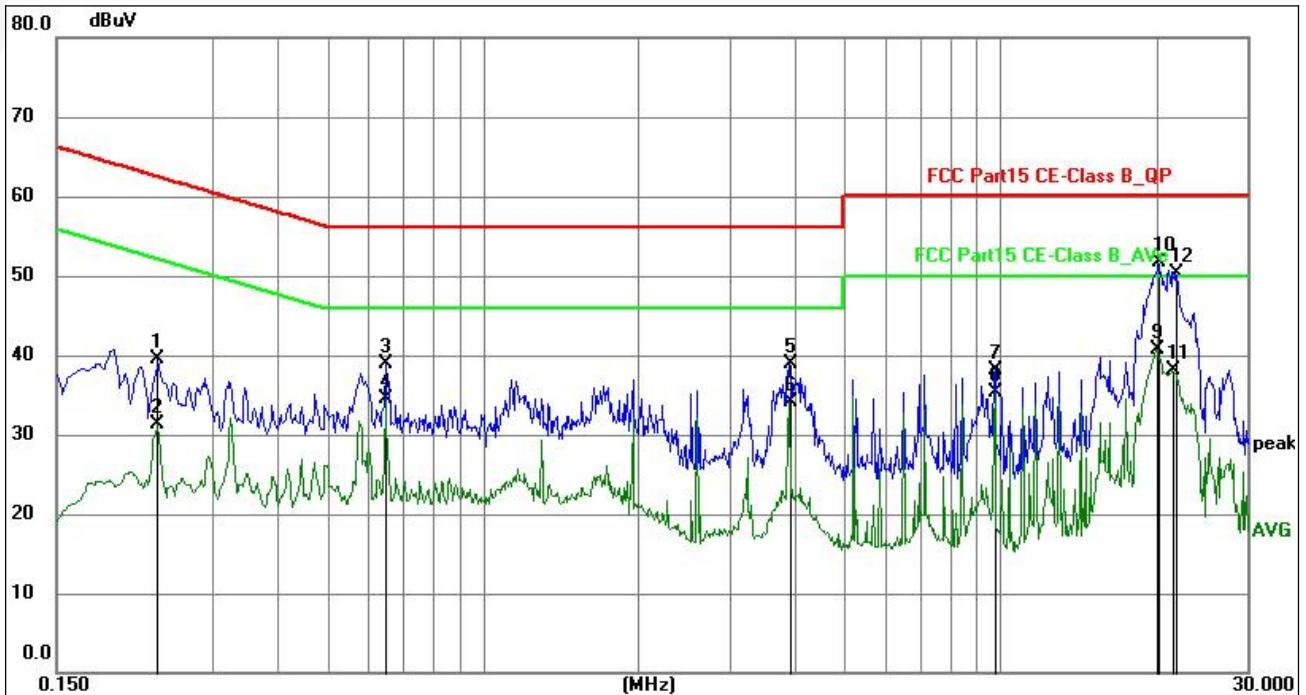


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2353	19.82	19.66	39.48	62.26	-22.78	QP	P	
2	0.2353	11.70	19.66	31.36	52.26	-20.90	AVG	P	
3	0.6492	19.25	19.63	38.88	56.00	-17.12	QP	P	
4	0.6492	14.89	19.63	34.52	46.00	-11.48	AVG	P	
5	3.9030	19.13	19.71	38.84	56.00	-17.16	QP	P	
6	3.9030	14.41	19.71	34.12	46.00	-11.88	AVG	P	
7	9.7575	18.41	19.76	38.17	60.00	-21.83	QP	P	
8	9.7575	15.64	19.76	35.40	50.00	-14.60	AVG	P	
9	19.9588	20.85	19.80	40.65	50.00	-9.35	AVG	P	
10	20.1975	31.87	19.80	51.67	60.00	-8.33	QP	P	
11	21.5293	18.36	19.79	38.15	50.00	-11.85	AVG	P	
12	21.7680	30.44	19.79	50.23	60.00	-9.77	QP	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lism factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1 recorded.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	DC 5V from adapter input AC 120V/60Hz.	Test Mode:	Mode 1

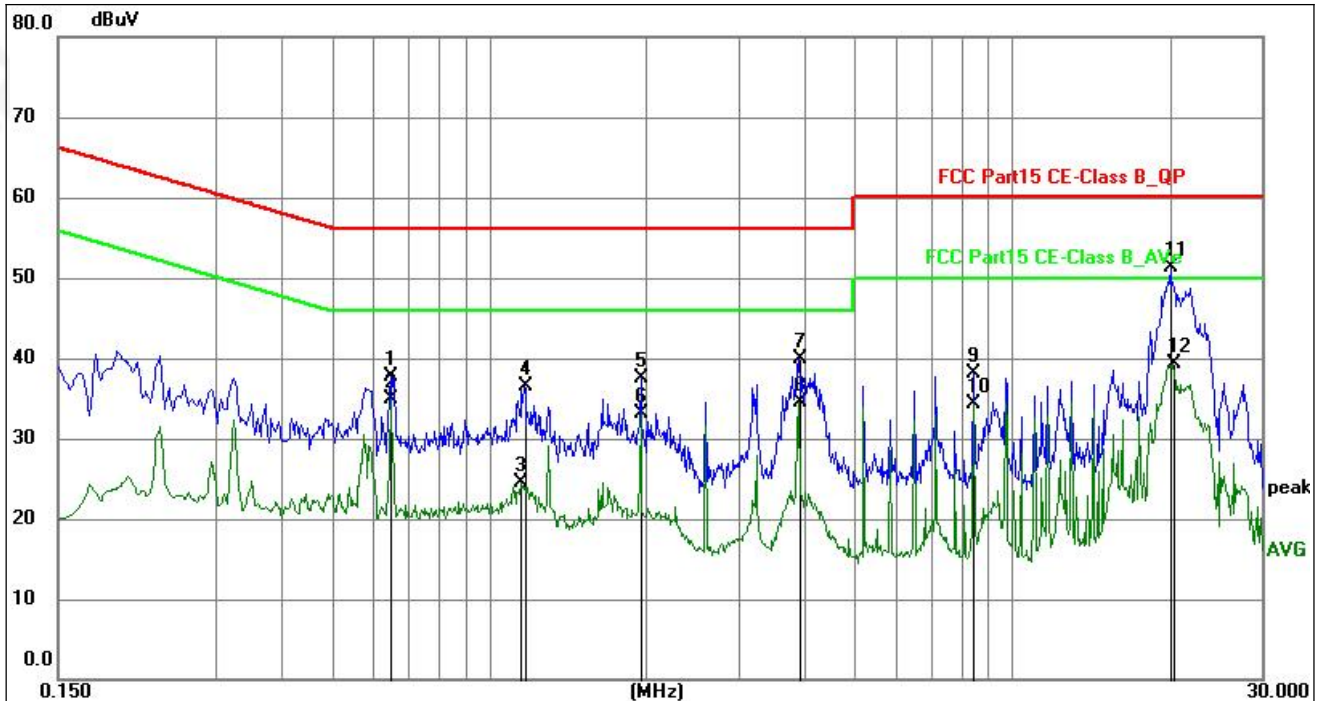

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.6492	18.07	19.63	37.70	56.00	-18.30	QP	P	
2	0.6492	15.29	19.63	34.92	46.00	-11.08	AVG	P	
3	1.1532	4.91	19.65	24.56	46.00	-21.44	AVG	P	
4	1.1713	16.76	19.65	36.41	56.00	-19.59	QP	P	
5	1.9500	17.94	19.66	37.60	56.00	-18.40	QP	P	
6	1.9500	13.50	19.66	33.16	46.00	-12.84	AVG	P	
7	3.9030	20.16	19.69	39.85	56.00	-16.15	QP	P	
8	3.9030	14.72	19.69	34.41	46.00	-11.59	AVG	P	
9	8.4525	18.37	19.73	38.10	60.00	-21.90	QP	P	
10	8.4525	14.50	19.73	34.23	50.00	-15.77	AVG	P	
11	20.1030	31.52	19.77	51.29	60.00	-8.71	QP	P	
12	20.3188	19.53	19.77	39.30	50.00	-10.70	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1 recorded.



5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor 1-2023				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value


Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value




5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

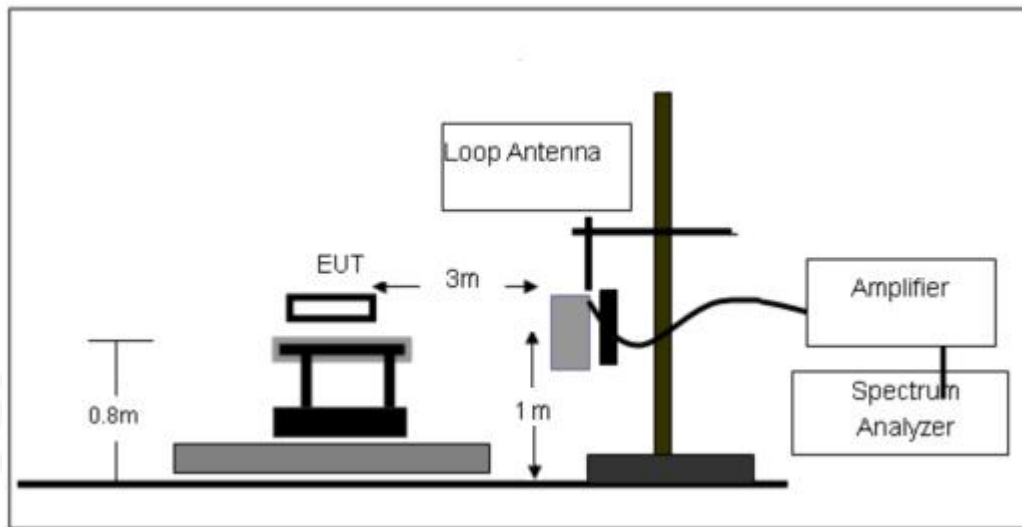

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

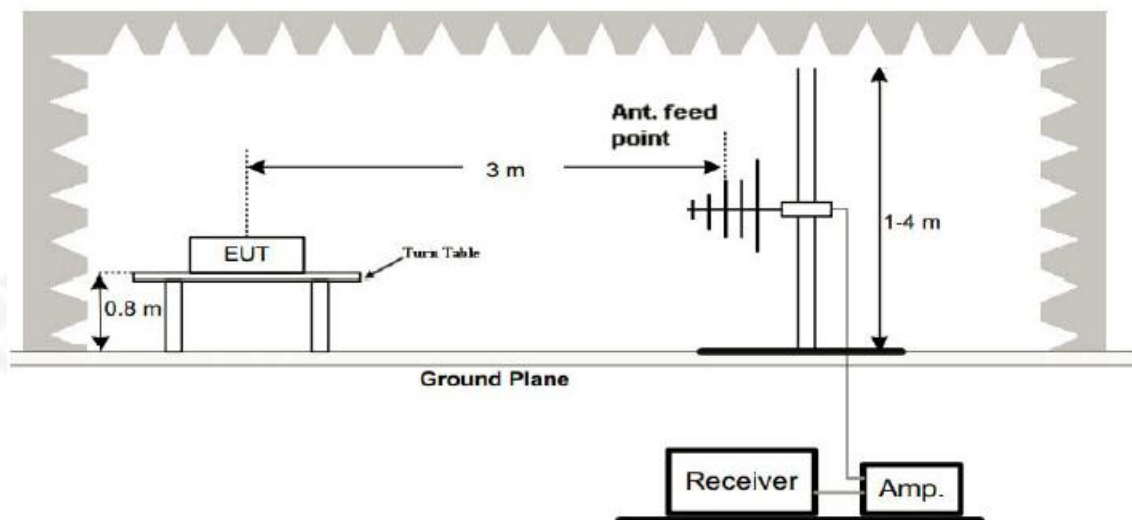

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor 1-2023. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation




5.5 Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80
Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	DC 3.7V	Simultaneously:	Mode 1a

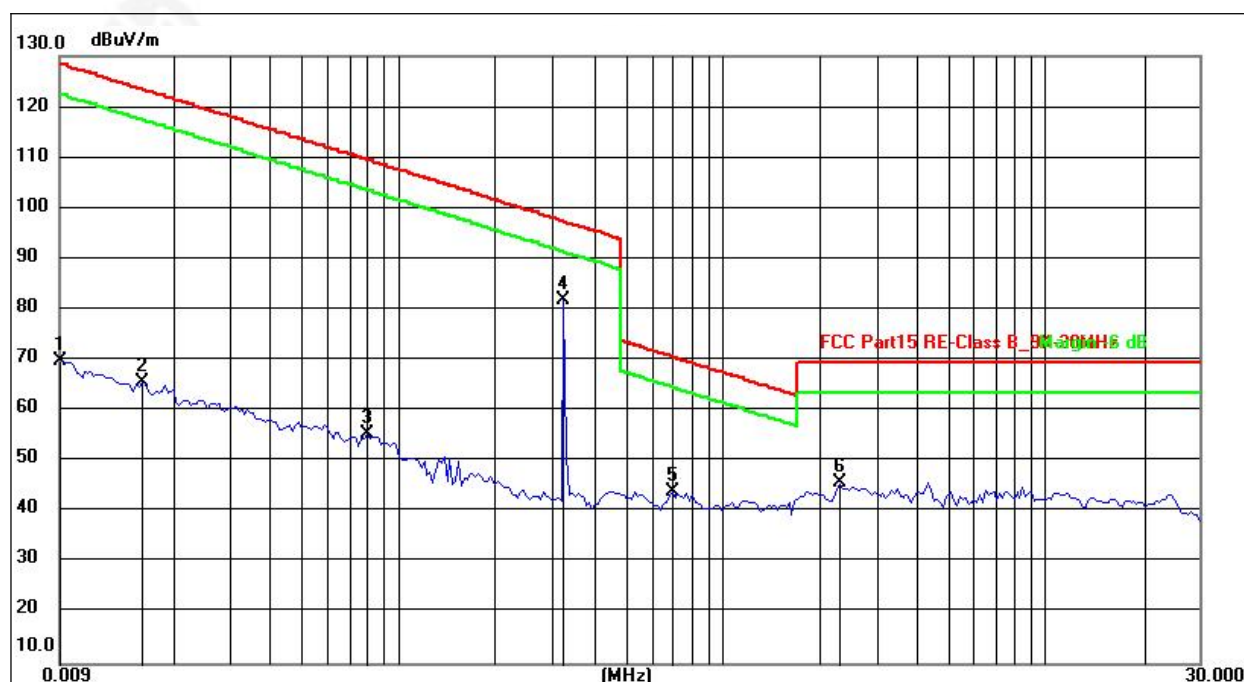


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0091	69.66	0.05	69.71	128.42	-58.71	peak
2	0.0160	45.07	20.49	65.56	123.52	-57.96	peak
3	0.0801	35.71	19.84	55.55	109.53	-53.98	peak
4	0.3259	61.62	20.13	81.75	97.34	-15.59	peak
5	0.7043	23.75	20.38	44.13	70.65	-26.52	peak
6	2.3302	25.95	19.75	45.70	69.54	-23.84	peak

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 3.7V	Test Mode :	Mode 1a

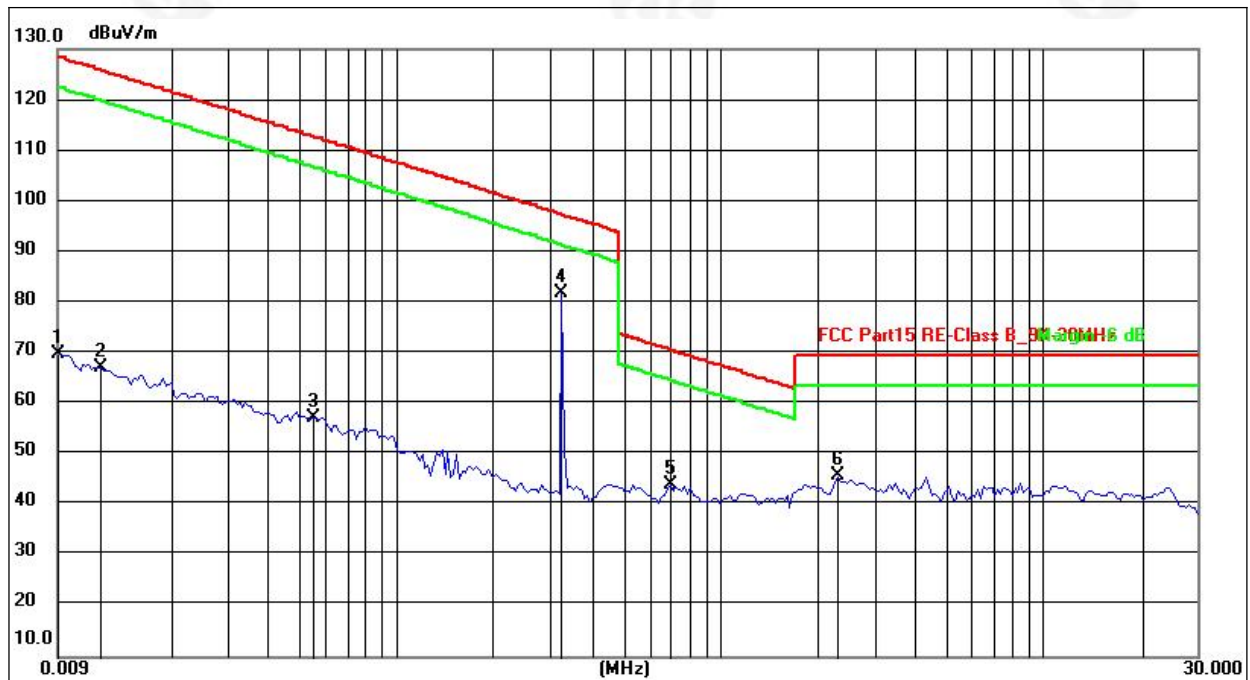


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0091	69.66	0.05	69.71	128.42	-58.71	peak
2	0.0120	46.77	20.53	67.30	126.02	-58.72	peak
3	0.0558	37.56	19.77	57.33	112.67	-55.34	peak
4	0.3259	61.62	20.13	81.75	97.34	-15.59	peak
5	0.7043	23.75	20.38	44.13	70.65	-26.52	peak
6	2.3302	25.95	19.75	45.70	69.54	-23.84	peak

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	DC 3.7V	Simultaneously:	Mode 1a

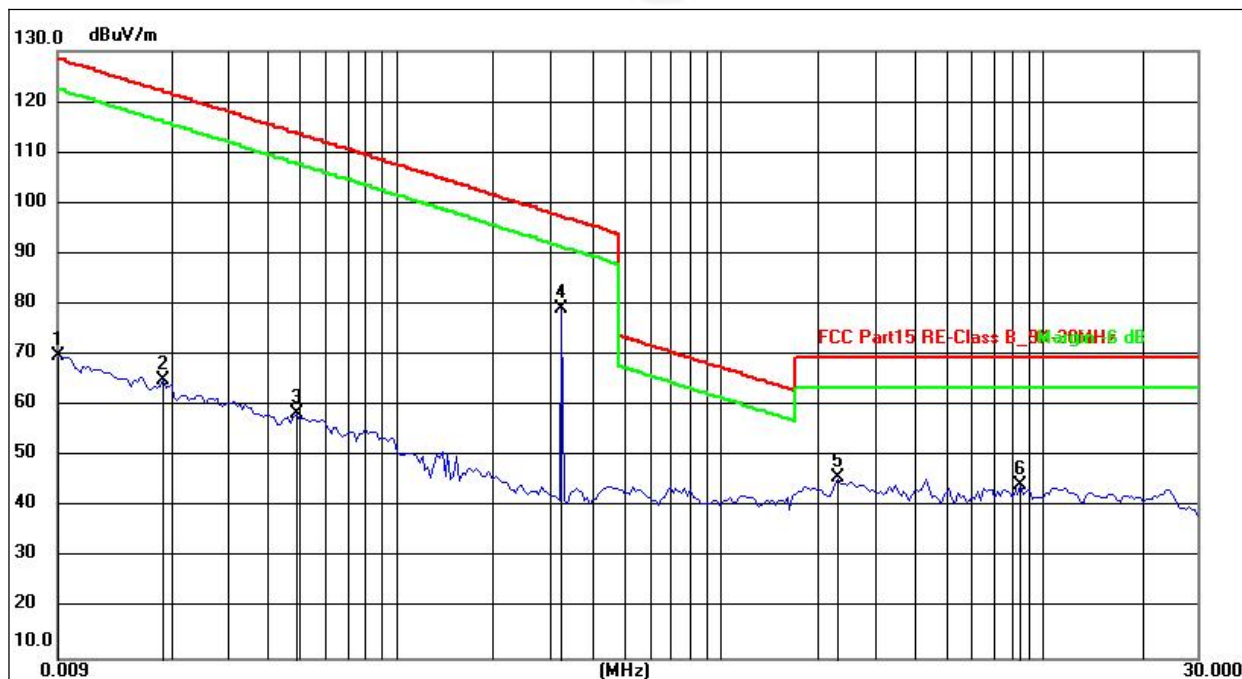


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0091	69.66	0.05	69.71	128.42	-58.71	AVG
2	0.0189	44.56	20.46	65.02	122.08	-57.06	AVG
3	0.0492	38.63	19.77	58.40	113.77	-55.37	AVG
4	0.3250	59.12	20.13	79.25	97.37	-18.12	AVG
5	2.3302	25.95	19.75	45.70	69.54	-23.84	AVG
6	8.5324	25.31	19.14	44.45	69.54	-25.09	AVG

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 3.7V	Test Mode :	Mode 1a

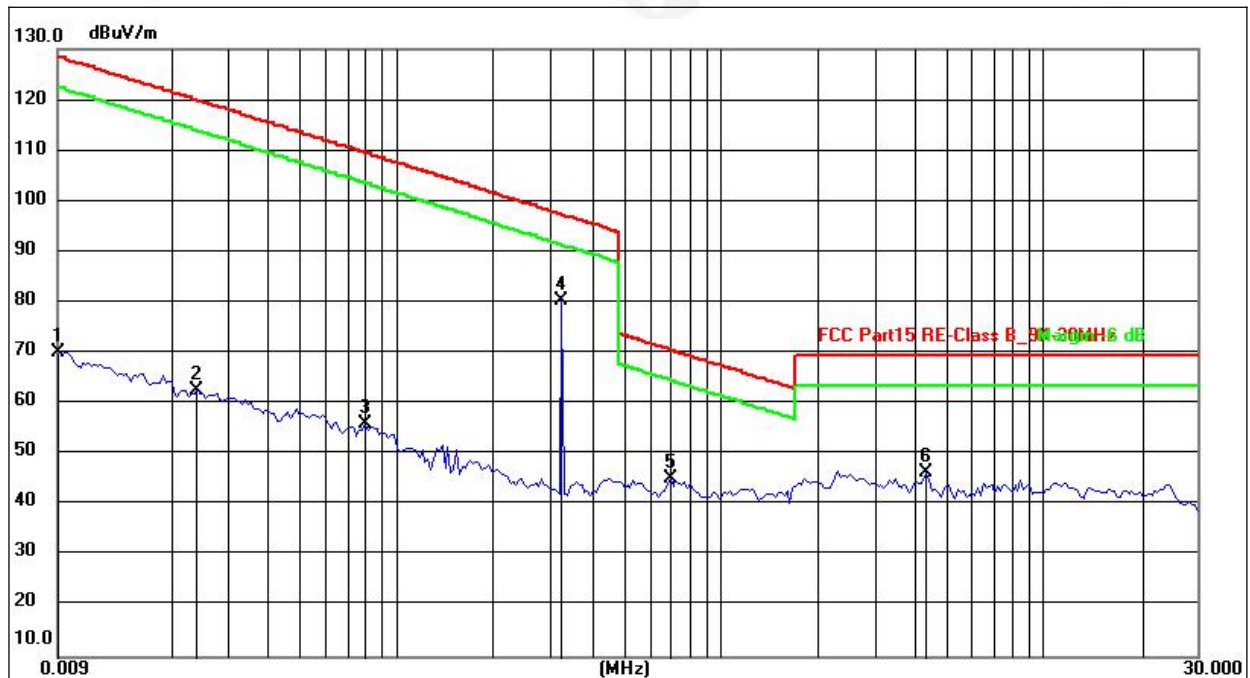

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0091	70.16	0.05	70.21	128.42	-58.21	AVG
2	0.0240	42.22	20.36	62.58	120.00	-57.42	AVG
3	0.0801	36.21	19.84	56.05	109.53	-53.48	AVG
4	0.3250	60.12	20.13	80.25	97.37	-17.12	AVG
5	0.7043	24.75	20.38	45.13	70.65	-25.52	AVG
6	4.3695	26.97	19.52	46.49	69.54	-23.05	AVG


Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.



30MHz-1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	Mode 1a

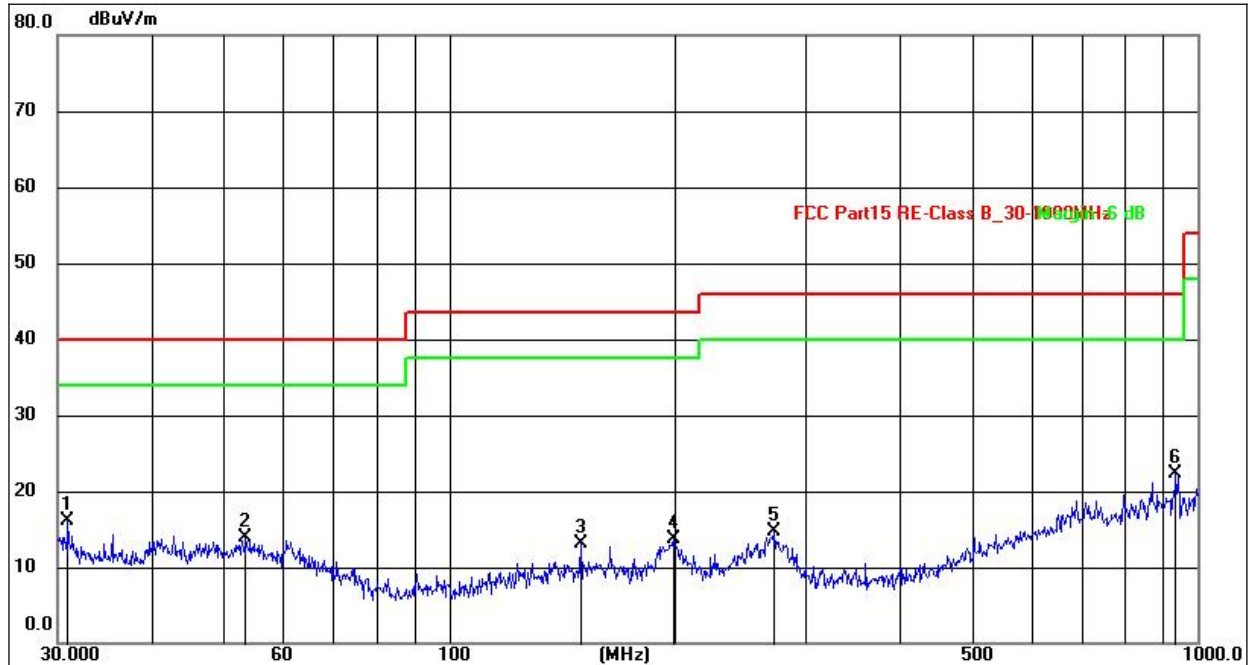


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.9618	31.60	-15.56	16.04	40.00	-23.96	QP
2	53.5052	29.37	-15.43	13.94	40.00	-26.06	QP
3	150.0107	32.00	-18.94	13.06	43.50	-30.44	QP
4	199.2855	35.54	-21.91	13.63	43.50	-29.87	QP
5	272.2776	33.67	-19.00	14.67	46.00	-31.33	QP
6	935.5461	35.03	-12.75	22.28	46.00	-23.72	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1a recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	Mode 1a

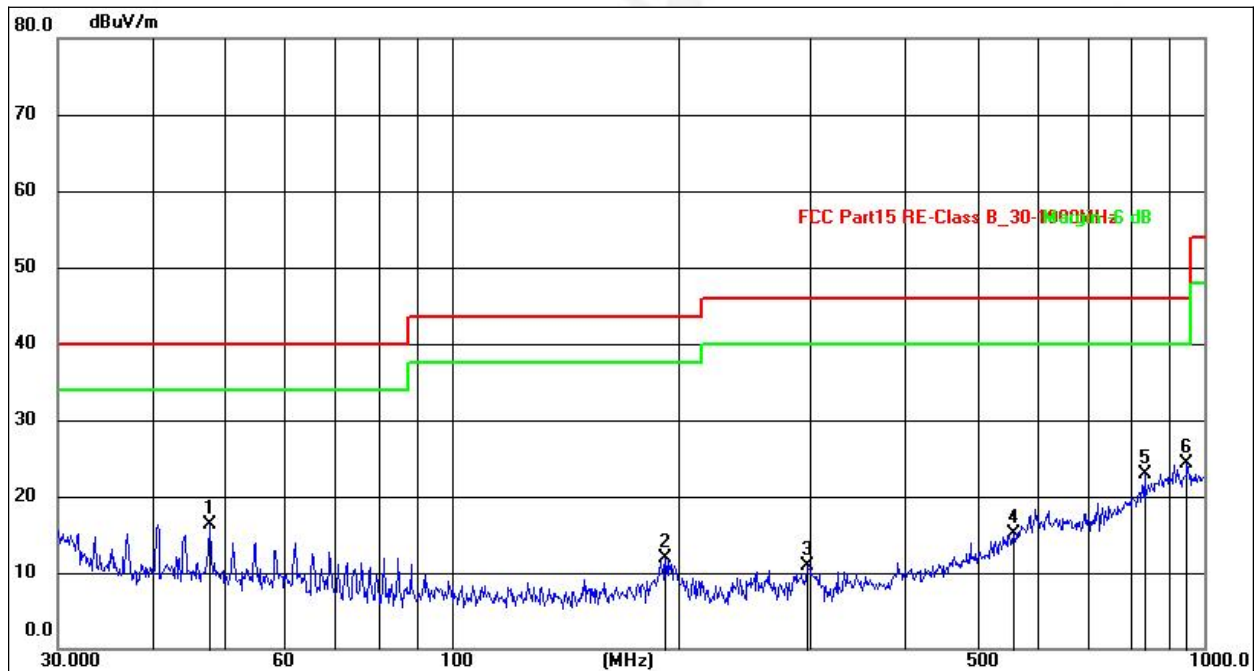

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.8260	34.75	-18.48	16.27	40.00	-23.73	QP
2	192.4182	35.35	-23.42	11.93	43.50	-31.57	QP
3	297.2238	33.78	-22.94	10.84	46.00	-35.16	QP
4	558.7300	29.71	-14.62	15.09	46.00	-30.91	QP
5	833.3170	31.82	-8.84	22.98	46.00	-23.02	QP
6	948.7608	31.32	-7.03	24.29	46.00	-21.71	QP

Remarks:


- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1a recorded.



6. BANDWIDTH TEST

1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP

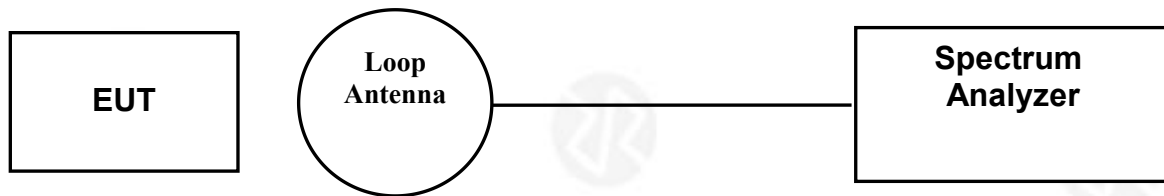



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Test Coil	Frequency (KHz)	20dB bandwidth (KHz)	Result
Phone	325	27.02	Pass

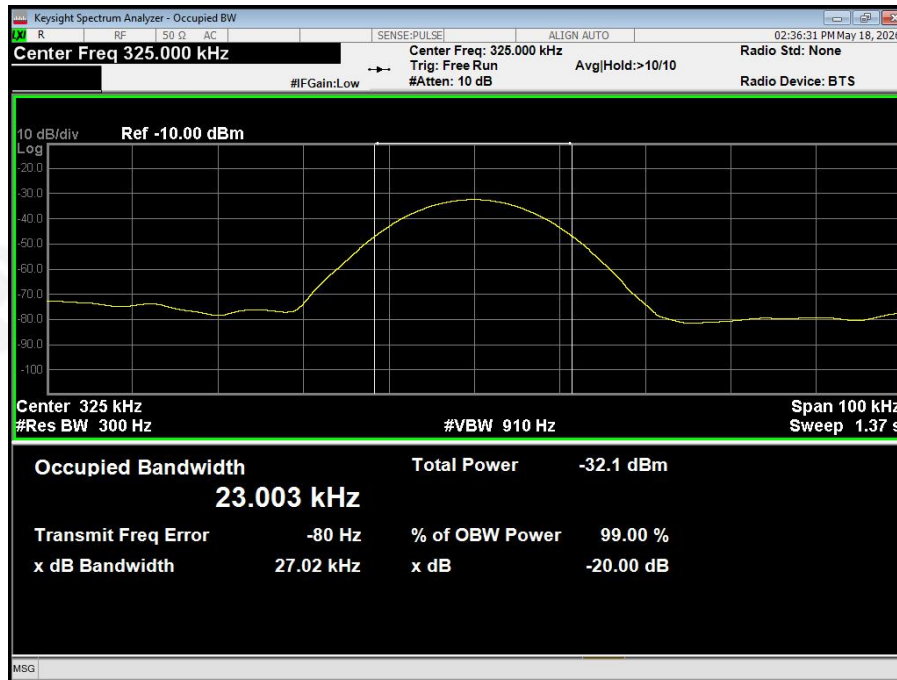



7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is loop coil antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****