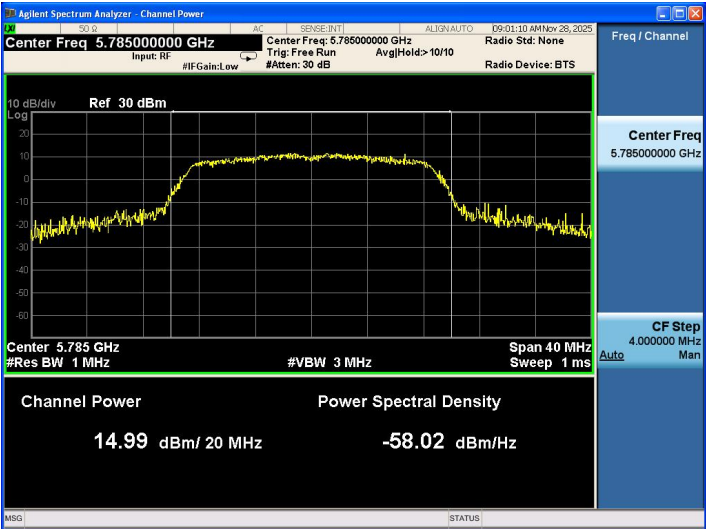
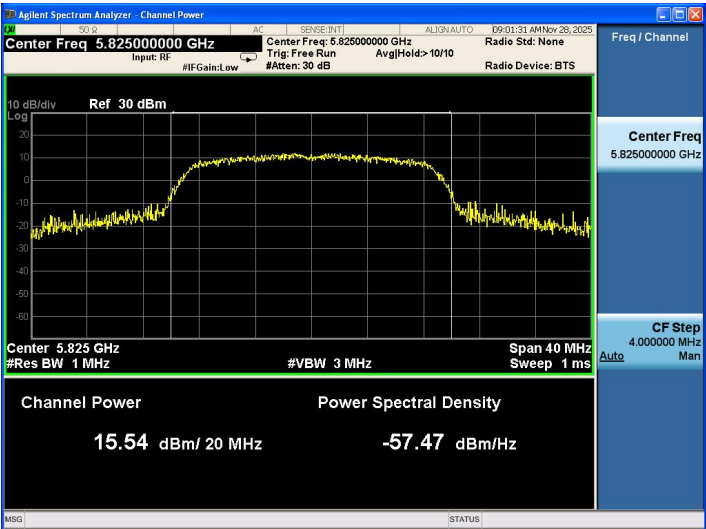
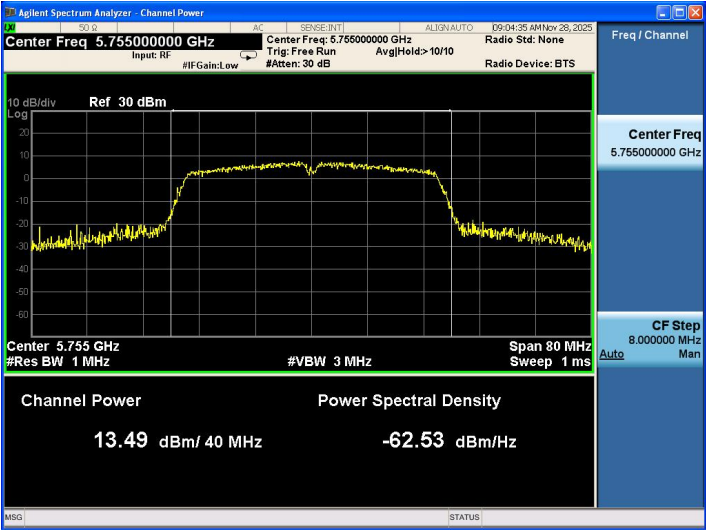
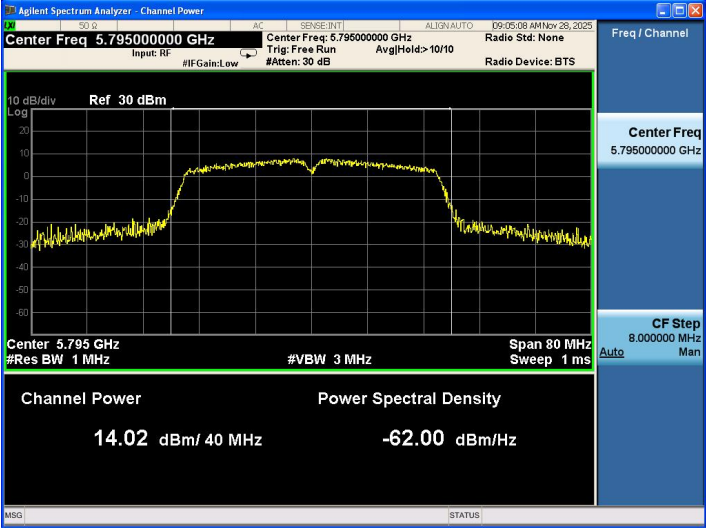
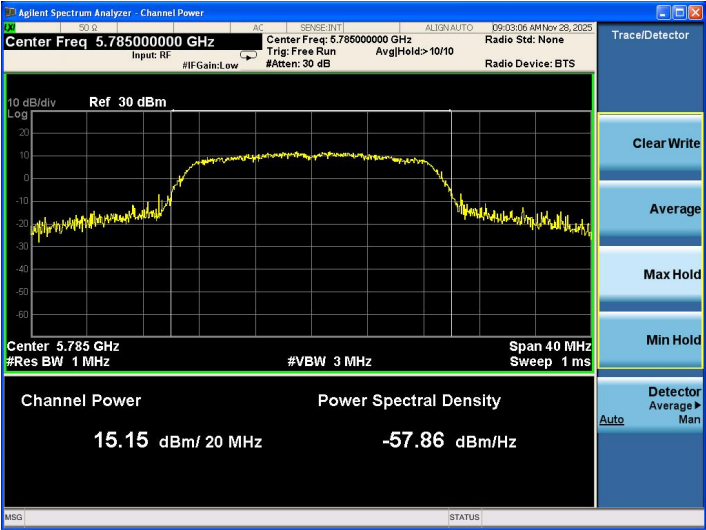
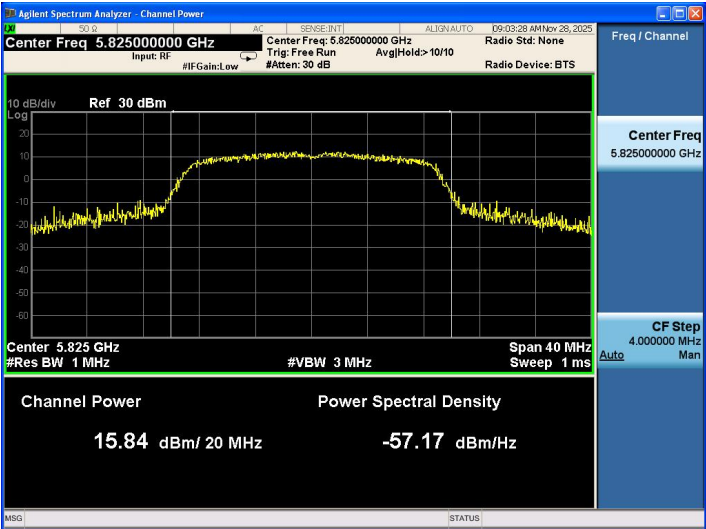
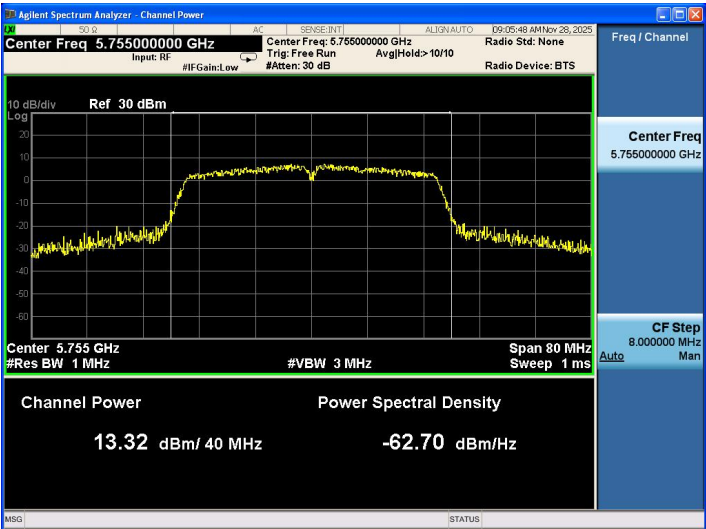
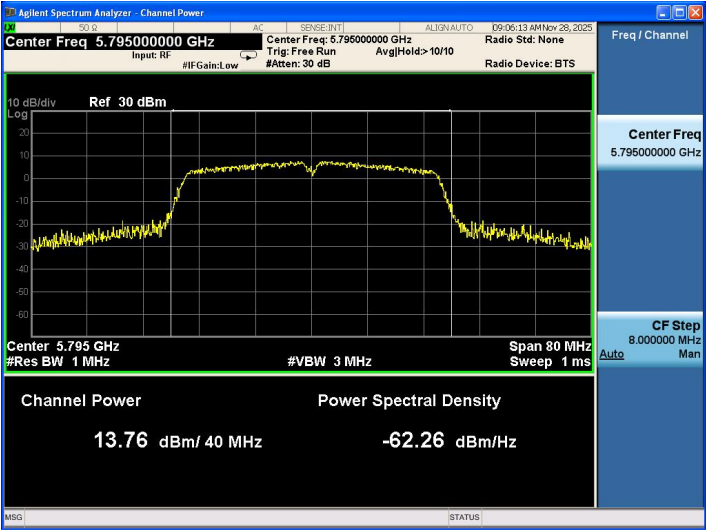
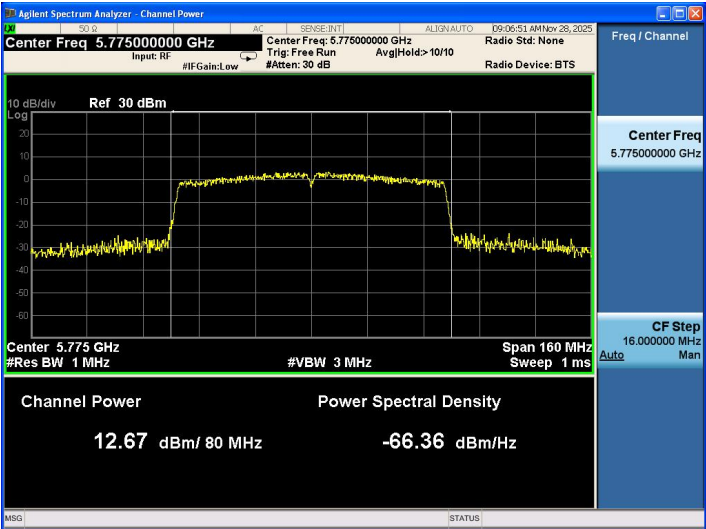


802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-VHT20-Low	

802.11ac-VHT20-Middle	
802.11ac-VHT20-High	
802.11ac-VHT40-Low	

802.11ac-VHT40-High	
802.11ac-VHT80-Low	

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.83	-30	503	0.097
100%		-20	504	0.097
100%		-10	502	0.097
100%		0	500	0.096
100%		+10	500	0.096
100%		+20	501	0.096
100%		+30	500	0.096
100%		+40	498	0.096
100%		+50	496	0.095
Low Battery power	4.21	+20	504	0.097
High Battery power	3.45	+20	495	0.095

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.83	-30	501	0.087
100%		-20	498	0.086
100%		-10	496	0.086
100%		0	505	0.087
100%		+10	499	0.086
100%		+20	500	0.087
100%		+30	505	0.087
100%		+40	504	0.087
100%		+50	502	0.087
Low Battery power	4.21	+20	499	0.086
High Battery power	3.45	+20	499	0.086

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****