

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER: Shenzhen Baichangda Electronic Technology Co., Ltd

客 戶 料 號:
CUST P/N:

DXD 料 號:
DXD P/N:

產 品 型 號:
DESC: A11/G43*5.3*0.6mm-25mm Inner
diameter 20.5 turns 10TS
0.08*24*2P6.5uH

日 期:
DATE: 2025-12-24

版 本:
Version: A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Zhipeng Rao	Yan Xu	Liang Xie	

Company: Dongguan Dexinda Electronic Technology Co., Ltd

Factory Address: 2nd Floor, No. 191 Tai'an Road, Wei Town, Zhangmutou Town,
Dongguan City

Contact: Liang Xie

telephone: 13691728992


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	A11/G43*5.3*0.6mm-25mm inner diameter 20.5number of turns10TS0.08*24*2P6.5UH	版本 Rev: A.0	客戶 CUST:	
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

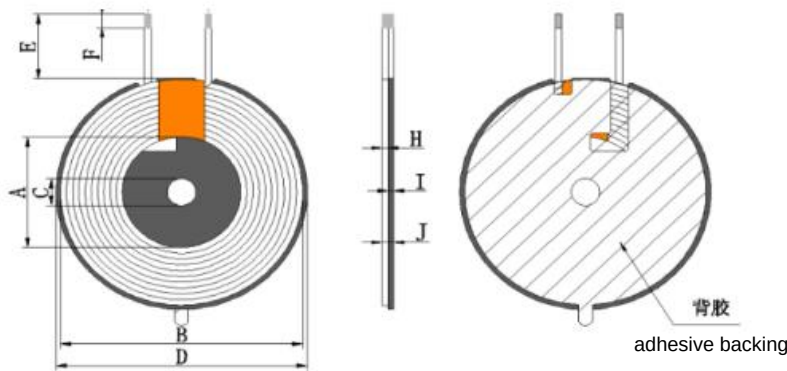

A	20.5±0.5 mm
B	38.5±1 mm
C	5.3±0.5 mm
D	43.5±0.5 mm
E	25±2 mm
F	4±1 mm
I	0.6±0.1 mm
H	0.8Max
J	1.6±Max

二、产品参考图 SCHEMATIC DIAGRAM:

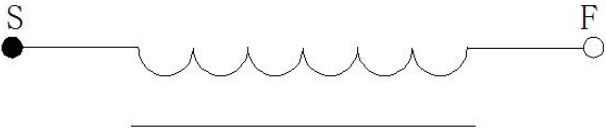

- Note:
- 1. Cross over outgoing lines;
 - 2. The size of the magnetic sheet is 43.5 ± 0.5mm, with a thickness of 0.6 ± 0.1mm,
 - 3. Stick adhesive on the back of the magnetic sheet,
 - 4. Tie the coil with 7mm brown tape and wrap it with 1.5TS

SPECIFICATION

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
L1	S	F	Heat sealed self-adhesive wire 0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10% Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.6uH ±10% Add magnetic plates	100KHz/1.0V	LCZ METER 1062B
3	Q value	S-F	35MIN	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤50m Ω	100KHz/1.0V	LCZ METER 1062B

Proposed/Date	Reviewed/Date
Zhipeng Rao 2025-12.24	