



PWRUP MAGALIGN™

WINDOW, DASH & VENT MOUNT


MODEL E-BT2-048-2

PLEASE READ INSTRUCTIONS COMPLETELY BEFORE USING THIS DEVICE




ASSEMBLY

WHAT'S INCLUDED

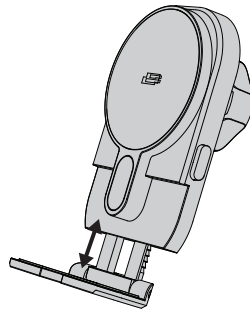


POWERUP MAGALIGN™
PHONE MOUNT



VENT HOOK ADAPTER



3M DASHBOARD PAD



EXTEND MOUNT



CAR CHARGER + USB-C
POWER CORD

INSTALLATION

ASSEMBLY

Join the device holder with either the Pivot suction mount:

- (1) Insert the ball on the mount into the socket on the device holder.
- (2) Fasten with nut. Ball joint can be adjusted for best viewing angle.

DASH

Clean mounting location with water or alcohol as necessary and let dry. Apply at room temperature. Peel cover off suction cup and press firmly while locking suction lever into down position. To release the mount from your dash, lift up the suction lever and pull up on the release tab.



After repeated applications, suction cup may lose its stickiness. Simply wash with warm water and air dry to restore original condition.

WINDOW

Alternatively, apply suction mount to windshield.

VENT

Insert fully extended vent hook within vent slat in preferred location. Then rotate and tighten for secure grip mounting.

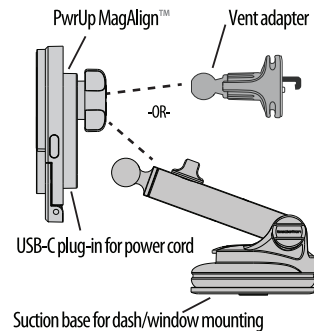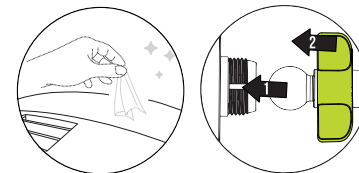

ADJUSTMENTS

Secure Magnetically: Place MagSafe compatible device or case on mount for perfectly aligned & secure hold.

Arm extension adjustment knob

Flip out foot extension button release

Arm height adjustment knob

Patented foot stabilizer for extra security

MAGSAFE COMPATIBILITY

MagAlign™ products are designed for use with MagSafe Compatible iPhones and cases. Compatible devices include iPhone 16, iPhone 16 Pro & Pro Max as well as iPhone 15 + Phone 14 iPhone 13 + iPhone 12 series.



iPhone 16 Pro Max & 16 Pro iPhone 15

REQUIRED: 12V Car Charger for MagSafe Wireless Charging

TROUBLE WITH DASH MOUNTING?

If window mounting isn't your preference - we include an optional 3M Dashboard Pad designed for leather or heavy texture dashboards.

Only use the 3M dashboard pad when using the suction cup base (no need to use this with glass window surface).

Thoroughly clean desired mounting surface using cleaning wipe.

Peel off protective backing and attach to desired mounting surface.

SINGLE USE - DO NOT PULL OFF AND REUSE

For best results, let the dashboard pad adhere for at least 24 hours before installing your suction cup base mount.



<1 Hour



<6 Hours



≥24 Hours



≥72 Hours

IN USE



FCC STATEMENT

This product complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).



IMPORTANT!
DO NOT RETURN PRODUCT TO THE RETAILER. IF YOU NEED ASSISTANCE
EMAIL OUR CUSTOMER SUPPORT DIRECTLY: tech@bracketron.com

LIMITED WARRANTY

BRKT Holdings, LLC. warrants this product against defects in material or workmanship for a period of one (1) year from the date of purchase. BRKT Holdings, at its option, may repair or replace with new or refurbished product, any product which BRKT Holdings determines to be defective. "Refurbished" means any product that has been returned to its original specifications. To obtain warranty services, you must deliver the product, freight prepaid, to BRKT Holdings, LLC. DBA Bracketron at 21 Commerce Dr., Cranbury, NJ. 08512. A dated purchase receipt MUST accompany the returned product. This Limited Warranty shall apply to any repair or replacement product for the remainder of the original Limited Warranty or for a period of ninety (90) days - whichever is longer. BRKT HOLDINGS, LLC. DBA BRACKETRON SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT. FURTHER, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.