





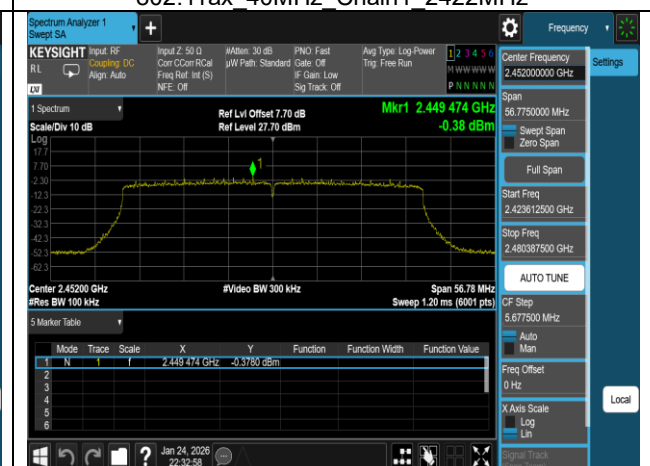

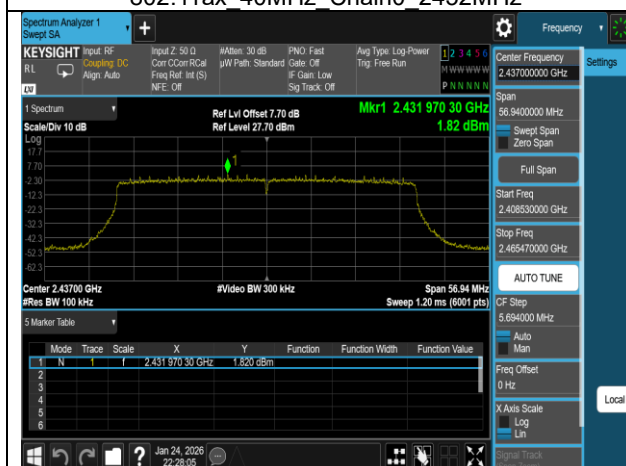


Project No: TM-2601000305P
Report No.: TMWK2601000342KR


FCC ID: 2BPQQ-I9074L

Page: 48 / 156
Rev.: 00


Band Edge

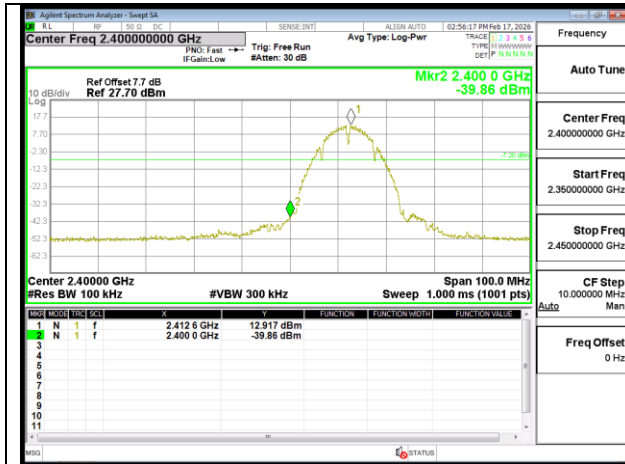


802.11b 20MHz Chain0 2412MHz

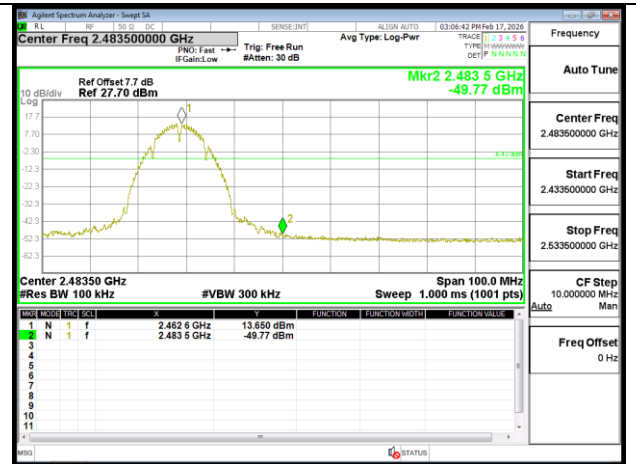


802.11b 20MHz Chain0 2462MHz

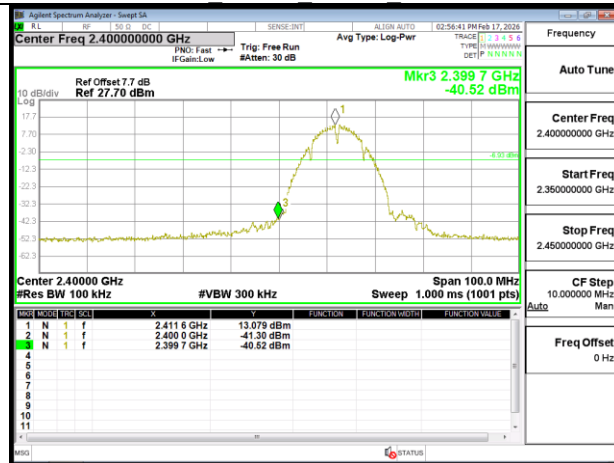


802.11b 20MHz Chain1 2412MHz

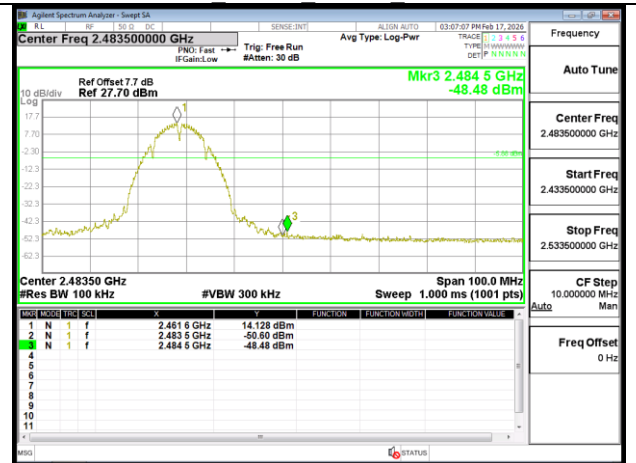


802.11b 20MHz Chain1 2462MHz

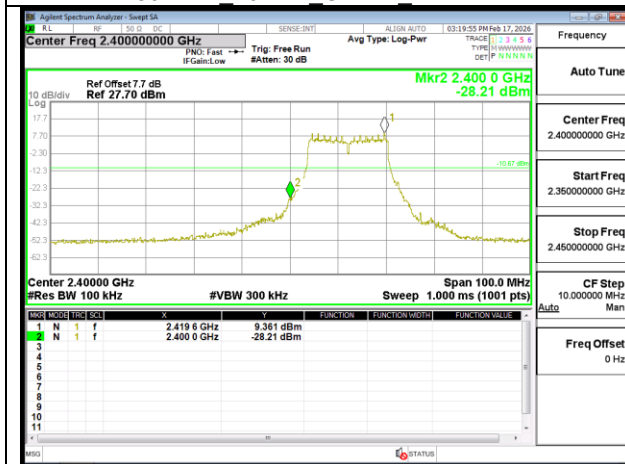


802.11g 20MHz Chain0 2412MHz

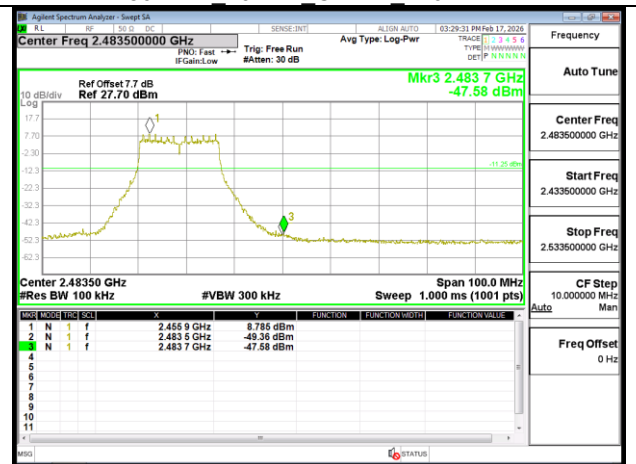

802.11g 20MHz Chain0 2462MHz

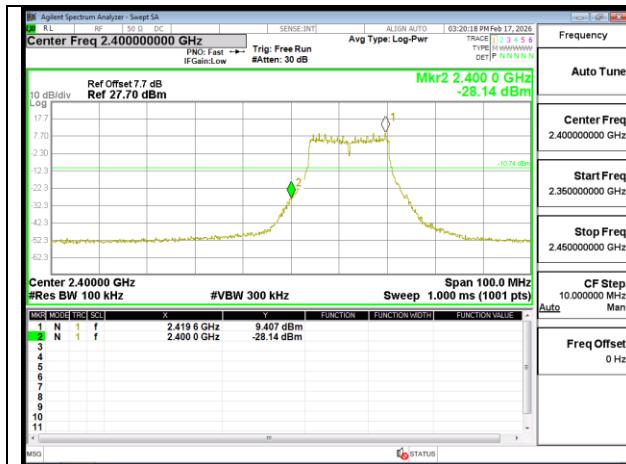

802.11g 20MHz Chain1 2412MHz

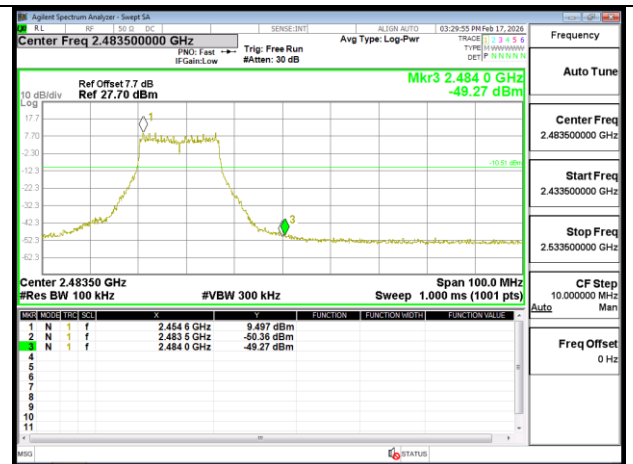

802.11g 20MHz Chain1 2462MHz



802.11ax 20MHz Chain0 2412MHz



802.11ax 20MHz Chain0 2462MHz



802.11ax 20MHz Chain1 2412MHz



802.11ax 20MHz Chain1 2462MHz



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 50 / 156
Rev.: 00



802.11ax 40MHz Chain0 2422MHz



802.11ax 40MHz Chain0 2452MHz




802.11ax 40MHz Chain1 2422MHz




802.11ax 40MHz Chain1 2452MHz


Spurious Emission

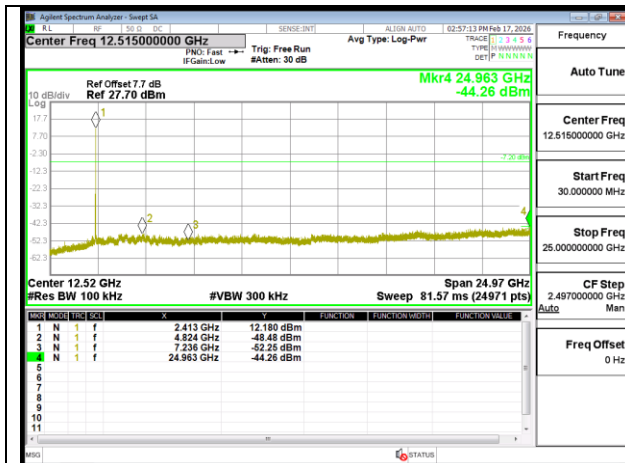


802.11b 20MHz Chain0 2412MHz

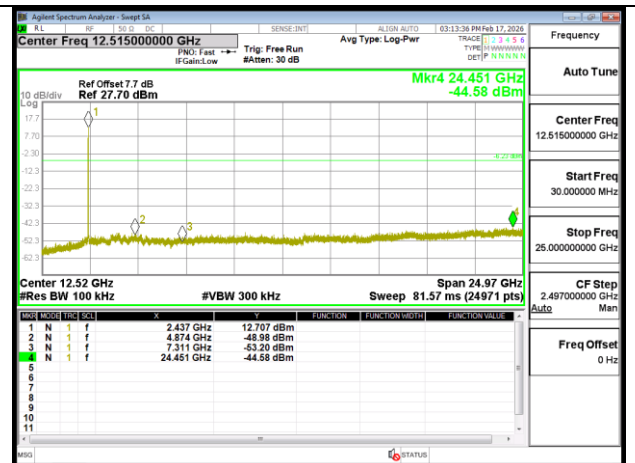


802.11b 20MHz Chain0 2437MHz

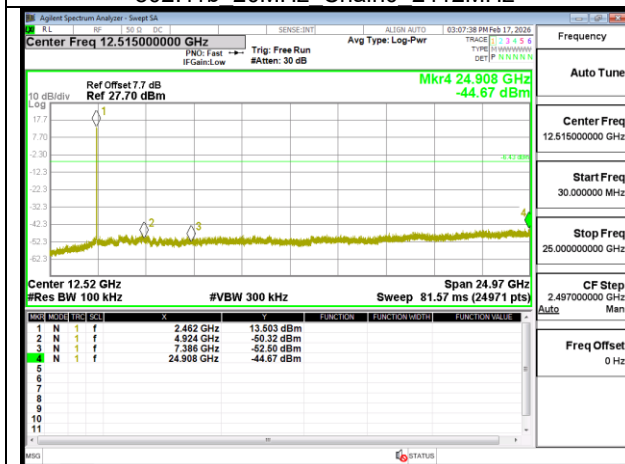


802.11b 20MHz Chain0 2462MHz

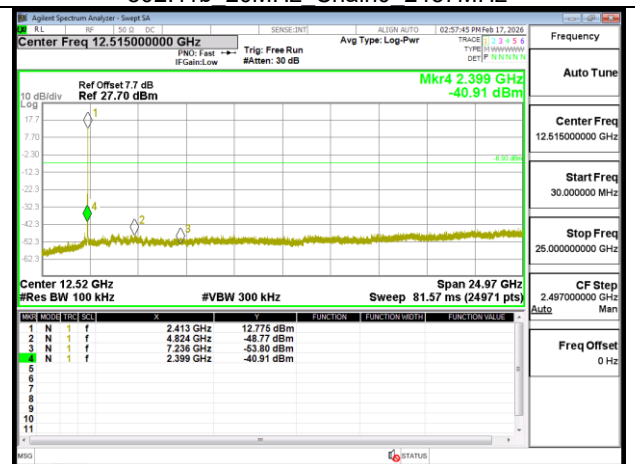

802.11b 20MHz Chain1 2412MHz

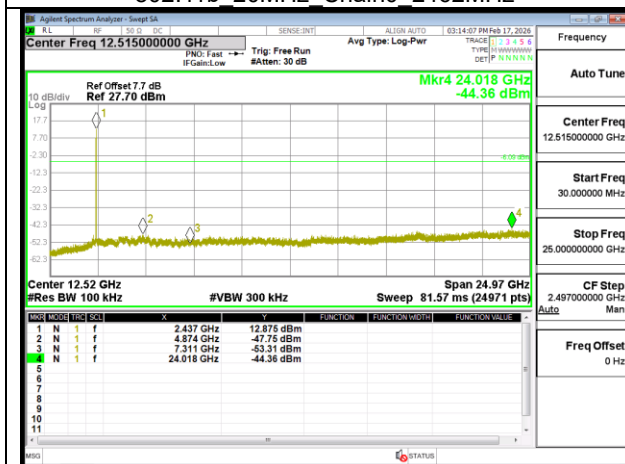

802.11b 20MHz Chain1 2437MHz

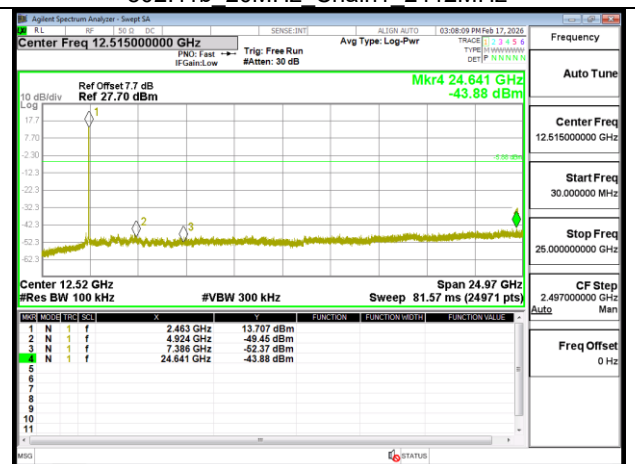


802.11b 20MHz Chain1 2462MHz


Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L


Page: 52 / 156
Rev.: 00

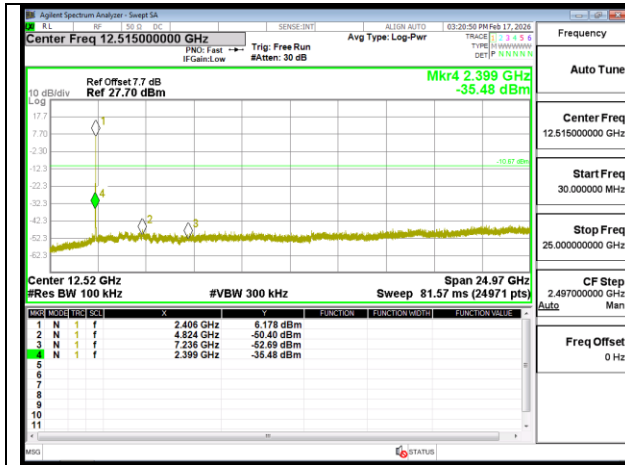


802.11g 20MHz Chain0 2412MHz

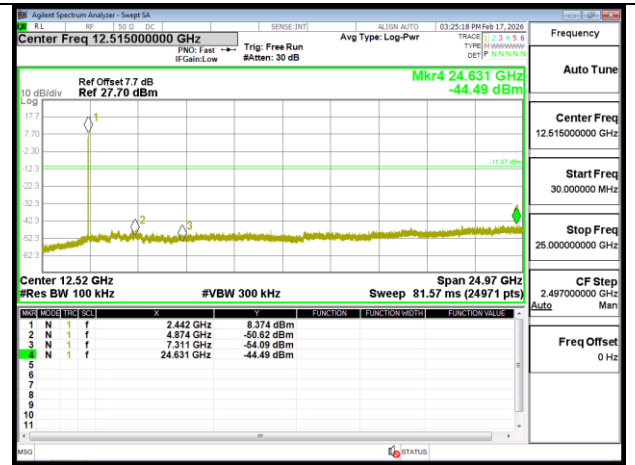


802.11g 20MHz Chain0 2437MHz

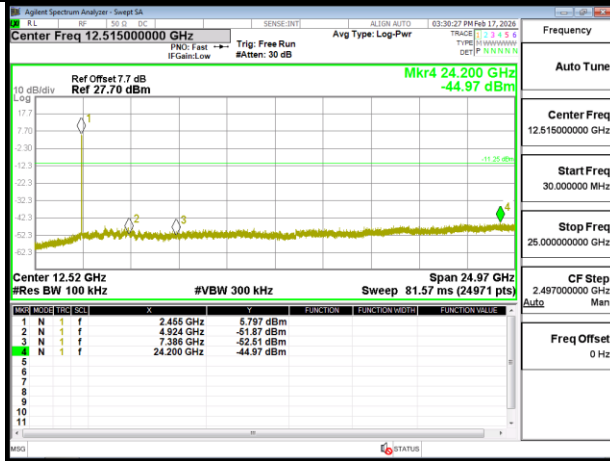


802.11g 20MHz Chain0 2462MHz

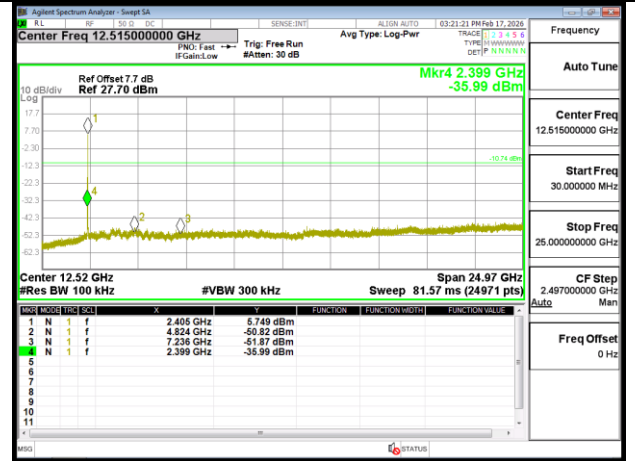



802.11g 20MHz Chain1 2412MHz


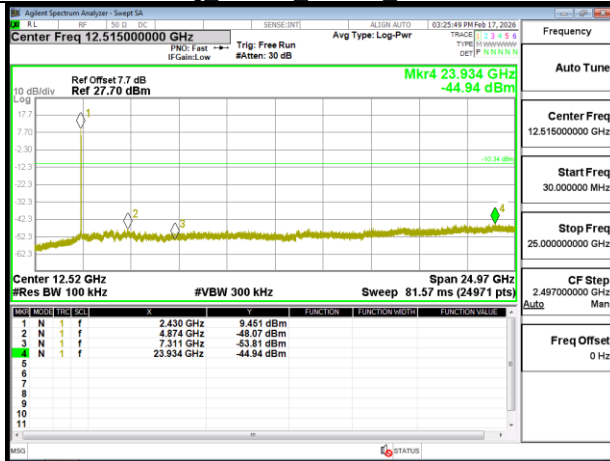


802.11g 20MHz Chain1 2437MHz

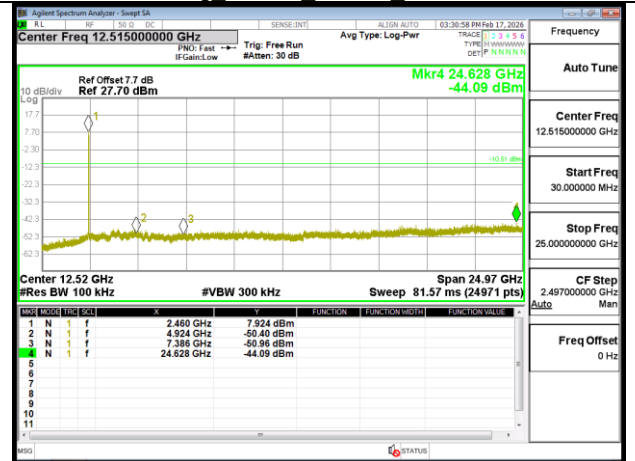

802.11g 20MHz Chain1 2462MHz

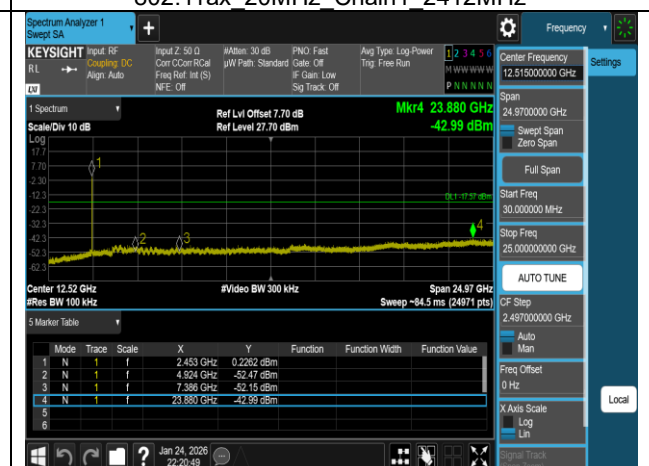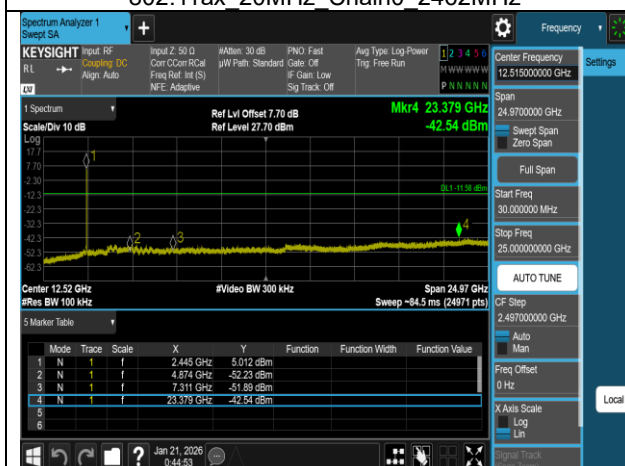

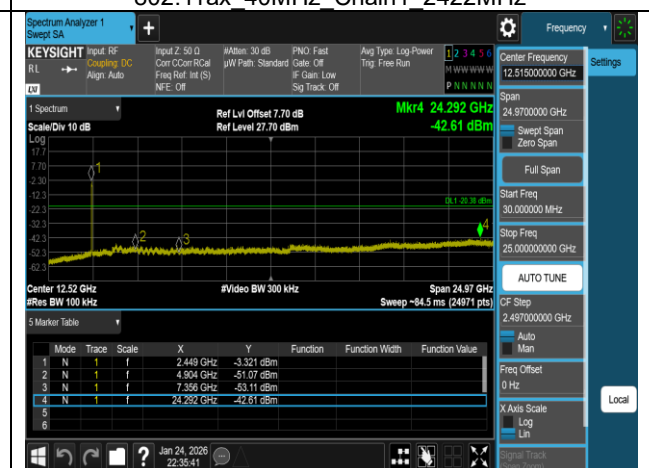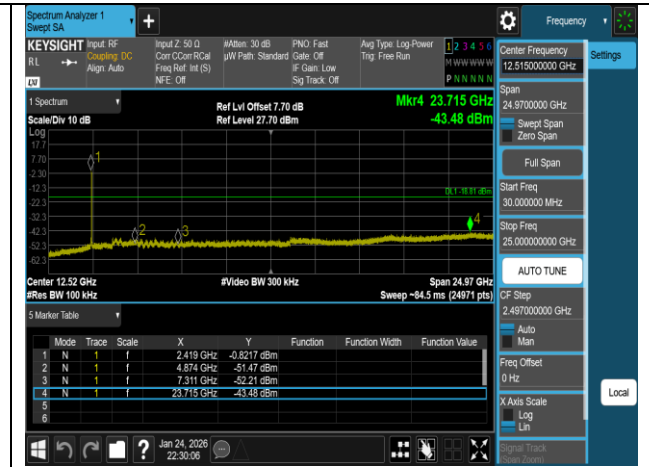

4.6 RADIATION BANDEGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.6.2 Test Procedure

Test method Refer as ANSI C63.10-2020.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq$ 3*RBW, Sweep = Auto,

Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq$ 98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

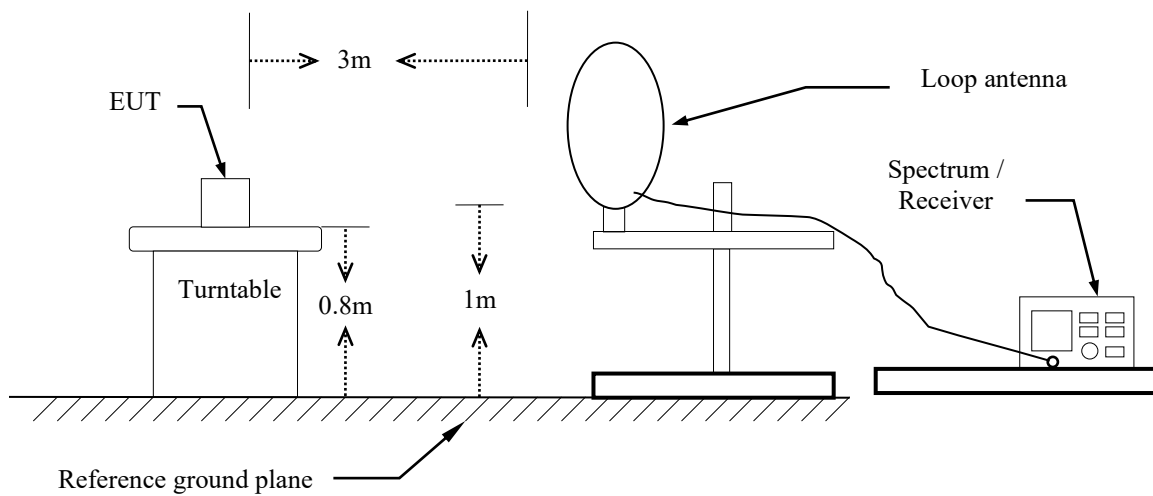

30MHz ~ 1GHz

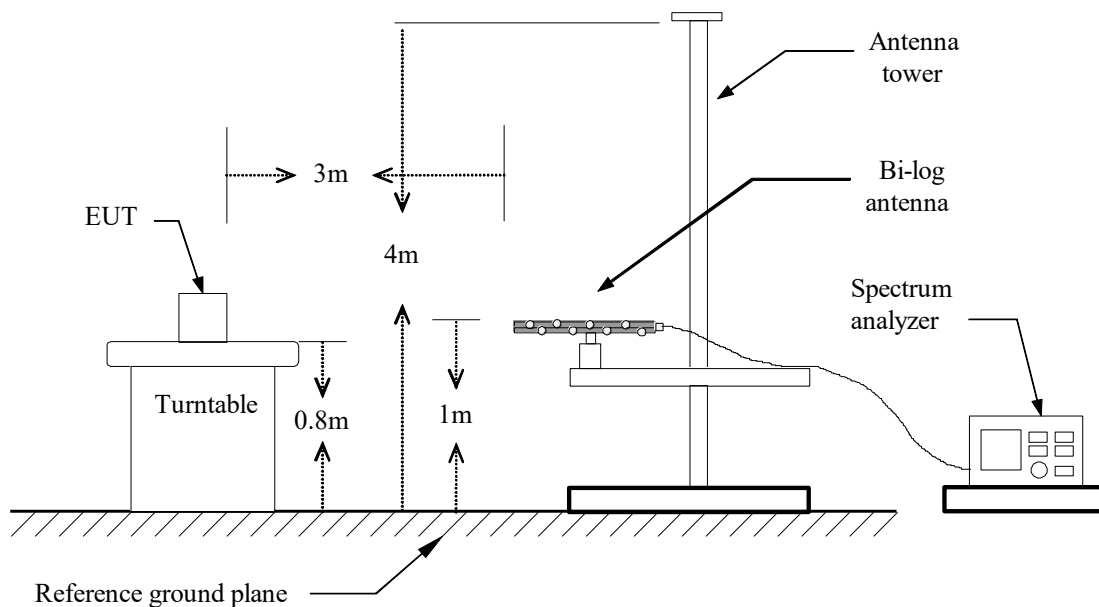

Above 1 GHz

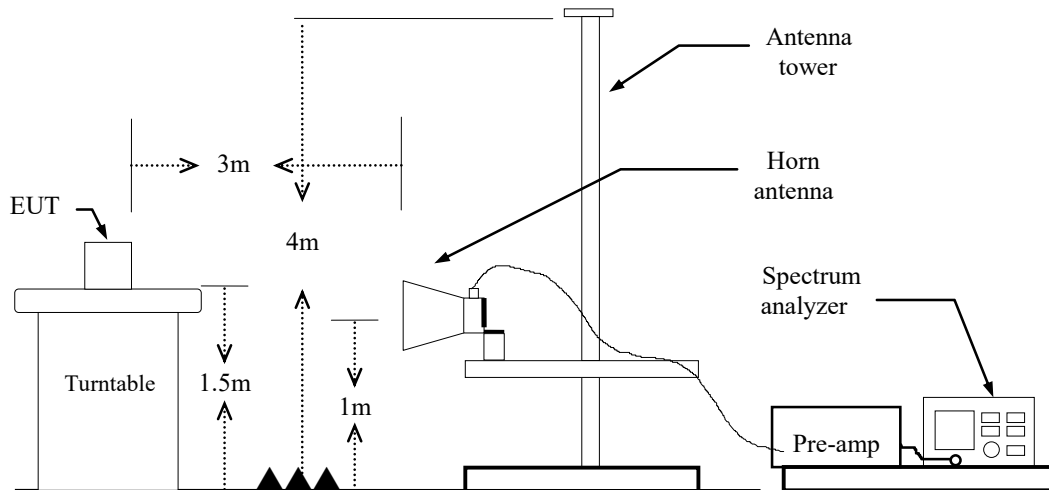



4.6.4 Test Result

Band Edge Test Data

1. Antenna-1

Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-12

Temp./Humi. : 25.5/51

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

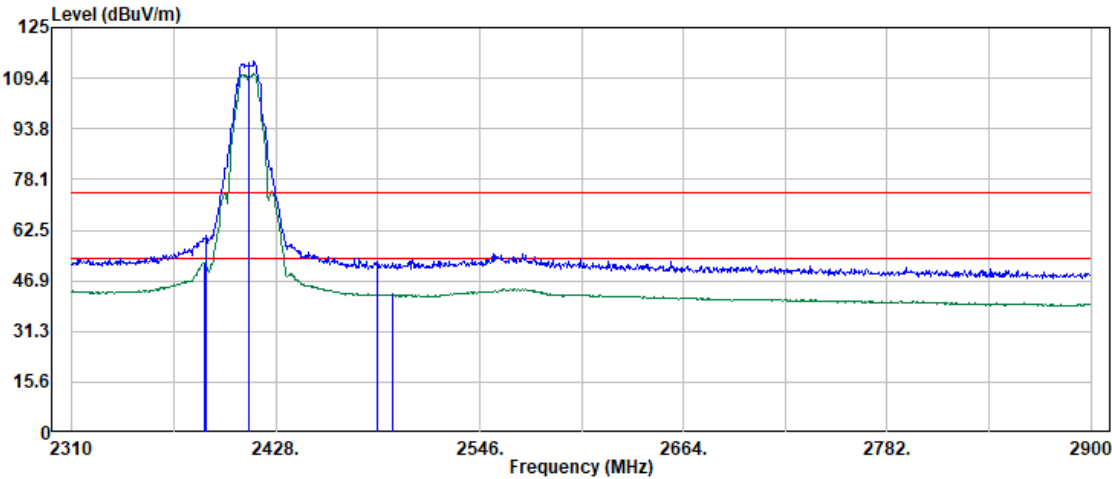

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	46.33	6.19	52.52	54.00	-1.48	Average
2387.93	54.46	6.19	60.65	74.00	-13.35	Peak
2412.00	108.38	6.22	114.60	--	--	Peak
2412.00	104.43	6.22	110.65	--	--	Average
2486.85	46.48	6.52	53.00	74.00	-21.00	Peak
2495.34	36.14	6.56	42.70	54.00	-11.30	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-12

Temp./Humi. : 25.5/51

Antenna Pol. : HORIZONTAL

Engineer : Tony.Chao

Test Chamber : 966A

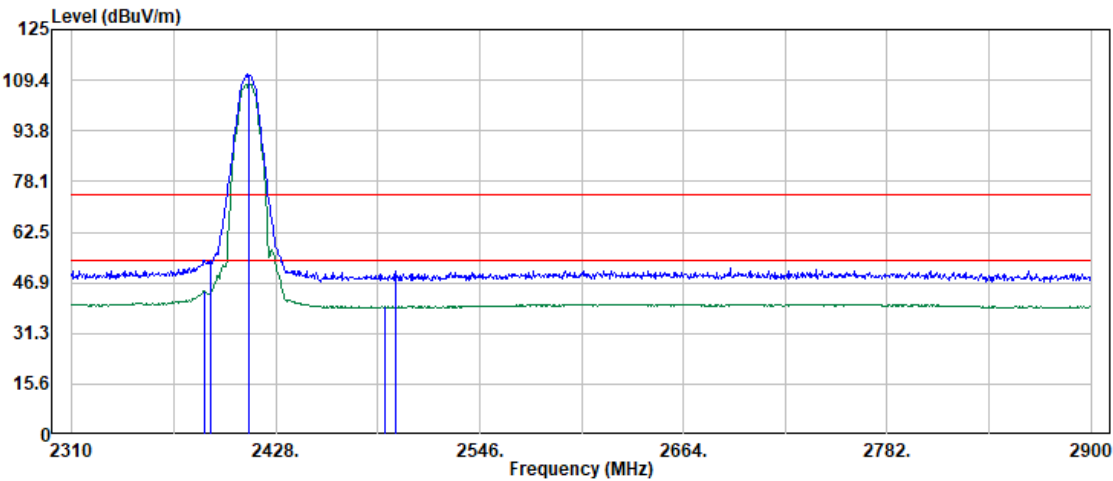

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	38.32	6.19	44.51	54.00	-9.49	Average
2389.93	47.75	6.20	53.95	74.00	-20.05	Peak
2412.00	105.16	6.22	111.38	--	--	Peak
2412.00	101.96	6.22	108.18	--	--	Average
2490.85	32.94	6.56	39.50	54.00	-14.50	Average
2497.34	43.72	6.57	50.29	74.00	-23.71	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 61 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-13

Temp./Humi. : 25.5/51

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

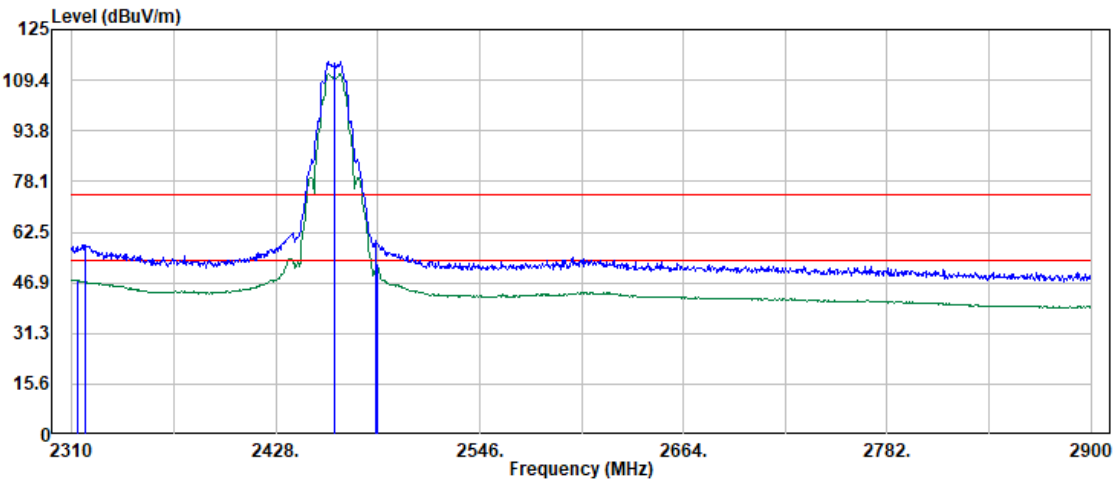

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2313.00	41.53	6.23	47.76	54.00	-6.24	Average
2317.99	52.46	6.18	58.64	74.00	-15.36	Peak
2462.00	108.56	6.33	114.89	--	--	Peak
2462.00	105.01	6.33	111.34	--	--	Average
2486.35	53.41	6.51	59.92	74.00	-14.08	Peak
2486.85	46.13	6.52	52.65	54.00	-1.35	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 62 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-12

Temp./Humi. : 25.5/51

Antenna Pol. : HORIZONTAL

Engineer : Tony.Chao

Test Chamber : 966A

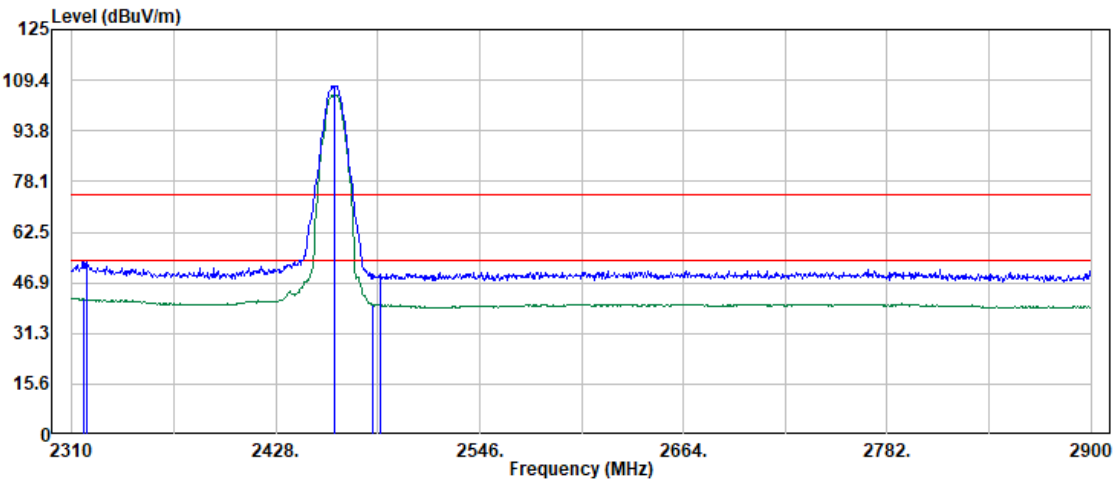

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2316.49	35.77	6.20	41.97	54.00	-12.03	Average
2318.49	47.09	6.18	53.27	74.00	-20.73	Peak
2462.00	101.08	6.33	107.41	--	--	Peak
2462.00	98.62	6.33	104.95	--	--	Average
2483.85	33.73	6.49	40.22	54.00	-13.78	Average
2488.35	43.23	6.53	49.76	74.00	-24.24	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 63 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 21


Test Date : 2026-02-12

Temp./Humi. : 25.5/51

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

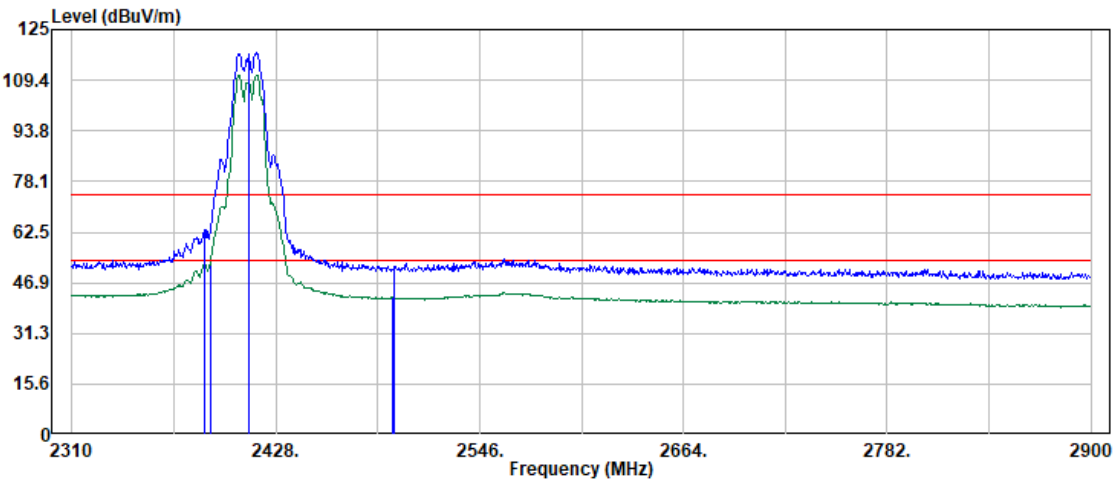


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	57.01	6.19	63.20	74.00	-10.80	Peak
2389.93	46.22	6.20	52.42	54.00	-1.58	Average
2412.00	111.68	6.22	117.90	--	--	Peak
2412.00	104.71	6.22	110.93	--	--	Average
2495.84	36.04	6.56	42.60	54.00	-11.40	Average
2496.84	45.54	6.57	52.11	74.00	-21.89	Peak



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 64 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-13
Operation Band	: G	Temp./Humi.	: 25.5/51
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

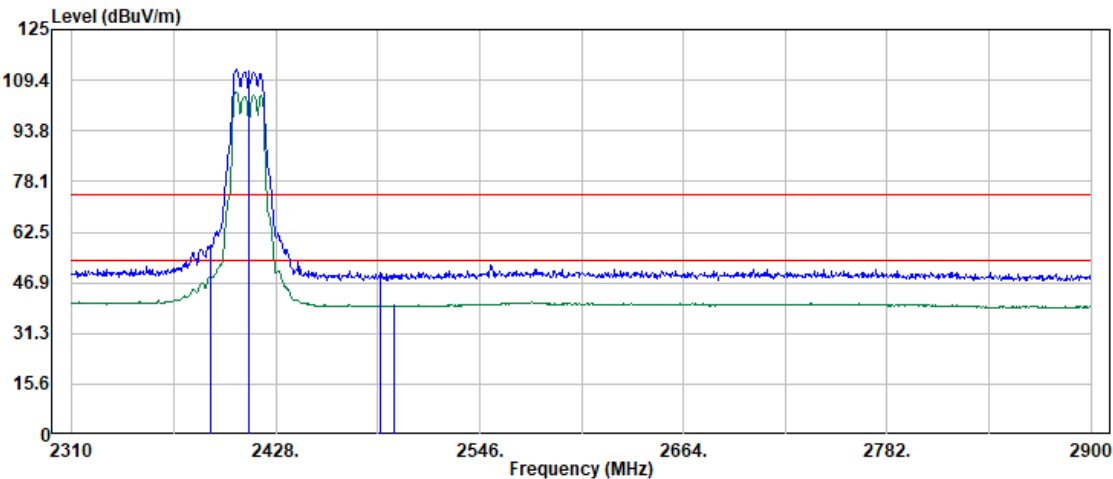

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	52.33	6.20	58.53	74.00	-15.47	Peak
2389.93	42.32	6.20	48.52	54.00	-5.48	Average
2412.00	106.35	6.22	112.57	--	--	Peak
2412.00	99.48	6.22	105.70	--	--	Average
2488.85	43.27	6.55	49.82	74.00	-24.18	Peak
2496.34	33.34	6.57	39.91	54.00	-14.09	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 65 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 21


Test Date : 2026-02-12

Temp./Humi. : 25.5/51

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

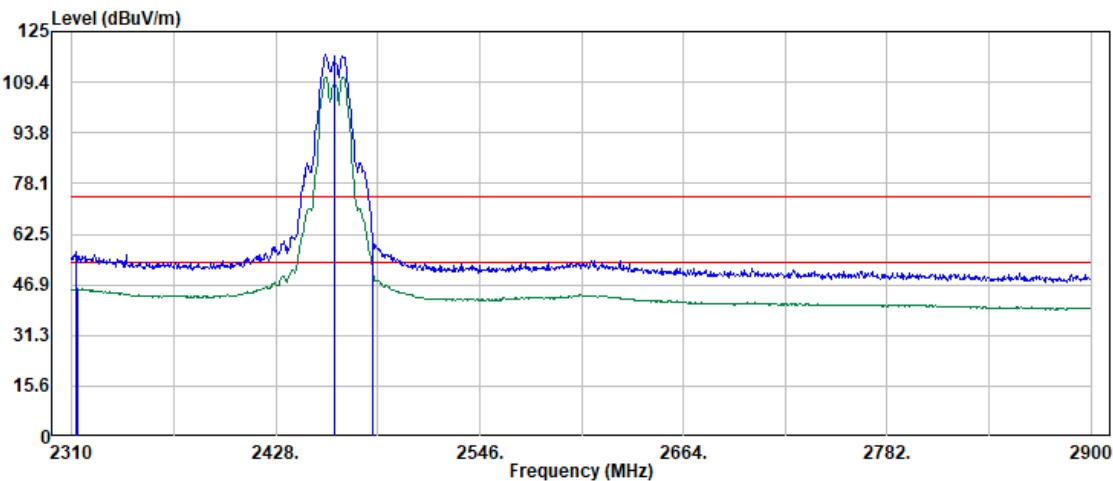

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.50	50.79	6.24	57.03	74.00	-16.97	Peak
2313.00	39.45	6.23	45.68	54.00	-8.32	Average
2462.00	111.58	6.33	117.91	--	--	Peak
2462.00	104.67	6.33	111.00	--	--	Average
2483.85	56.21	6.49	62.70	74.00	-11.30	Peak
2483.85	45.90	6.49	52.39	54.00	-1.61	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 21


Test Date : 2026-02-13

Temp./Humi. : 25.5/51

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

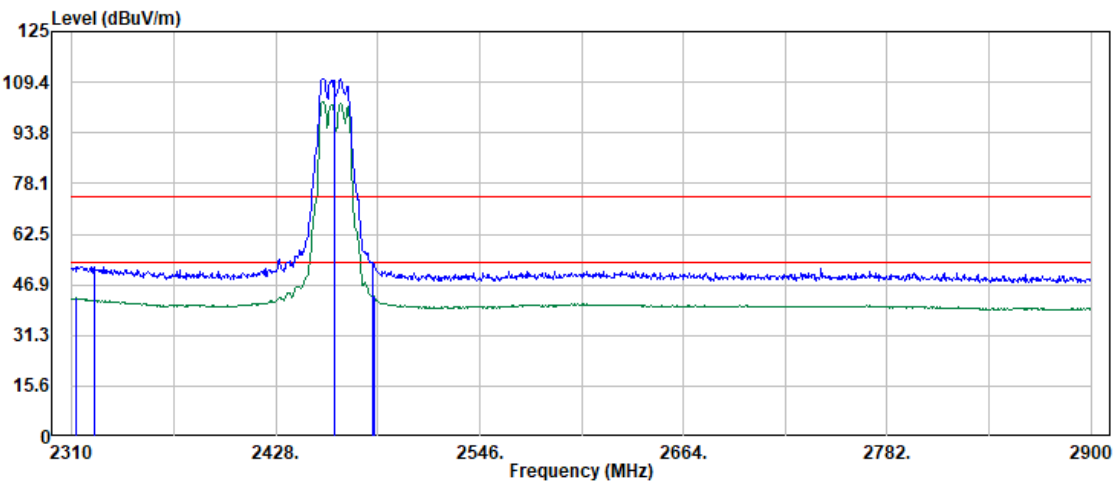

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.00	36.47	6.24	42.71	54.00	-11.29	Average
2322.99	46.17	6.17	52.34	74.00	-21.66	Peak
2462.00	104.25	6.33	110.58	--	--	Peak
2462.00	97.11	6.33	103.44	--	--	Average
2483.85	47.41	6.49	53.90	74.00	-20.10	Peak
2485.35	36.79	6.50	43.29	54.00	-10.71	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 67 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 17.5


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

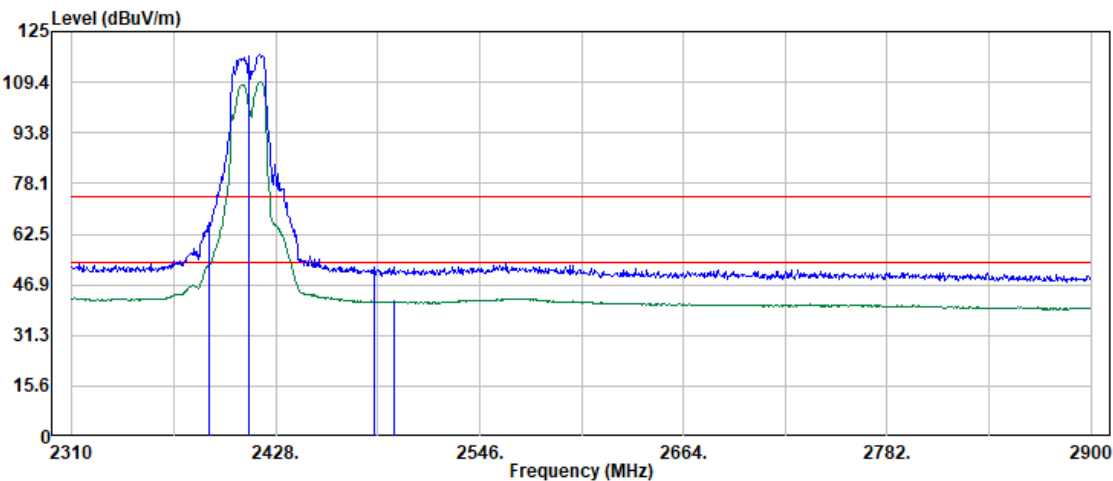


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	59.85	6.16	66.01	74.00	-7.99	Peak
2389.43	46.98	6.16	53.14	54.00	-0.86	Average
2412.00	111.58	6.18	117.76	--	--	Peak
2412.00	103.16	6.18	109.34	--	--	Average
2484.85	45.74	6.47	52.21	74.00	-21.79	Peak
2496.84	35.22	6.54	41.76	54.00	-12.24	Average



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 68 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-01-23
Operation Band	: AX20	Temp./Humi.	: 25.4/52
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

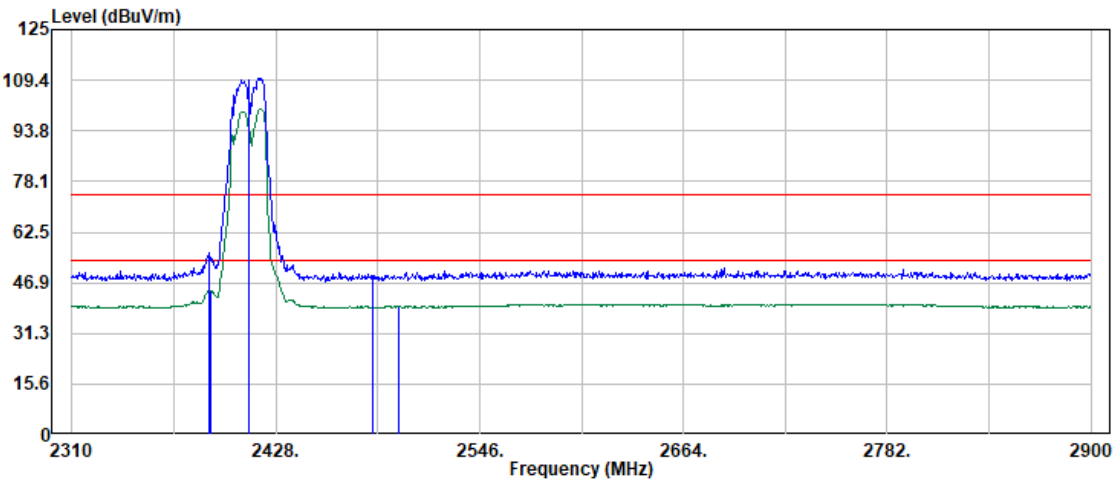


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	50.19	6.16	56.35	74.00	-17.65	Peak
2389.93	38.14	6.16	44.30	54.00	-9.70	Average
2412.00	103.93	6.18	110.11	--	--	Peak
2412.00	94.32	6.18	100.50	--	--	Average
2484.35	42.79	6.46	49.25	74.00	-24.75	Peak
2498.84	33.00	6.54	39.54	54.00	-14.46	Average



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 69 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-01-23
Operation Band	: AX20	Temp./Humi.	: 25.2/56
Frequency	: 2417 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

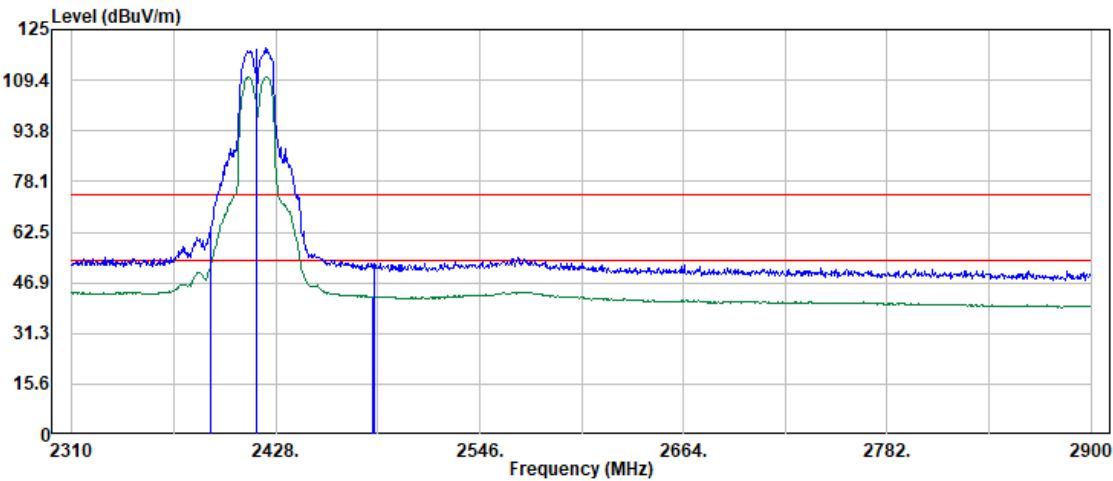


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	56.46	6.16	62.62	74.00	-11.38	Peak
2389.93	45.78	6.16	51.94	54.00	-2.06	Average
2417.00	113.10	6.23	119.33	--	--	Peak
2417.00	104.14	6.23	110.37	--	--	Average
2483.85	36.17	6.46	42.63	54.00	-11.37	Average
2484.85	46.37	6.47	52.84	74.00	-21.16	Peak



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 70 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-01-23
Operation Band	: AX20	Temp./Humi.	: 25.2/56
Frequency	: 2417 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

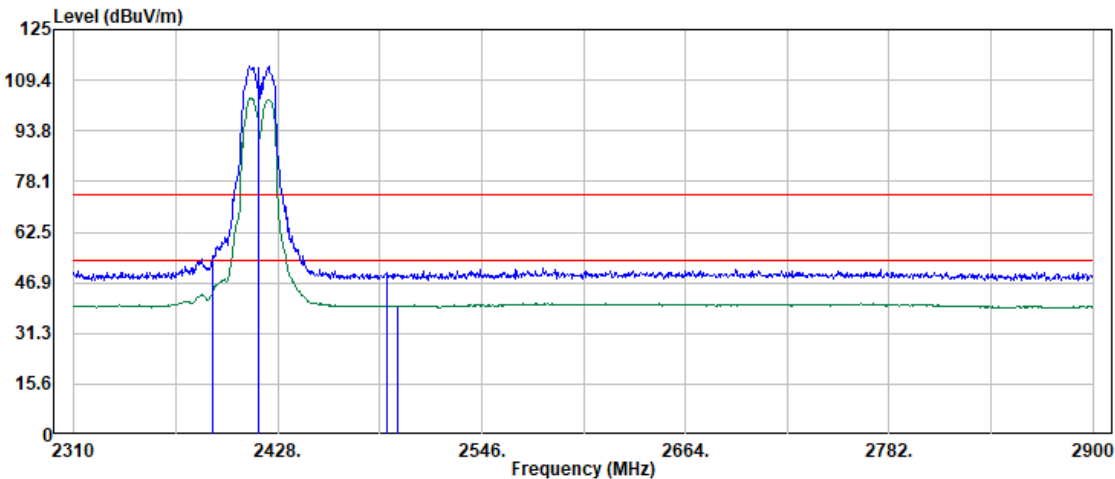

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	49.01	6.16	55.17	74.00	-18.83	Peak
2389.93	37.20	6.16	43.36	54.00	-10.64	Average
2417.00	107.58	6.23	113.81	--	--	Peak
2417.00	97.40	6.23	103.63	--	--	Average
2490.85	43.41	6.53	49.94	74.00	-24.06	Peak
2497.84	33.23	6.54	39.77	54.00	-14.23	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 71 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

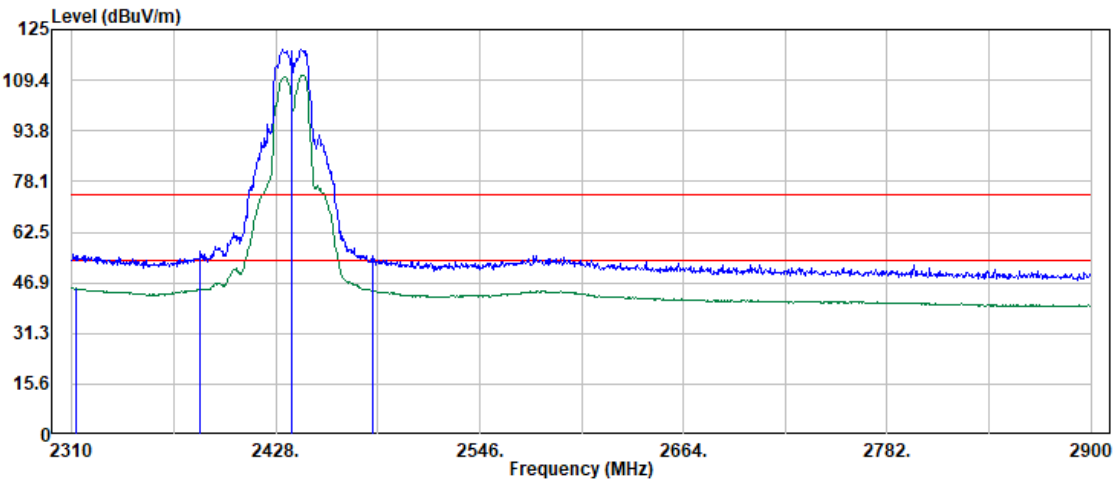

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.00	39.10	6.20	45.30	54.00	-8.70	Average
2384.44	50.27	6.16	56.43	74.00	-17.57	Peak
2437.00	112.72	6.10	118.82	--	--	Peak
2437.00	104.67	6.10	110.77	--	--	Average
2483.85	48.89	6.46	55.35	74.00	-18.65	Peak
2483.85	38.07	6.46	44.53	54.00	-9.47	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

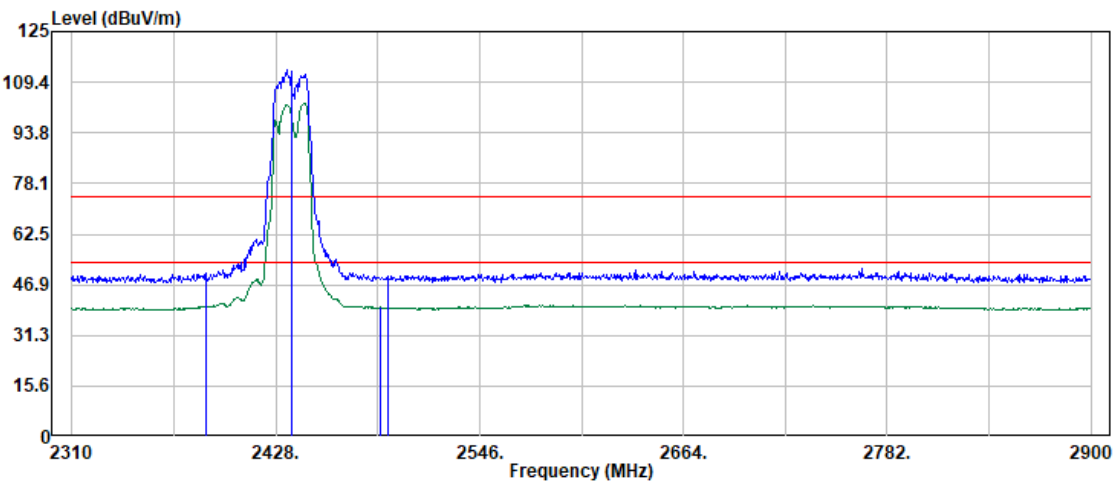

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2387.43	44.30	6.15	50.45	74.00	-23.55	Peak
2387.93	33.94	6.15	40.09	54.00	-13.91	Average
2437.00	107.01	6.10	113.11	--	--	Peak
2437.00	96.62	6.10	102.72	--	--	Average
2488.85	33.51	6.52	40.03	54.00	-13.97	Average
2493.35	43.16	6.53	49.69	74.00	-24.31	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 73 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2457 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.2/56

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

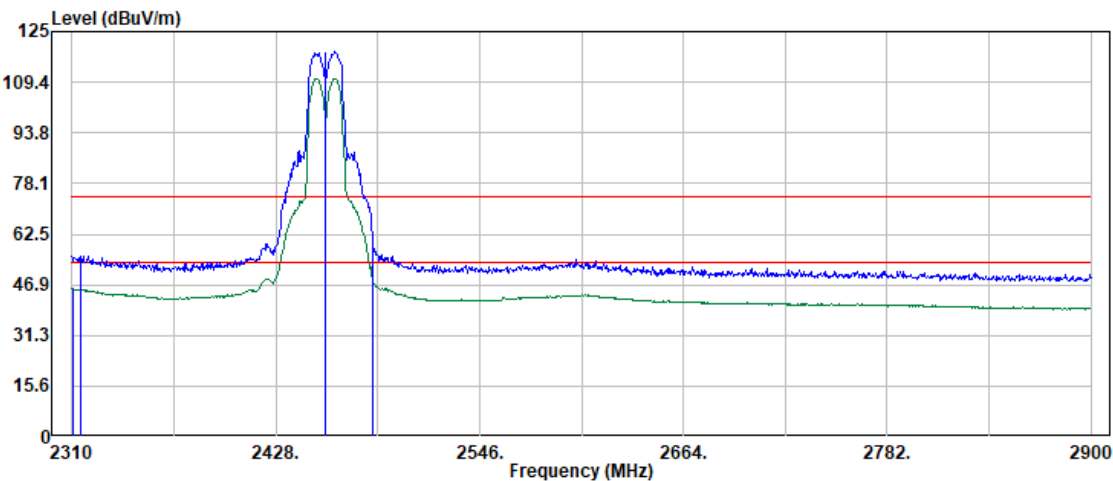

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.00	39.51	6.20	45.71	54.00	-8.29	Average
2315.00	49.49	6.17	55.66	74.00	-18.34	Peak
2457.00	112.53	6.25	118.78	--	--	Peak
2457.00	104.16	6.25	110.41	--	--	Average
2483.85	56.17	6.46	62.63	74.00	-11.37	Peak
2483.85	42.24	6.46	48.70	54.00	-5.30	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 74 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2457 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.2/56

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

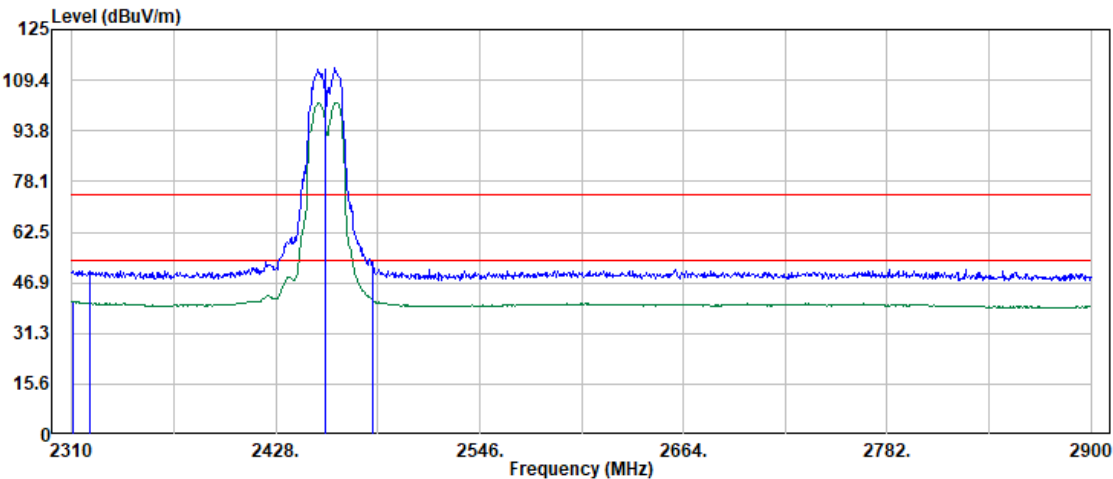

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.00	34.92	6.20	41.12	54.00	-12.88	Average
2319.99	44.50	6.13	50.63	74.00	-23.37	Peak
2457.00	106.84	6.25	113.09	--	--	Peak
2457.00	96.13	6.25	102.38	--	--	Average
2483.85	35.24	6.46	41.70	54.00	-12.30	Average
2484.35	46.92	6.46	53.38	74.00	-20.62	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 75 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

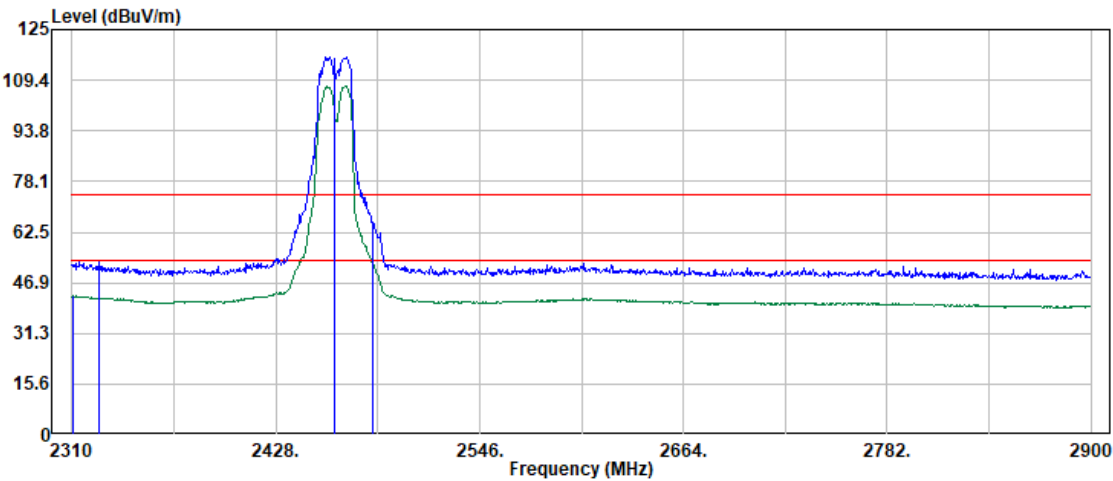

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.50	36.73	6.21	42.94	54.00	-11.06	Average
2325.99	46.99	6.13	53.12	74.00	-20.88	Peak
2462.00	110.39	6.29	116.68	--	--	Peak
2462.00	101.29	6.29	107.58	--	--	Average
2483.85	46.45	6.46	52.91	54.00	-1.09	Average
2484.35	58.97	6.46	65.43	74.00	-8.57	Peak



Project No: TM-2601000305P


Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 76 / 156

Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-01-23
Operation Band	: AX20	Temp./Humi.	: 25.4/52
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 15		

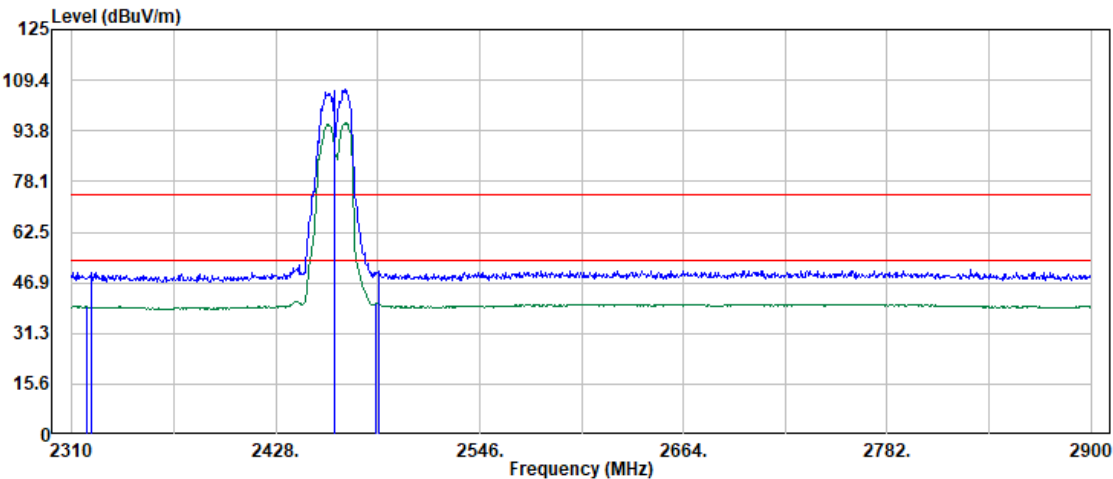

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2318.49	33.54	6.14	39.68	54.00	-14.32	Average
2321.49	43.88	6.13	50.01	74.00	-23.99	Peak
2462.00	100.19	6.29	106.48	--	--	Peak
2462.00	89.84	6.29	96.13	--	--	Average
2485.85	33.93	6.48	40.41	54.00	-13.59	Average
2487.85	44.12	6.50	50.62	74.00	-23.38	Peak



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 16


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

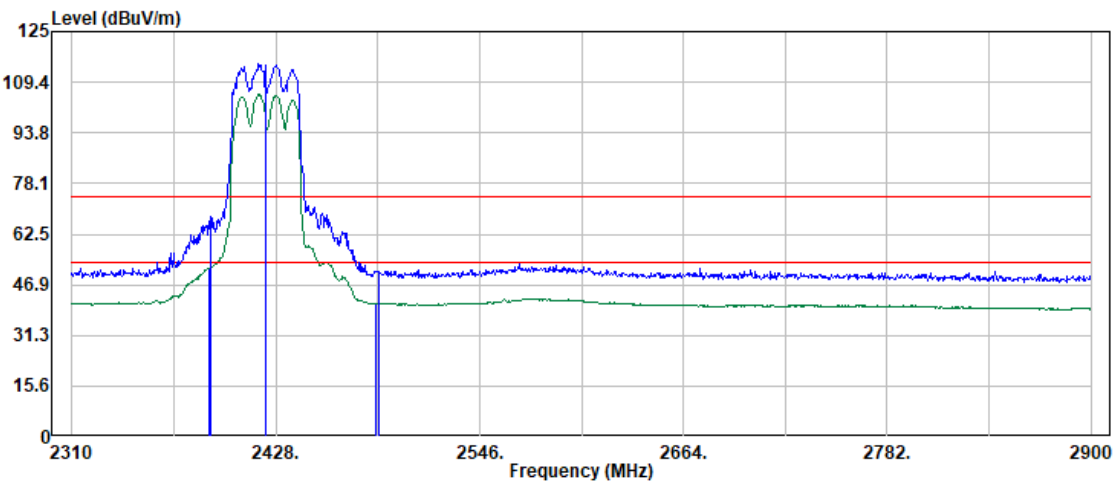


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	45.95	6.16	52.11	54.00	-1.89	Average
2389.93	61.60	6.16	67.76	74.00	-6.24	Peak
2422.00	108.79	6.25	115.04	--	--	Peak
2422.00	99.28	6.25	105.53	--	--	Average
2486.35	34.76	6.48	41.24	54.00	-12.76	Average
2487.85	44.62	6.50	51.12	74.00	-22.88	Peak



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 78 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-01-23
Operation Band	: AX40	Temp./Humi.	: 25.4/52
Frequency	: 2422 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16		

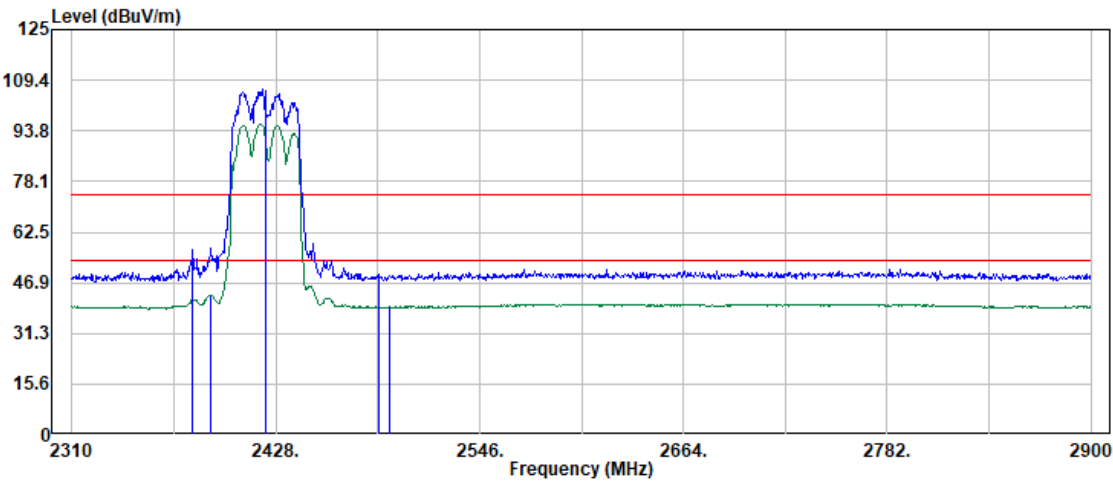

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2379.94	50.79	6.16	56.95	74.00	-17.05	Peak
2389.93	36.83	6.16	42.99	54.00	-11.01	Average
2422.00	100.23	6.25	106.48	--	--	Peak
2422.00	89.62	6.25	95.87	--	--	Average
2487.85	43.24	6.50	49.74	74.00	-24.26	Peak
2493.84	32.95	6.53	39.48	54.00	-14.52	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 17


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

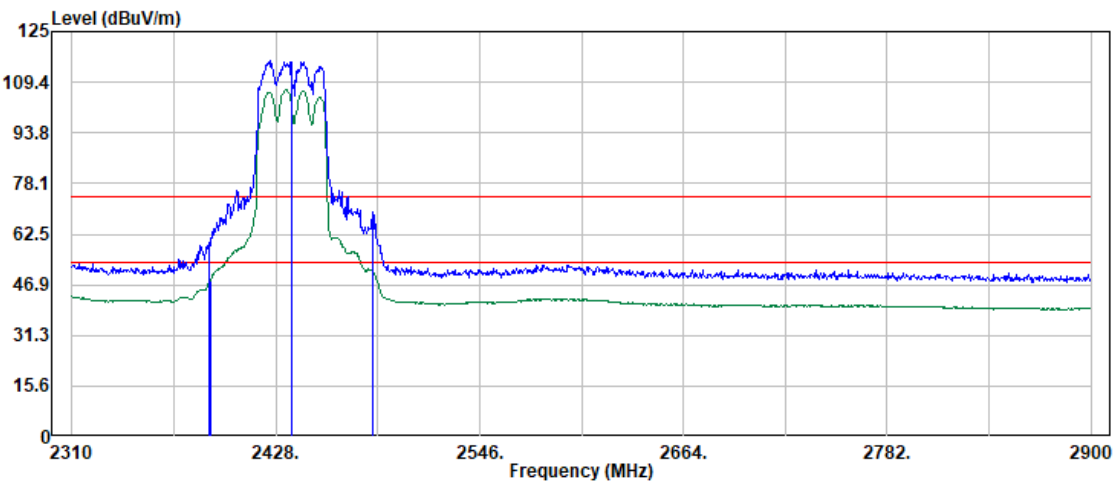

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	53.59	6.16	59.75	74.00	-14.25	Peak
2389.93	41.89	6.16	48.05	54.00	-5.95	Average
2437.00	110.07	6.10	116.17	--	--	Peak
2437.00	100.87	6.10	106.97	--	--	Average
2483.85	62.72	6.46	69.18	74.00	-4.82	Peak
2483.85	44.74	6.46	51.20	54.00	-2.80	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 80 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 17


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

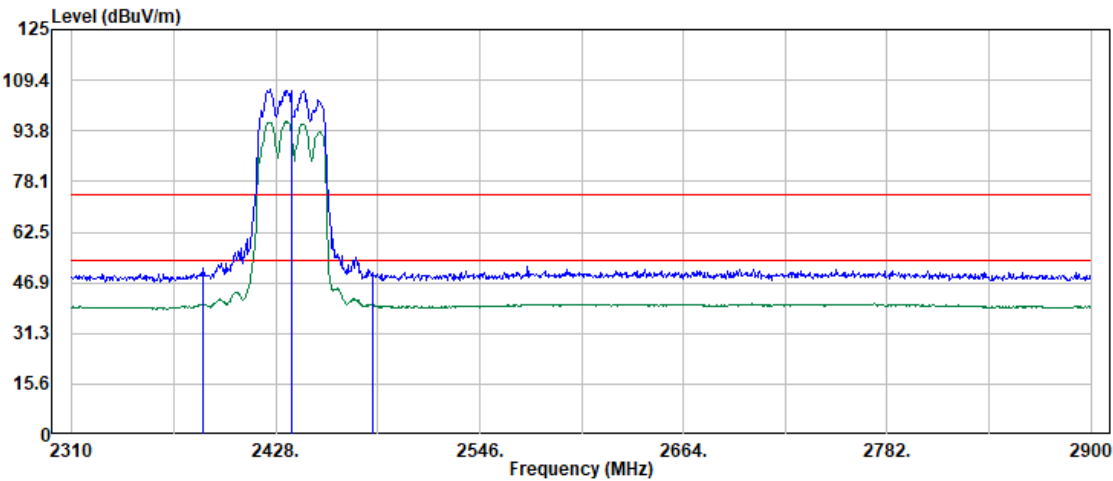

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2385.44	45.10	6.16	51.26	74.00	-22.74	Peak
2385.44	34.09	6.16	40.25	54.00	-13.75	Average
2437.00	100.57	6.10	106.67	--	--	Peak
2437.00	90.43	6.10	96.53	--	--	Average
2483.85	33.57	6.46	40.03	54.00	-13.97	Average
2484.35	43.66	6.46	50.12	74.00	-23.88	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 81 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

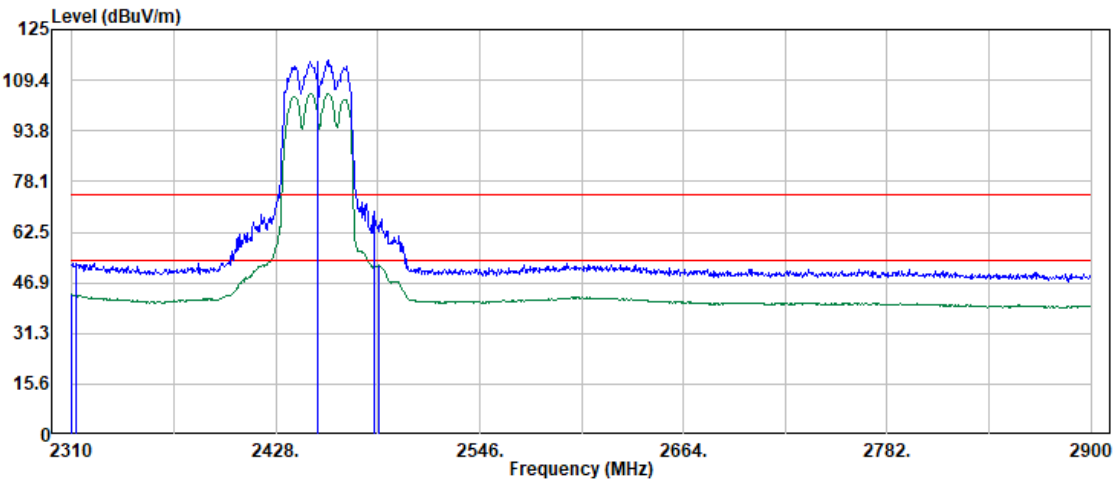

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.00	37.00	6.21	43.21	54.00	-10.79	Average
2312.50	46.83	6.20	53.03	74.00	-20.97	Peak
2452.00	109.28	6.20	115.48	--	--	Peak
2452.00	99.03	6.20	105.23	--	--	Average
2484.85	62.59	6.47	69.06	74.00	-4.94	Peak
2487.35	45.78	6.49	52.27	54.00	-1.73	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 82 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

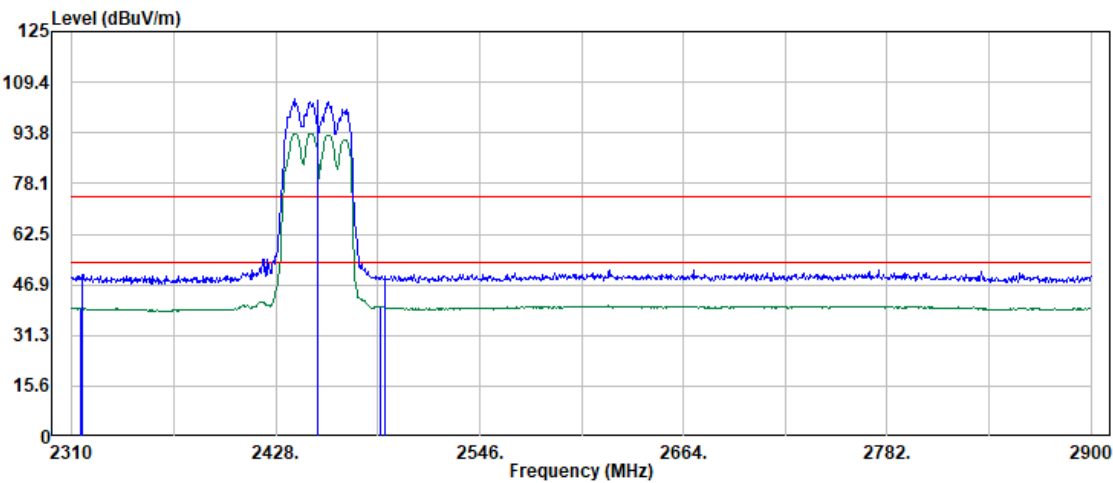

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2315.00	33.49	6.17	39.66	54.00	-14.34	Average
2315.50	43.98	6.17	50.15	74.00	-23.85	Peak
2452.00	98.22	6.20	104.42	--	--	Peak
2452.00	87.42	6.20	93.62	--	--	Average
2488.35	33.68	6.50	40.18	54.00	-13.82	Average
2491.35	43.22	6.53	49.75	74.00	-24.25	Peak



2. Antenna-2

Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-13

Temp./Humi. : 25.6/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

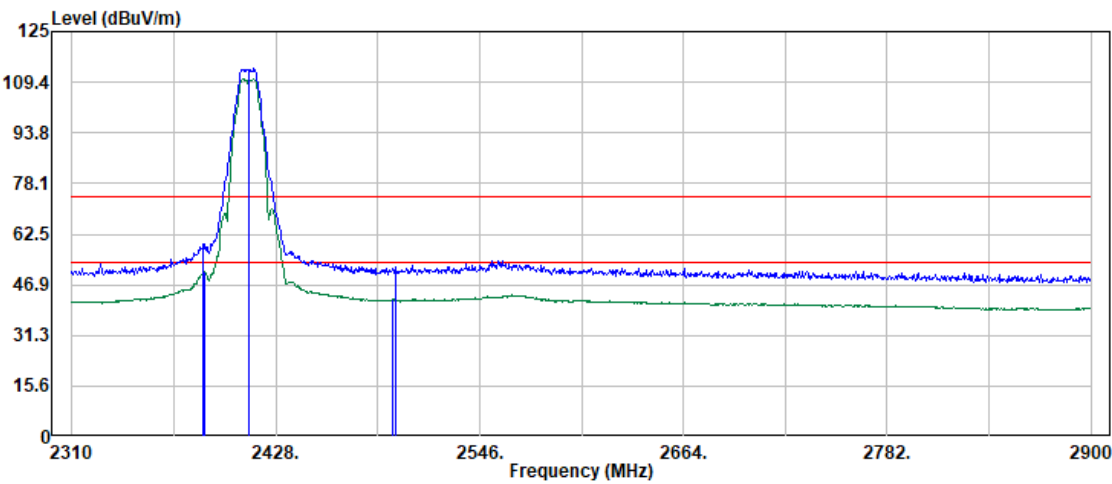

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2385.94	53.17	6.20	59.37	74.00	-14.63	Peak
2386.44	44.77	6.19	50.96	54.00	-3.04	Average
2412.00	107.46	6.22	113.68	--	--	Peak
2412.00	104.10	6.22	110.32	--	--	Average
2495.34	35.83	6.56	42.39	54.00	-11.61	Average
2497.34	45.68	6.57	52.25	74.00	-21.75	Peak



Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-13

Temp./Humi. : 25.6/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

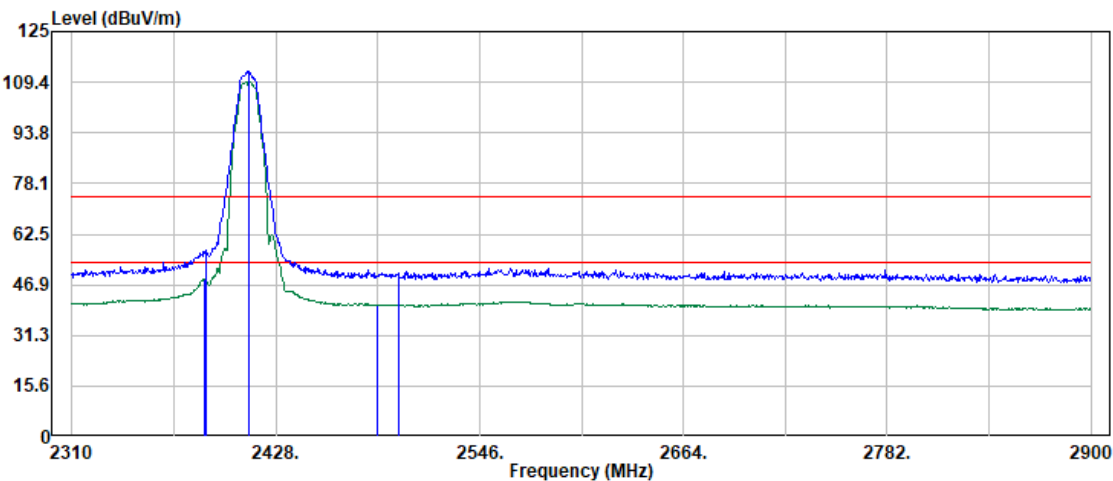

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.94	42.31	6.19	48.50	54.00	-5.50	Average
2387.93	51.23	6.19	57.42	74.00	-16.58	Peak
2412.00	106.63	6.22	112.85	--	--	Peak
2412.00	103.32	6.22	109.54	--	--	Average
2486.85	34.24	6.52	40.76	54.00	-13.24	Average
2498.84	44.00	6.57	50.57	74.00	-23.43	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 85 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 22


Test Date : 2026-02-13

Temp./Humi. : 25.6/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang


Test Chamber : 966A

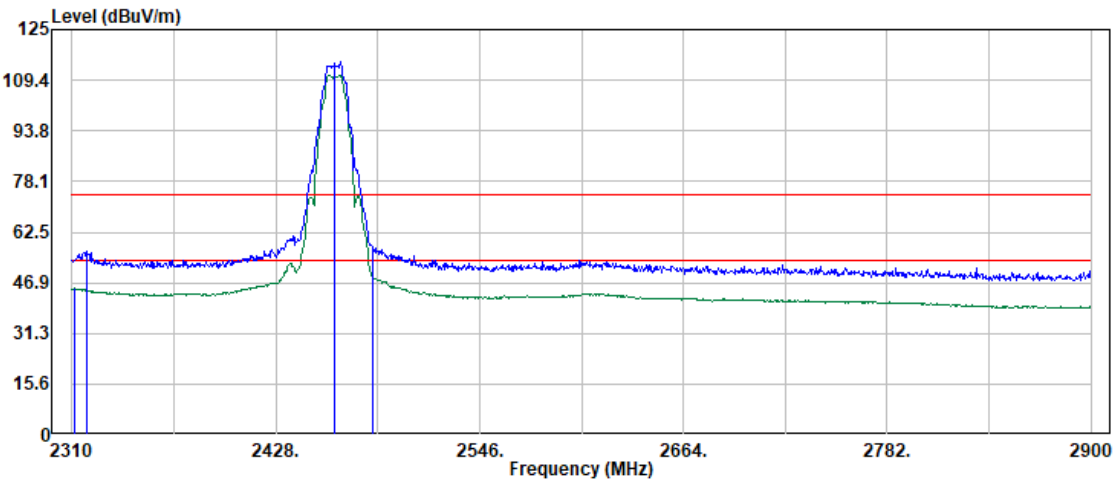

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.50	38.89	6.24	45.13	54.00	-8.87	Average
2318.99	50.47	6.17	56.64	74.00	-17.36	Peak
2462.00	108.55	6.33	114.88	--	--	Peak
2462.00	104.55	6.33	110.88	--	--	Average
2483.85	51.69	6.49	58.18	74.00	-15.82	Peak
2483.85	42.40	6.49	48.89	54.00	-5.11	Average



Project No	: TM-2601000305P	Test Date	: 2026-02-13
Operation Band	: B	Temp./Humi.	: 25.6/52
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 22		

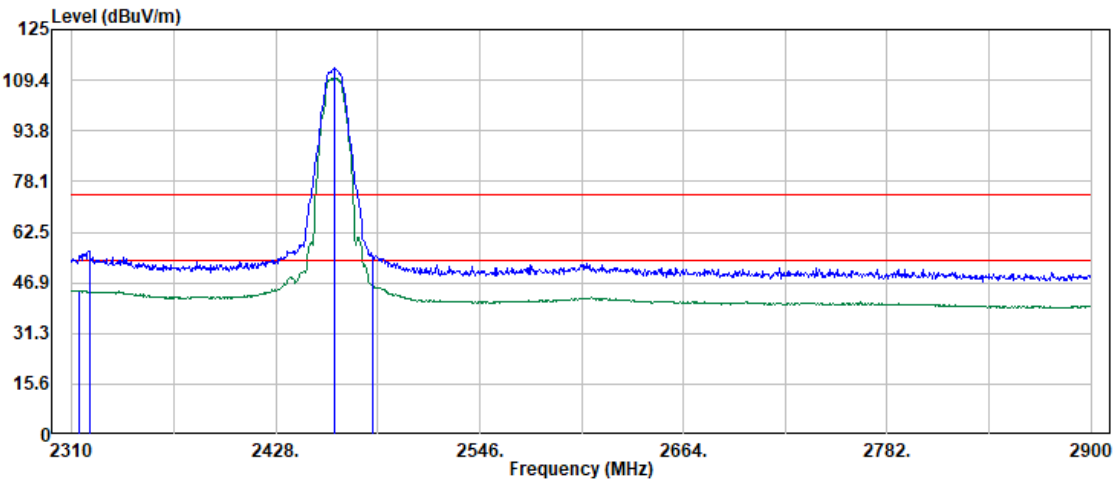

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2314.00	38.08	6.22	44.30	54.00	-9.70	Average
2319.99	50.51	6.17	56.68	74.00	-17.32	Peak
2462.00	106.94	6.33	113.27	--	--	Peak
2462.00	103.62	6.33	109.95	--	--	Average
2483.85	48.93	6.49	55.42	74.00	-18.58	Peak
2483.85	39.48	6.49	45.97	54.00	-8.03	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 87 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 21


Test Date : 2026-02-13

Temp./Humi. : 25.6/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

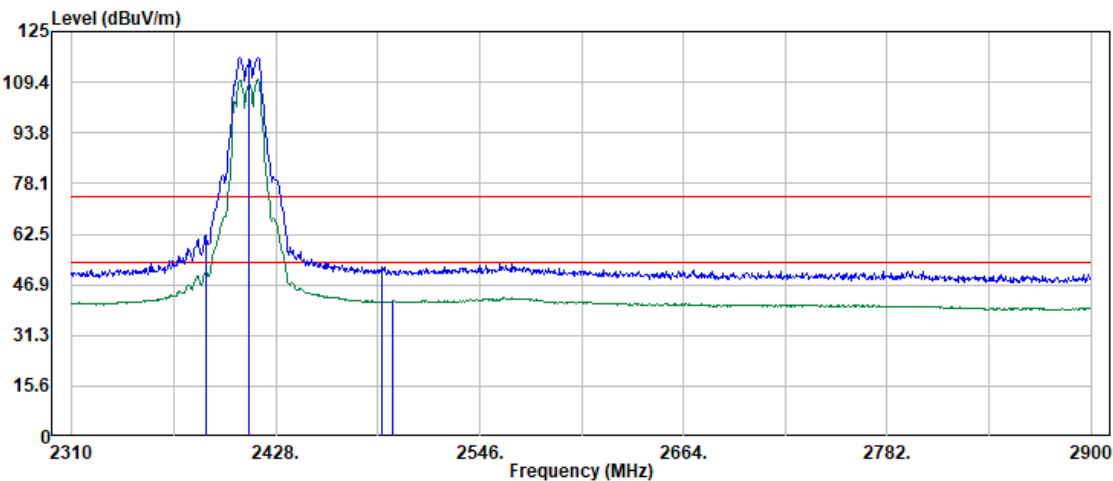

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2387.43	56.22	6.19	62.41	74.00	-11.59	Peak
2387.43	44.81	6.19	51.00	54.00	-3.00	Average
2412.00	110.76	6.22	116.98	--	--	Peak
2412.00	104.04	6.22	110.26	--	--	Average
2489.35	45.80	6.55	52.35	74.00	-21.65	Peak
2495.84	35.49	6.56	42.05	54.00	-11.95	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 88 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 21


Test Date : 2026-02-13

Temp./Humi. : 25.6/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

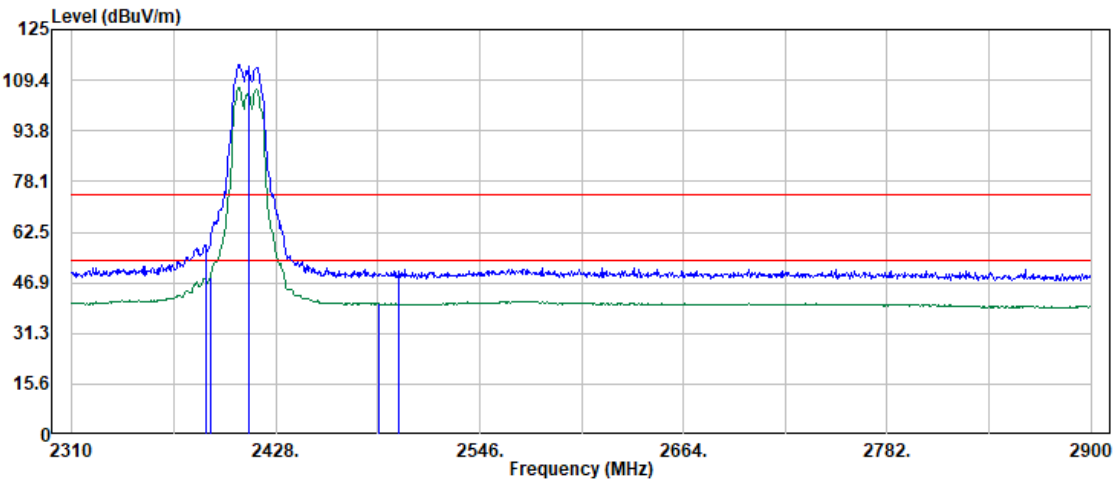


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2387.93	52.48	6.19	58.67	74.00	-15.33	Peak
2389.93	42.30	6.20	48.50	54.00	-5.50	Average
2412.00	108.08	6.22	114.30	--	--	Peak
2412.00	100.69	6.22	106.91	--	--	Average
2487.85	33.99	6.53	40.52	54.00	-13.48	Average
2499.34	43.91	6.57	50.48	74.00	-23.52	Peak



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 89 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-13
Operation Band	: G	Temp./Humi.	: 25.6/52
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

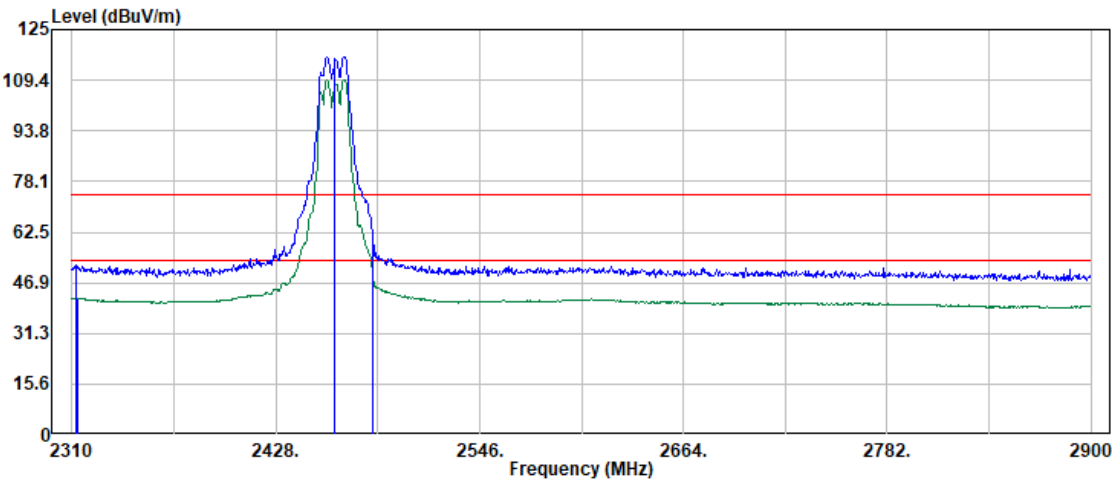


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.50	46.09	6.24	52.33	74.00	-21.67	Peak
2313.00	35.85	6.23	42.08	54.00	-11.92	Average
2462.00	110.17	6.33	116.50	--	--	Peak
2462.00	103.30	6.33	109.63	--	--	Average
2483.85	55.21	6.49	61.70	74.00	-12.30	Peak
2483.85	44.40	6.49	50.89	54.00	-3.11	Average



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 90 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-13
Operation Band	: G	Temp./Humi.	: 25.6/52
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 21		

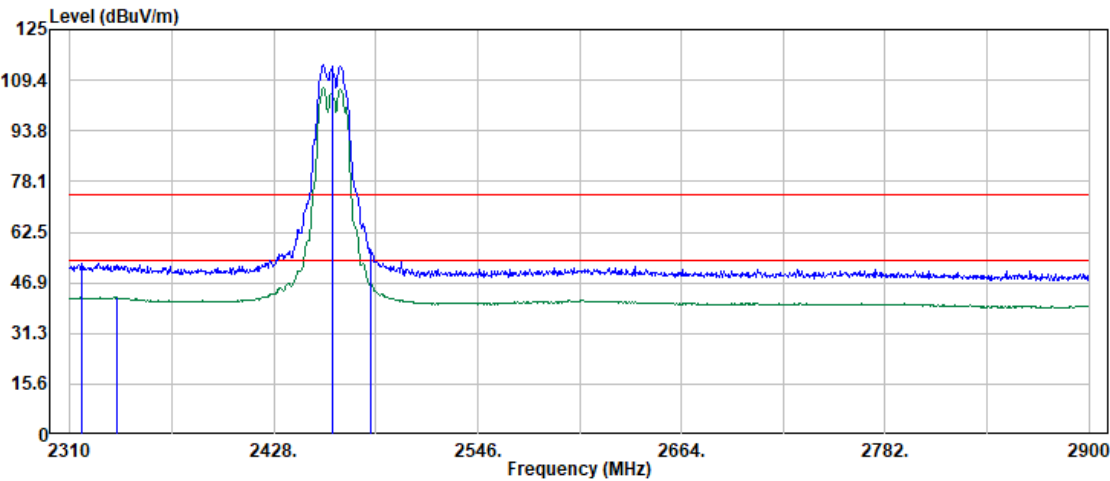


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2316.99	46.55	6.19	52.74	74.00	-21.26	Peak
2336.98	36.07	6.26	42.33	54.00	-11.67	Average
2462.00	107.98	6.33	114.31	--	--	Peak
2462.00	100.64	6.33	106.97	--	--	Average
2483.85	50.69	6.49	57.18	74.00	-16.82	Peak
2483.85	40.18	6.49	46.67	54.00	-7.33	Average



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 91 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-04
Operation Band	: AX20	Temp./Humi.	: 25.5/52
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

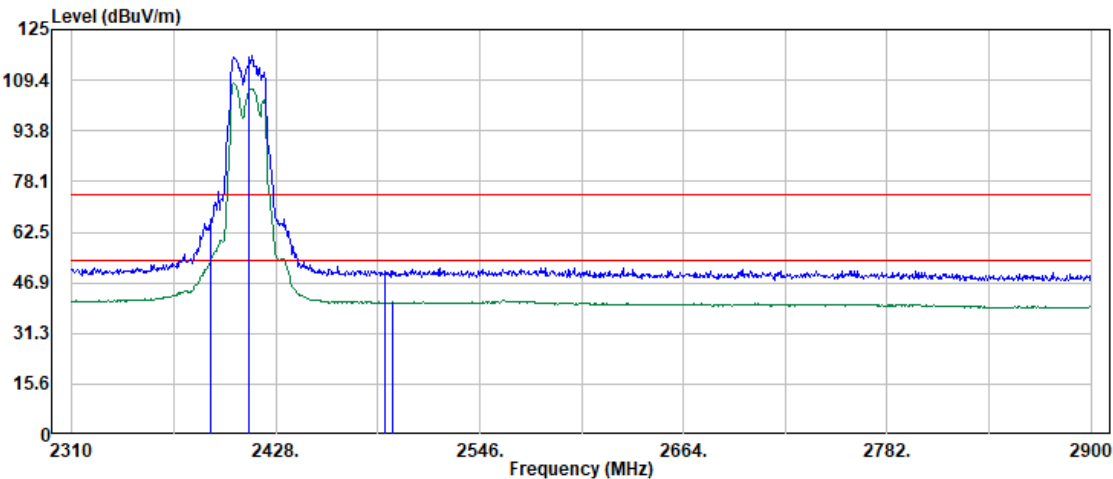


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	60.38	6.16	66.54	74.00	-7.46	Peak
2389.93	47.31	6.16	53.47	54.00	-0.53	Average
2412.00	110.76	6.18	116.94	--	--	Peak
2412.00	102.25	6.18	108.43	--	--	Average
2491.35	43.90	6.53	50.43	74.00	-23.57	Peak
2495.84	34.59	6.53	41.12	54.00	-12.88	Average



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 92 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-04
Operation Band	: AX20	Temp./Humi.	: 25.5/52
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

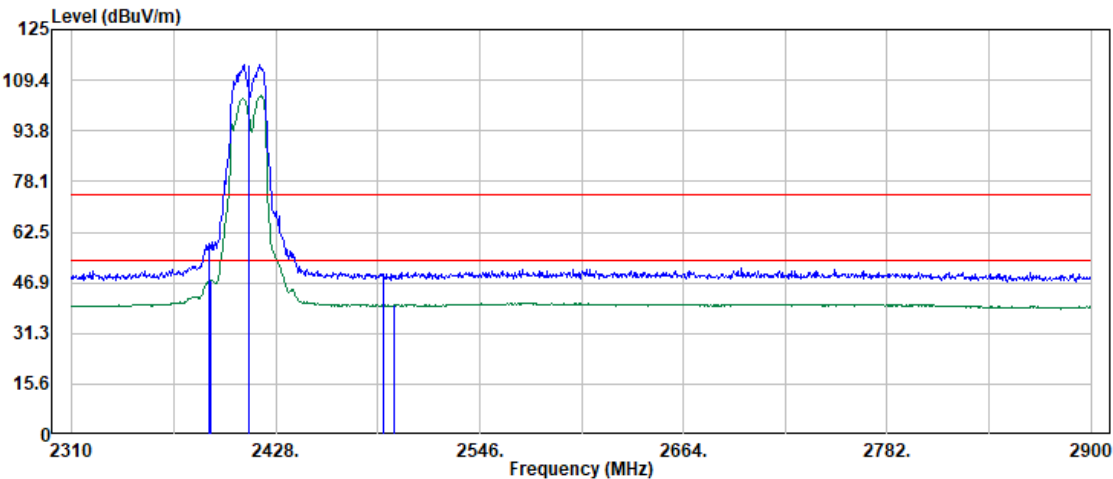

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	52.65	6.16	58.81	74.00	-15.19	Peak
2389.93	41.39	6.16	47.55	54.00	-6.45	Average
2412.00	107.94	6.18	114.12	--	--	Peak
2412.00	98.36	6.18	104.54	--	--	Average
2490.35	43.23	6.53	49.76	74.00	-24.24	Peak
2496.84	33.46	6.54	40.00	54.00	-14.00	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 93 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2417 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

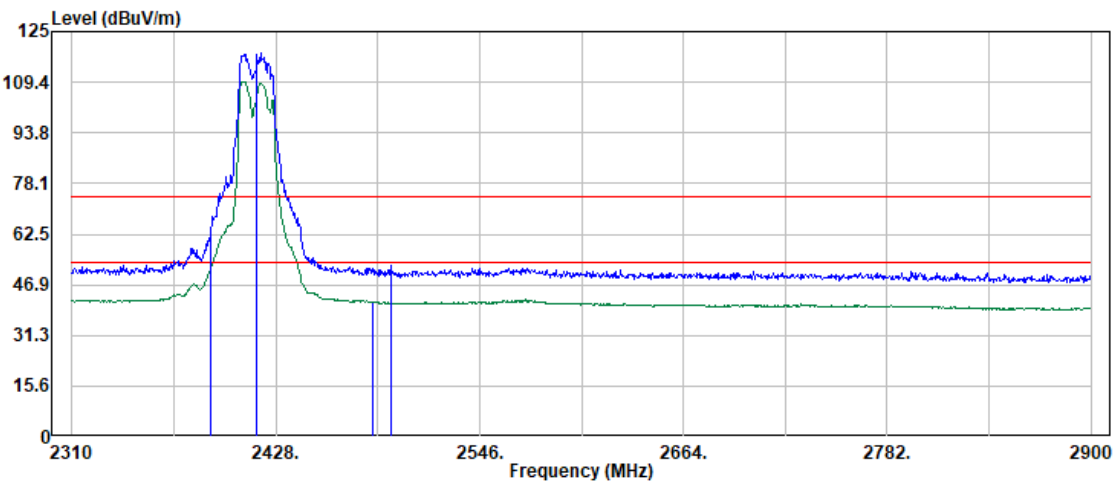

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	55.84	6.16	62.00	74.00	-12.00	Peak
2389.93	45.38	6.16	51.54	54.00	-2.46	Average
2417.00	112.20	6.23	118.43	--	--	Peak
2417.00	103.39	6.23	109.62	--	--	Average
2484.35	35.25	6.46	41.71	54.00	-12.29	Average
2494.34	46.07	6.53	52.60	74.00	-21.40	Peak



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2417 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

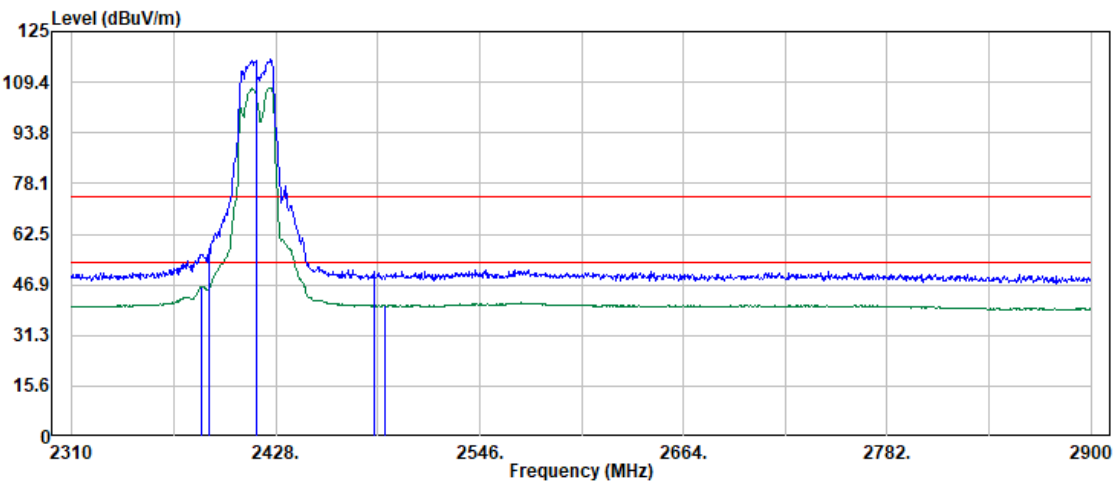

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2384.94	40.12	6.16	46.28	54.00	-7.72	Average
2389.43	51.95	6.16	58.11	74.00	-15.89	Peak
2417.00	110.16	6.23	116.39	--	--	Peak
2417.00	101.38	6.23	107.61	--	--	Average
2484.85	44.40	6.47	50.87	74.00	-23.13	Peak
2491.35	34.02	6.53	40.55	54.00	-13.45	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 95 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

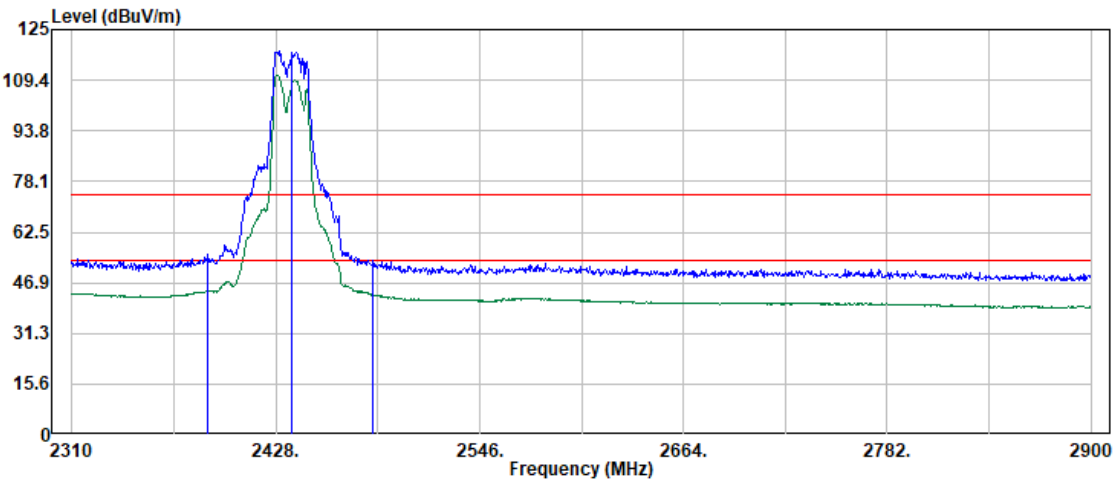

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.93	49.31	6.16	55.47	74.00	-18.53	Peak
2388.93	38.32	6.16	44.48	54.00	-9.52	Average
2437.00	112.09	6.10	118.19	--	--	Peak
2437.00	104.69	6.10	110.79	--	--	Average
2484.35	47.09	6.46	53.55	74.00	-20.45	Peak
2484.35	36.90	6.46	43.36	54.00	-10.64	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 96 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

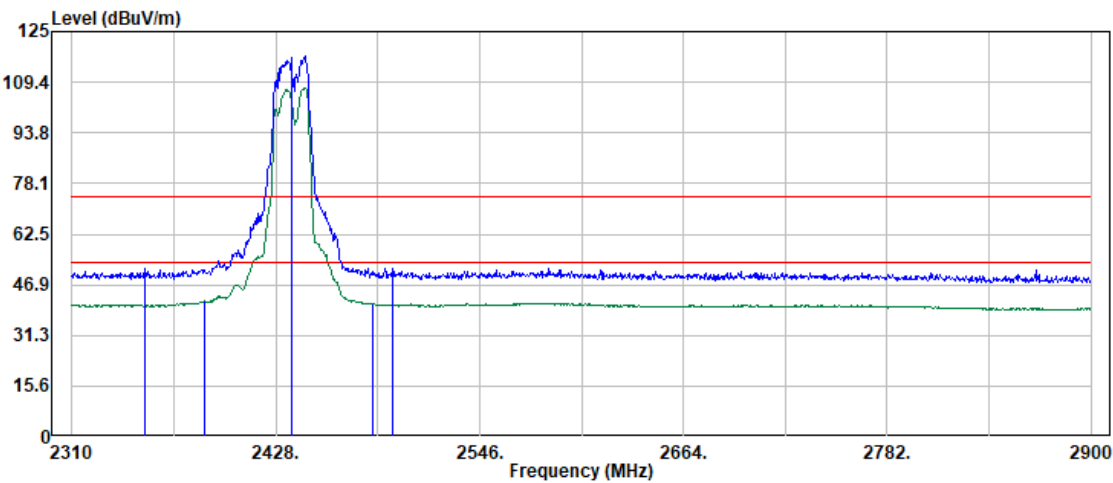

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2352.46	45.90	6.15	52.05	74.00	-21.95	Peak
2386.94	35.67	6.15	41.82	54.00	-12.18	Average
2437.00	111.22	6.10	117.32	--	--	Peak
2437.00	101.40	6.10	107.50	--	--	Average
2483.85	34.55	6.46	41.01	54.00	-12.99	Average
2495.84	45.27	6.53	51.80	74.00	-22.20	Peak



Project No: TM-2601000305P


Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 97 / 156

Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-04
Operation Band	: AX20	Temp./Humi.	: 25.5/52
Frequency	: 2457 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

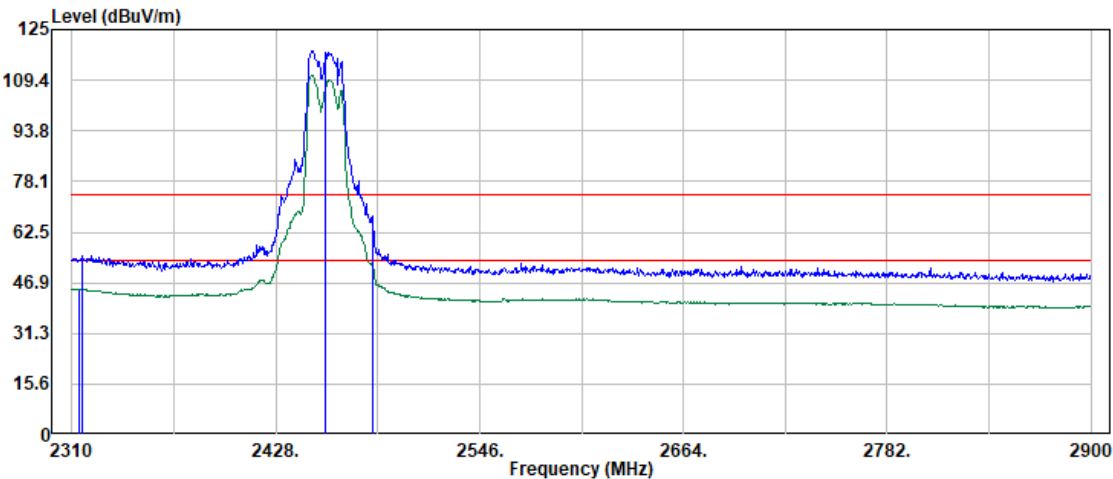

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2314.50	38.85	6.18	45.03	54.00	-8.97	Average
2315.50	48.89	6.17	55.06	74.00	-18.94	Peak
2457.00	112.23	6.25	118.48	--	--	Peak
2457.00	104.48	6.25	110.73	--	--	Average
2483.85	61.07	6.46	67.53	74.00	-6.47	Peak
2483.85	45.55	6.46	52.01	54.00	-1.99	Average




Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 98 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-04
Operation Band	: AX20	Temp./Humi.	: 25.5/52
Frequency	: 2457 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

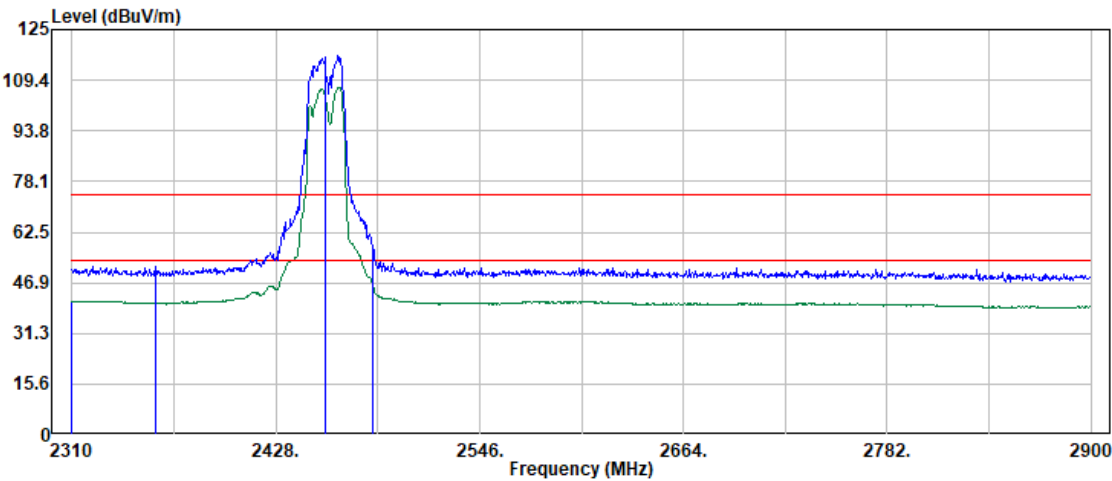

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.00	35.00	6.21	41.21	54.00	-12.79	Average
2358.46	45.94	6.08	52.02	74.00	-21.98	Peak
2457.00	110.65	6.25	116.90	--	--	Peak
2457.00	101.01	6.25	107.26	--	--	Average
2483.85	52.25	6.46	58.71	74.00	-15.29	Peak
2483.85	40.35	6.46	46.81	54.00	-7.19	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 99 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

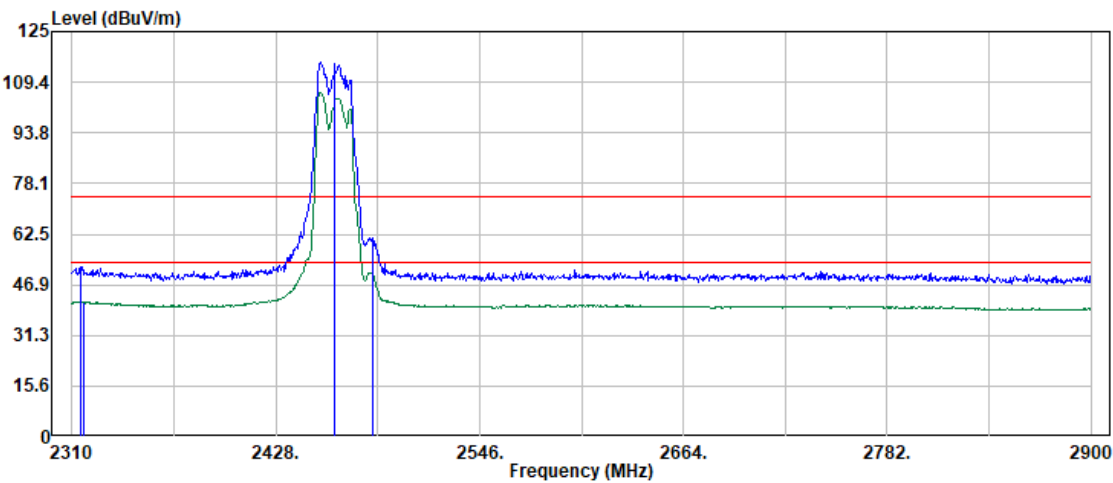

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2315.00	46.16	6.17	52.33	74.00	-21.67	Peak
2316.49	35.52	6.16	41.68	54.00	-12.32	Average
2462.00	109.30	6.29	115.59	--	--	Peak
2462.00	99.83	6.29	106.12	--	--	Average
2483.85	54.93	6.46	61.39	74.00	-12.61	Peak
2483.85	44.04	6.46	50.50	54.00	-3.50	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

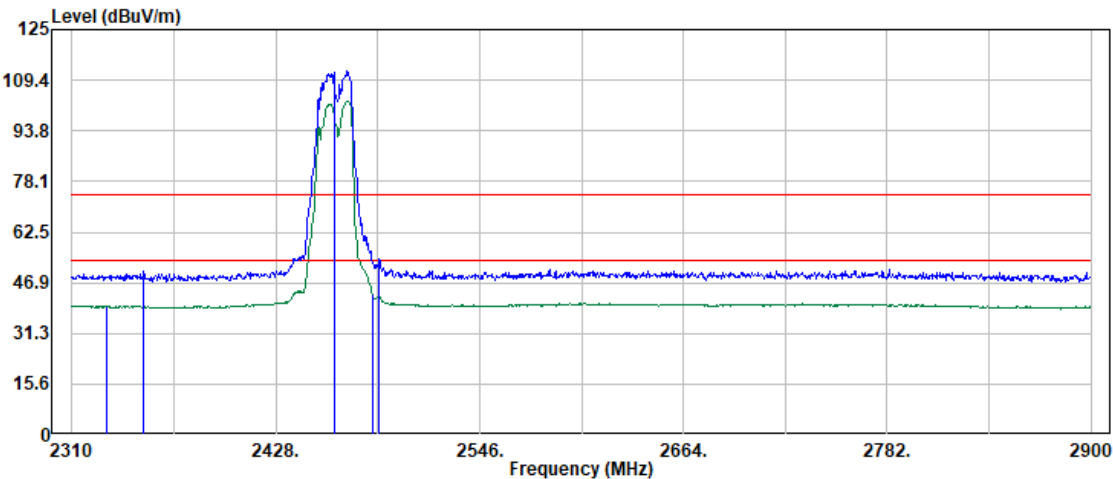

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2330.48	33.61	6.14	39.75	54.00	-14.25	Average
2351.47	44.17	6.16	50.33	74.00	-23.67	Peak
2462.00	106.20	6.29	112.49	--	--	Peak
2462.00	96.62	6.29	102.91	--	--	Average
2483.85	36.97	6.46	43.43	54.00	-10.57	Average
2487.85	47.93	6.50	54.43	74.00	-19.57	Peak



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 16


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

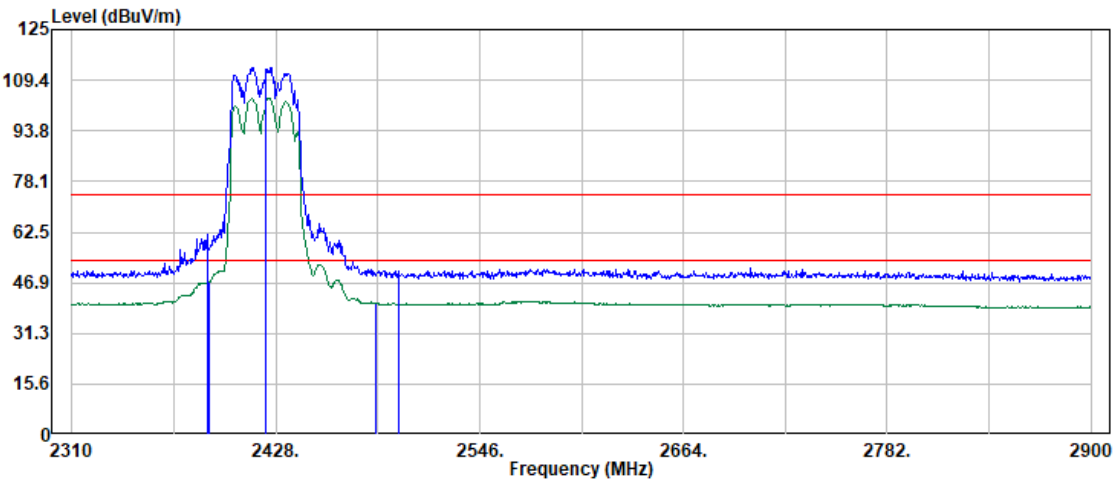


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.43	55.69	6.15	61.84	74.00	-12.16	Peak
2389.43	41.09	6.16	47.25	54.00	-6.75	Average
2422.00	106.93	6.25	113.18	--	--	Peak
2422.00	97.47	6.25	103.72	--	--	Average
2486.35	34.20	6.48	40.68	54.00	-13.32	Average
2498.84	44.09	6.54	50.63	74.00	-23.37	Peak



Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L
Page: 102 / 156
Rev.: 00

Project No	: TM-2601000305P	Test Date	: 2026-02-04
Operation Band	: AX40	Temp./Humi.	: 25.5/52
Frequency	: 2422 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16		

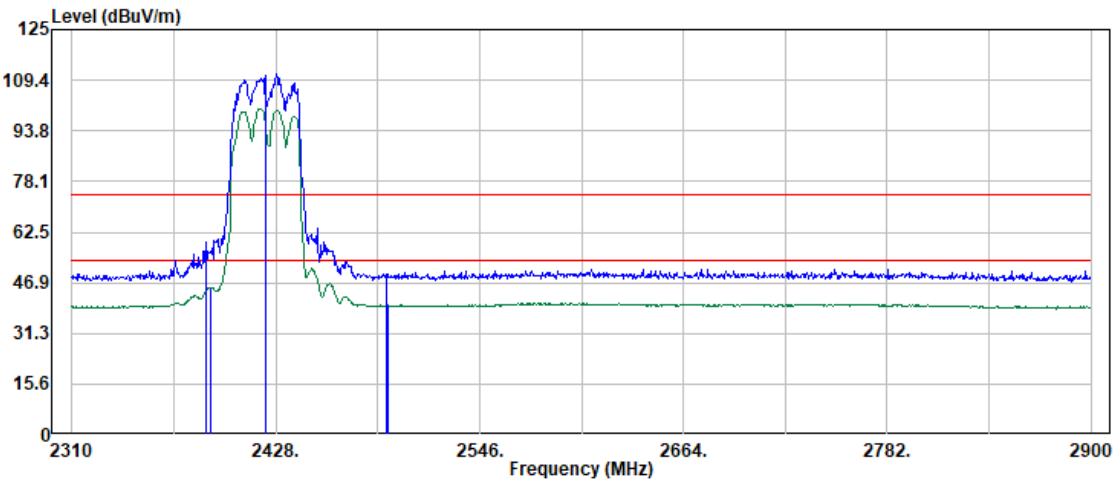

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2387.93	53.13	6.15	59.28	74.00	-14.72	Peak
2389.93	39.31	6.16	45.47	54.00	-8.53	Average
2422.00	104.87	6.25	111.12	--	--	Peak
2422.00	94.45	6.25	100.70	--	--	Average
2492.35	43.23	6.53	49.76	74.00	-24.24	Peak
2493.35	33.40	6.53	39.93	54.00	-14.07	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

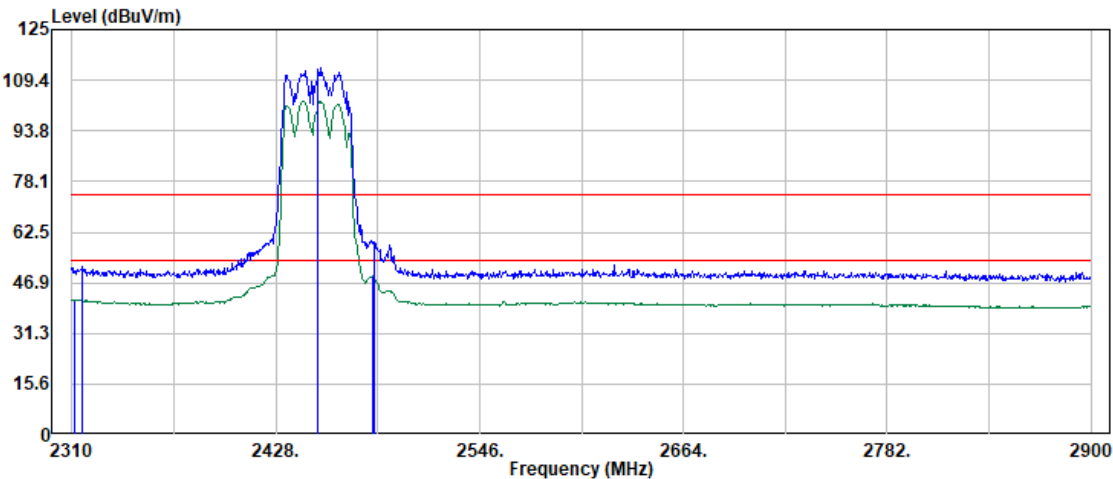

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.50	35.38	6.20	41.58	54.00	-12.42	Average
2316.00	45.82	6.16	51.98	74.00	-22.02	Peak
2452.00	107.23	6.20	113.43	--	--	Peak
2452.00	96.58	6.20	102.78	--	--	Average
2483.85	42.44	6.46	48.90	54.00	-5.10	Average
2484.85	52.78	6.47	59.25	74.00	-14.75	Peak



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

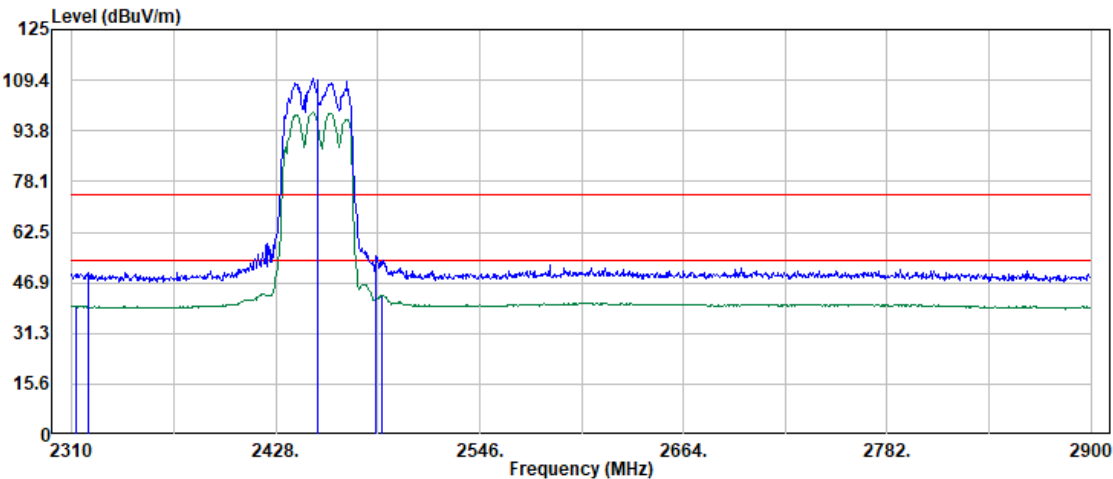

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.50	33.51	6.20	39.71	54.00	-14.29	Average
2319.49	44.01	6.14	50.15	74.00	-23.85	Peak
2452.00	103.70	6.20	109.90	--	--	Peak
2452.00	93.27	6.20	99.47	--	--	Average
2486.35	48.76	6.48	55.24	74.00	-18.76	Peak
2489.85	36.47	6.53	43.00	54.00	-11.00	Average