



TX Test Data

1. Antenna-1

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting :


Test Date : 2026-01-23

Temp./Humi. : 25.2/56

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

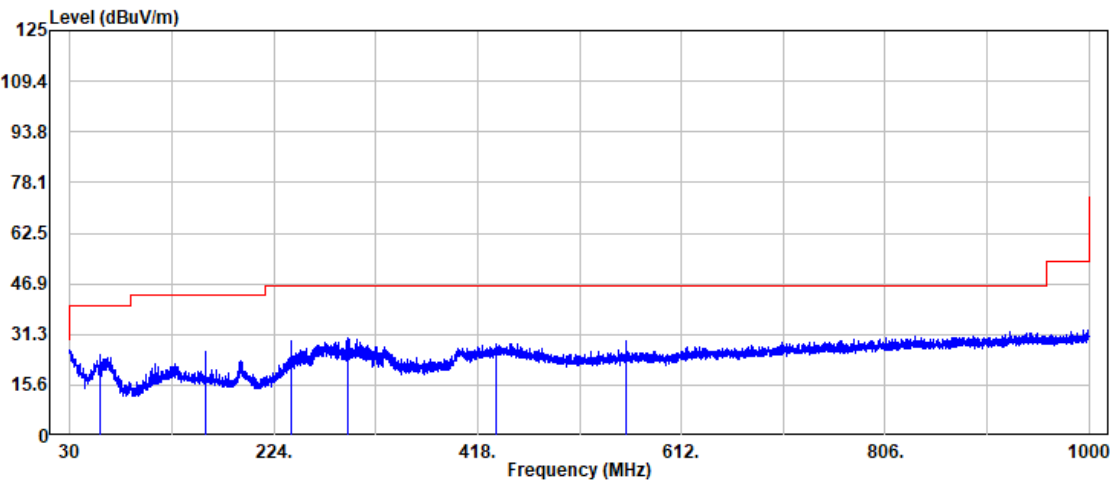

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
58.98	41.15	-16.23	24.92	40.00	-15.08	Peak
159.01	36.96	-11.03	25.93	43.50	-17.57	Peak
240.13	40.78	-11.39	29.39	46.00	-16.61	Peak
294.20	39.38	-9.42	29.96	46.00	-16.04	Peak
435.10	34.24	-5.71	28.53	46.00	-17.47	Peak
559.98	32.72	-3.60	29.12	46.00	-16.88	Peak



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 106 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting :


Test Date : 2026-01-23

Temp./Humi. : 25.2/56

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

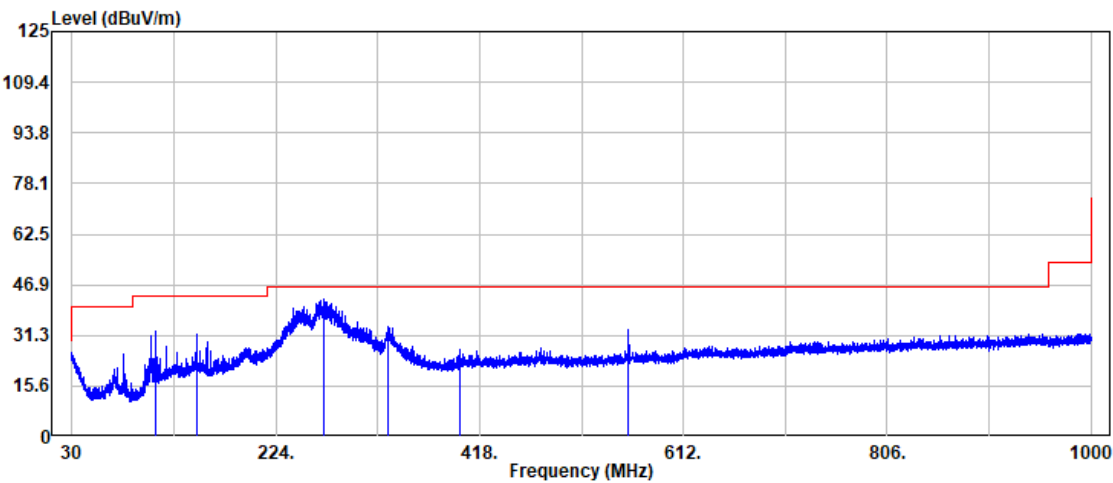

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
109.90	43.58	-10.85	32.73	43.50	-10.77	Peak
148.22	42.31	-10.87	31.44	43.50	-12.06	Peak
269.47	52.23	-9.63	42.60	46.00	-3.40	Peak
331.43	42.58	-8.79	33.79	46.00	-12.21	Peak
399.09	33.69	-6.79	26.90	46.00	-19.10	Peak
559.98	36.56	-3.60	32.96	46.00	-13.04	Peak



Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

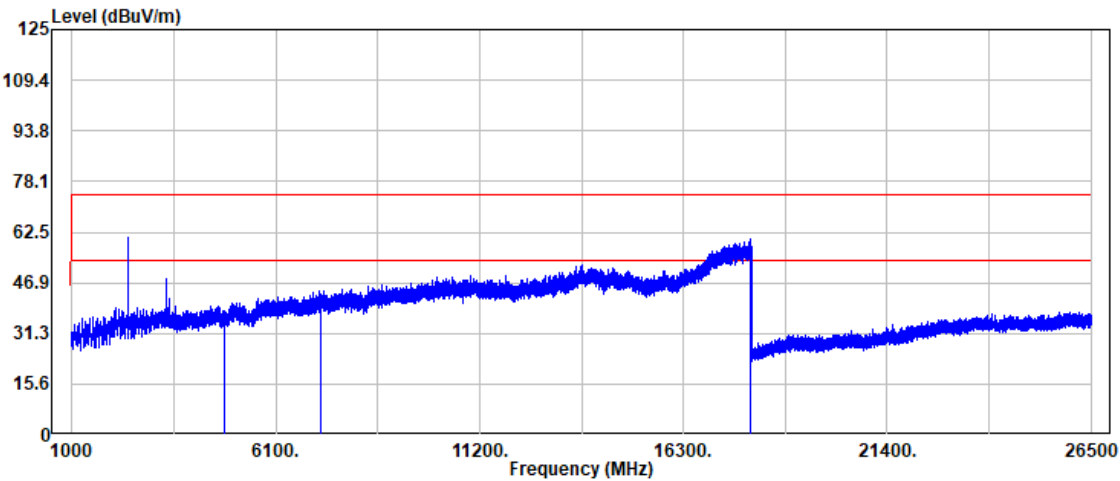

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	35.13	2.33	37.46	74.00	-36.54	Peak
4824.00	29.15	2.33	31.48	54.00	-22.52	Average
7236.00	34.20	9.17	43.37	74.00	-30.63	Peak
7236.00	26.30	9.17	35.47	54.00	-18.53	Average
17997.00	33.60	26.63	60.23	74.00	-13.77	Peak
17997.00	24.13	26.63	50.76	54.00	-3.24	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 108 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

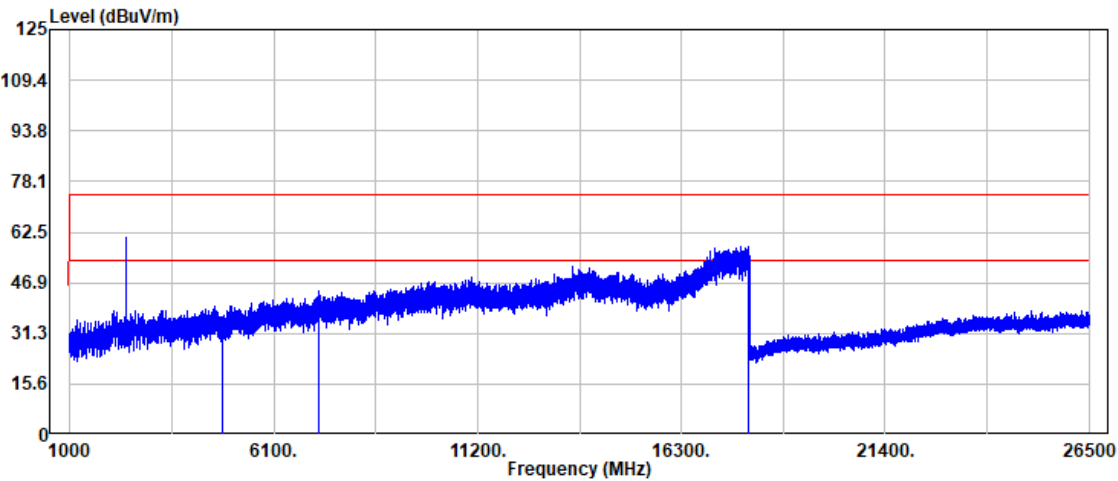

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	33.97	2.33	36.30	74.00	-37.70	Peak
4824.00	29.22	2.33	31.55	54.00	-22.45	Average
7236.00	32.38	9.17	41.55	74.00	-32.45	Peak
7236.00	27.12	9.17	36.29	54.00	-17.71	Average
17984.00	31.86	26.26	58.12	74.00	-15.88	Peak
17984.00	24.27	26.26	50.53	54.00	-3.47	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

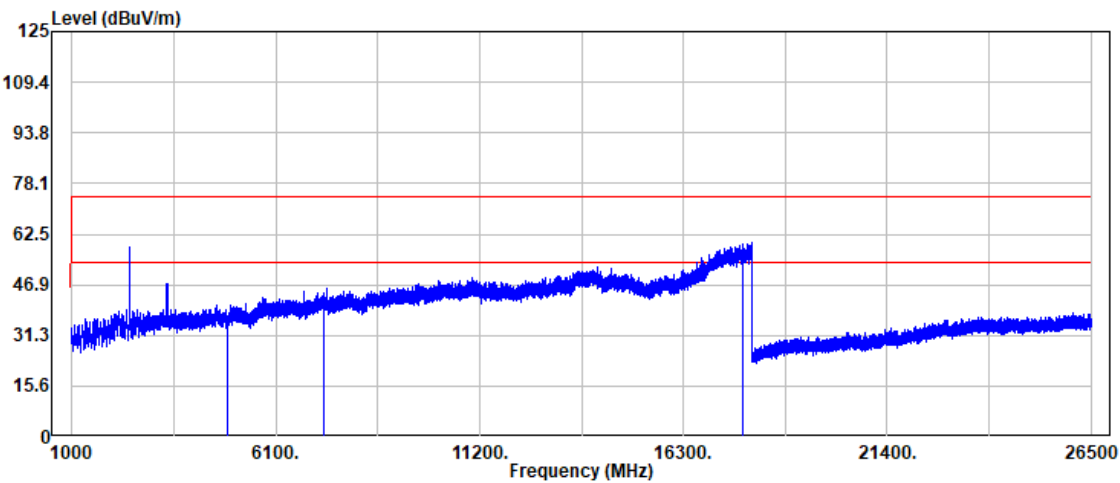

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.09	2.49	37.58	74.00	-36.42	Peak
4874.00	29.39	2.49	31.88	54.00	-22.12	Average
7311.00	34.95	9.16	44.11	74.00	-29.89	Peak
7311.00	27.62	9.16	36.78	54.00	-17.22	Average
17804.00	33.82	25.53	59.35	74.00	-14.65	Peak
17804.00	24.20	25.53	49.73	54.00	-4.27	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 110 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

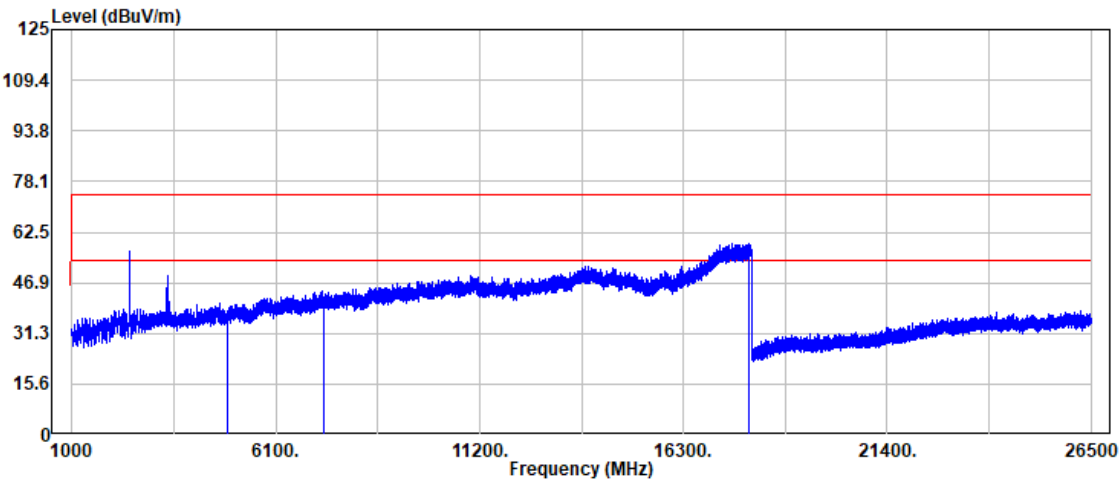

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	34.87	2.49	37.36	74.00	-36.64	Peak
4874.00	29.26	2.49	31.75	54.00	-22.25	Average
7311.00	32.81	9.16	41.97	74.00	-32.03	Peak
7311.00	27.41	9.16	36.57	54.00	-17.43	Average
17959.00	33.25	25.57	58.82	74.00	-15.18	Peak
17959.00	24.28	25.57	49.85	54.00	-4.15	Average


Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 111 / 156
Rev.: 00

Project No : TM-2601000305P
Operation Band : B
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 22

Test Date : 2026-01-23
Temp./Humi. : 25.4/52
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

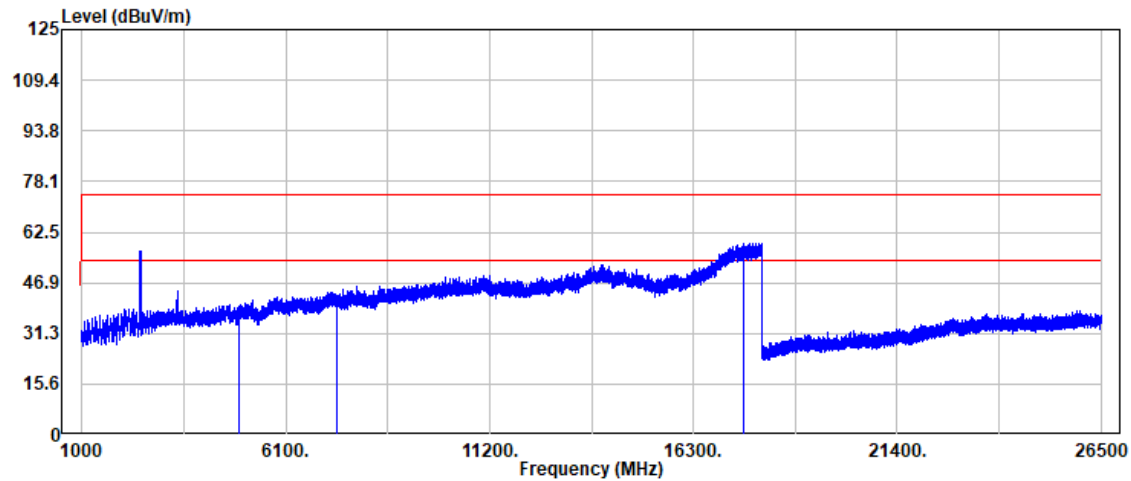

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.63	2.99	39.62	74.00	-34.38	Peak
4924.00	29.43	2.99	32.42	54.00	-21.58	Average
7386.00	34.02	9.04	43.06	74.00	-30.94	Peak
7386.00	27.22	9.04	36.26	54.00	-17.74	Average
17539.00	33.94	25.17	59.11	74.00	-14.89	Peak
17539.00	24.39	25.17	49.56	54.00	-4.44	Average


Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 112 / 156
Rev.: 00

Project No : TM-2601000305P
Operation Band : B
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 22

Test Date : 2026-01-23
Temp./Humi. : 25.4/52
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

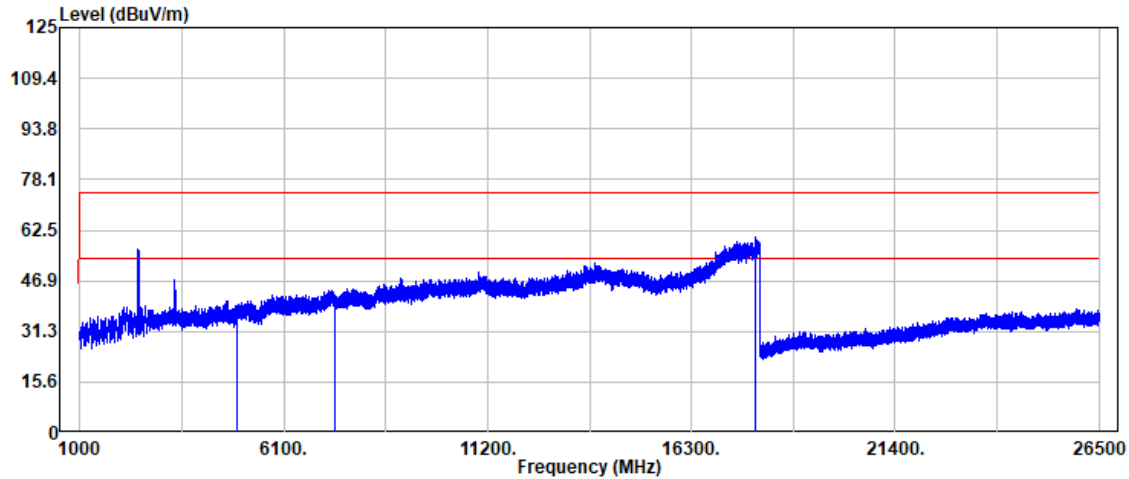

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.30	2.99	39.29	74.00	-34.71	Peak
4924.00	29.26	2.99	32.25	54.00	-21.75	Average
7386.00	33.46	9.04	42.50	74.00	-31.50	Peak
7386.00	27.60	9.04	36.64	54.00	-17.36	Average
17902.00	34.96	25.23	60.19	74.00	-13.81	Peak
17902.00	24.32	25.23	49.55	54.00	-4.45	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 113 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

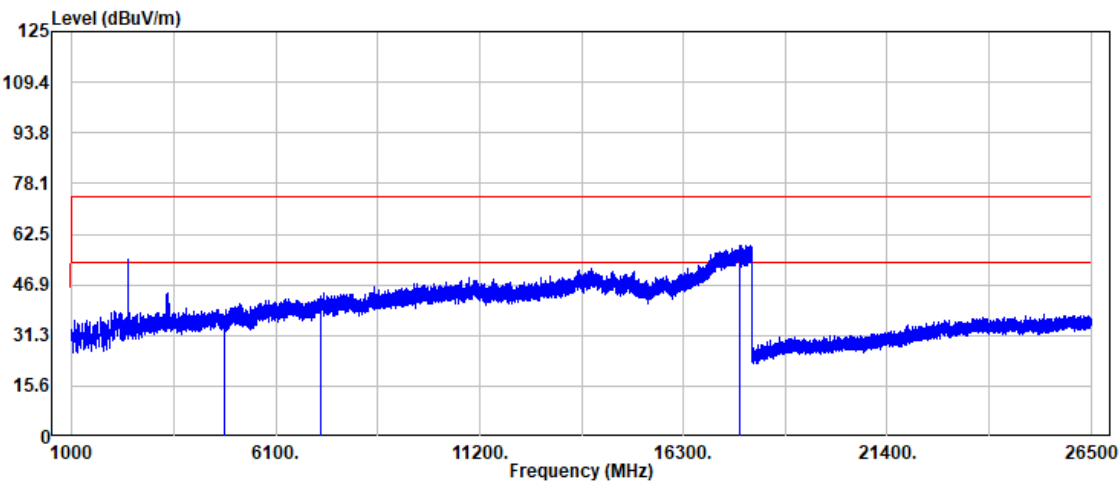

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	35.58	2.33	37.91	74.00	-36.09	Peak
4824.00	27.42	2.33	29.75	54.00	-24.25	Average
7236.00	34.13	9.17	43.30	74.00	-30.70	Peak
7236.00	26.21	9.17	35.38	54.00	-18.62	Average
17708.00	33.40	25.75	59.15	74.00	-14.85	Peak
17708.00	24.20	25.75	49.95	54.00	-4.05	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 114 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

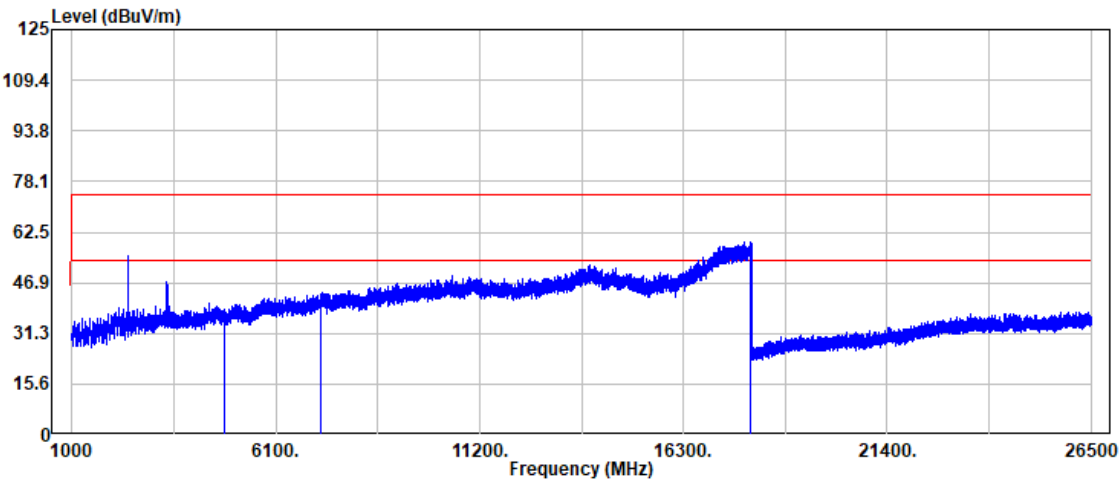

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.23	2.33	38.56	74.00	-35.44	Peak
4824.00	27.85	2.33	30.18	54.00	-23.82	Average
7236.00	33.87	9.17	43.04	74.00	-30.96	Peak
7236.00	26.22	9.17	35.39	54.00	-18.61	Average
17986.00	33.22	26.32	59.54	74.00	-14.46	Peak
17986.00	24.19	26.32	50.51	54.00	-3.49	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 115 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

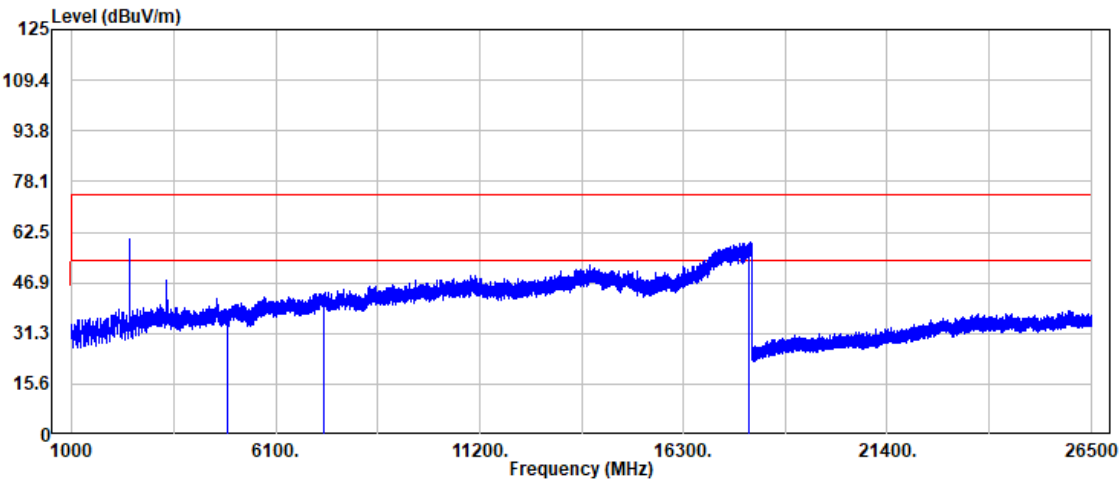

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.52	2.49	38.01	74.00	-35.99	Peak
4874.00	27.49	2.49	29.98	54.00	-24.02	Average
7311.00	34.88	9.16	44.04	74.00	-29.96	Peak
7311.00	26.59	9.16	35.75	54.00	-18.25	Average
17939.00	33.72	25.30	59.02	74.00	-14.98	Peak
17939.00	24.55	25.30	49.85	54.00	-4.15	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 116 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

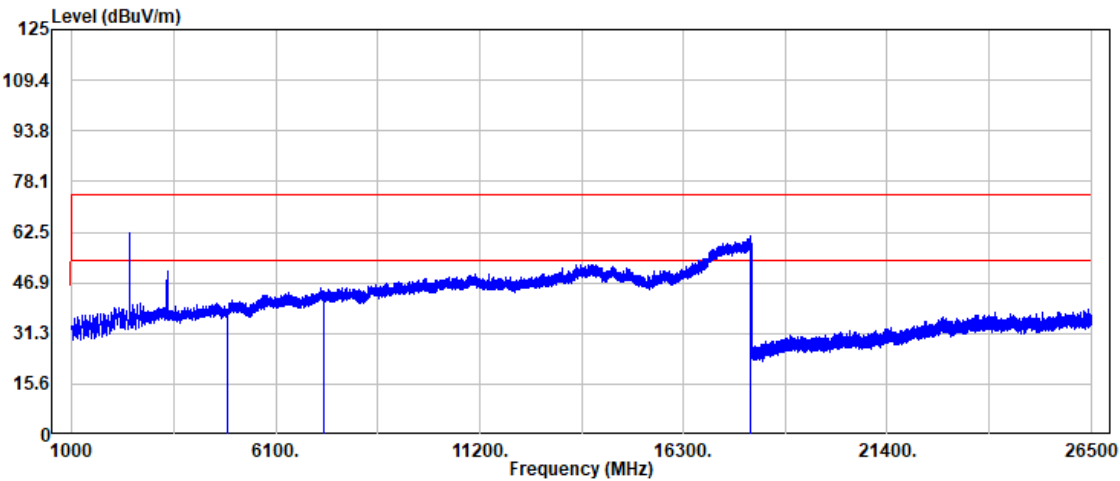

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.16	2.49	38.65	74.00	-35.35	Peak
4874.00	27.22	2.49	29.71	54.00	-24.29	Average
7311.00	35.27	9.16	44.43	74.00	-29.57	Peak
7311.00	26.56	9.16	35.72	54.00	-18.28	Average
17993.00	35.00	26.52	61.52	74.00	-12.48	Peak
17993.00	24.18	26.52	50.70	54.00	-3.30	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 117 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

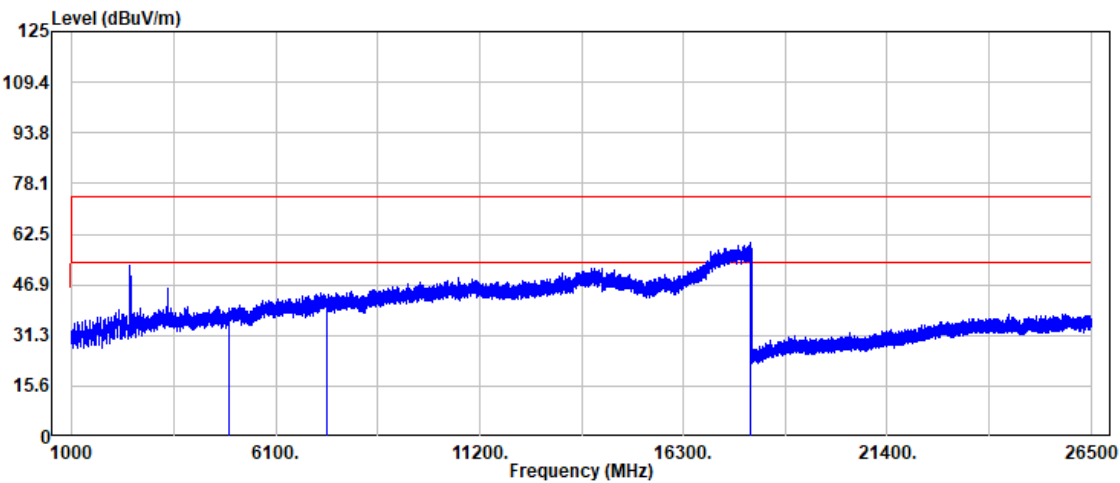

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.78	2.99	38.77	74.00	-35.23	Peak
4924.00	27.16	2.99	30.15	54.00	-23.85	Average
7386.00	33.45	9.04	42.49	74.00	-31.51	Peak
7386.00	26.02	9.04	35.06	54.00	-18.94	Average
17985.00	33.09	26.29	59.38	74.00	-14.62	Peak
17985.00	24.19	26.29	50.48	54.00	-3.52	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

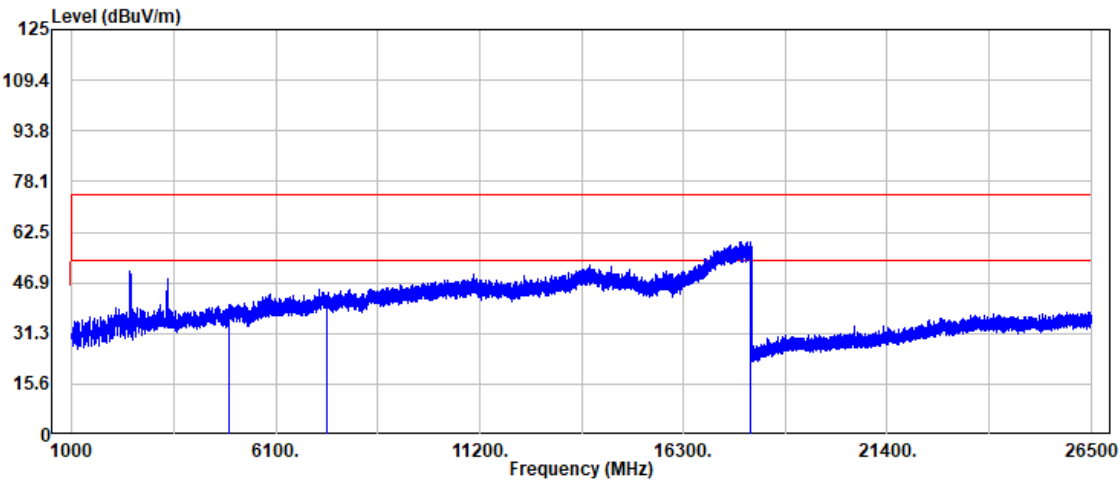

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	37.02	2.99	40.01	74.00	-33.99	Peak
4924.00	27.25	2.99	30.24	54.00	-23.76	Average
7386.00	33.90	9.04	42.94	74.00	-31.06	Peak
7386.00	26.01	9.04	35.05	54.00	-18.95	Average
17996.00	33.05	26.60	59.65	74.00	-14.35	Peak
17996.00	24.27	26.60	50.87	54.00	-3.13	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 119 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17.5


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

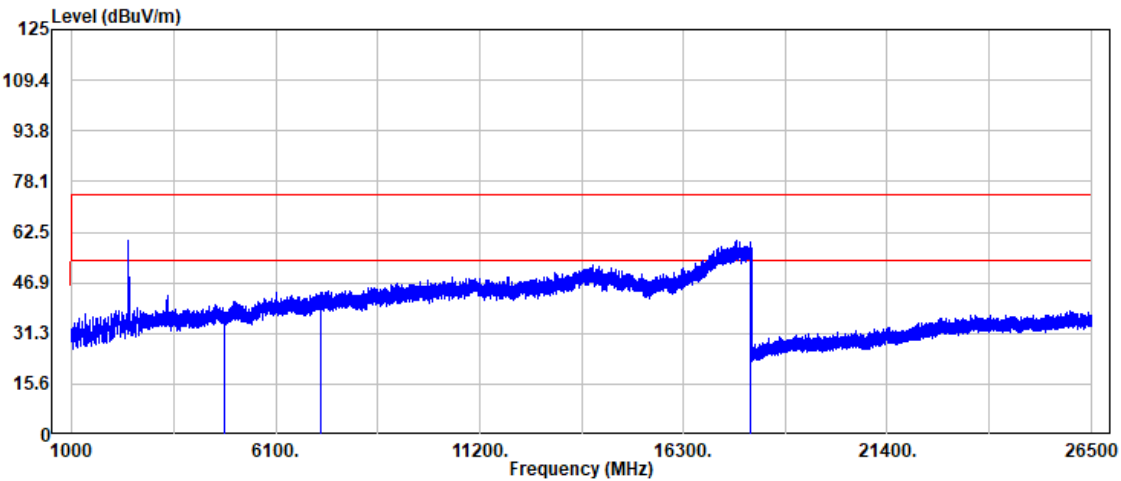

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	35.42	2.33	37.75	74.00	-36.25	Peak
4824.00	27.60	2.33	29.93	54.00	-24.07	Average
7236.00	34.84	9.17	44.01	74.00	-29.99	Peak
7236.00	26.20	9.17	35.37	54.00	-18.63	Average
17969.00	33.73	25.85	59.58	74.00	-14.42	Peak
17969.00	24.27	25.85	50.12	54.00	-3.88	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17.5


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

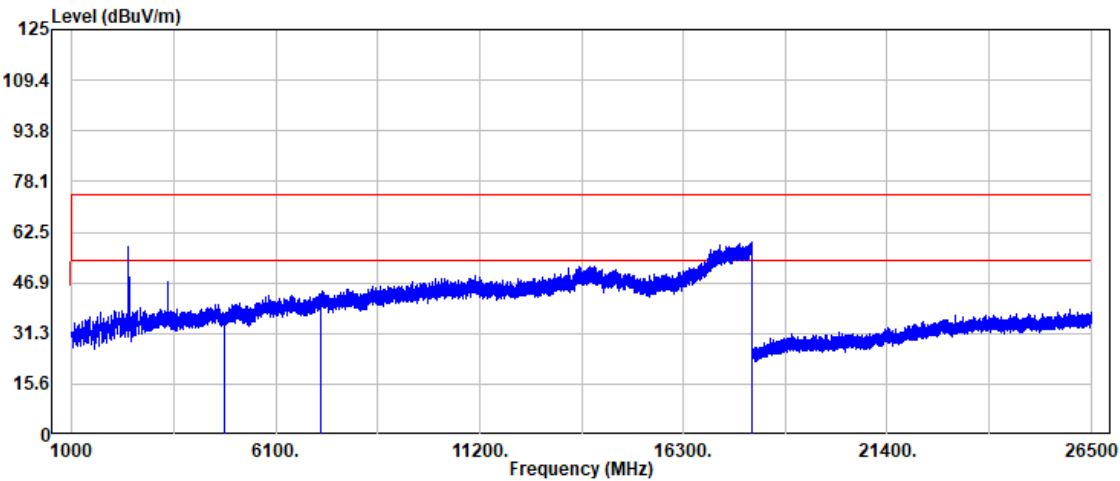

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	35.36	2.33	37.69	74.00	-36.31	Peak
4824.00	27.65	2.33	29.98	54.00	-24.02	Average
7236.00	34.20	9.17	43.37	74.00	-30.63	Peak
7236.00	26.52	9.17	35.69	54.00	-18.31	Average
17999.00	32.96	26.68	59.64	74.00	-14.36	Peak
17999.00	24.16	26.68	50.84	54.00	-3.16	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 121 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

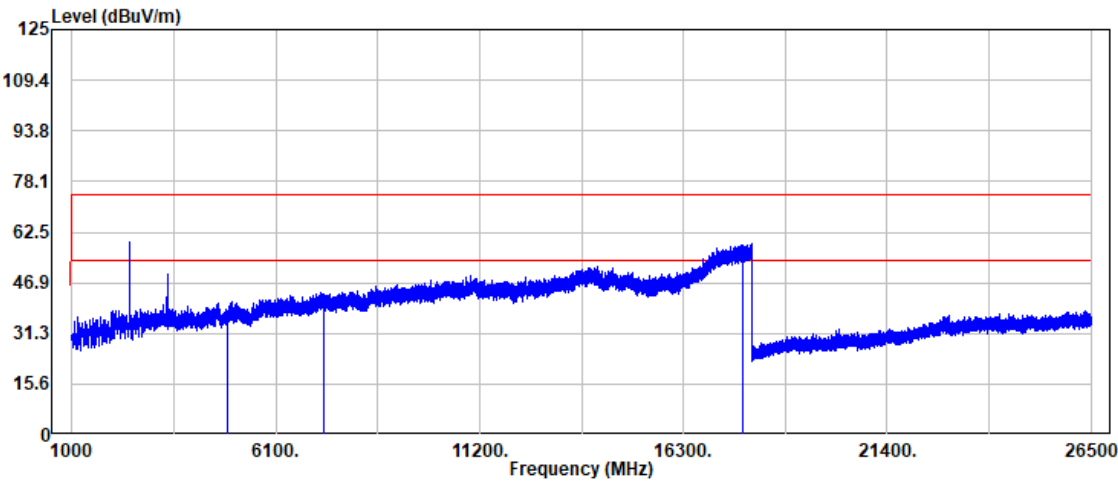

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.02	2.49	38.51	74.00	-35.49	Peak
4874.00	27.14	2.49	29.63	54.00	-24.37	Average
7311.00	34.31	9.16	43.47	74.00	-30.53	Peak
7311.00	26.52	9.16	35.68	54.00	-18.32	Average
17800.00	32.96	25.56	58.52	74.00	-15.48	Peak
17800.00	24.33	25.56	49.89	54.00	-4.11	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 19


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

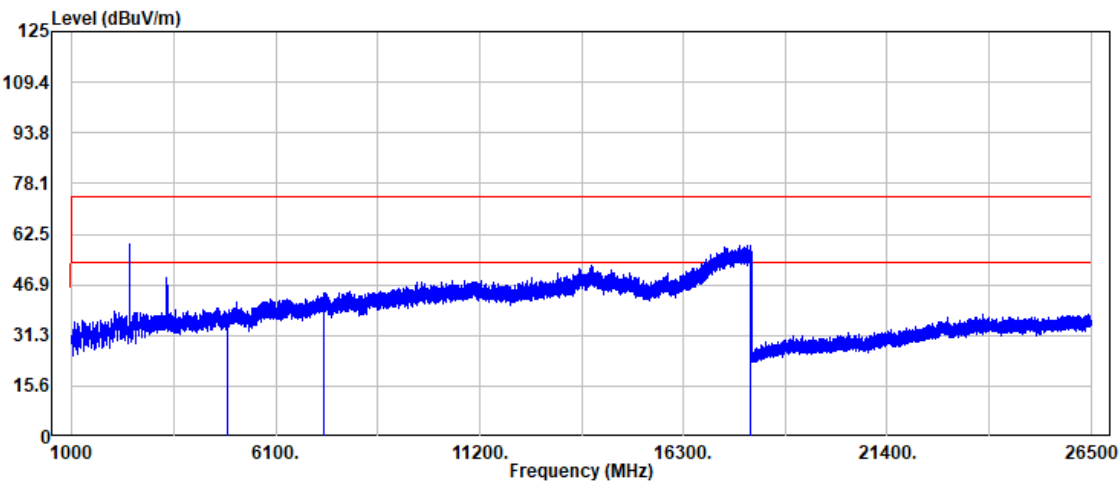

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	34.82	2.49	37.31	74.00	-36.69	Peak
4874.00	27.46	2.49	29.95	54.00	-24.05	Average
7311.00	34.16	9.16	43.32	74.00	-30.68	Peak
7311.00	26.28	9.16	35.44	54.00	-18.56	Average
17993.00	32.65	26.52	59.17	74.00	-14.83	Peak
17993.00	24.18	26.52	50.70	54.00	-3.30	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 123 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

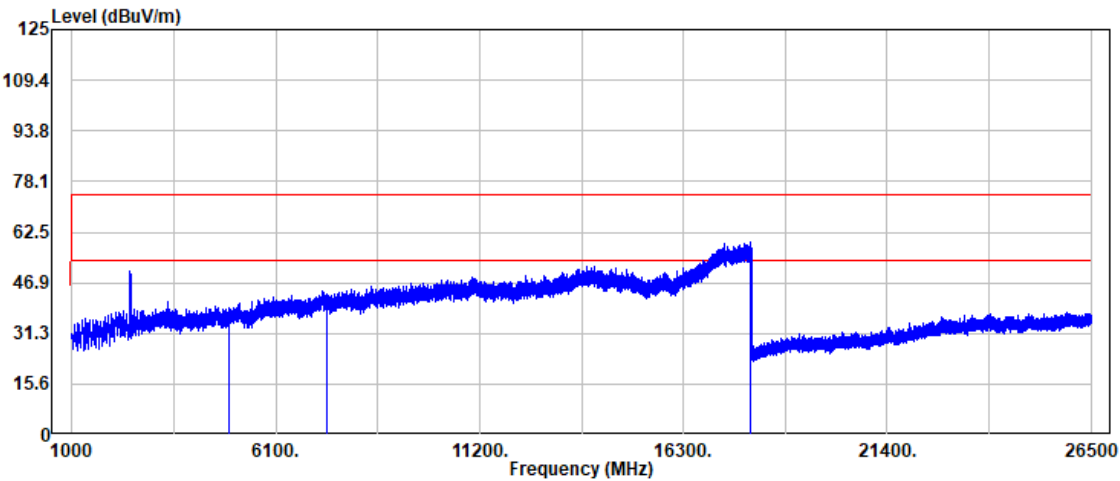

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.16	2.99	38.15	74.00	-35.85	Peak
4924.00	27.35	2.99	30.34	54.00	-23.66	Average
7386.00	34.43	9.04	43.47	74.00	-30.53	Peak
7386.00	26.31	9.04	35.35	54.00	-18.65	Average
17971.00	32.90	25.91	58.81	74.00	-15.19	Peak
17971.00	24.71	25.91	50.62	54.00	-3.38	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

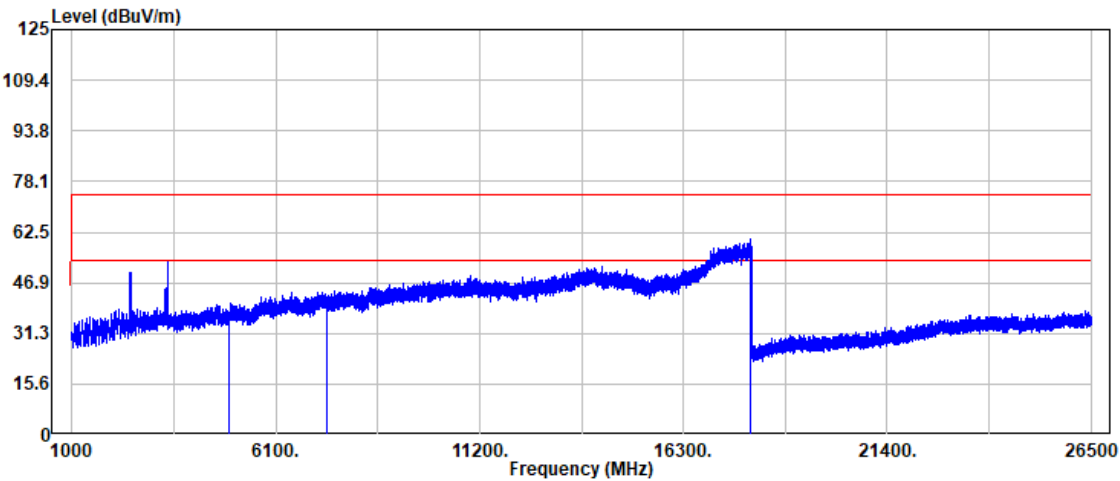

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	34.91	2.99	37.90	74.00	-36.10	Peak
4924.00	27.19	2.99	30.18	54.00	-23.82	Average
7386.00	33.68	9.04	42.72	74.00	-31.28	Peak
7386.00	26.38	9.04	35.42	54.00	-18.58	Average
17990.00	33.72	26.43	60.15	74.00	-13.85	Peak
17990.00	24.29	26.43	50.72	54.00	-3.28	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 125 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : TX

EUT Pol : H

Setting : 16


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

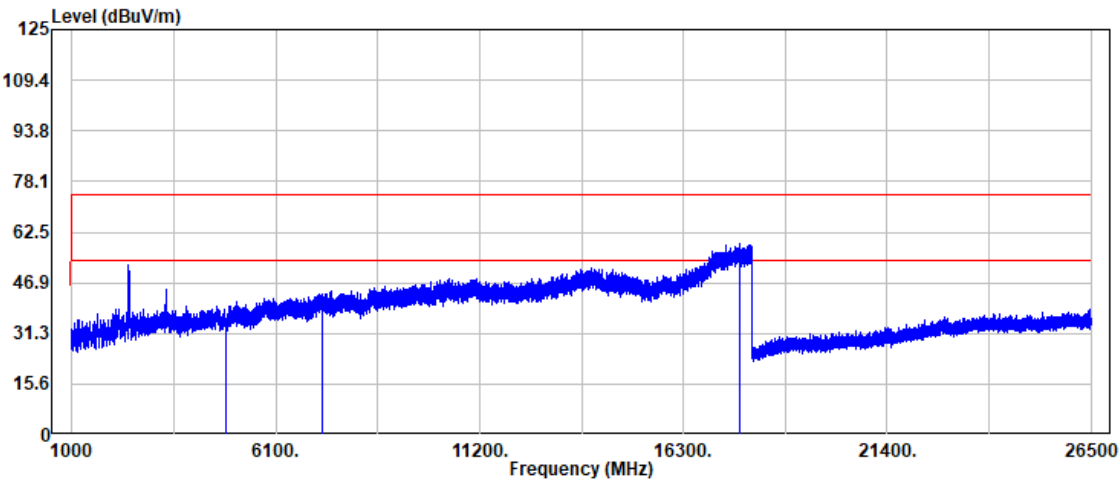

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	33.72	2.32	36.04	74.00	-37.96	Peak
4844.00	27.16	2.32	29.48	54.00	-24.52	Average
7266.00	34.41	9.21	43.62	74.00	-30.38	Peak
7266.00	26.28	9.21	35.49	54.00	-18.51	Average
17710.00	33.08	25.70	58.78	74.00	-15.22	Peak
17710.00	24.32	25.70	50.02	54.00	-3.98	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : TX

EUT Pol : H

Setting : 16


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

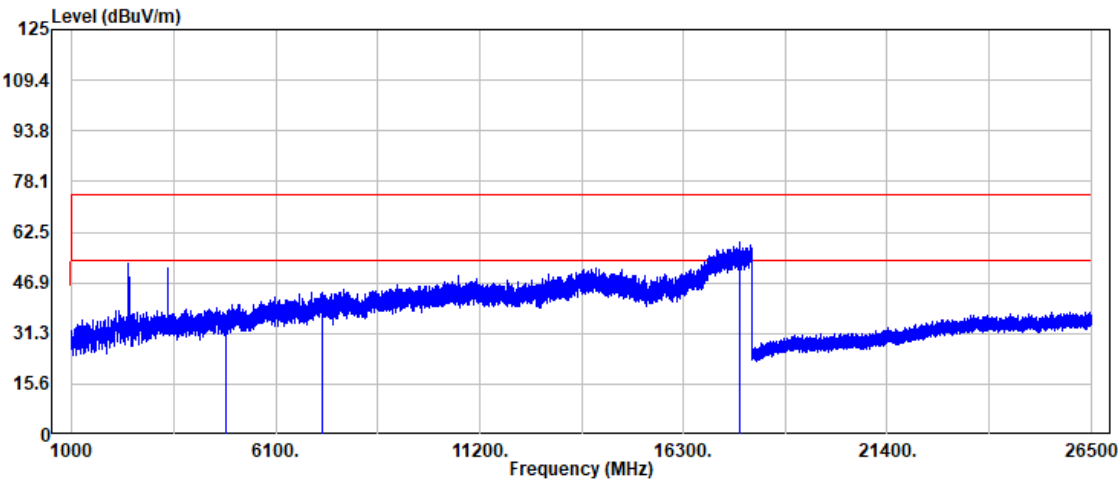

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	34.55	2.32	36.87	74.00	-37.13	Peak
4844.00	27.59	2.32	29.91	54.00	-24.09	Average
7266.00	34.58	9.21	43.79	74.00	-30.21	Peak
7266.00	26.38	9.21	35.59	54.00	-18.41	Average
17716.00	34.03	25.53	59.56	74.00	-14.44	Peak
17716.00	24.12	25.53	49.65	54.00	-4.35	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

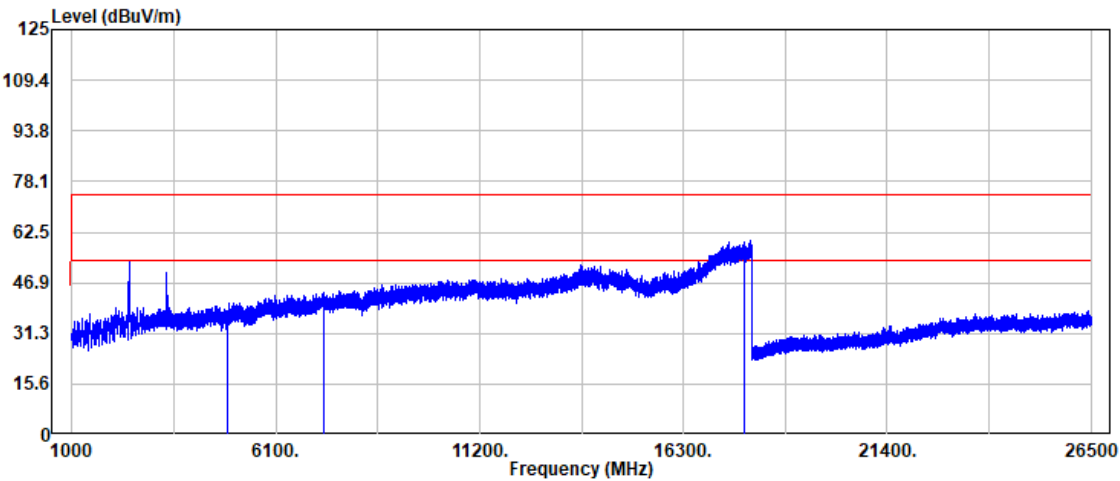

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.92	2.49	38.41	74.00	-35.59	Peak
4874.00	27.63	2.49	30.12	54.00	-23.88	Average
7311.00	33.57	9.16	42.73	74.00	-31.27	Peak
7311.00	26.61	9.16	35.77	54.00	-18.23	Average
17834.00	34.01	25.37	59.38	74.00	-14.62	Peak
17834.00	24.15	25.37	49.52	54.00	-4.48	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

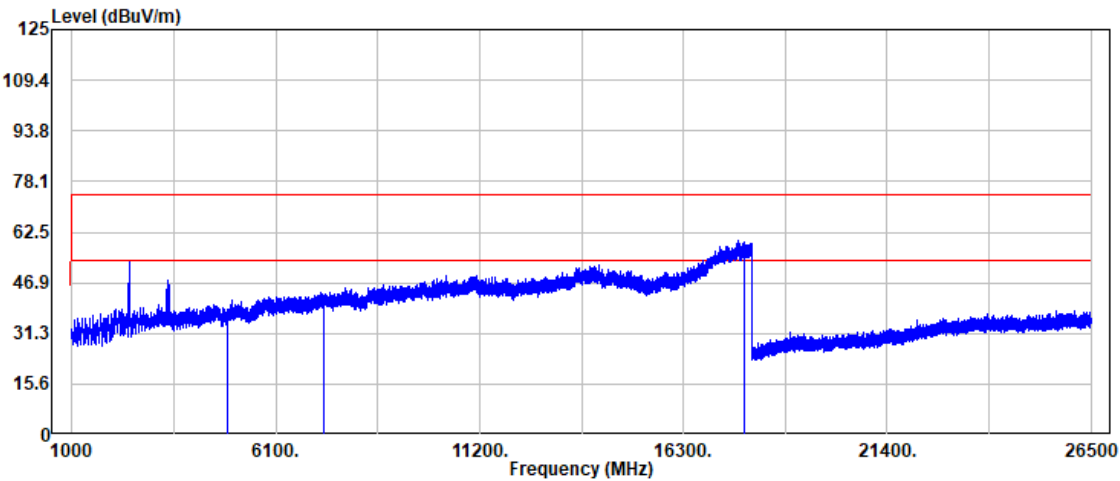

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.93	2.49	38.42	74.00	-35.58	Peak
4874.00	27.43	2.49	29.92	54.00	-24.08	Average
7311.00	33.55	9.16	42.71	74.00	-31.29	Peak
7311.00	26.45	9.16	35.61	54.00	-18.39	Average
17810.00	33.84	25.50	59.34	74.00	-14.66	Peak
17810.00	24.38	25.50	49.88	54.00	-4.12	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 129 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

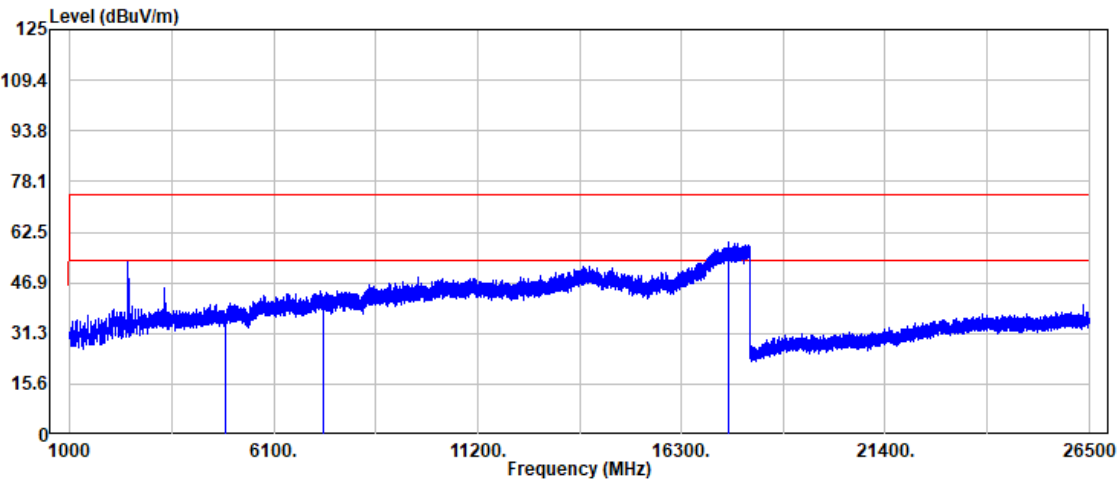

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	35.18	2.73	37.91	74.00	-36.09	Peak
4904.00	27.35	2.73	30.08	54.00	-23.92	Average
7356.00	32.74	9.04	41.78	74.00	-32.22	Peak
7356.00	26.42	9.04	35.46	54.00	-18.54	Average
17490.00	34.24	25.17	59.41	74.00	-14.59	Peak
17490.00	24.23	25.17	49.40	54.00	-4.60	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-01-23

Temp./Humi. : 25.4/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

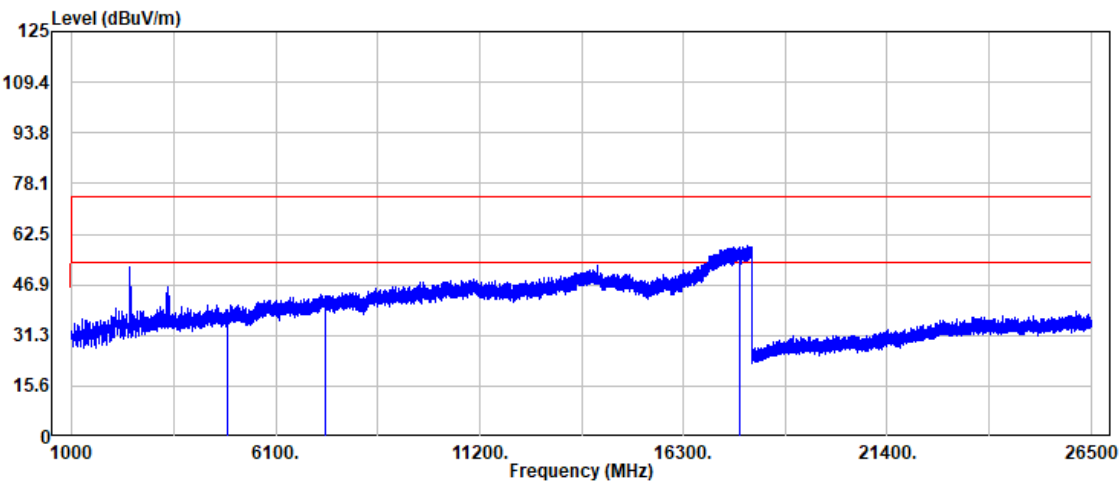

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.00	2.73	38.73	74.00	-35.27	Peak
4904.00	27.95	2.73	30.68	54.00	-23.32	Average
7356.00	33.24	9.04	42.28	74.00	-31.72	Peak
7356.00	26.43	9.04	35.47	54.00	-18.53	Average
17694.00	32.45	25.90	58.35	74.00	-15.65	Peak
17694.00	24.15	25.90	50.05	54.00	-3.95	Average



2. Antenna-2

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting :


Test Date : 2026-02-05

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

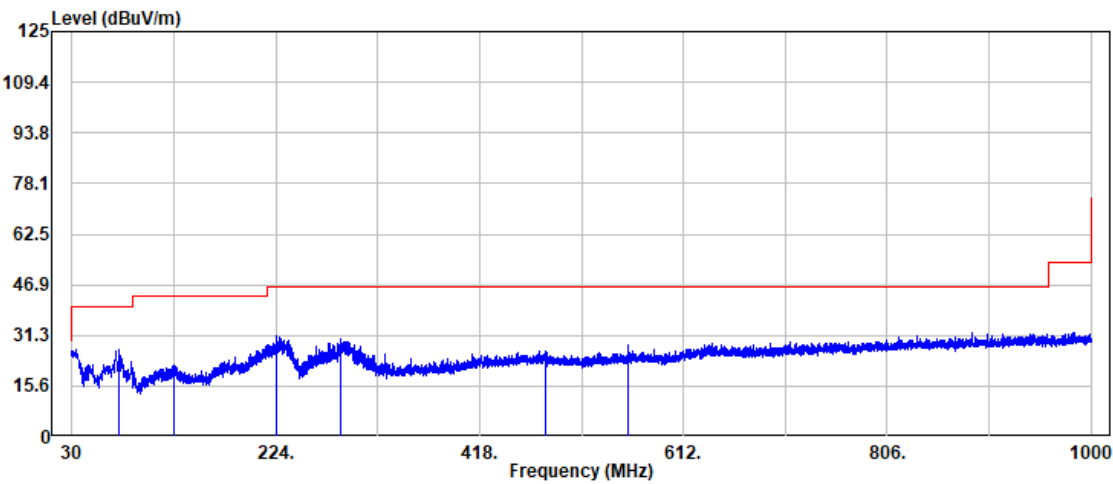

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
74.50	42.59	-15.84	26.75	40.00	-13.25	Peak
127.12	31.60	-9.66	21.94	43.50	-21.56	Peak
224.00	43.56	-12.35	31.21	46.00	-14.79	Peak
285.47	39.64	-9.54	30.10	46.00	-15.90	Peak
480.44	30.98	-4.49	26.49	46.00	-19.51	Peak
559.98	31.75	-3.60	28.15	46.00	-17.85	Peak



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting :


Test Date : 2026-02-05

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

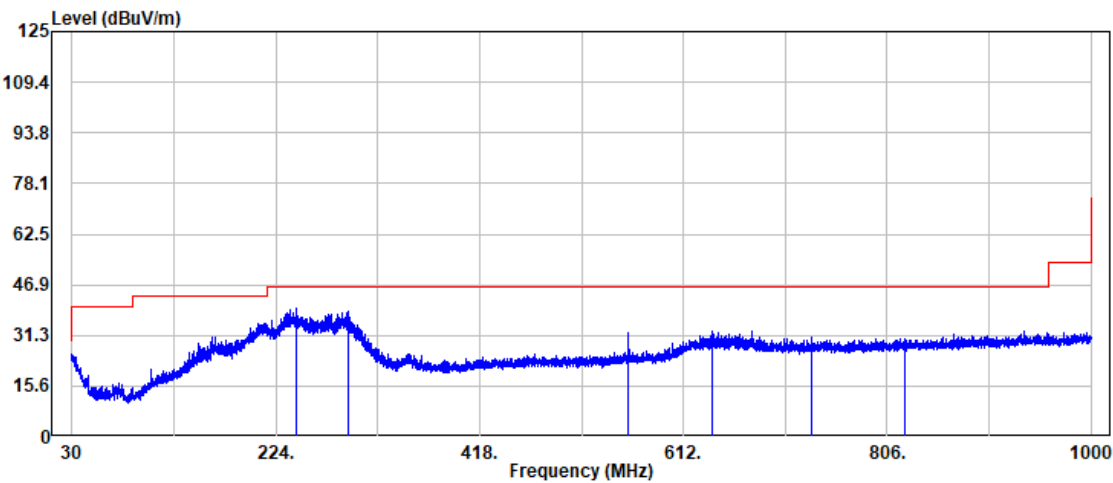

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
243.89	50.75	-11.29	39.46	46.00	-6.54	Peak
293.60	48.12	-9.43	38.69	46.00	-7.31	Peak
559.98	35.73	-3.60	32.13	46.00	-13.87	Peak
640.01	34.39	-1.71	32.68	46.00	-13.32	Peak
733.74	31.32	-0.70	30.62	46.00	-15.38	Peak
822.73	29.48	0.76	30.24	46.00	-15.76	Peak



Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

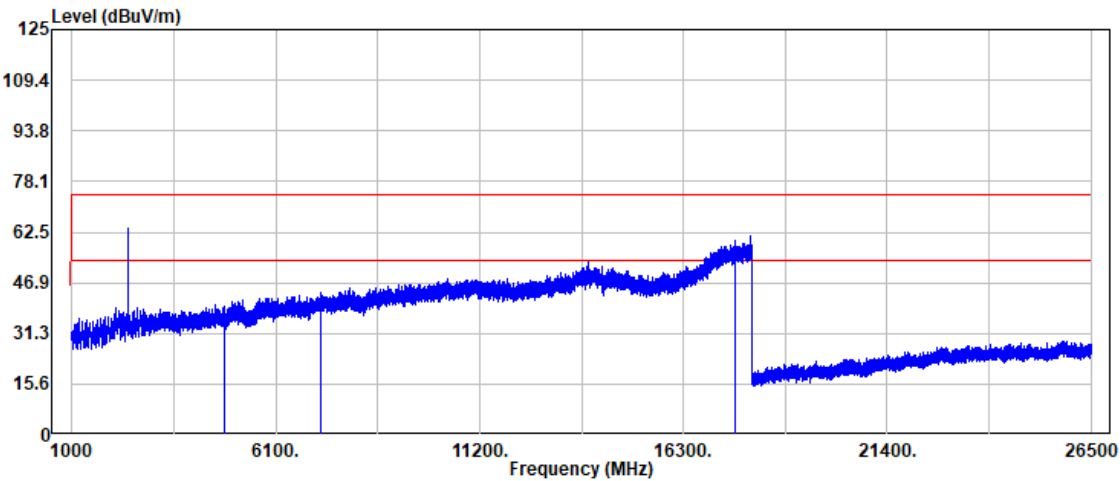

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.25	2.33	39.58	74.00	-34.42	Peak
4824.00	34.48	2.33	36.81	54.00	-17.19	Average
7236.00	34.82	9.17	43.99	74.00	-30.01	Peak
7236.00	26.34	9.17	35.51	54.00	-18.49	Average
17596.00	34.38	25.43	59.81	74.00	-14.19	Peak
17596.00	24.15	25.43	49.58	54.00	-4.42	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

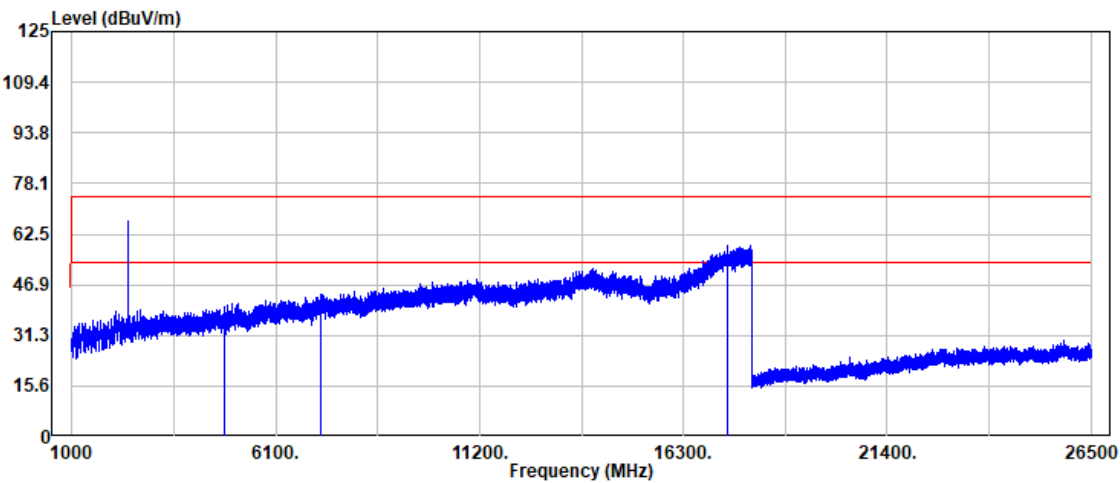

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.89	2.33	40.22	74.00	-33.78	Peak
4824.00	31.60	2.33	33.93	54.00	-20.07	Average
7236.00	34.65	9.17	43.82	74.00	-30.18	Peak
7236.00	26.65	9.17	35.82	54.00	-18.18	Average
17390.00	33.63	25.20	58.83	74.00	-15.17	Peak
17390.00	24.29	25.20	49.49	54.00	-4.51	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

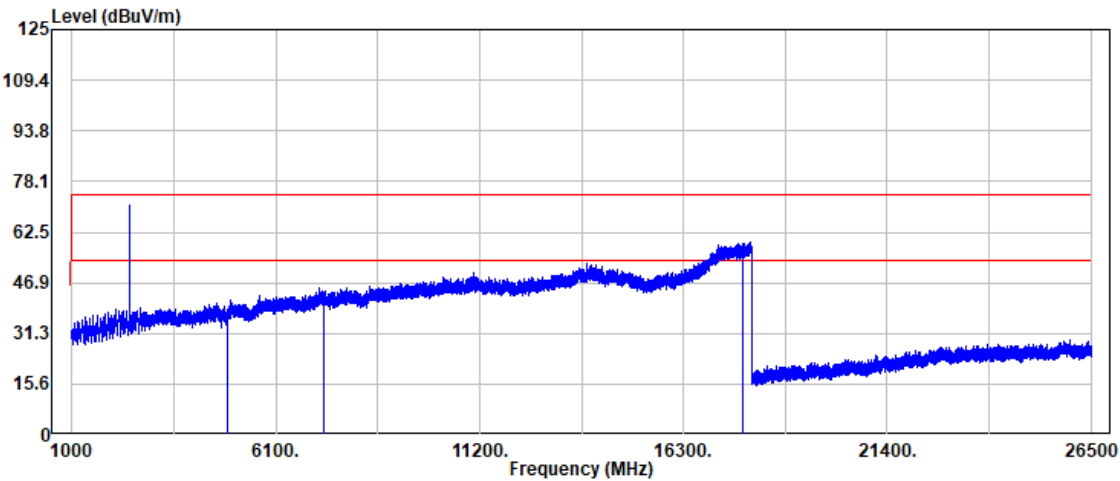

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.31	2.49	38.80	74.00	-35.20	Peak
4874.00	29.68	2.49	32.17	54.00	-21.83	Average
7311.00	34.81	9.16	43.97	74.00	-30.03	Peak
7311.00	26.71	9.16	35.87	54.00	-18.13	Average
17784.00	33.74	25.25	58.99	74.00	-15.01	Peak
17784.00	24.25	25.25	49.50	54.00	-4.50	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 136 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : B

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

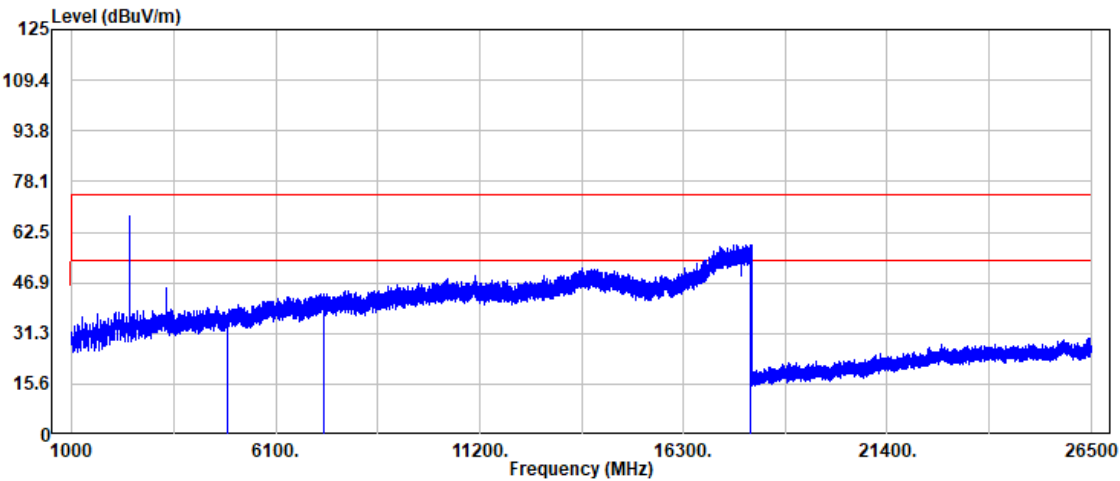

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	34.55	2.49	37.04	74.00	-36.96	Peak
4874.00	28.24	2.49	30.73	54.00	-23.27	Average
7311.00	32.89	9.16	42.05	74.00	-31.95	Peak
7311.00	26.29	9.16	35.45	54.00	-18.55	Average
17966.00	32.89	25.77	58.66	74.00	-15.34	Peak
17966.00	24.28	25.77	50.05	54.00	-3.95	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

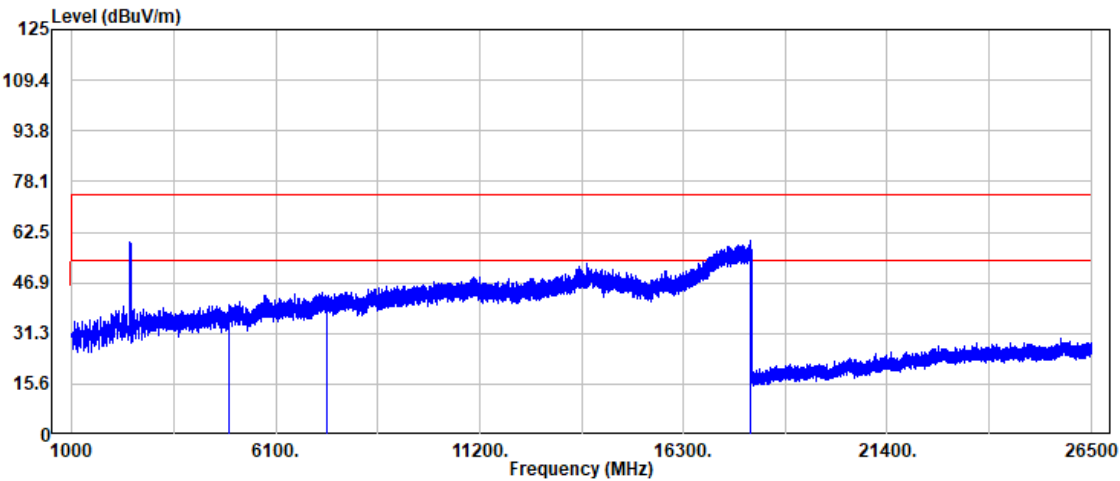

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	37.30	2.99	40.29	74.00	-33.71	Peak
4924.00	31.93	2.99	34.92	54.00	-19.08	Average
7386.00	32.62	9.04	41.66	74.00	-32.34	Peak
7386.00	26.14	9.04	35.18	54.00	-18.82	Average
17967.00	34.07	25.79	59.86	74.00	-14.14	Peak
17967.00	24.29	25.79	50.08	54.00	-3.92	Average



Project No : TM-2601000305P

Operation Band : B

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 22


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

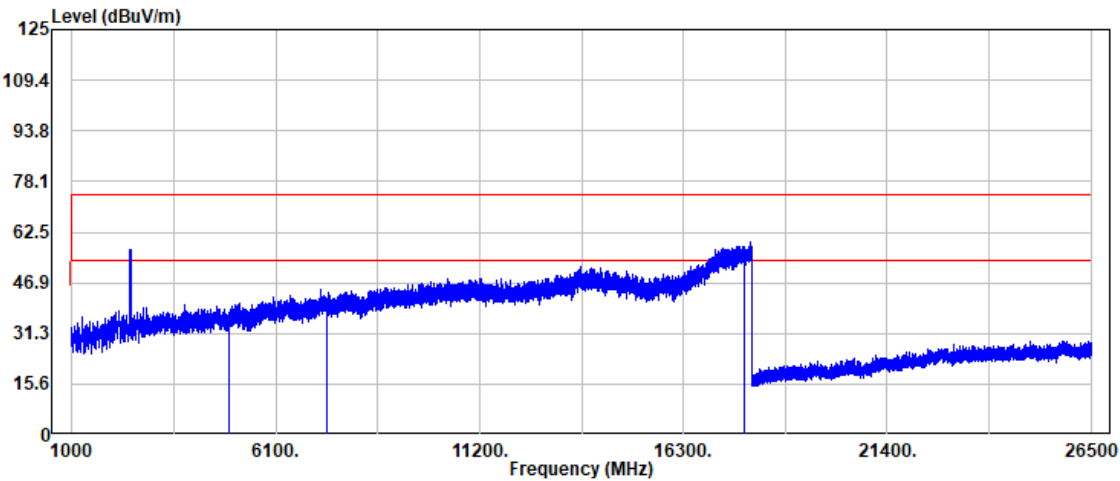

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	34.46	2.99	37.45	74.00	-36.55	Peak
4924.00	27.60	2.99	30.59	54.00	-23.41	Average
7386.00	32.94	9.04	41.98	74.00	-32.02	Peak
7386.00	26.18	9.04	35.22	54.00	-18.78	Average
17810.00	32.73	25.50	58.23	74.00	-15.77	Peak
17810.00	24.31	25.50	49.81	54.00	-4.19	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

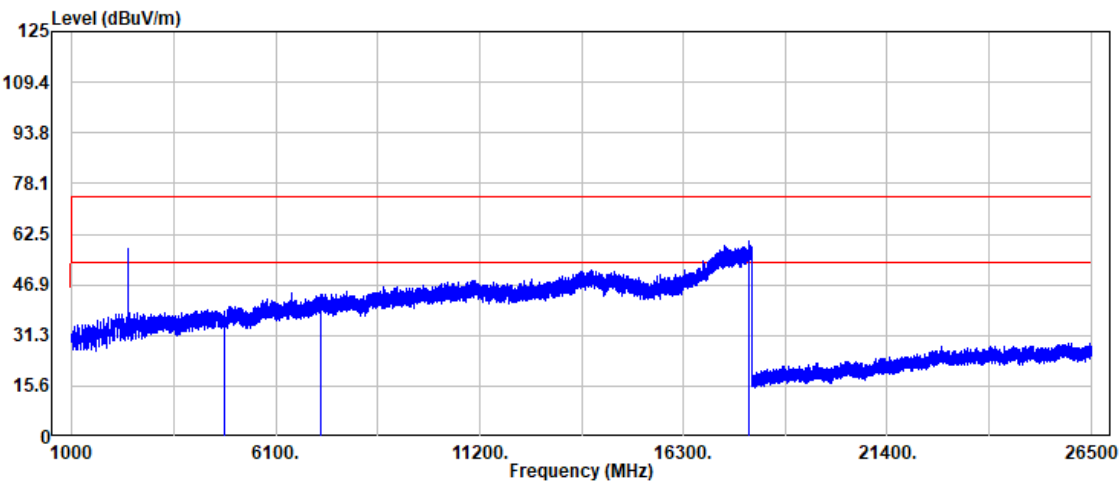

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	34.77	2.33	37.10	74.00	-36.90	Peak
4824.00	27.68	2.33	30.01	54.00	-23.99	Average
7236.00	34.69	9.17	43.86	74.00	-30.14	Peak
7236.00	26.47	9.17	35.64	54.00	-18.36	Average
17959.00	34.89	25.57	60.46	74.00	-13.54	Peak
17959.00	24.11	25.57	49.68	54.00	-4.32	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

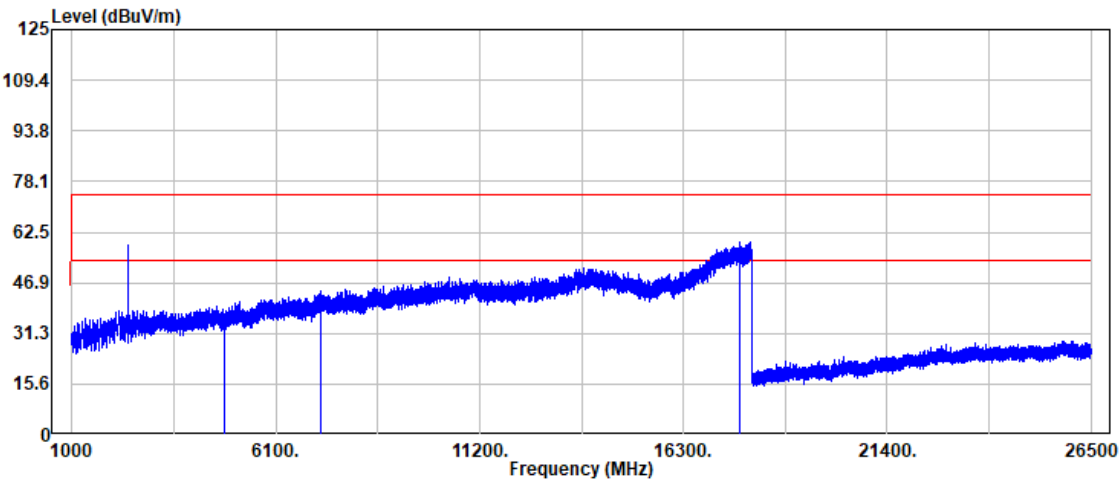

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	34.81	2.33	37.14	74.00	-36.86	Peak
4824.00	27.67	2.33	30.00	54.00	-24.00	Average
7236.00	33.68	9.17	42.85	74.00	-31.15	Peak
7236.00	26.23	9.17	35.40	54.00	-18.60	Average
17709.00	33.50	25.73	59.23	74.00	-14.77	Peak
17709.00	24.28	25.73	50.01	54.00	-3.99	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

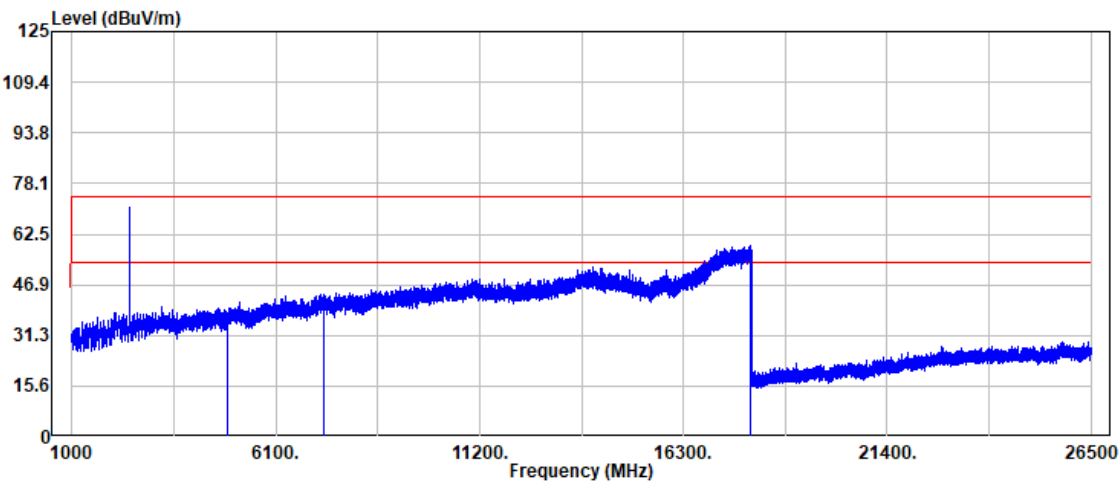

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.14	2.49	38.63	74.00	-35.37	Peak
4874.00	27.83	2.49	30.32	54.00	-23.68	Average
7311.00	34.50	9.16	43.66	74.00	-30.34	Peak
7311.00	26.54	9.16	35.70	54.00	-18.30	Average
17978.00	32.64	26.10	58.74	74.00	-15.26	Peak
17978.00	24.19	26.10	50.29	54.00	-3.71	Average


Project No: TM-2601000305P
Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 142 / 156
Rev.: 00

Project No : TM-2601000305P
Operation Band : G
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 21

Test Date : 2026-02-04
Temp./Humi. : 25.5/52
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

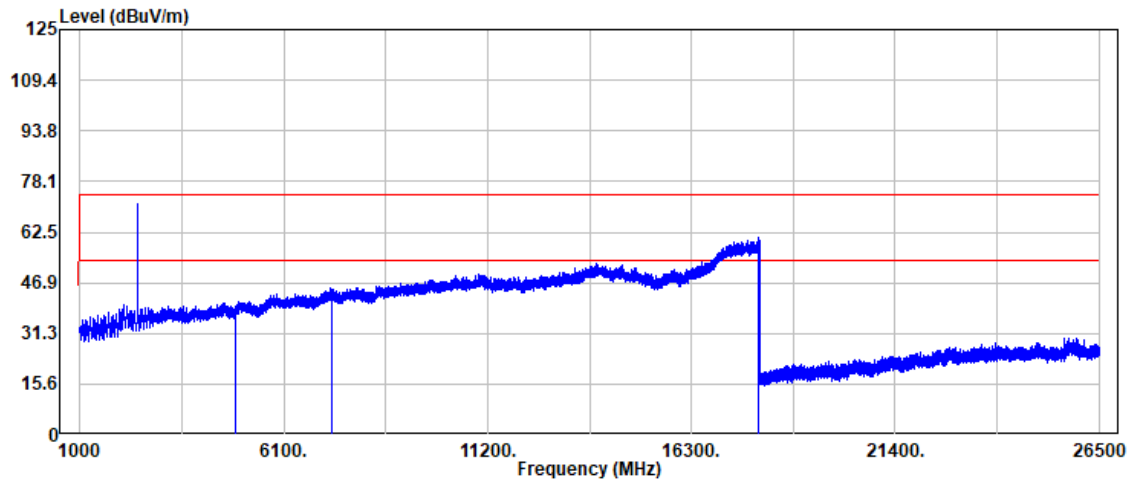

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.55	2.49	39.04	74.00	-34.96	Peak
4874.00	27.87	2.49	30.36	54.00	-23.64	Average
7311.00	35.57	9.16	44.73	74.00	-29.27	Peak
7311.00	26.05	9.16	35.21	54.00	-18.79	Average
17981.00	34.44	26.18	60.62	74.00	-13.38	Peak
17981.00	24.17	26.18	50.35	54.00	-3.65	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 143 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

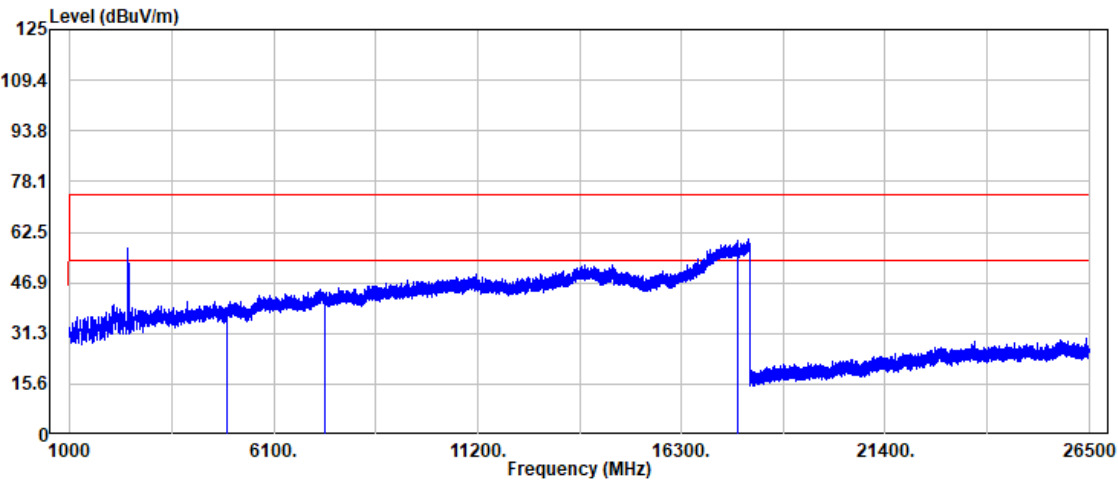

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.98	2.99	38.97	74.00	-35.03	Peak
4924.00	27.35	2.99	30.34	54.00	-23.66	Average
7386.00	34.48	9.04	43.52	74.00	-30.48	Peak
7386.00	26.47	9.04	35.51	54.00	-18.49	Average
17710.00	34.38	25.70	60.08	74.00	-13.92	Peak
17710.00	24.28	25.70	49.98	54.00	-4.02	Average



Project No : TM-2601000305P

Operation Band : G

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 21


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

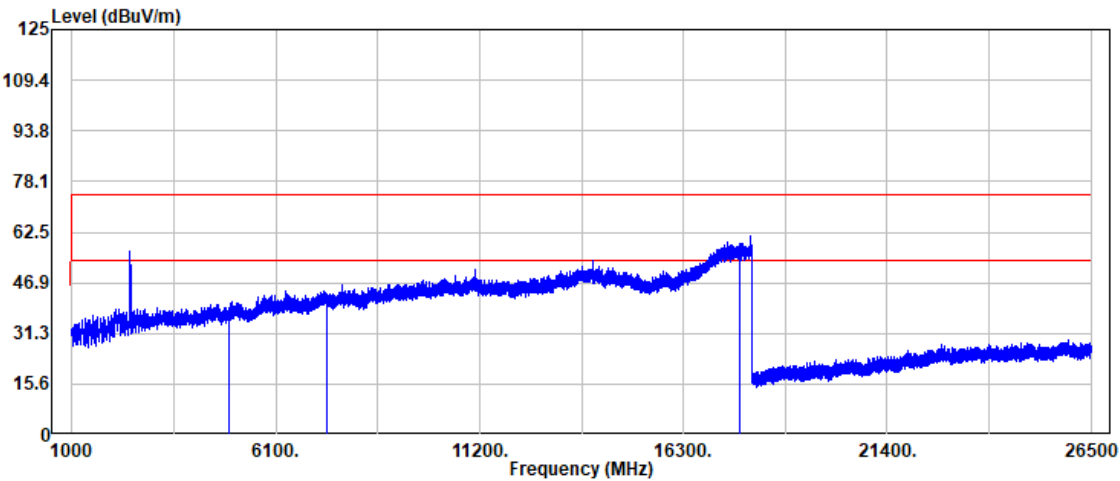

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.29	2.99	39.28	74.00	-34.72	Peak
4924.00	27.51	2.99	30.50	54.00	-23.50	Average
7386.00	34.25	9.04	43.29	74.00	-30.71	Peak
7386.00	26.28	9.04	35.32	54.00	-18.68	Average
17697.00	33.24	25.94	59.18	74.00	-14.82	Peak
17697.00	24.19	25.94	50.13	54.00	-3.87	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17.5


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

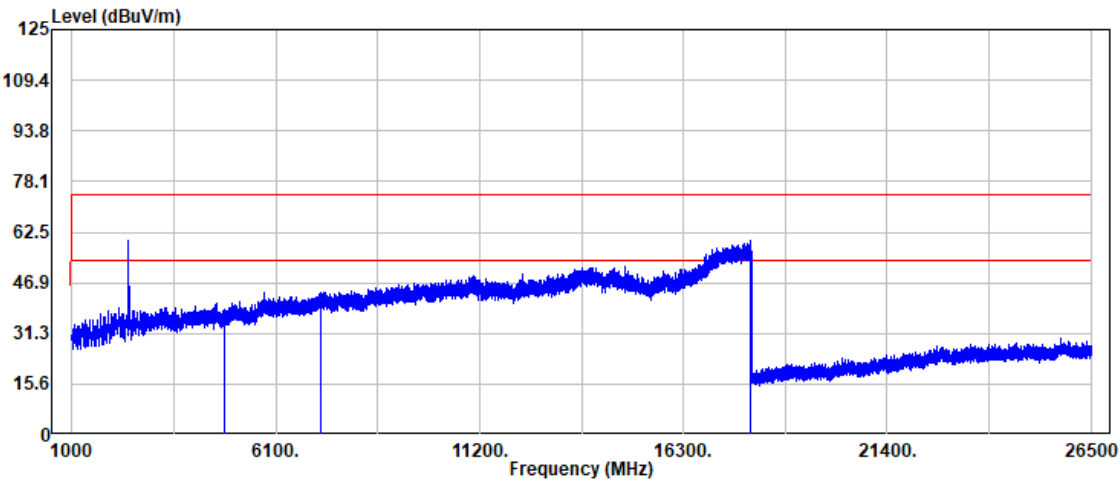

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.35	2.33	38.68	74.00	-35.32	Peak
4824.00	27.70	2.33	30.03	54.00	-23.97	Average
7236.00	34.88	9.17	44.05	74.00	-29.95	Peak
7236.00	26.52	9.17	35.69	54.00	-18.31	Average
17965.00	34.05	25.74	59.79	74.00	-14.21	Peak
17965.00	24.26	25.74	50.00	54.00	-4.00	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2412 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17.5


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

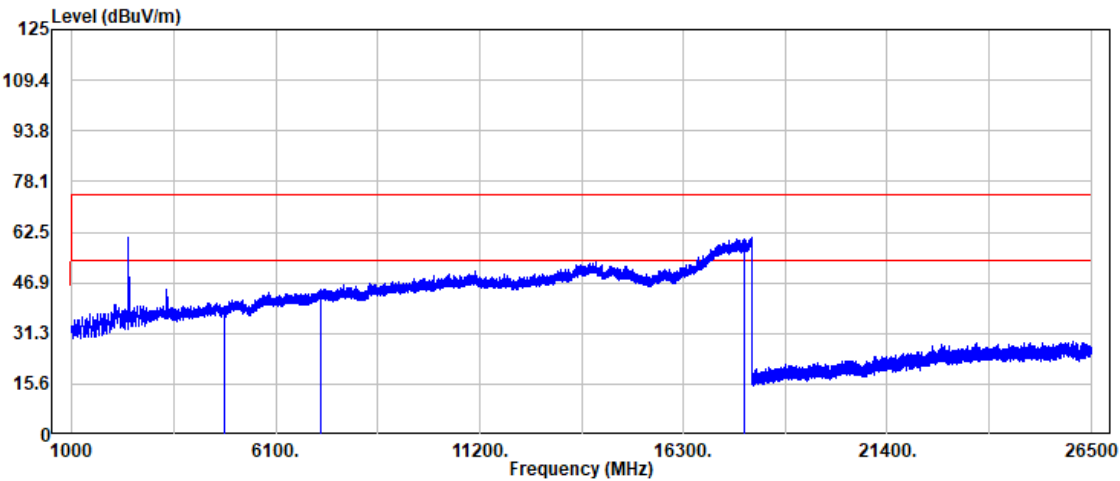

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.04	2.33	39.37	74.00	-34.63	Peak
4824.00	27.51	2.33	29.84	54.00	-24.16	Average
7236.00	35.31	9.17	44.48	74.00	-29.52	Peak
7236.00	26.29	9.17	35.46	54.00	-18.54	Average
17817.00	34.70	25.46	60.16	74.00	-13.84	Peak
17817.00	24.30	25.46	49.76	54.00	-4.24	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 147 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

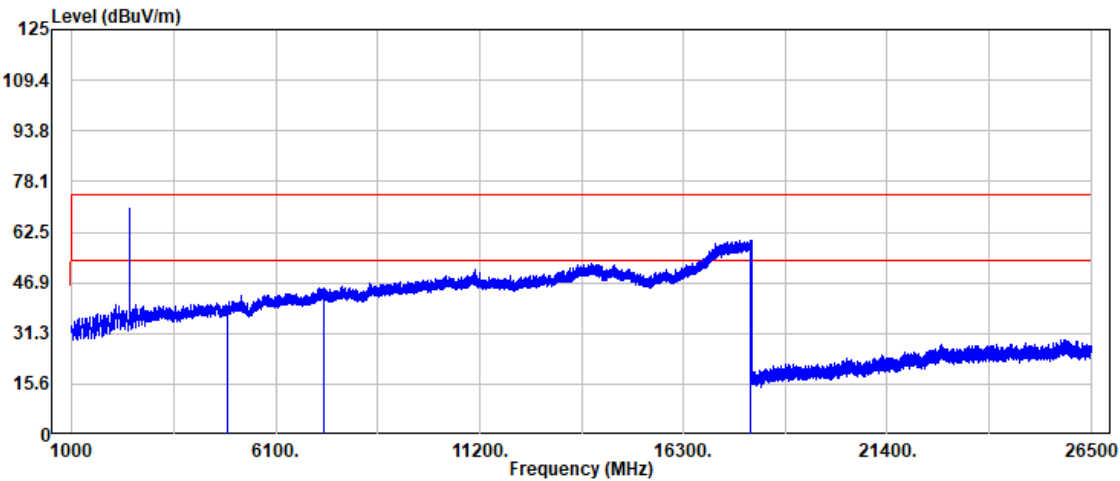

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	37.82	2.49	40.31	74.00	-33.69	Peak
4874.00	27.52	2.49	30.01	54.00	-23.99	Average
7311.00	36.25	9.16	45.41	74.00	-28.59	Peak
7311.00	26.15	9.16	35.31	54.00	-18.69	Average
17964.00	34.28	25.71	59.99	74.00	-14.01	Peak
17964.00	24.13	25.71	49.84	54.00	-4.16	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 19


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

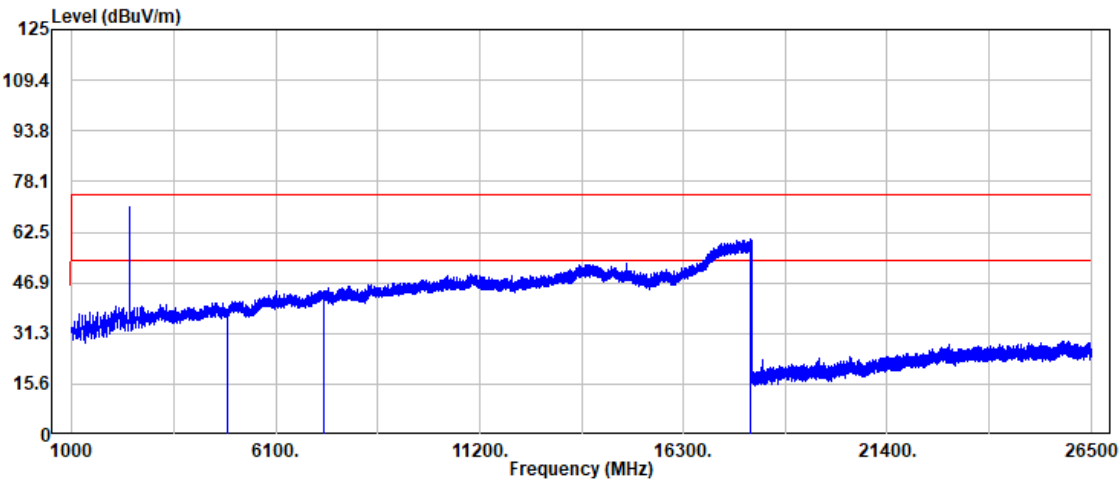

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.39	2.49	38.88	74.00	-35.12	Peak
4874.00	27.50	2.49	29.99	54.00	-24.01	Average
7311.00	35.16	9.16	44.32	74.00	-29.68	Peak
7311.00	26.25	9.16	35.41	54.00	-18.59	Average
17984.00	33.65	26.26	59.91	74.00	-14.09	Peak
17984.00	24.12	26.26	50.38	54.00	-3.62	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 149 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

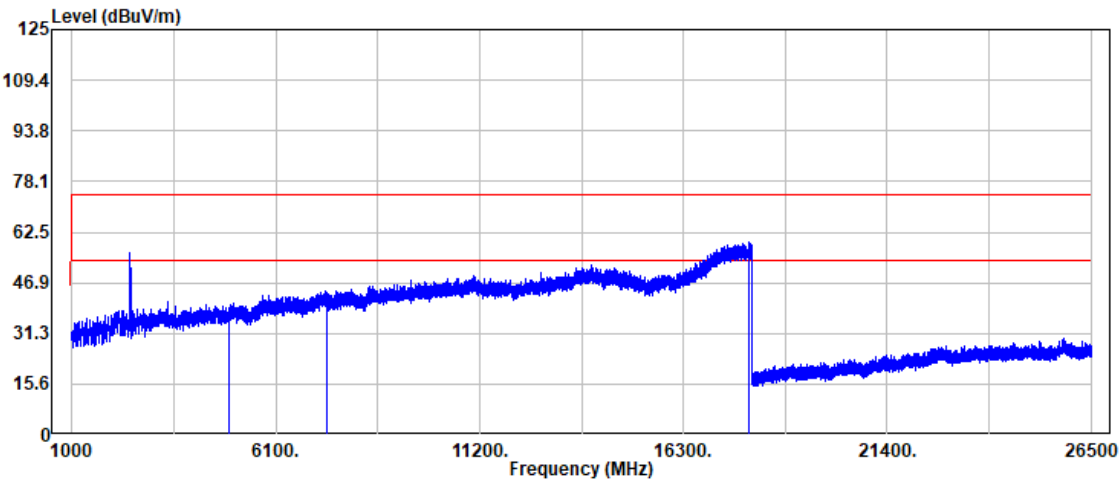

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.96	2.99	38.95	74.00	-35.05	Peak
4924.00	27.29	2.99	30.28	54.00	-23.72	Average
7386.00	34.00	9.04	43.04	74.00	-30.96	Peak
7386.00	26.16	9.04	35.20	54.00	-18.80	Average
17925.00	34.24	25.27	59.51	74.00	-14.49	Peak
17925.00	24.16	25.27	49.43	54.00	-4.57	Average



Project No : TM-2601000305P

Operation Band : AX20

Frequency : 2462 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

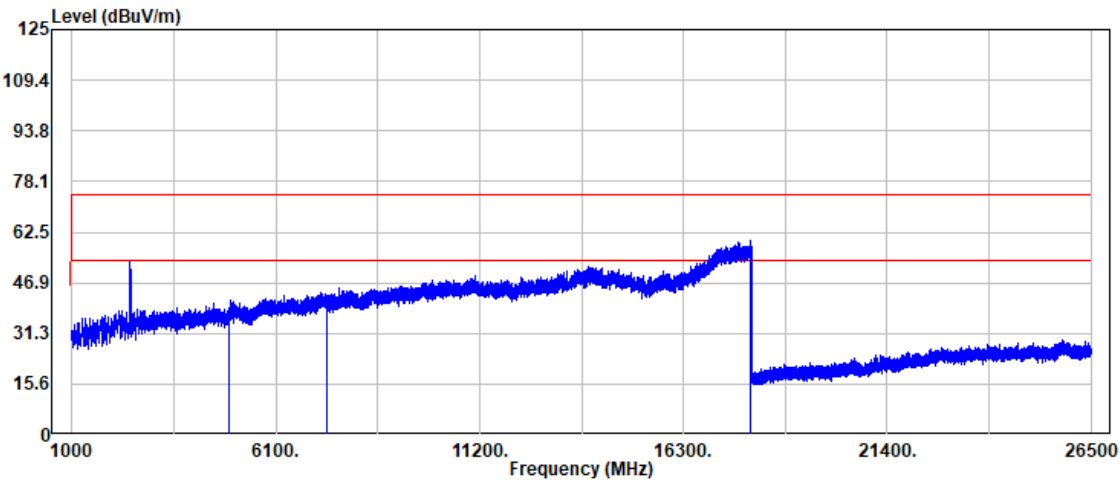

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.98	2.99	38.97	74.00	-35.03	Peak
4924.00	27.26	2.99	30.25	54.00	-23.75	Average
7386.00	33.14	9.04	42.18	74.00	-31.82	Peak
7386.00	26.36	9.04	35.40	54.00	-18.60	Average
17962.00	33.94	25.66	59.60	74.00	-14.40	Peak
17962.00	24.16	25.66	49.82	54.00	-4.18	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : TX

EUT Pol : H

Setting : 16


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

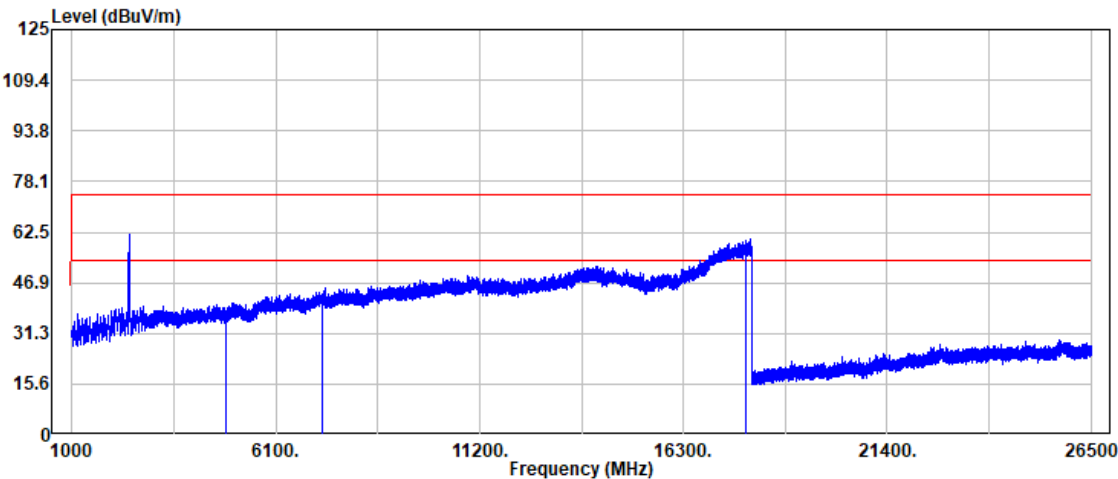

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.66	2.32	37.98	74.00	-36.02	Peak
4844.00	27.59	2.32	29.91	54.00	-24.09	Average
7266.00	34.34	9.21	43.55	74.00	-30.45	Peak
7266.00	26.11	9.21	35.32	54.00	-18.68	Average
17875.00	34.43	25.25	59.68	74.00	-14.32	Peak
17875.00	24.10	25.25	49.35	54.00	-4.65	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2422 MHz

Operation Mode : TX

EUT Pol : H

Setting : 16


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

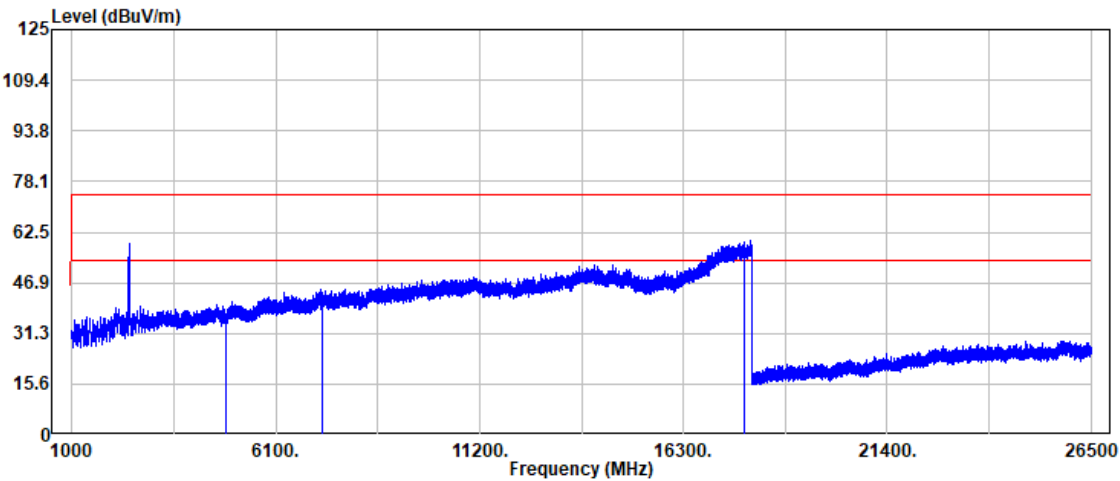

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	34.95	2.32	37.27	74.00	-36.73	Peak
4844.00	27.26	2.32	29.58	54.00	-24.42	Average
7266.00	34.54	9.21	43.75	74.00	-30.25	Peak
7266.00	26.25	9.21	35.46	54.00	-18.54	Average
17837.00	34.17	25.35	59.52	74.00	-14.48	Peak
17837.00	24.14	25.35	49.49	54.00	-4.51	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 153 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

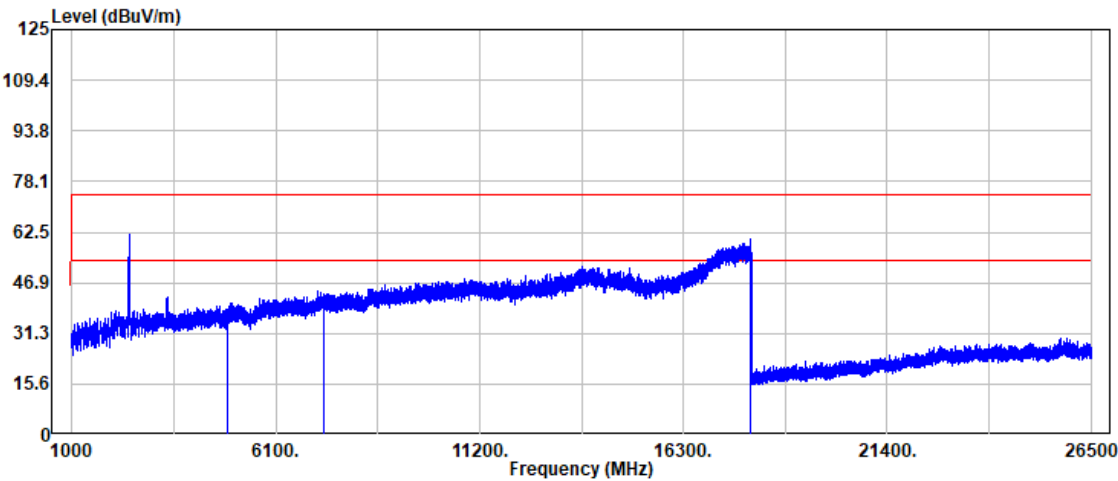

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.61	2.49	38.10	74.00	-35.90	Peak
4874.00	27.65	2.49	30.14	54.00	-23.86	Average
7311.00	33.71	9.16	42.87	74.00	-31.13	Peak
7311.00	26.26	9.16	35.42	54.00	-18.58	Average
17985.00	33.96	26.29	60.25	74.00	-13.75	Peak
17985.00	24.16	26.29	50.45	54.00	-3.55	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2437 MHz

Operation Mode : TX

EUT Pol : H

Setting : 17


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

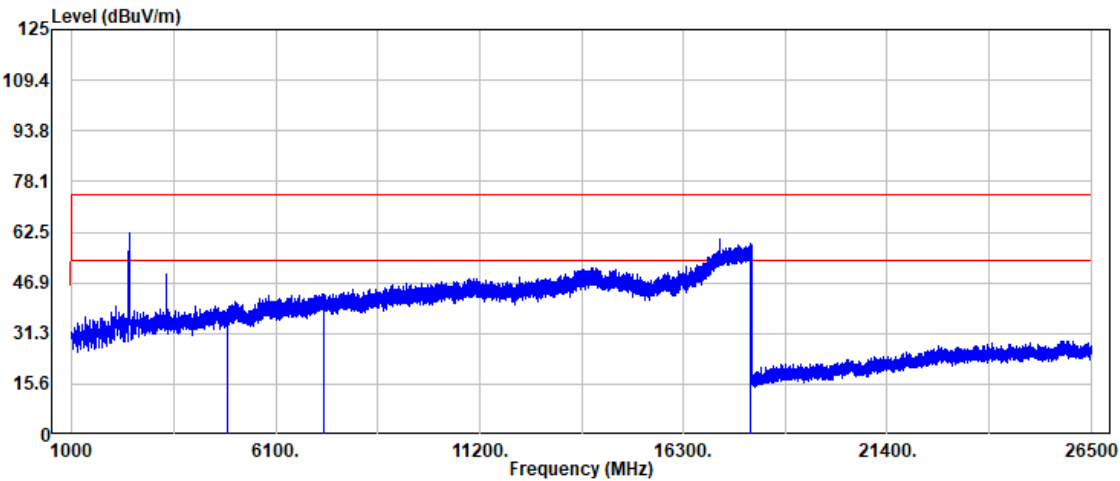

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.03	2.49	38.52	74.00	-35.48	Peak
4874.00	27.59	2.49	30.08	54.00	-23.92	Average
7311.00	34.16	9.16	43.32	74.00	-30.68	Peak
7311.00	26.19	9.16	35.35	54.00	-18.65	Average
17979.00	32.67	26.13	58.80	74.00	-15.20	Peak
17979.00	24.17	26.13	50.30	54.00	-3.70	Average



Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : VERTICAL

Engineer : Ben.Yang

Test Chamber : 966A

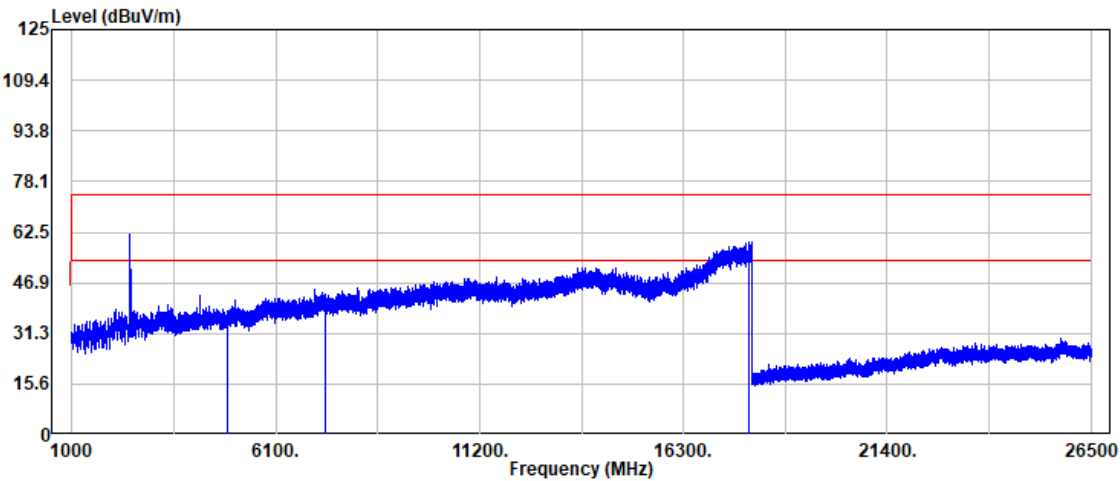

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	35.50	2.73	38.23	74.00	-35.77	Peak
4904.00	27.47	2.73	30.20	54.00	-23.80	Average
7356.00	33.50	9.04	42.54	74.00	-31.46	Peak
7356.00	26.51	9.04	35.55	54.00	-18.45	Average
17939.00	33.90	25.30	59.20	74.00	-14.80	Peak
17939.00	24.16	25.30	49.46	54.00	-4.54	Average



Project No: TM-2601000305P

Report No.: TMWK2601000342KR

FCC ID: 2BPQQ-I9074L

Page: 156 / 156

Rev.: 00

Project No : TM-2601000305P

Operation Band : AX40

Frequency : 2452 MHz

Operation Mode : TX

EUT Pol : H

Setting : 15


Test Date : 2026-02-04

Temp./Humi. : 25.5/52

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

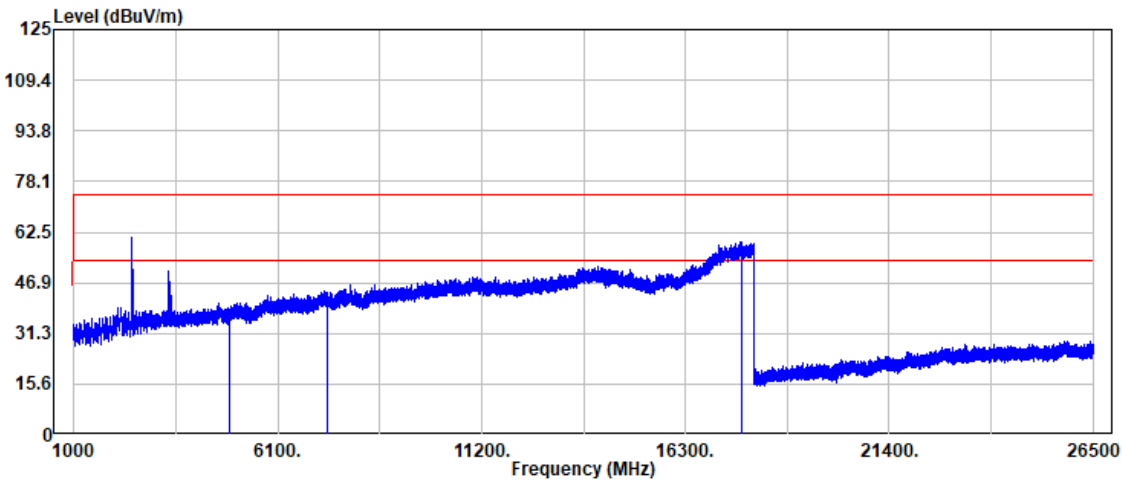

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.11	2.73	38.84	74.00	-35.16	Peak
4904.00	27.44	2.73	30.17	54.00	-23.83	Average
7356.00	34.63	9.04	43.67	74.00	-30.33	Peak
7356.00	26.63	9.04	35.67	54.00	-18.33	Average
17699.00	33.26	25.97	59.23	74.00	-14.77	Peak
17699.00	24.20	25.97	50.17	54.00	-3.83	Average

- End of Test Report -