



RADIO TEST REPORT

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Bridge
Model No.	:	L2526
FCC ID	:	2BPSN-L2526
IC	:	34118-L2526
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020, RSS-247 Issue 4 July 24, 2025, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021), ANSI C63 10-2020+Cor.1-2023+C63.10a- 2024+Errata to C63.10a-2024
Report No.	:	DDT-RE25092317-2E01
Issue Date	:	2026/01/08
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	8
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	10
3.	Equipment Used During Conductive Test	11
4.	6dB Bandwidth	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Test graphs	14
5.	99% Bandwidth	18
5.1.	Block diagram of test setup	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test result.....	19
5.5.	Test graphs	20
6.	Conducted Output Power	24
6.1.	Block diagram of test setup	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result average.....	25
7.	Power Spectral Density	26
7.1.	Block diagram of test setup	26
7.2.	Limits	26
7.3.	Test procedure	26
7.4.	Test result.....	27
7.5.	Test graphs	28
8.	Band Edge Compliance (Conducted Method)	32
8.1.	Block diagram of test setup	32

8.2.	Limits	32
8.3.	Test procedure	32
8.4.	Test result.....	33
8.5.	Test graphs	34
9.	RF Conducted Spurious Emissions.....	37
9.1.	Block diagram of test setup	37
9.2.	Limits	37
9.3.	Test procedure	37
9.4.	Test result.....	38
9.5.	Test graphs	39
10.	Duty Cycle	51
10.1.	Block diagram of test setup	51
10.2.	Limit.....	51
10.3.	Test procedure	51
10.4.	Test result.....	52
10.5.	Test graphs	53
11.	Antenna Requirements.....	57
11.1.	Limit.....	57
11.2.	Result	57
12.	Radiated Emission	58
12.1.	Test equipment.....	58
12.2.	Block diagram of test setup	59
12.3.	Limits	60
12.4.	Assistant equipment used for test	62
12.5.	Test procedure	62
12.6.	Test result.....	63
12.7.	Test data	64
13.	Band Edge Compliance.....	72
13.1.	Test equipment.....	72
13.2.	Block diagram of test setup	73
13.3.	Limits	73
13.4.	Assistant equipment used for test	73
13.5.	Test procedure	73
13.6.	Test result.....	73
13.7.	Test data	74
14.	Power Line Conducted Emissions.....	90
14.1.	Test equipment.....	90
14.2.	Block diagram of test setup	90

14.3.	Limits	90
14.4.	Assistant equipment used for test	90
14.5.	Test procedure	90
14.6.	Test result.....	91
14.7.	Test data	92
15.	Test Setup Photograph	94
16.	Photos of the EUT	97

Test Report Declare

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Bridge
Model No.	:	L2526
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020,
RSS-247 Issue 4 July 24, 2025,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021),
ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25092317-2E01		
Date of Receipt:	2025/10/16	Date of Test:	2025/10/16 - 2025/12/24

Created: Tiger Mo	Reviewed: Johnson Huang	Approved: Ella Gong
		
2025/12/29	2026/01/08	2026/01/08

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/01/08	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	47 CFR Part 15 15.247(a)(2), RSS-247 clause 6.3.1(a), RSS-Gen clause 6.7	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3), RSS-247 clause 6.3.2	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.247(e), RSS-247 clause 6.3.1(b)	/	Pass
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d), RSS-247 clause 6.6	/	Pass
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
7	Antenna Requirement	47 CFR Part 15 15.203, RSS-Gen clause 6.8	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a), RSS-Gen clause 8.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: Wireless Bridge
Model Number	: L2526
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: PoE Input 24V, 0.5A
Antenna Type	: PCB Antenna
Max Antenna Gain(dBi)	: 2.53

Radio Technology	: IEEE 802.11b/g/n
Operation frequency	: IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
POE Switching Power Supply	RISUNIC Technology (ShenZhen) Co., Ltd.	RP023-2400500ZG	Input: AC 100-240V, 50/60Hz 0.5A Max. output: DC 24.0V/0.5A 12.0W +(4,5) pins, -(7,8) pins
Power cable	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool Dbg.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency				
Tested mode	Tx Power Setting	Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1			
IEEE 802.11b	20	1	LCH: CH1	2412
	20	1	MCH: CH6	2437
	20	1	HCH: CH11	2462
IEEE 802.11g	17.5	6	LCH: CH1	2412
	17.5	6	MCH: CH6	2437
	17.5	6	HCH: CH11	2462
IEEE 802.11n HT20	16	MCS 0	LCH: CH1	2412
	16	MCS 0	MCH: CH6	2437
	16	MCS 0	HCH: CH11	2462
IEEE 802.11n HT40	12.5	MCS 0	LCH: CH3	2422
	12.5	MCS 0	MCH: CH6	2437
	12.5	MCS 0	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz $\leq$ f < 3.6 GHz); 1.38 dB (3.6 GHz $\leq$ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz $\leq$ f < 3.6 GHz); 1.38 dB (3.6 GHz $\leq$ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method) 5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz $\leq$ f < 3.6 GHz); 1.40 dB (3.6 GHz $\leq$ f < 8 GHz) 1.66 dB (8 GHz $\leq$ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3x10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2026/08/10
RF Control Unit	Tonscend	JS0806-2	21I8060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

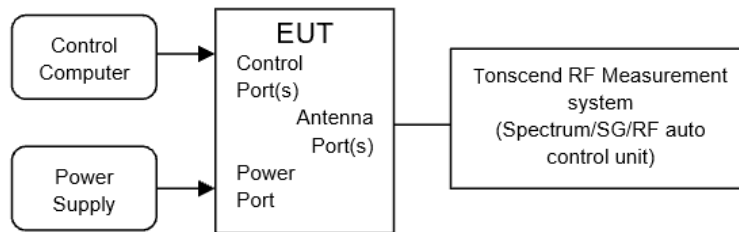

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.16	2406.92	2417.08	0.5	PASS
		2437	10.16	2431.92	2442.08	0.5	PASS
		2462	10.16	2456.92	2467.08	0.5	PASS
11G	Ant1	2412	16.00	2404.00	2420.00	0.5	PASS
		2437	15.96	2429.08	2445.04	0.5	PASS
		2462	16.08	2453.96	2470.04	0.5	PASS
11N20SISO	Ant1	2412	17.28	2403.32	2420.60	0.5	PASS
		2437	17.20	2428.32	2445.52	0.5	PASS
		2462	17.08	2453.36	2470.44	0.5	PASS
11N40SISO	Ant1	2422	35.12	2404.64	2439.76	0.5	PASS
		2437	35.36	2419.24	2454.60	0.5	PASS
		2452	35.04	2434.48	2469.52	0.5	PASS

4.5. Test graphs




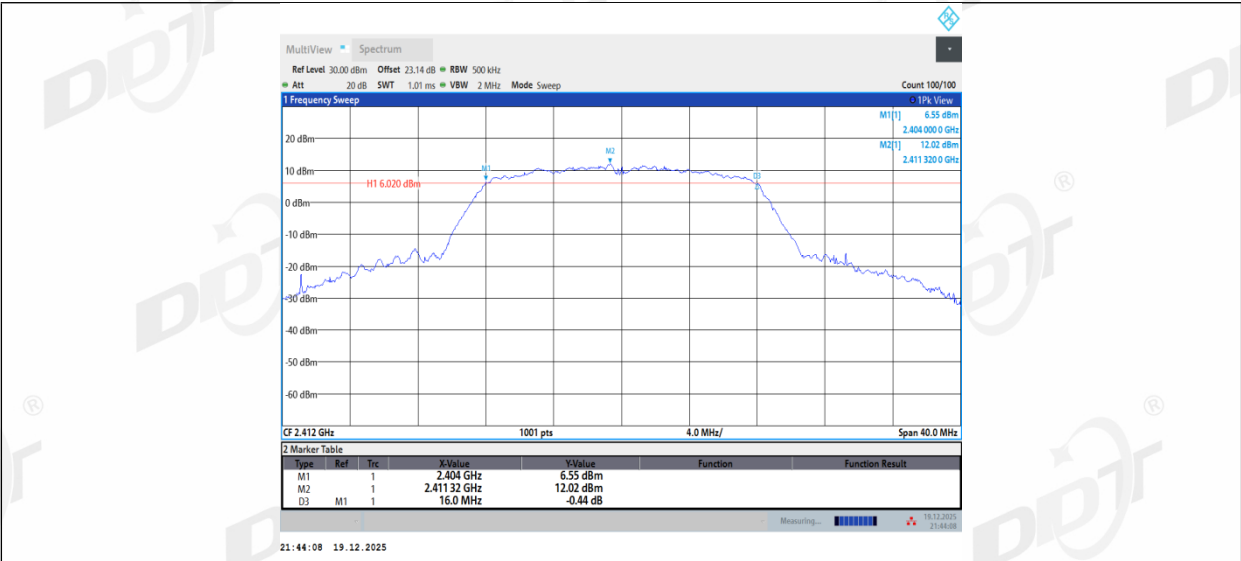


11G_Ant1_2437

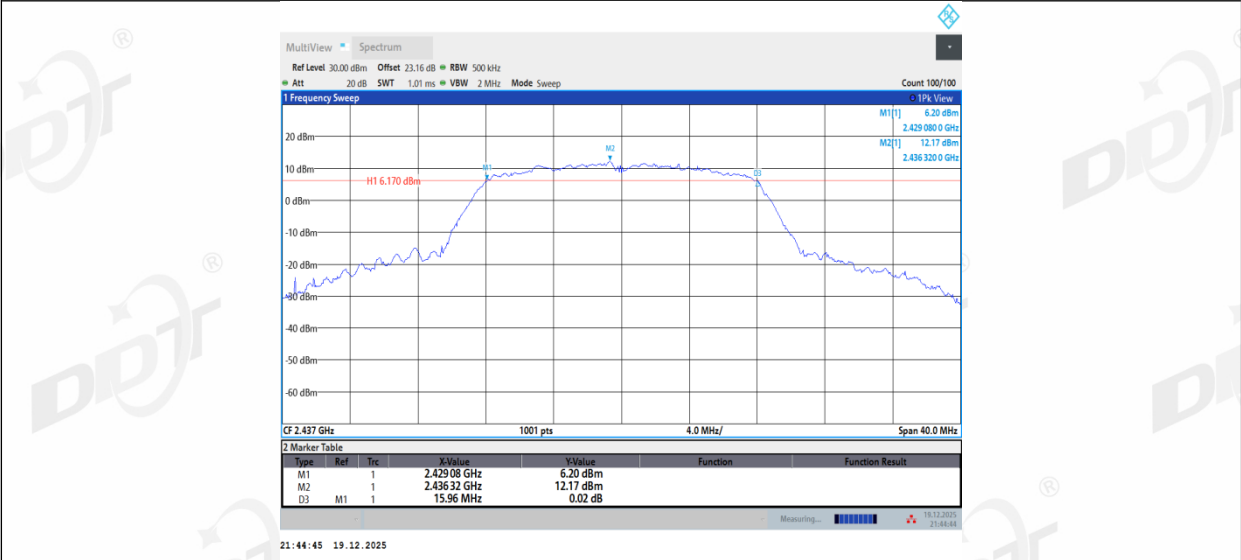


11G_Ant1_2462

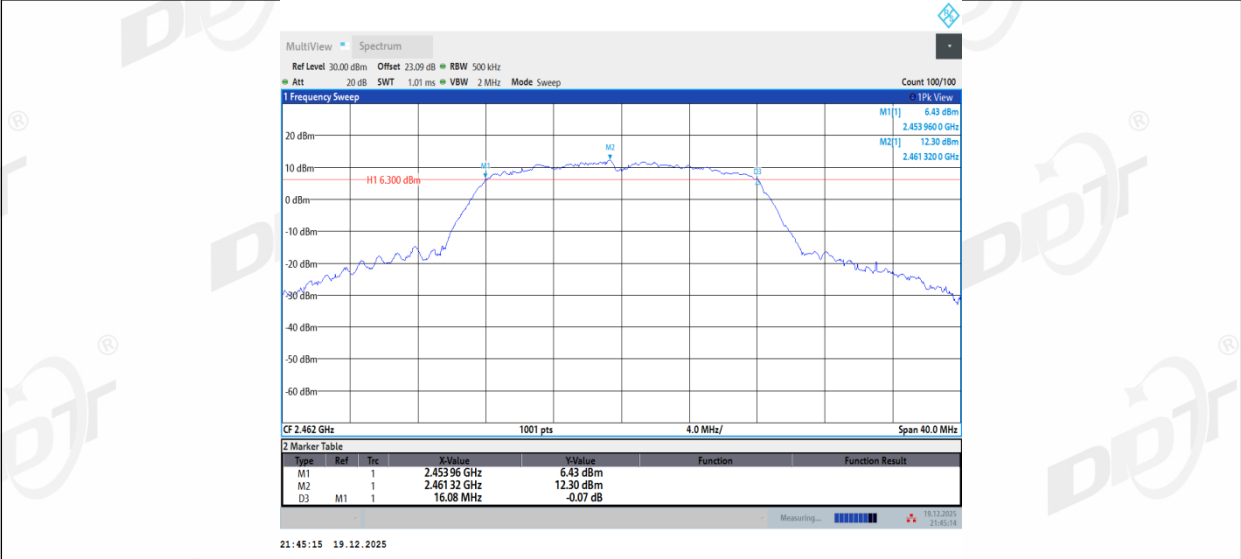


11N20SISO_Ant1_2412

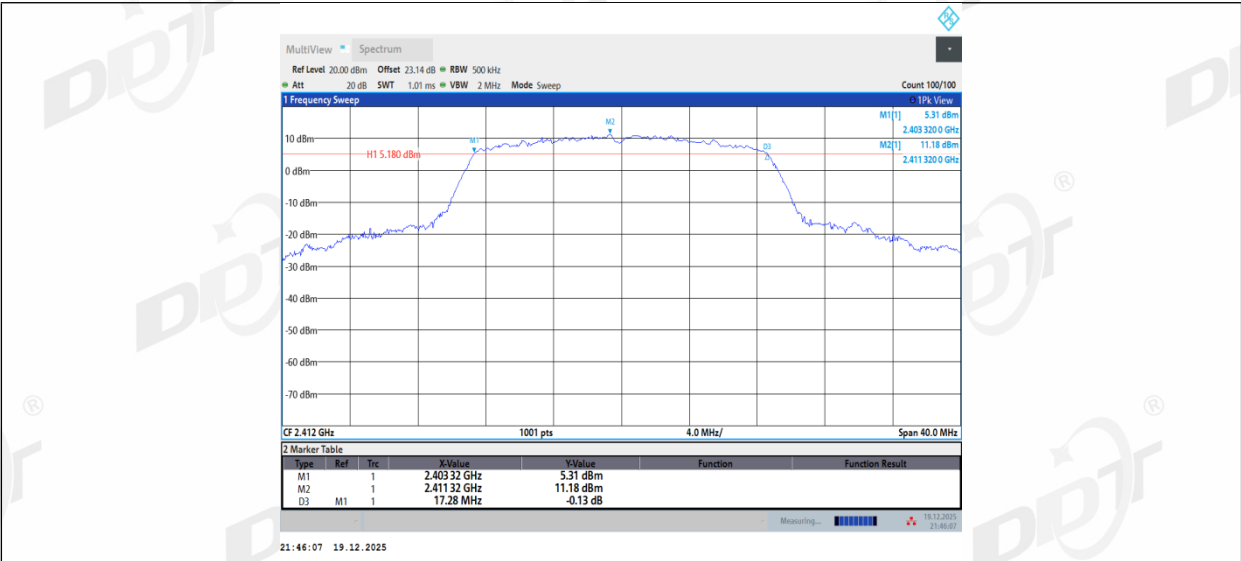


11N20SISO_Ant1_2437

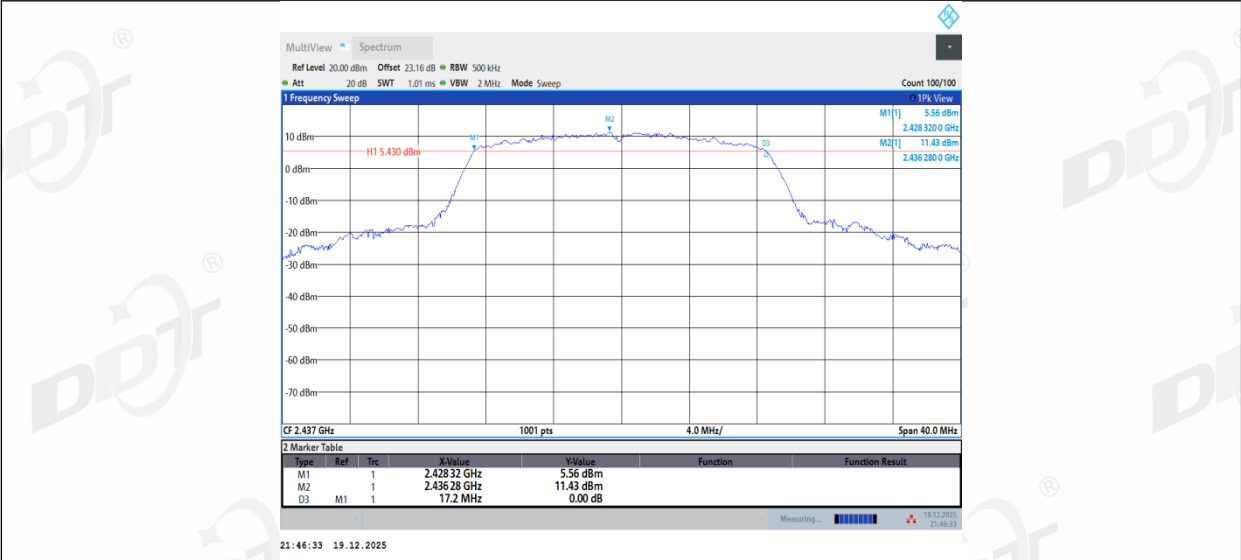


11N20SISO_Ant1_2462

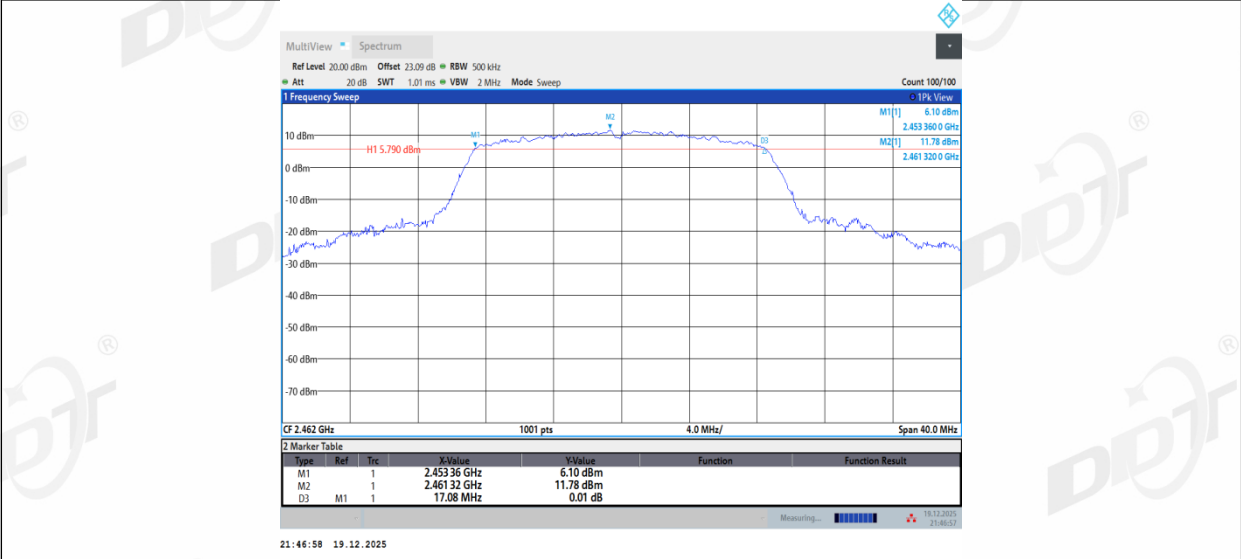


11N40SISO_Ant1_2422

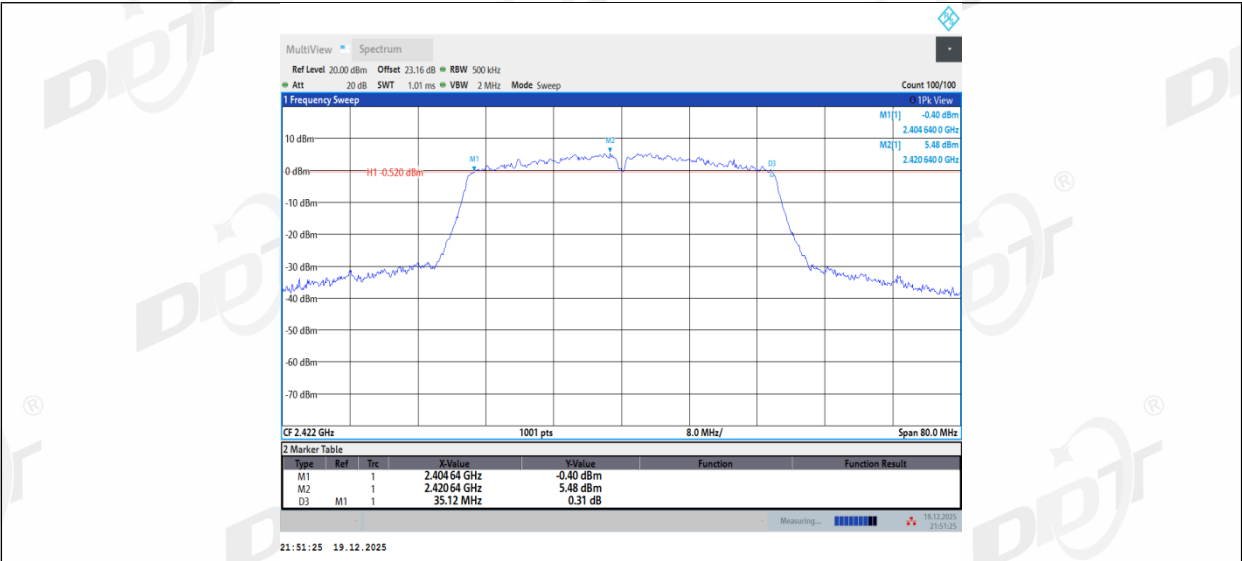

11N40SISO_Ant1_2437

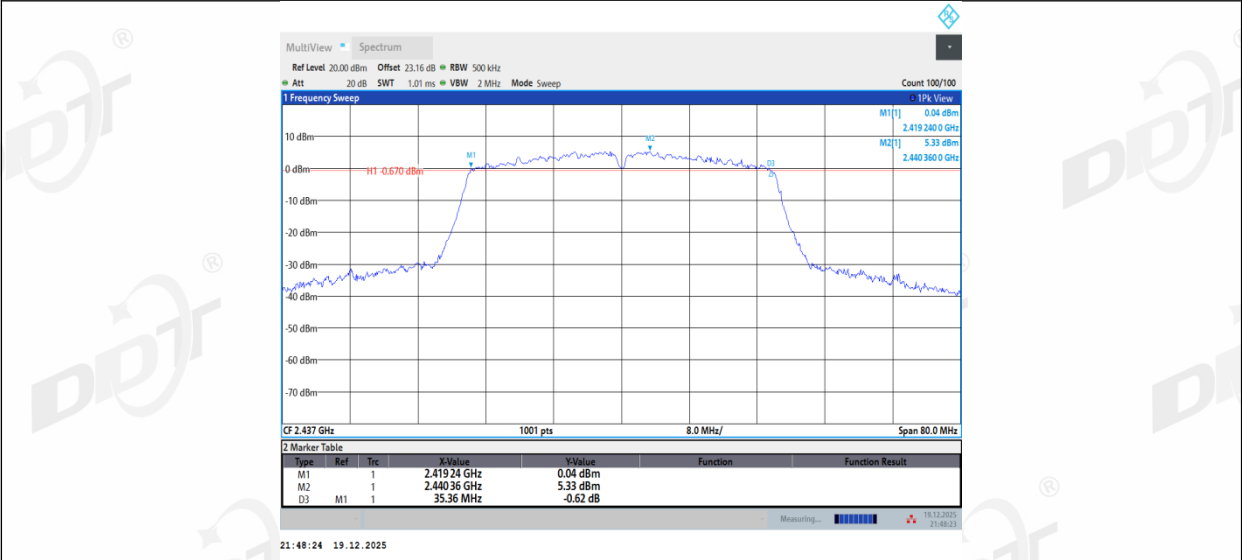


11N40SISO_Ant1_2452

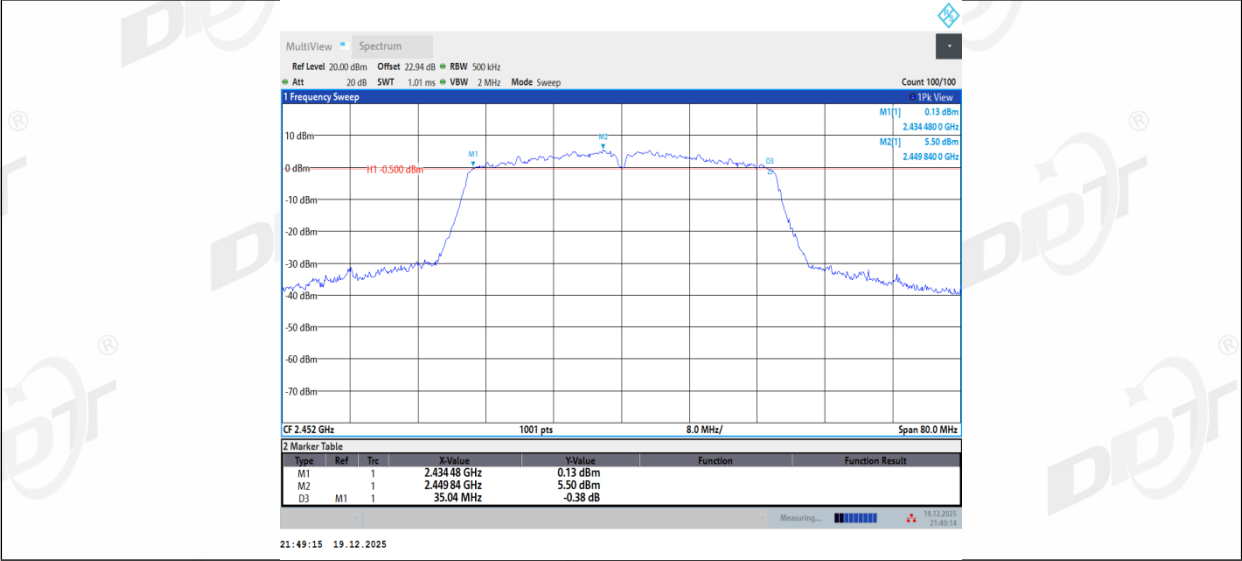

5. 99% Bandwidth

5.1. Block diagram of test setup

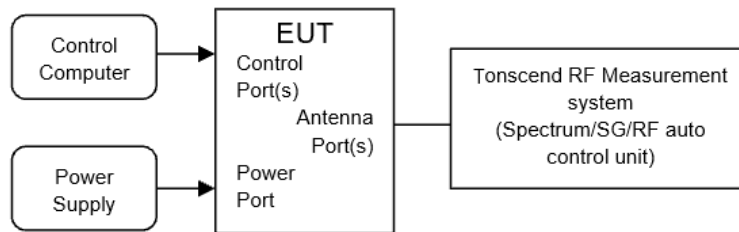

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.784	2404.5375	2419.3211	---	---
		2437	14.734	2429.5881	2444.3220	---	---
		2462	14.644	2454.6654	2469.3093	---	---
11G	Ant1	2412	17.264	2403.2732	2420.5367	---	---
		2437	17.239	2428.3286	2445.5676	---	---
		2462	17.167	2453.3500	2470.5173	---	---
11N20SISO	Ant1	2412	18.030	2402.9494	2420.9791	---	---
		2437	18.006	2427.9720	2445.9776	---	---
		2462	17.956	2453.0067	2470.9628	---	---
11N40SISO	Ant1	2422	36.032	2403.9087	2439.9404	---	---
		2437	36.016	2418.9662	2454.9819	---	---
		2452	36.007	2433.9820	2469.9891	---	---

5.5. Test graphs

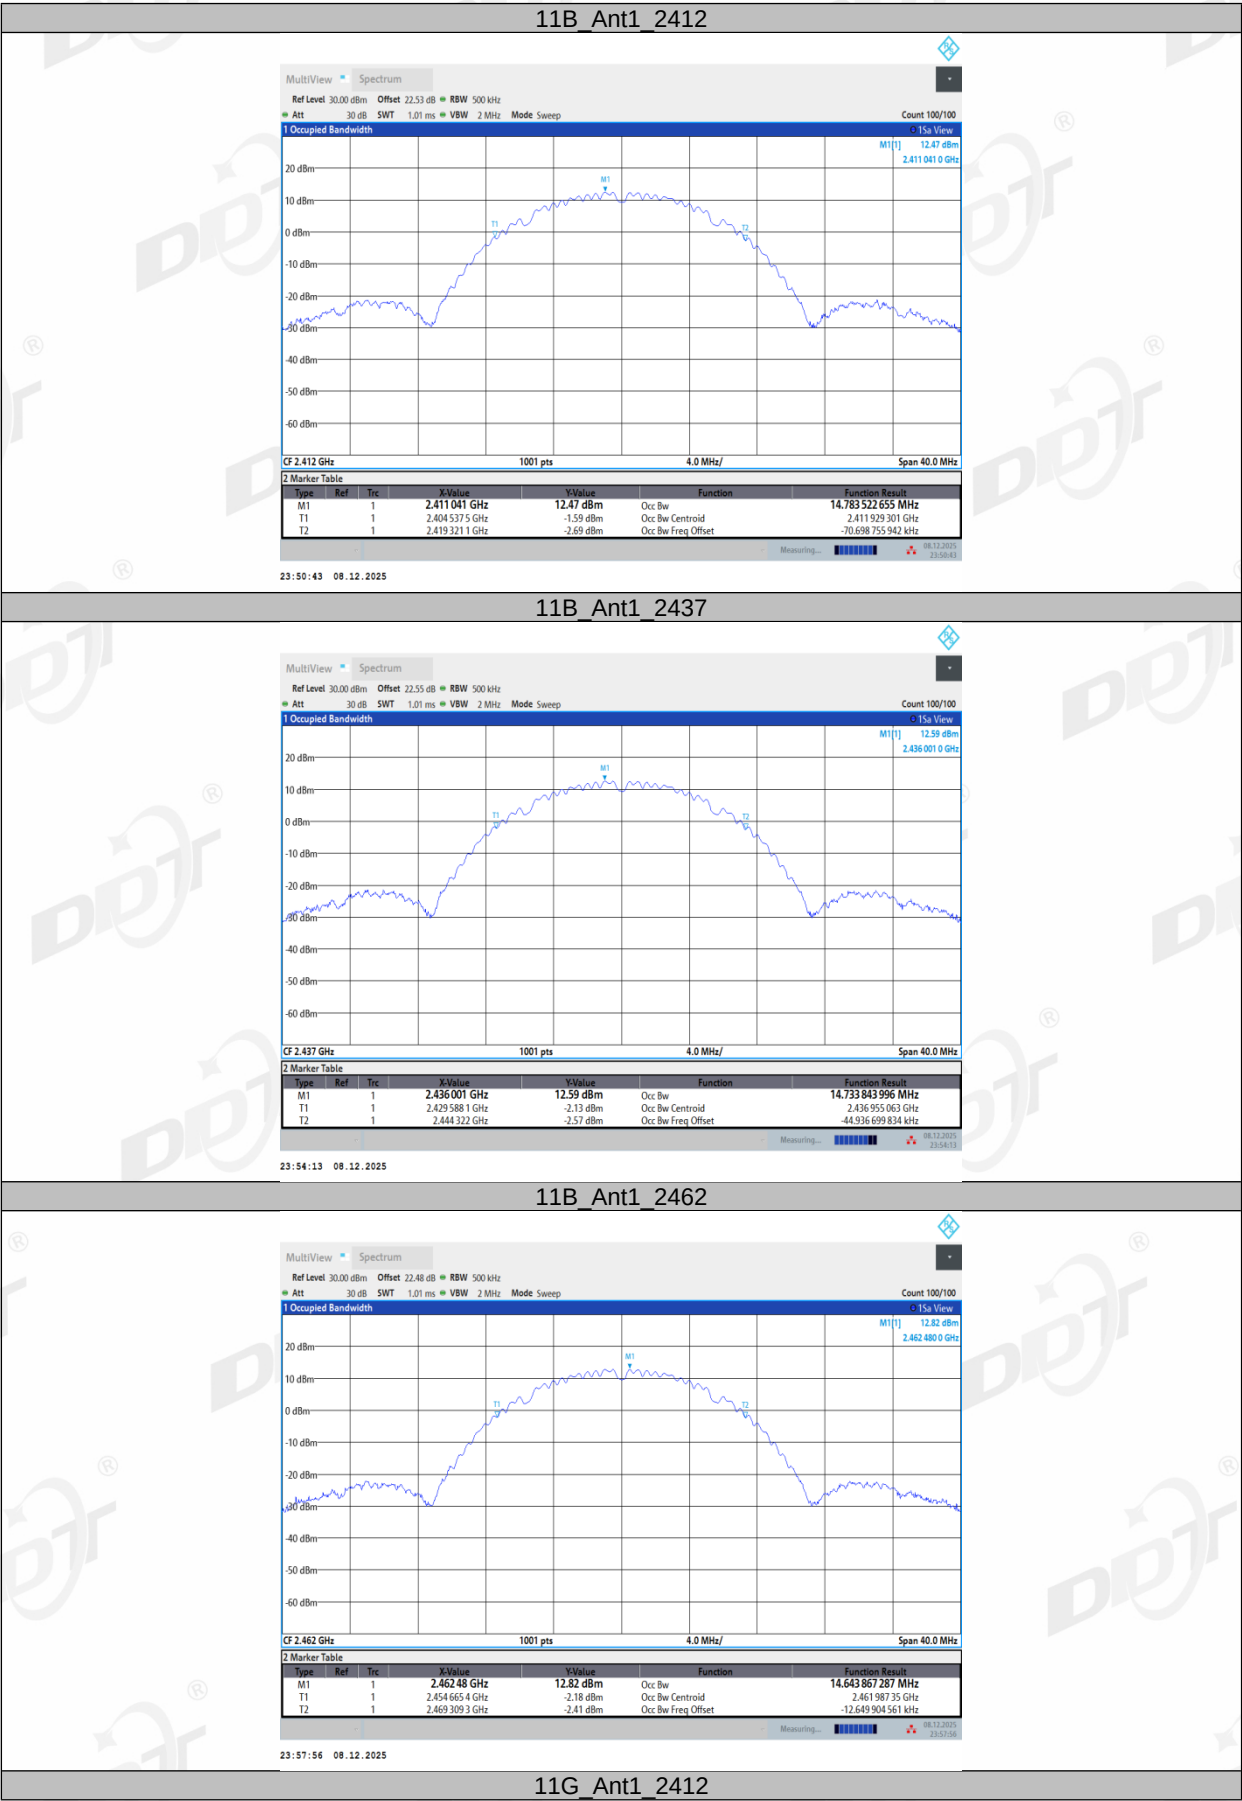


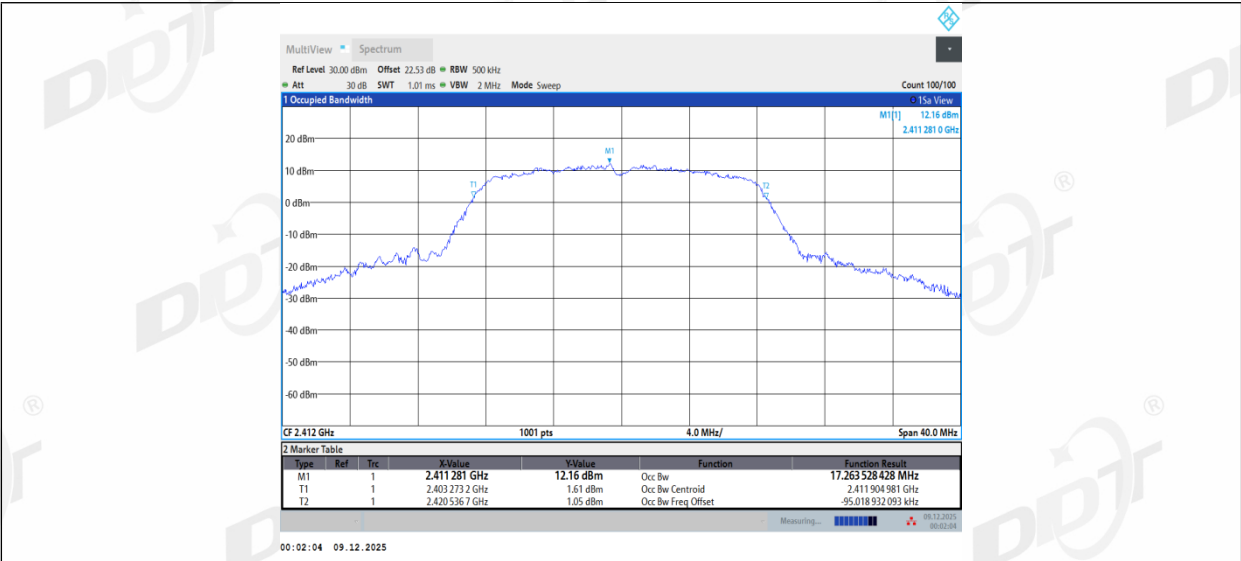


11G_Ant1_2437

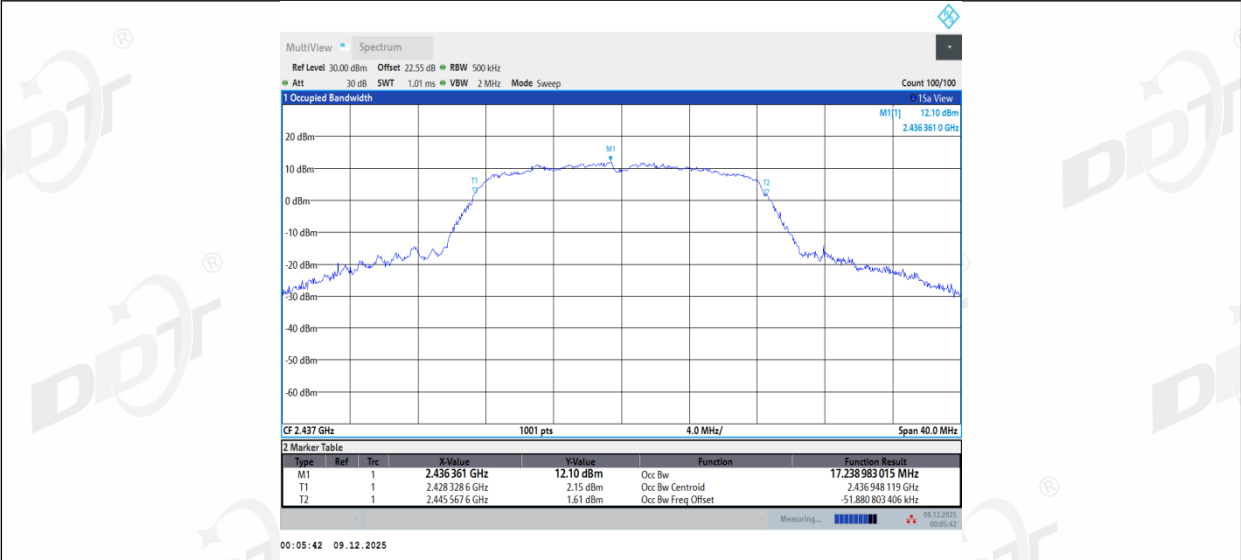


11G_Ant1_2462

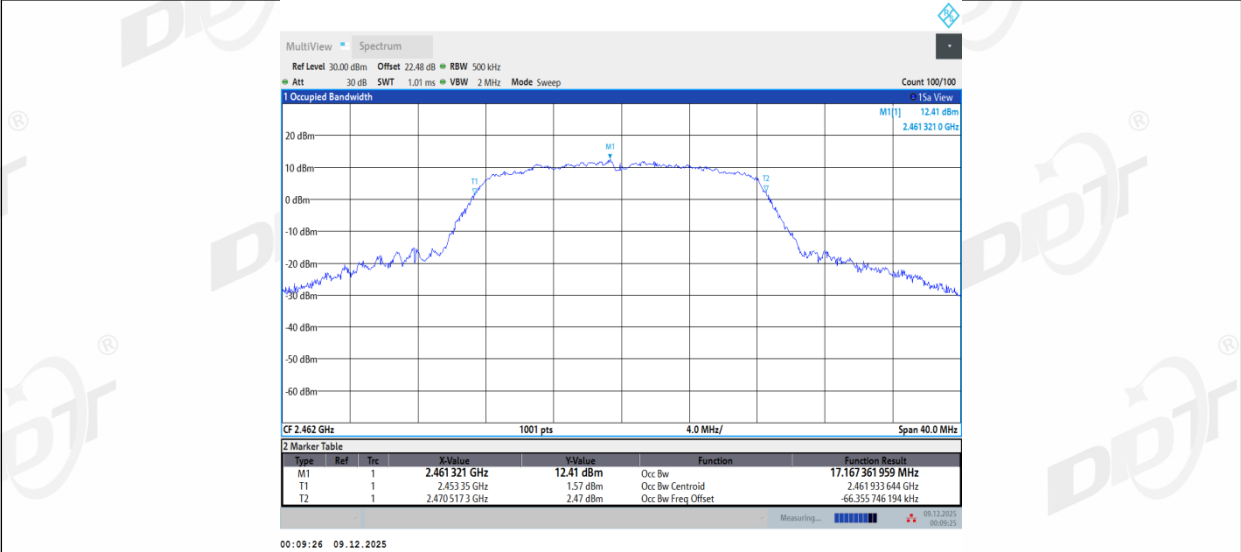


11N20SiSO_Ant1_2412

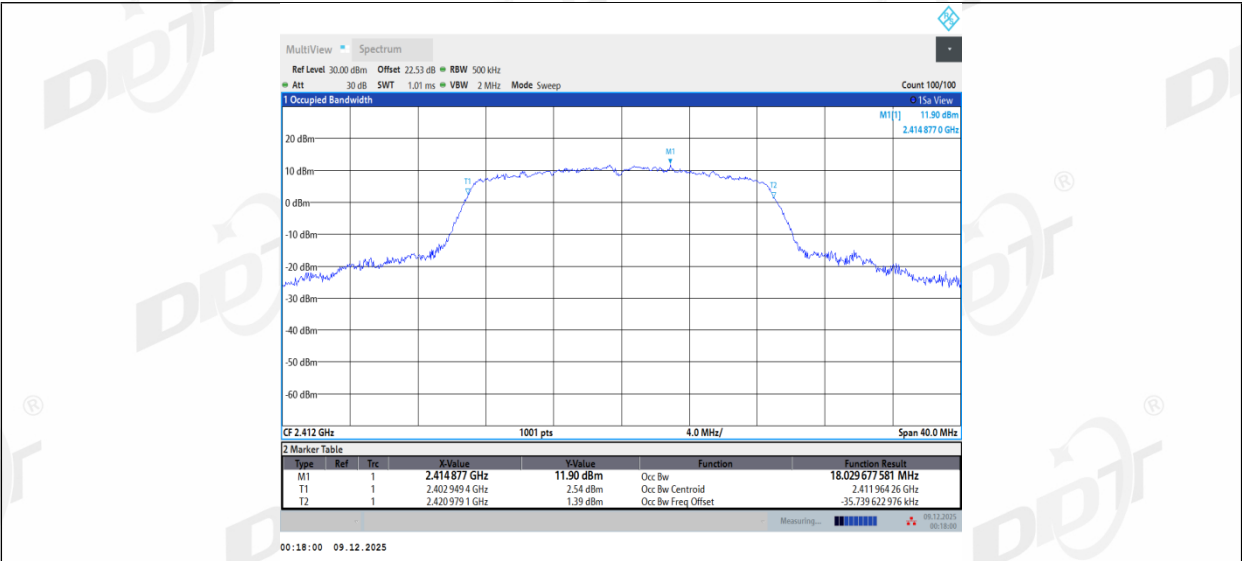


11N20SISO_Ant1_2437

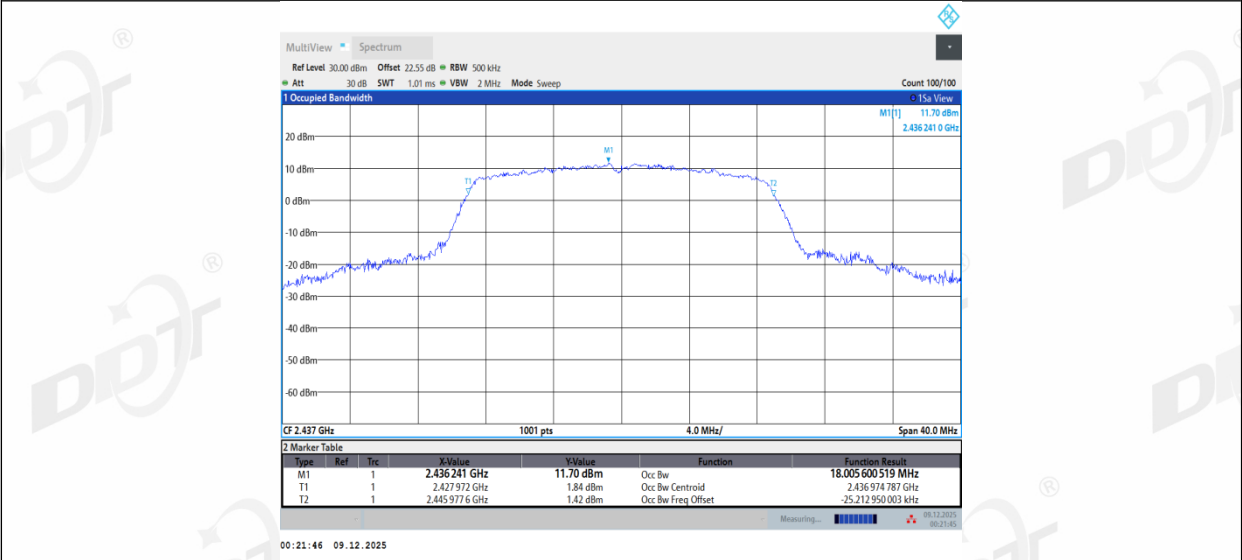


11N20SISO_Ant1_2462

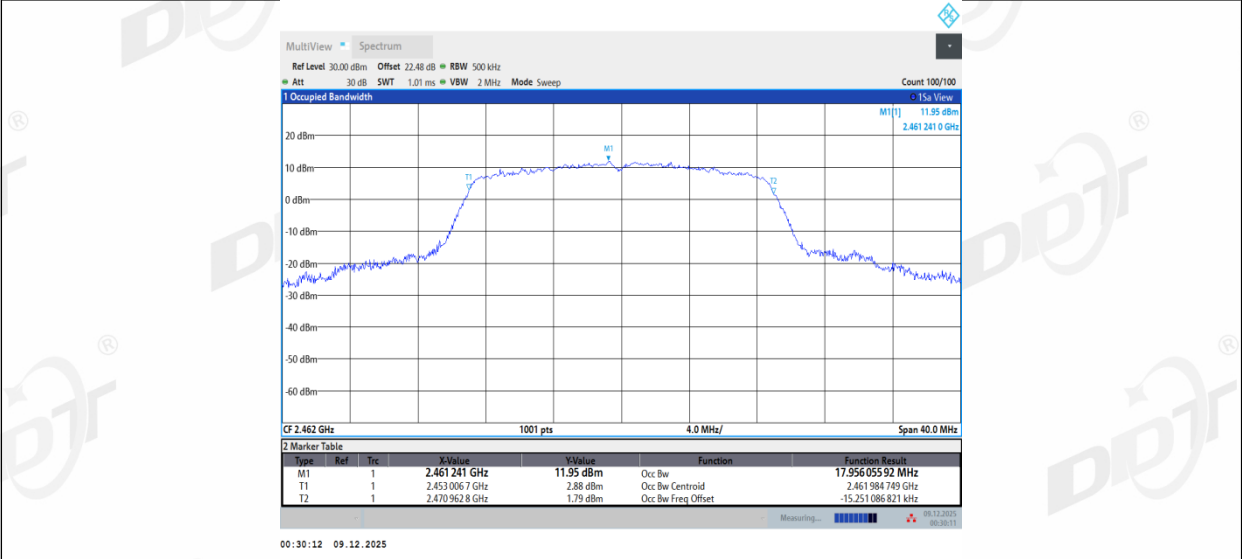


11N40SISO_Ant1_2422

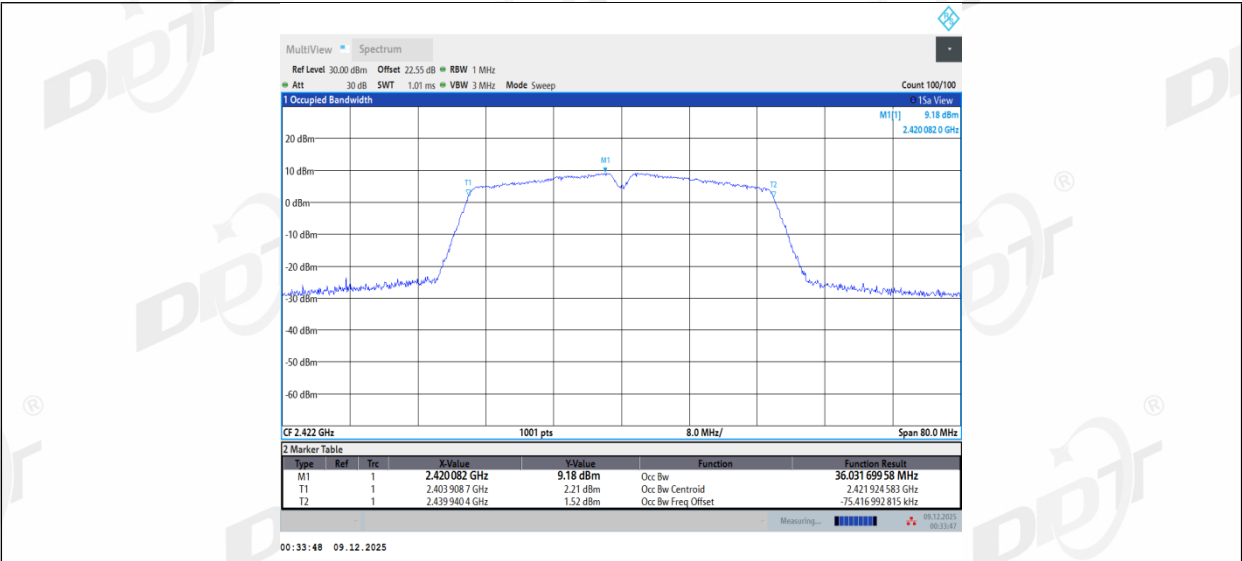

11N40SISO_Ant1_2437

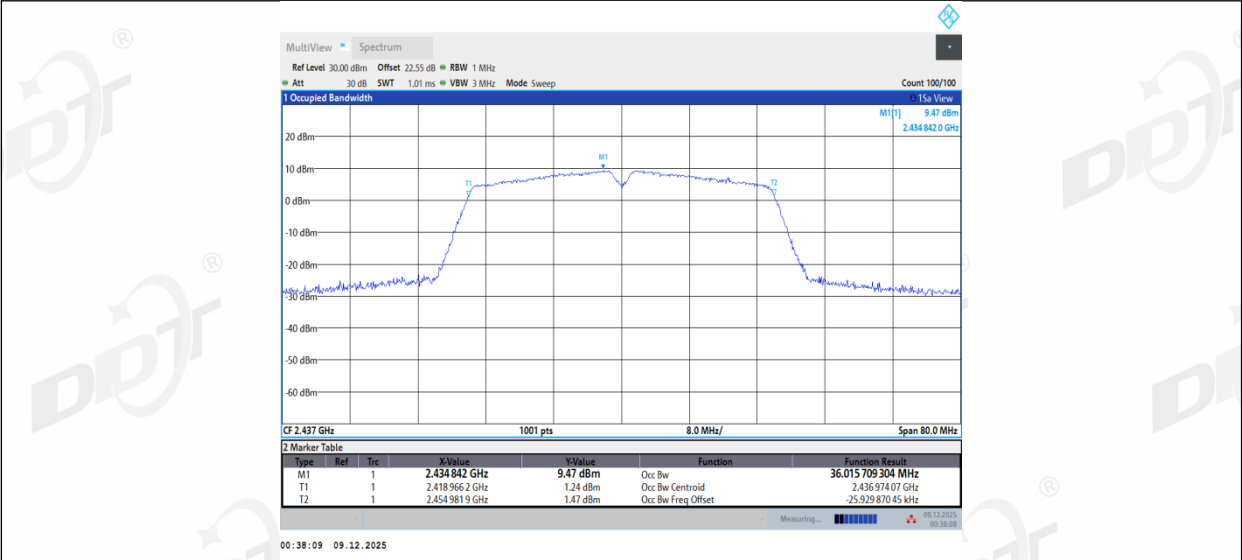


11N40SISO_Ant1_2452

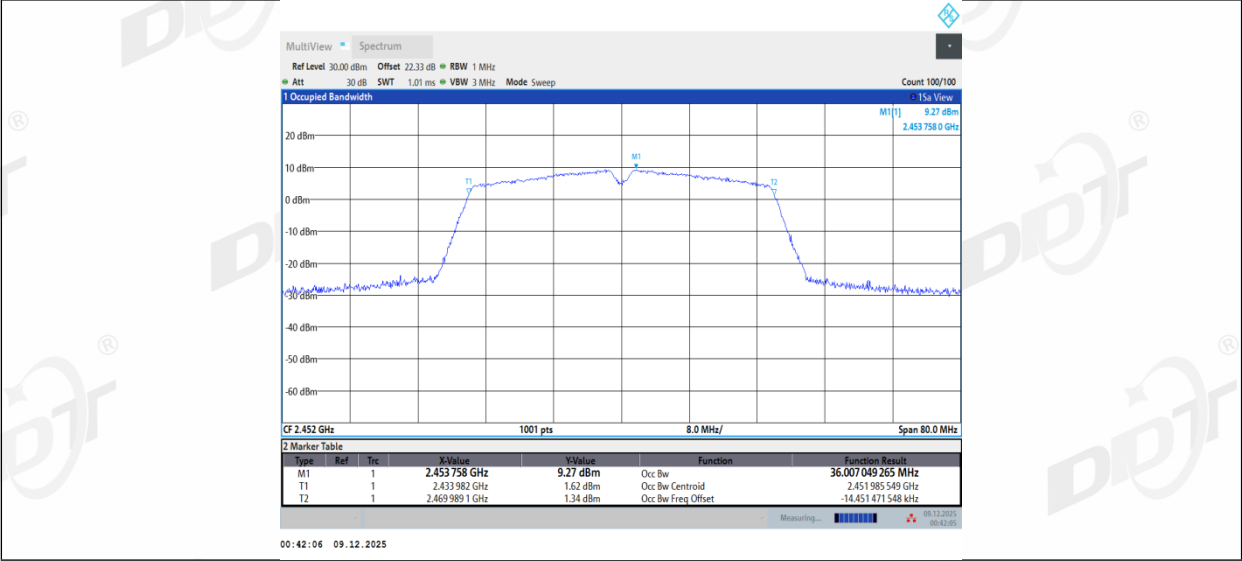

6. Conducted Output Power

6.1. Block diagram of test setup

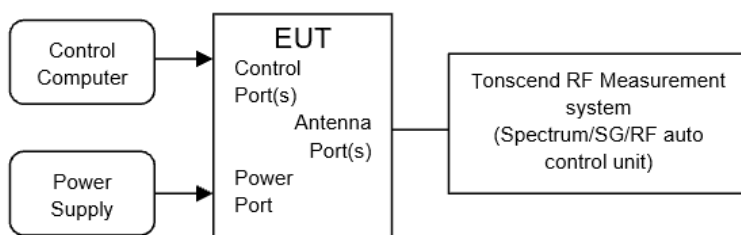

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	20.84	99.41	0.03	20.87	≤30.00	23.40	≤36.00	PASS
		2437	20.99	99.65	0.02	21.01	≤30.00	23.54	≤36.00	PASS
		2462	21.02	98.36	0.07	21.09	≤30.00	23.62	≤36.00	PASS
11G	Ant1	2412	17.45	89.10	0.50	17.95	≤30.00	20.48	≤36.00	PASS
		2437	17.57	92.67	0.33	17.90	≤30.00	20.43	≤36.00	PASS
		2462	17.66	90.32	0.44	18.10	≤30.00	20.63	≤36.00	PASS
11N20SISO	Ant1	2412	17.31	89.12	0.50	17.81	≤30.00	20.34	≤36.00	PASS
		2437	17.36	89.12	0.50	17.86	≤30.00	20.39	≤36.00	PASS
		2462	17.52	88.51	0.53	18.05	≤30.00	20.58	≤36.00	PASS
11N40SISO	Ant1	2422	13.79	81.25	0.90	14.69	≤30.00	17.22	≤36.00	PASS
		2437	13.95	79.01	1.02	14.97	≤30.00	17.50	≤36.00	PASS
		2452	13.82	80.00	0.97	14.79	≤30.00	17.32	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

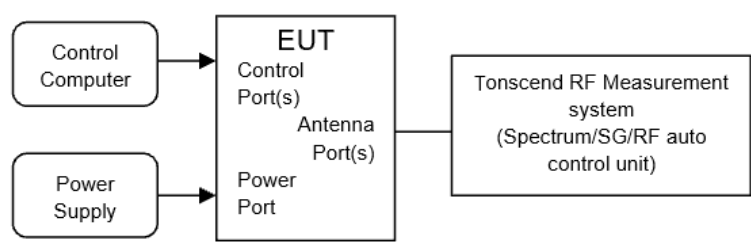

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

- (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001

Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.01	≤8.00	PASS
		2437	-8.73	≤8.00	PASS
		2462	-7.72	≤8.00	PASS
11G	Ant1	2412	-13.05	≤8.00	PASS
		2437	-13.53	≤8.00	PASS
		2462	-13.16	≤8.00	PASS
11N20SISO	Ant1	2412	-13.87	≤8.00	PASS
		2437	-13.34	≤8.00	PASS
		2462	-14.02	≤8.00	PASS
11N40SISO	Ant1	2422	-19.18	≤8.00	PASS
		2437	-19.23	≤8.00	PASS
		2452	-19.48	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

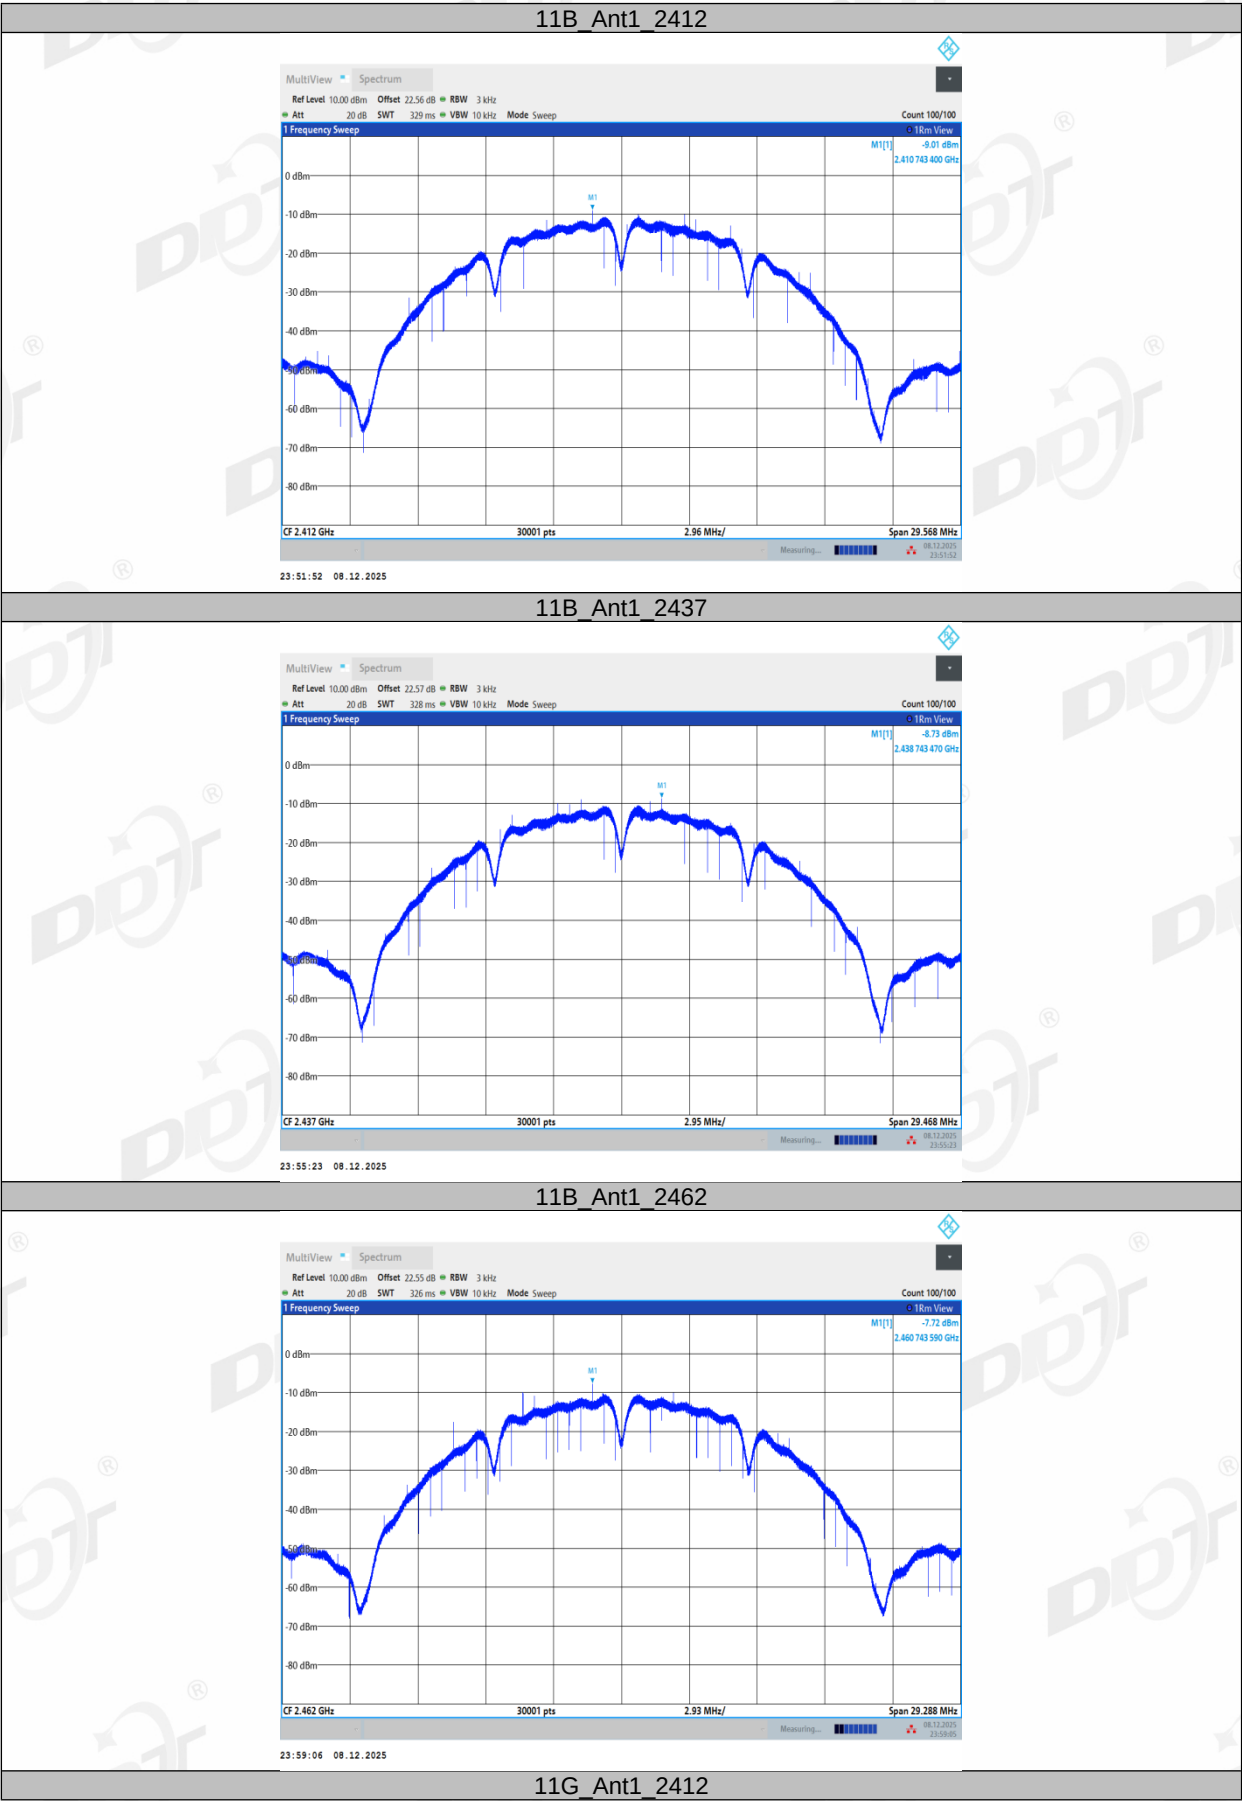


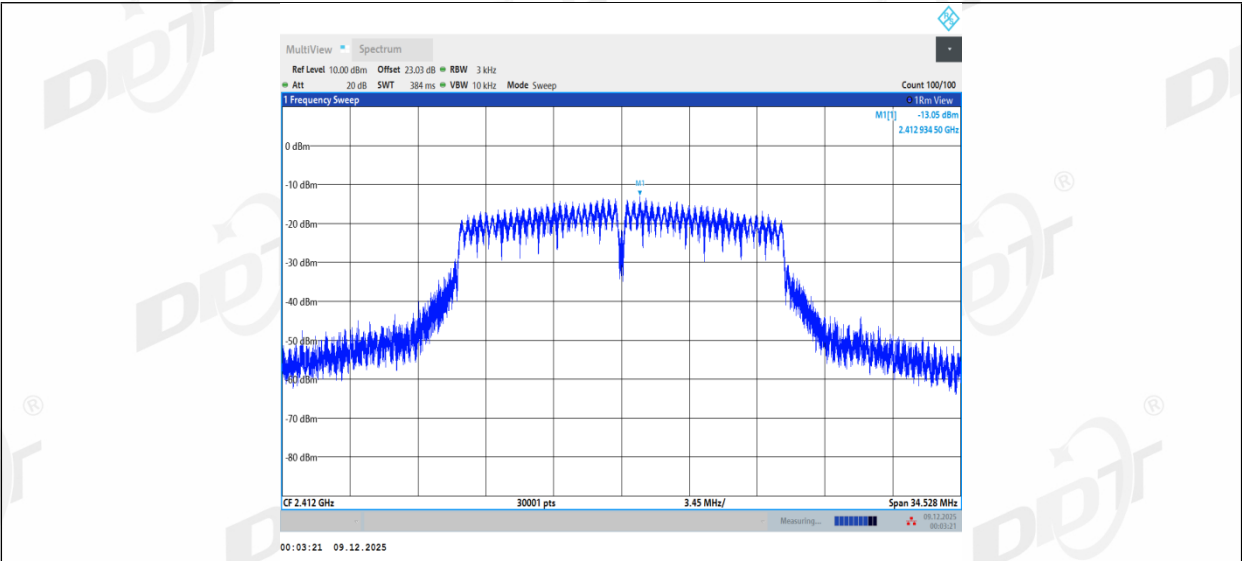


11G_Ant1_2437

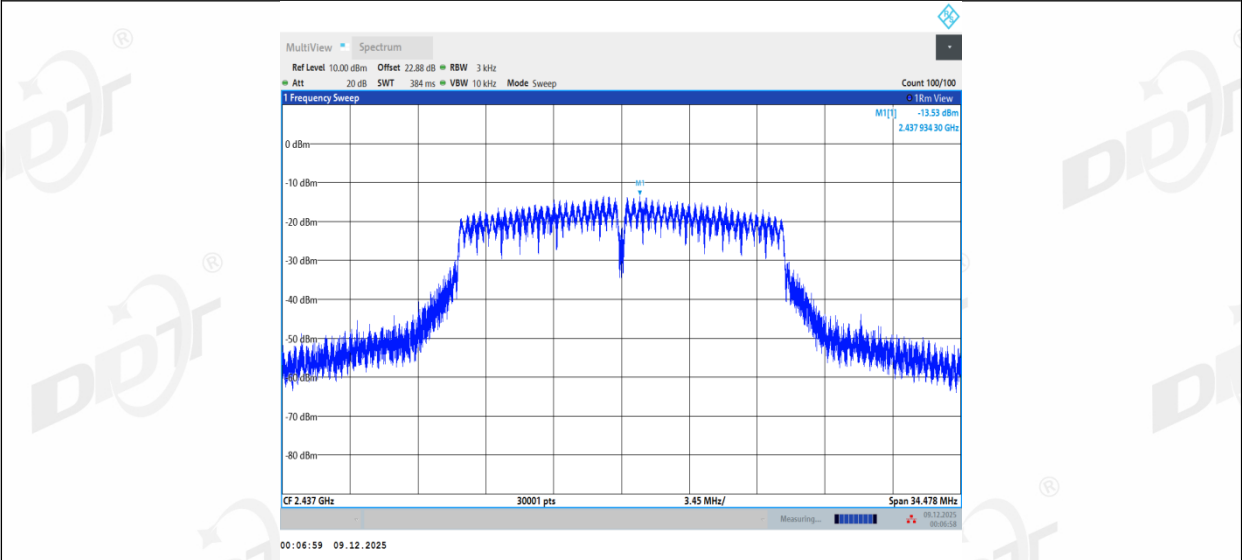


11G_Ant1_2462

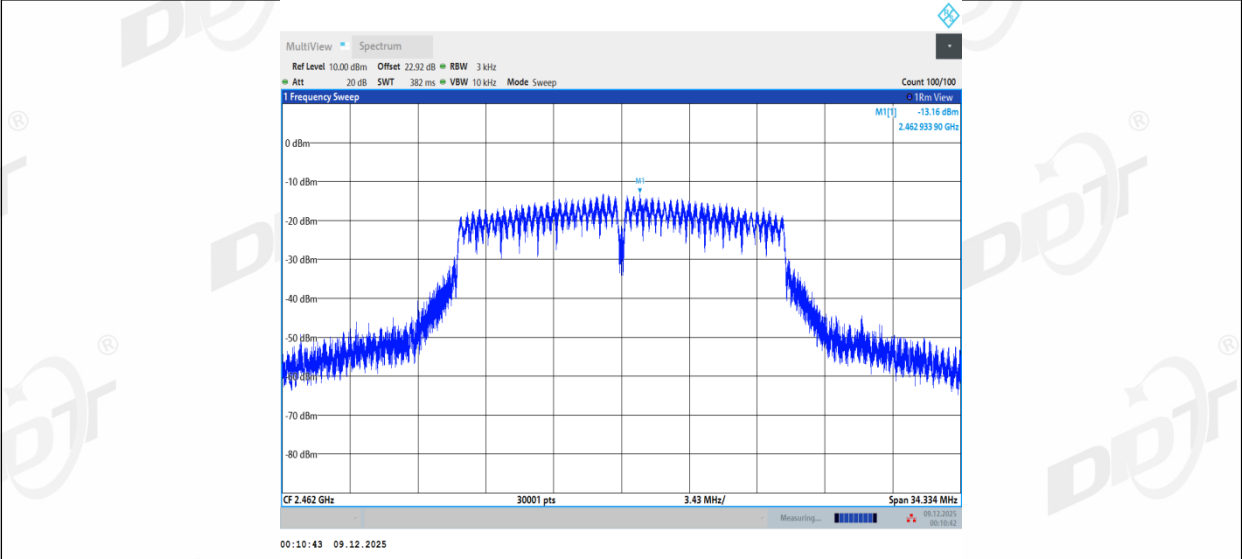


11N20SISO_Ant1_2412

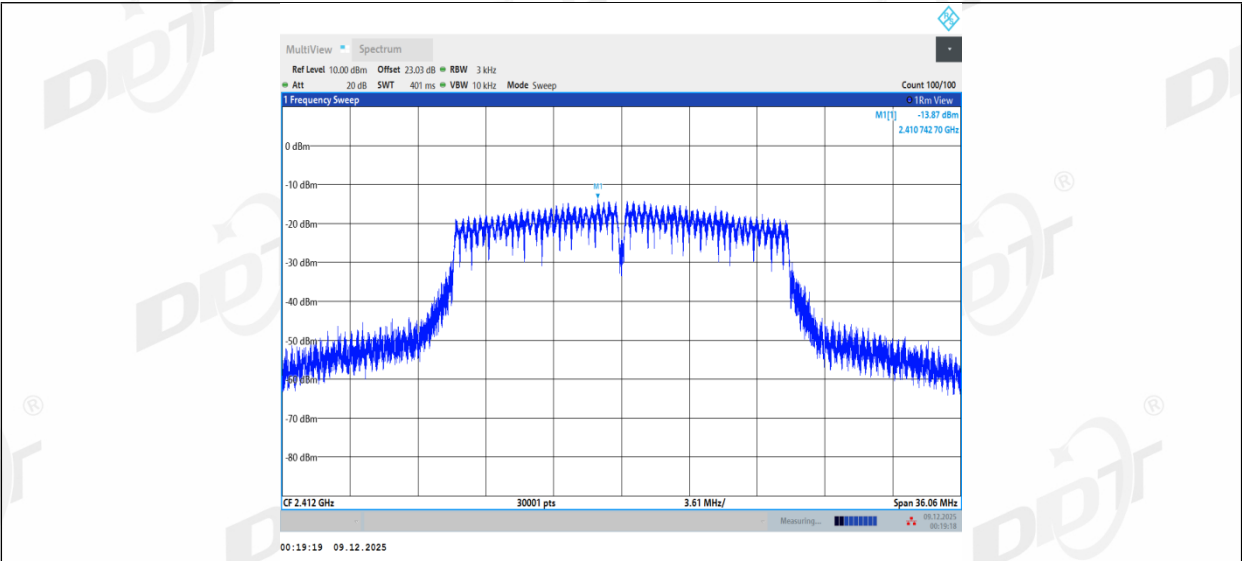


11N20SISO_Ant1_2437

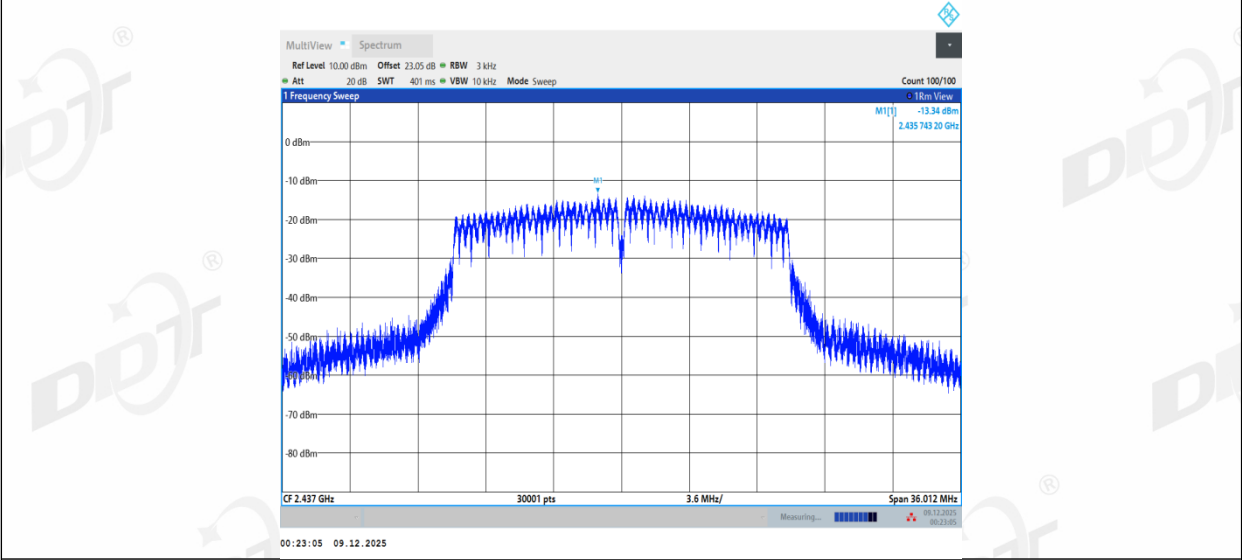


11N20SISO_Ant1_2462

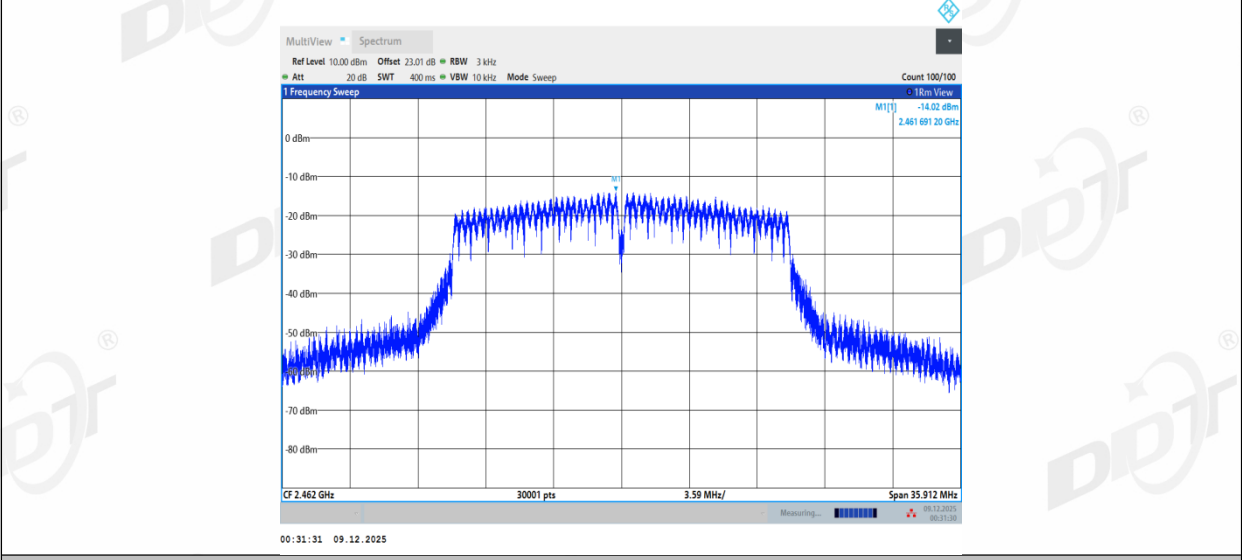


11N40SISO_Ant1_2422

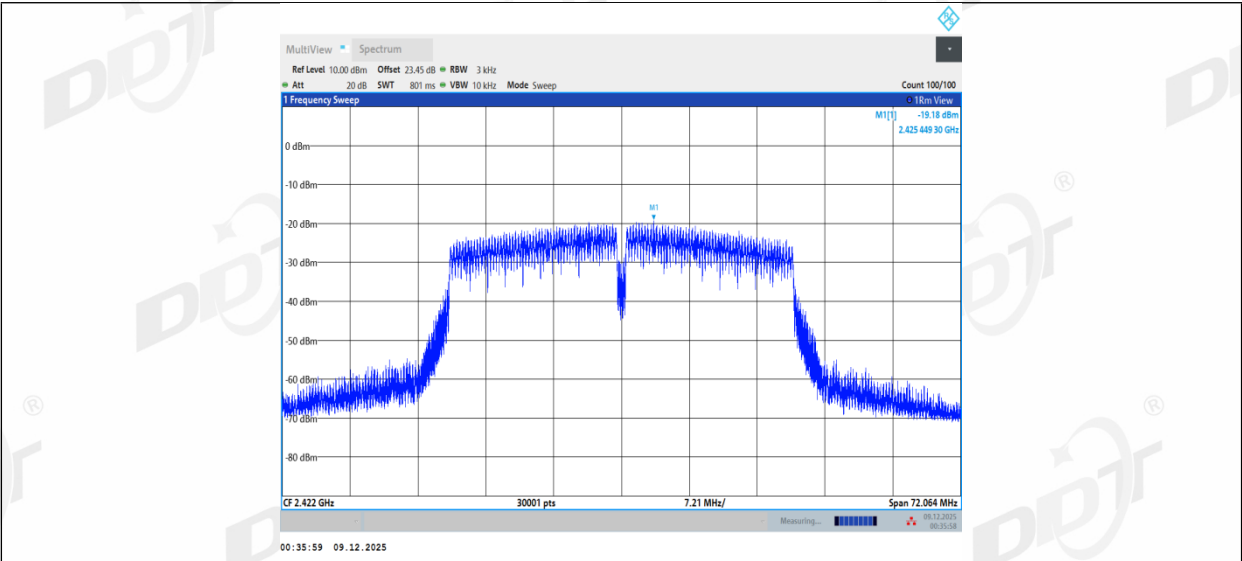

11N40SISO_Ant1_2437

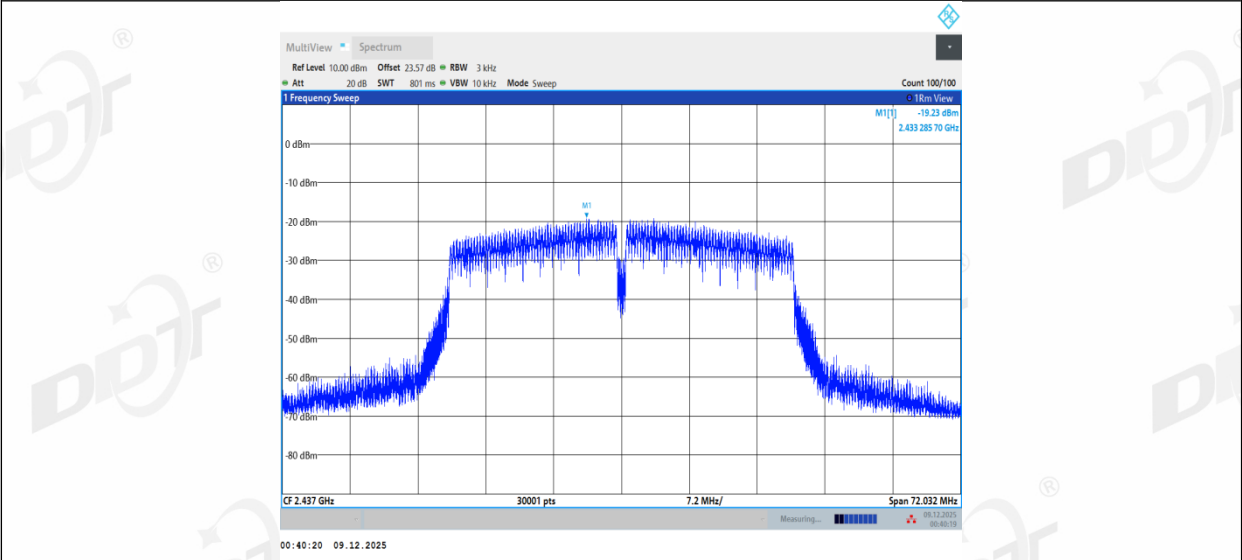


11N40SISO_Ant1_2452

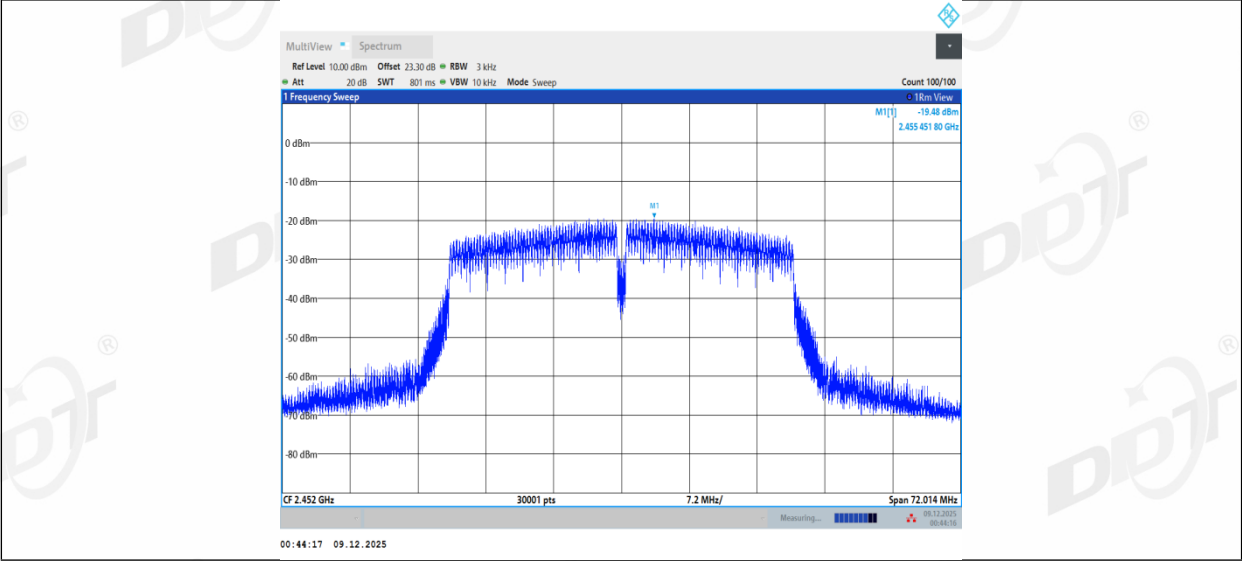

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

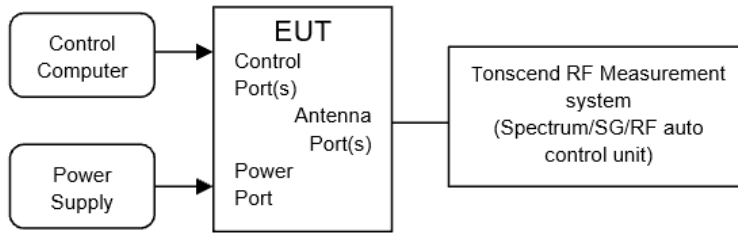

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result

Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

8.5. Test graphs

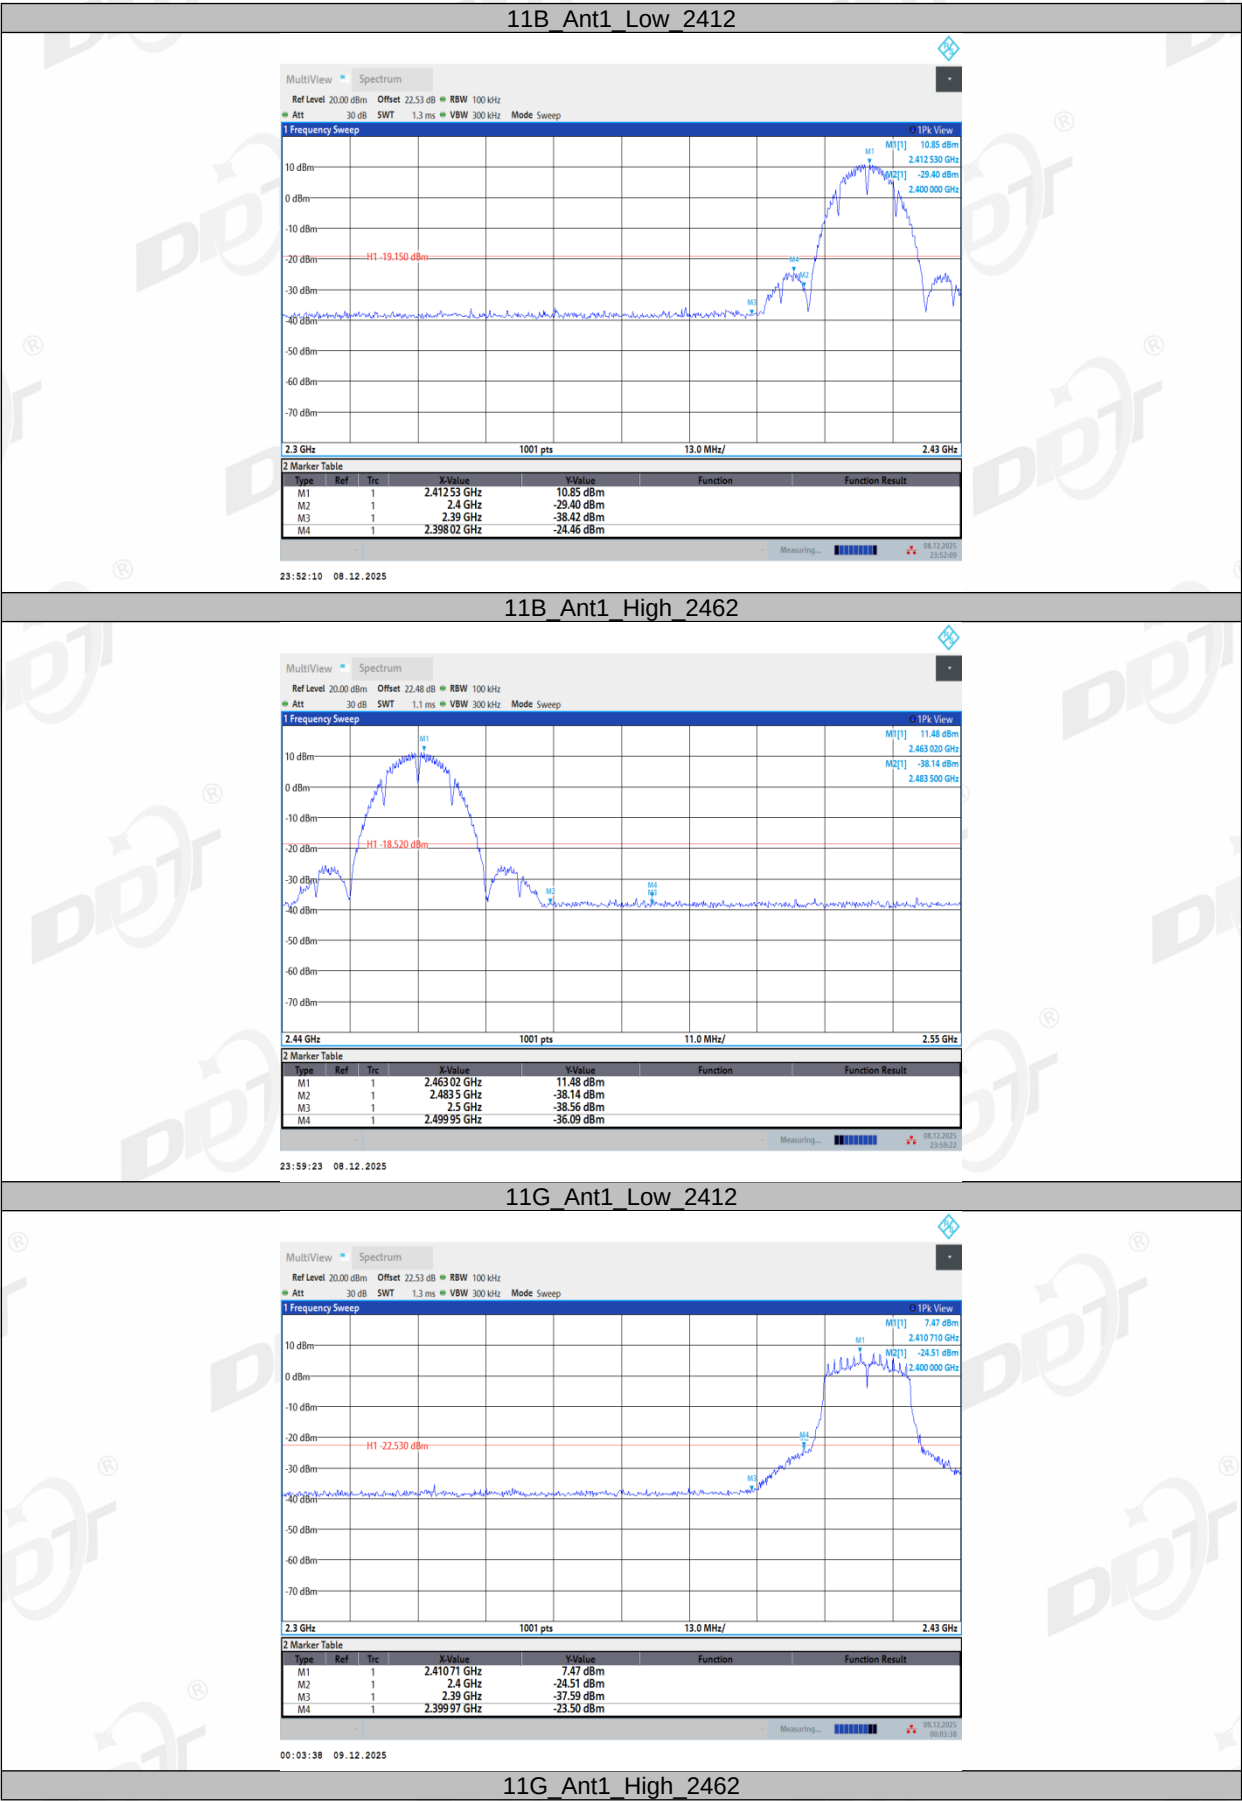


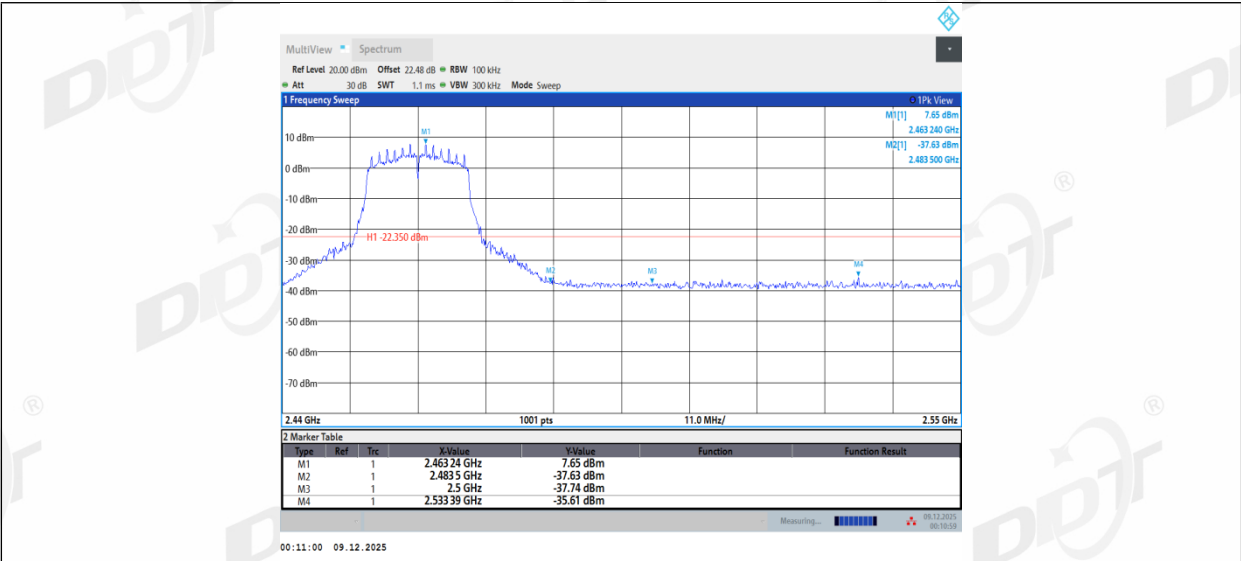


11N20SISO_Ant1_Low_2412

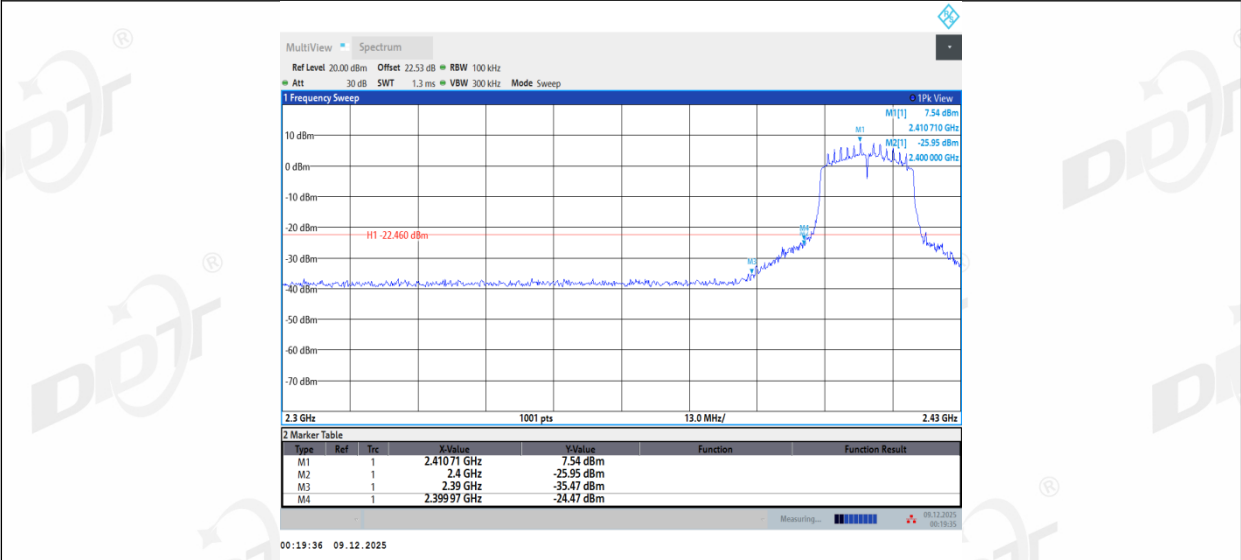


11N20SISO_Ant1_High_2462

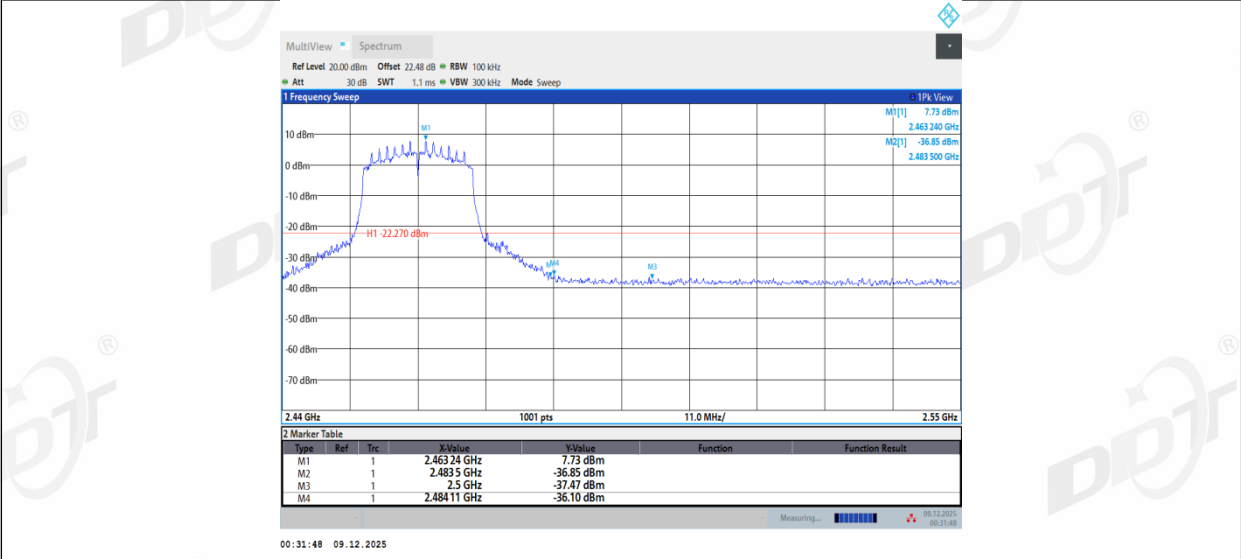

11N40SISO_Ant1_Low_2422

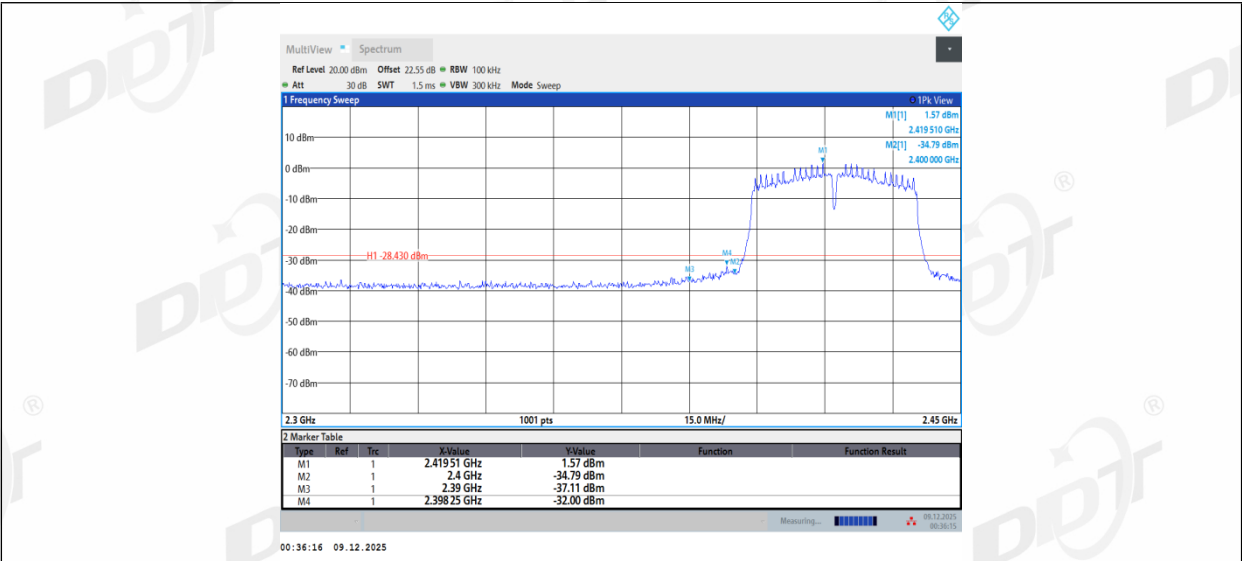


11N40SISO_Ant1_High_2452

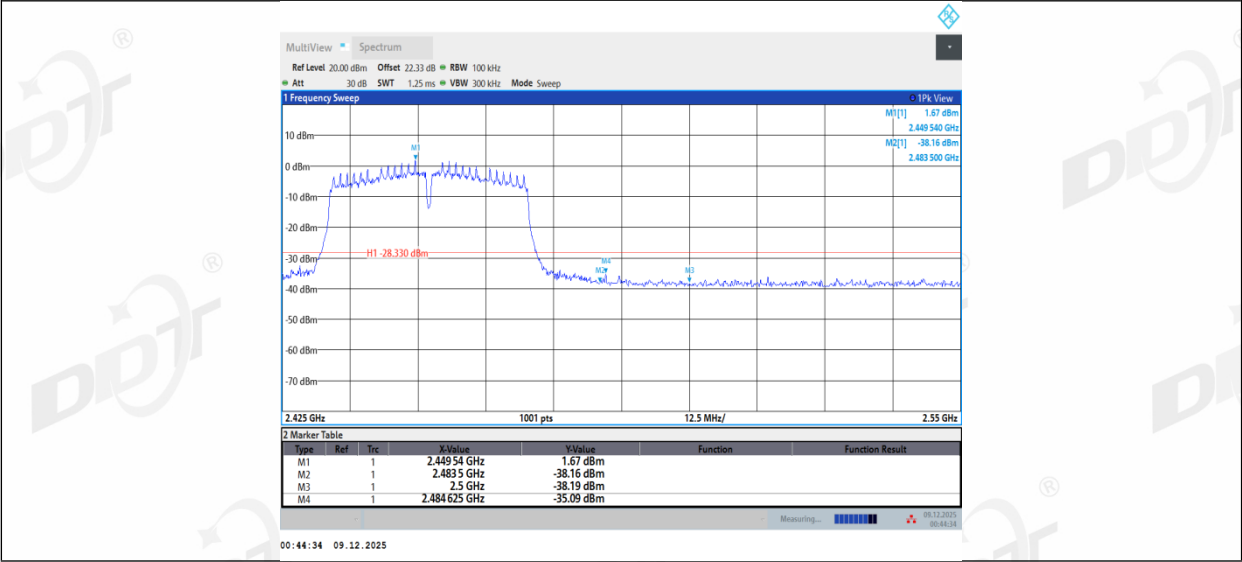

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

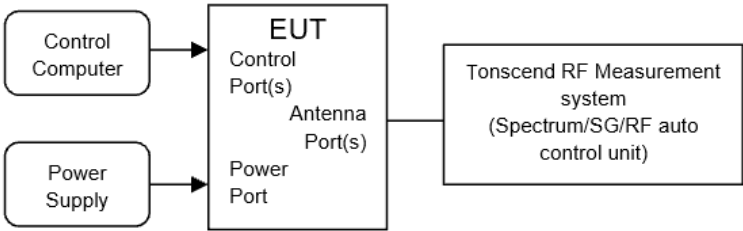

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result

Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 4#		
Ambient Condition:	25.2℃,44.8%RH	Test Date:	2025.12.01-2025.12.19		
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001		


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

9.5. Test graphs

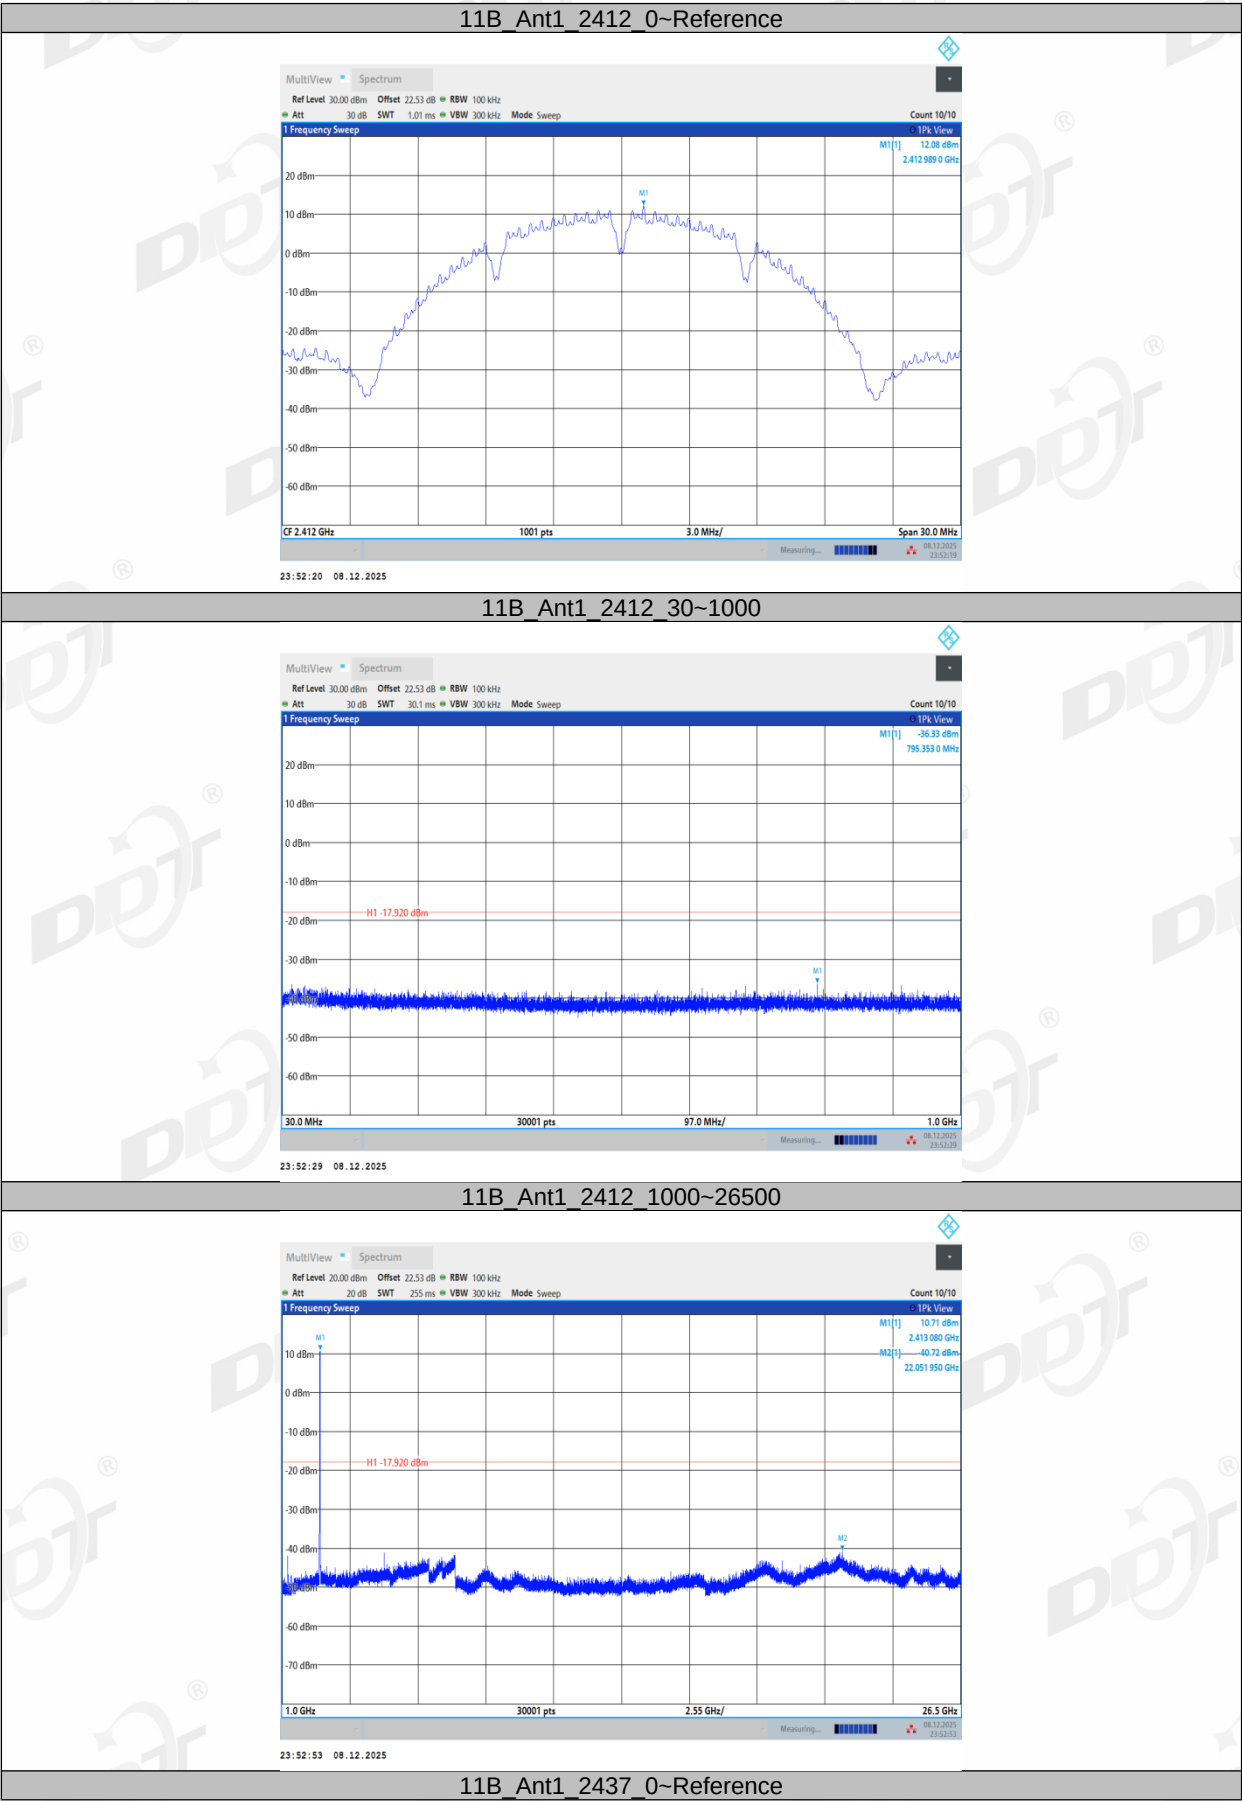


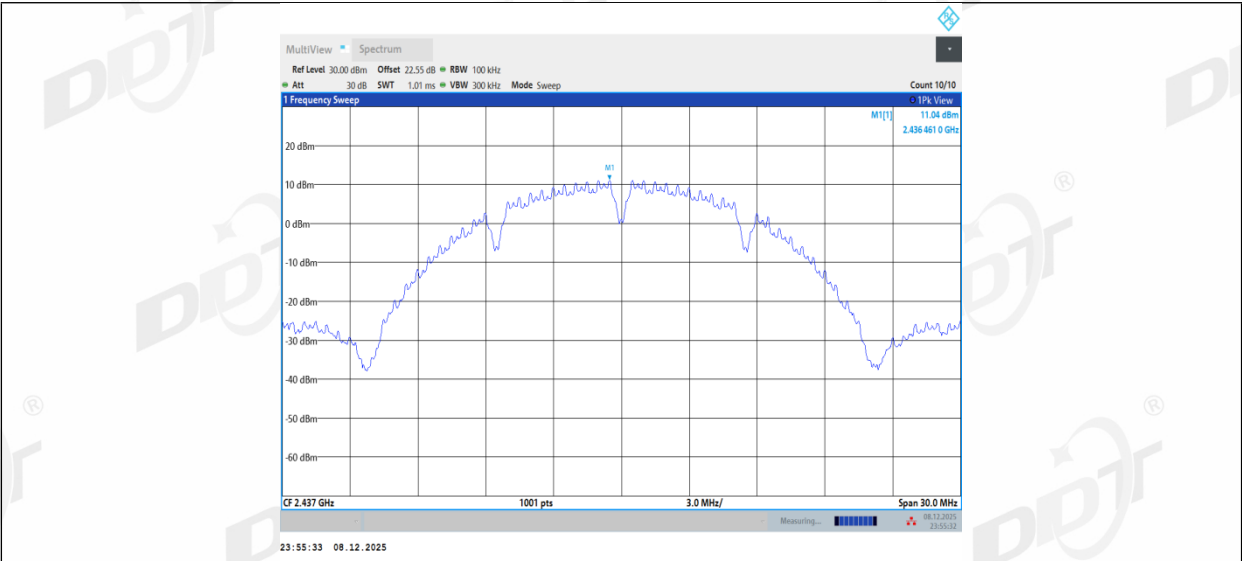


11B_Ant1_2437_30~1000

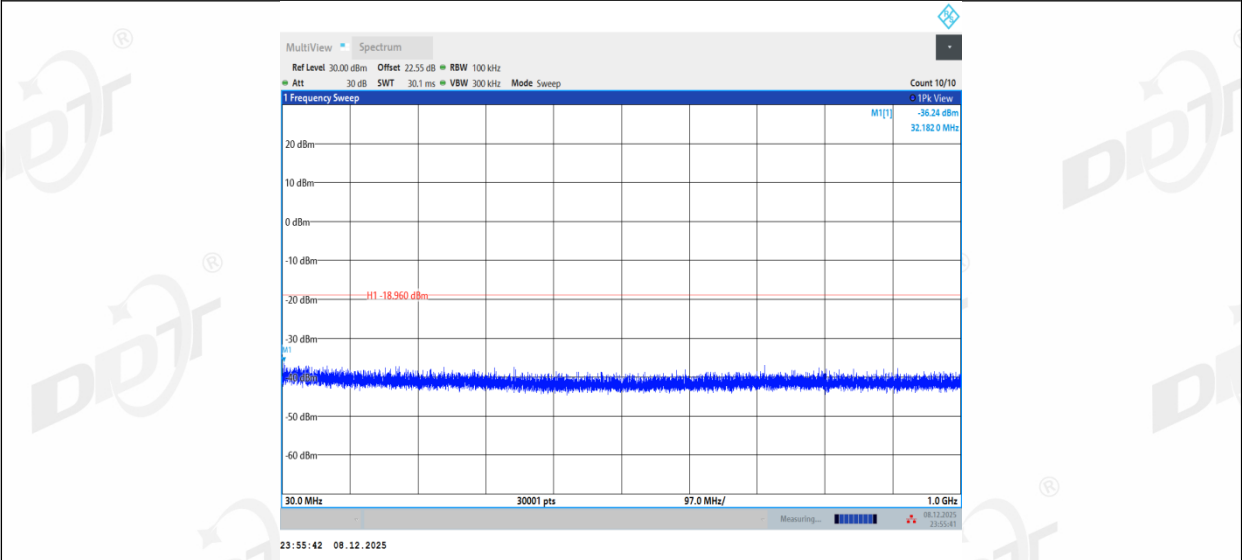


11B_Ant1_2437_1000~26500

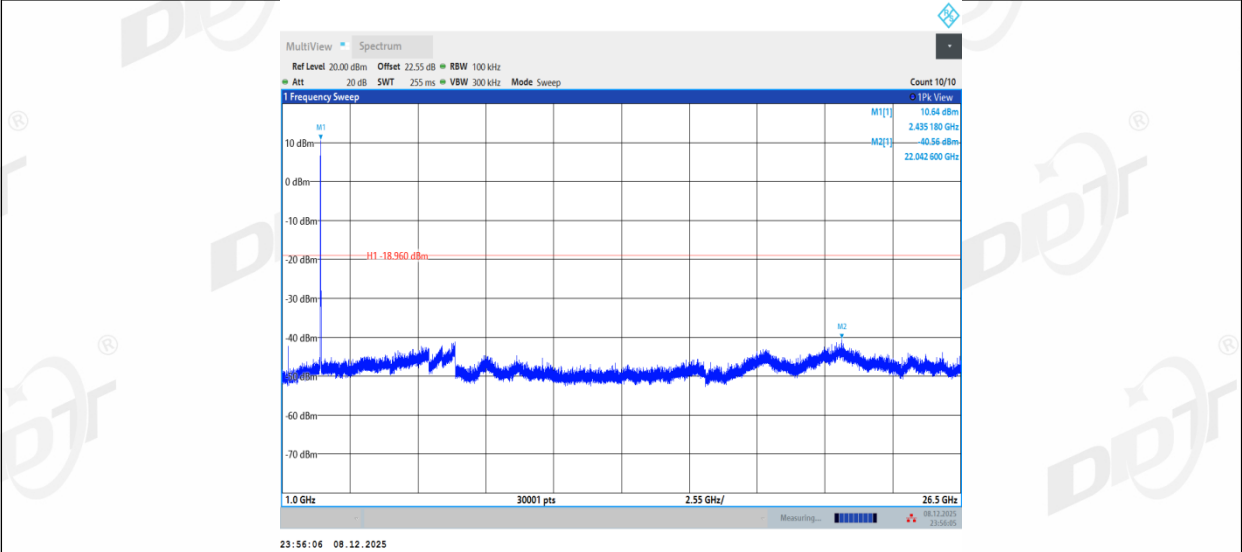


11B_Ant1_2462_0~Reference

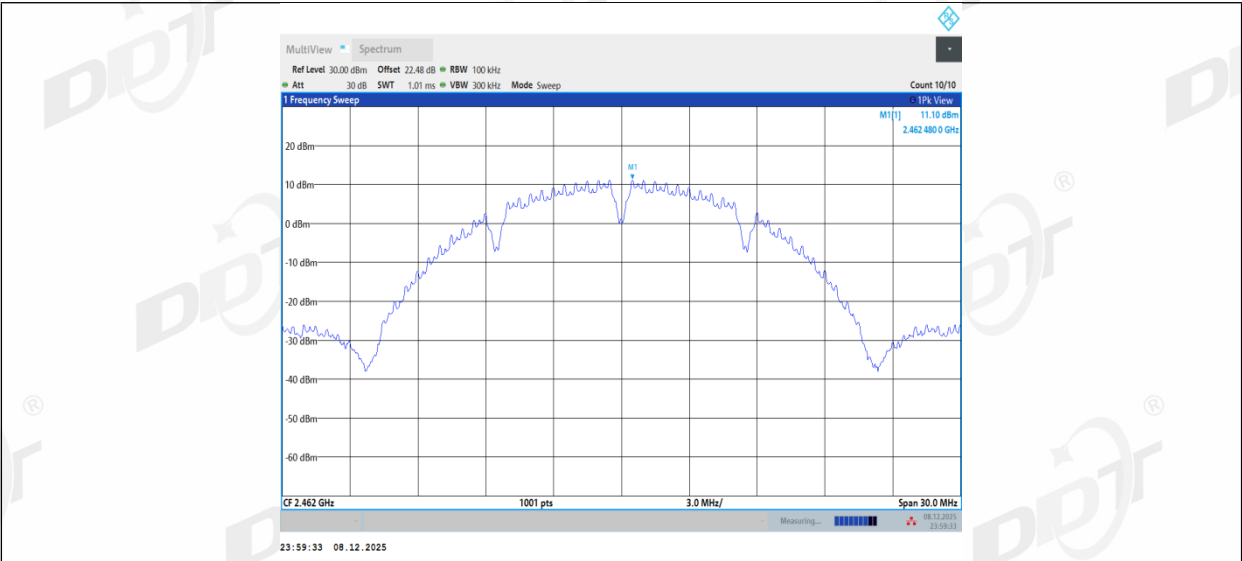


11B_Ant1_2462_30~1000

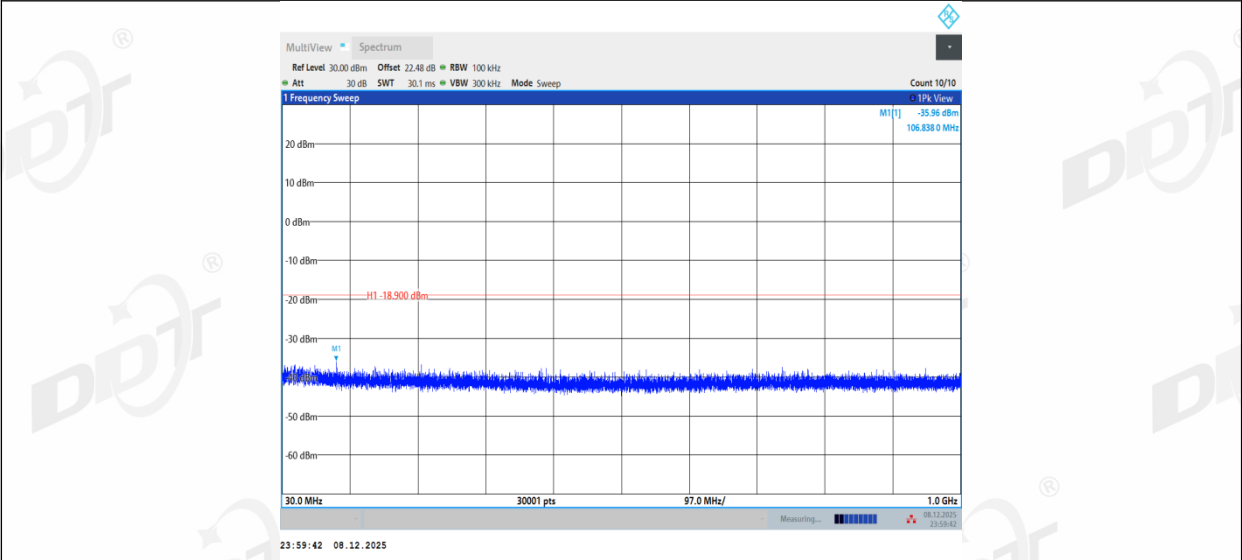


11B_Ant1_2462_1000~26500

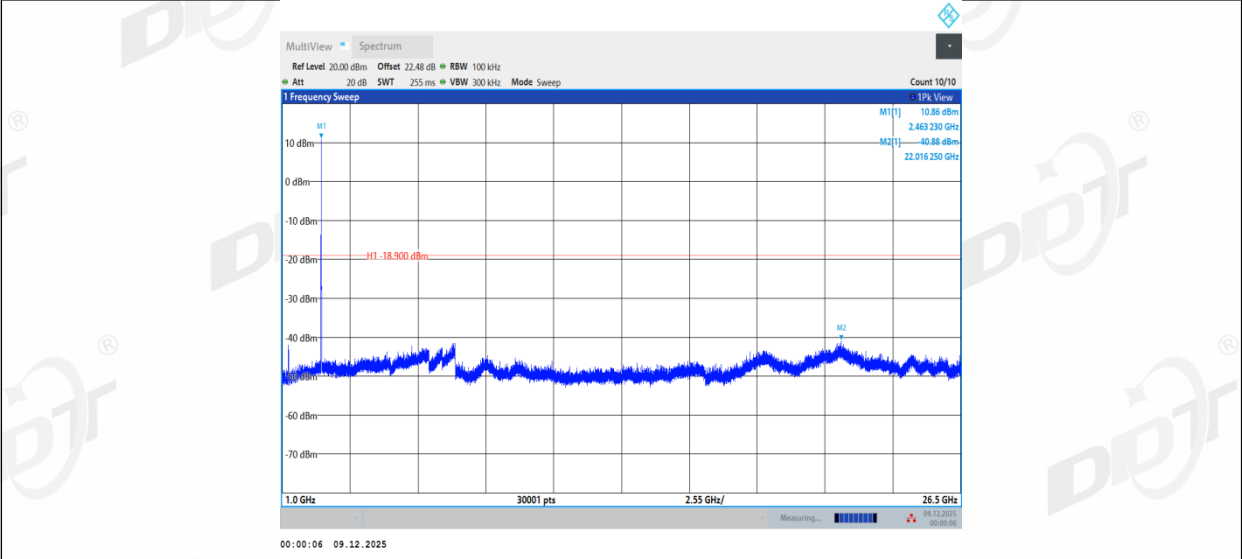


11G_Ant1_2412_0~Reference

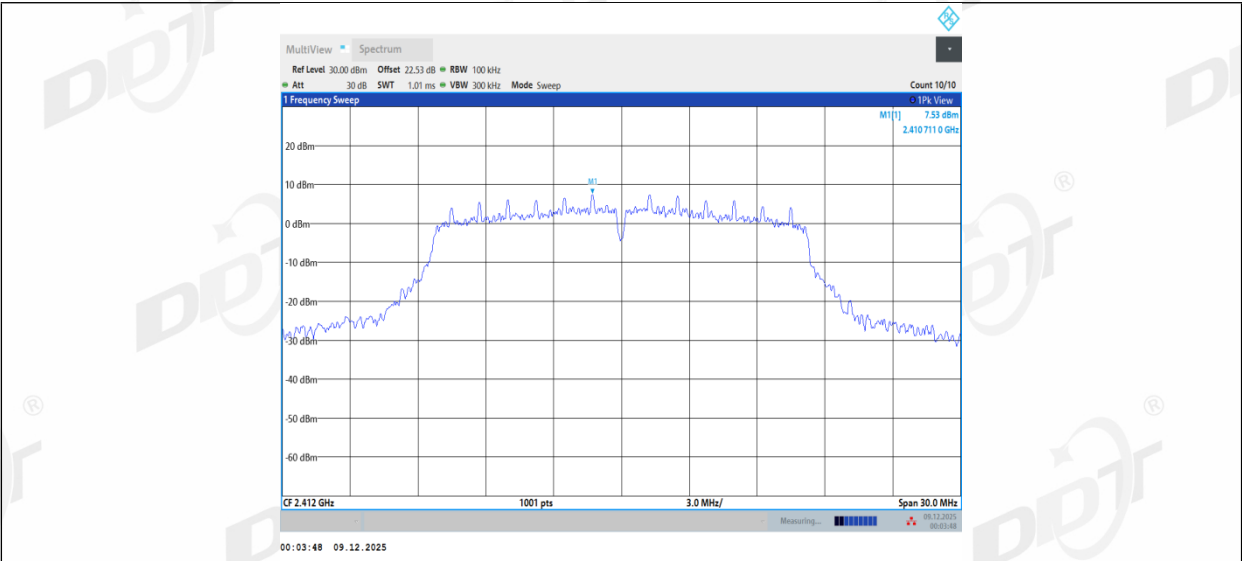


11G_Ant1_2412_30~1000

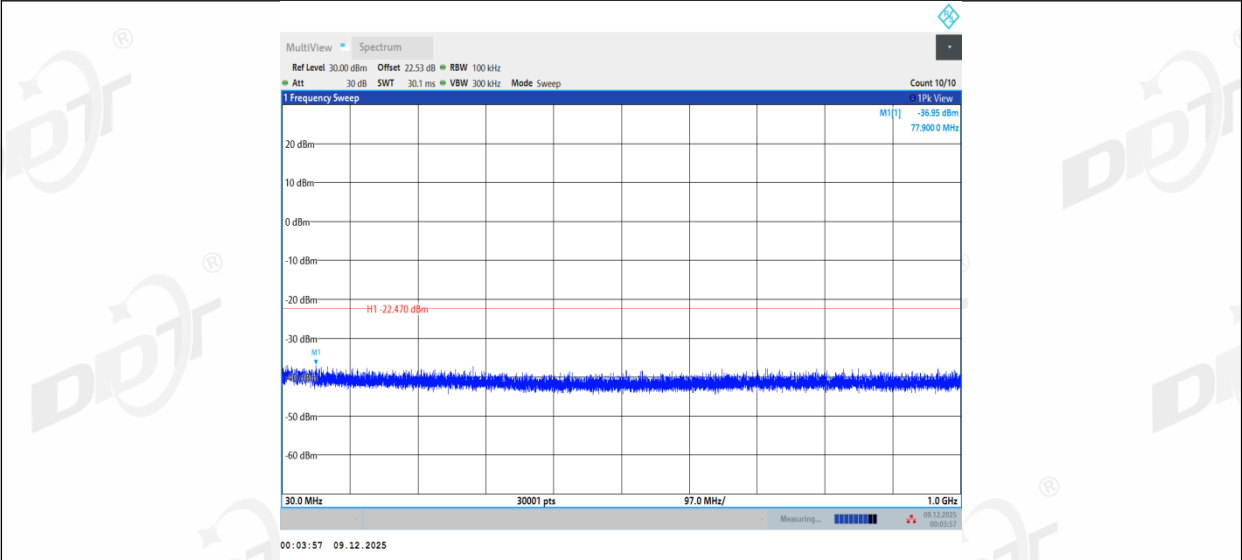


11G_Ant1_2412_1000~26500

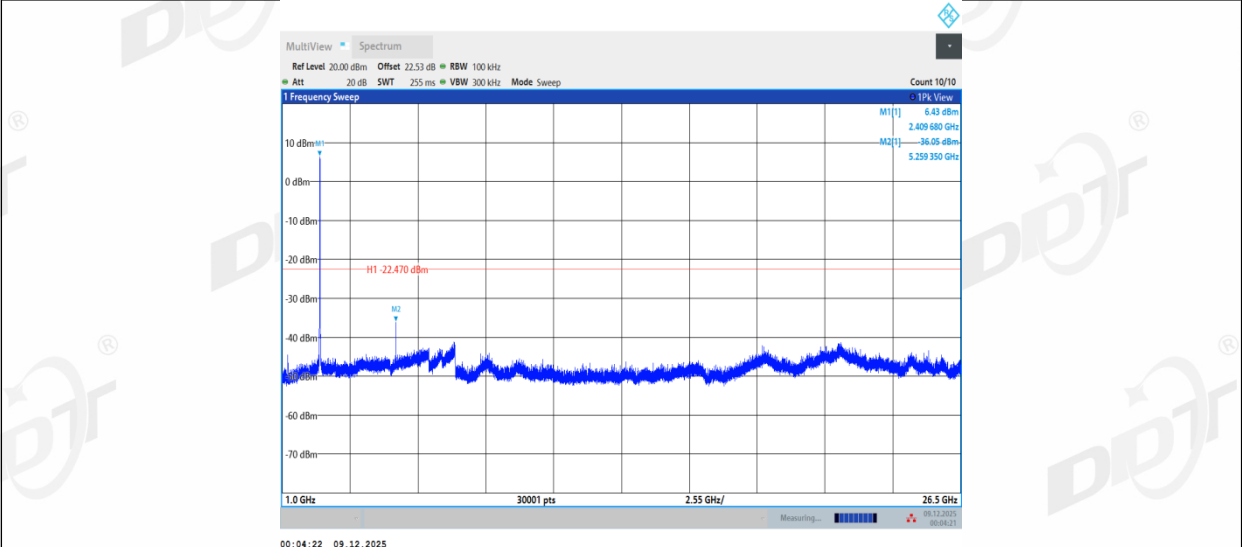


11G_Ant1_2437_0~Reference

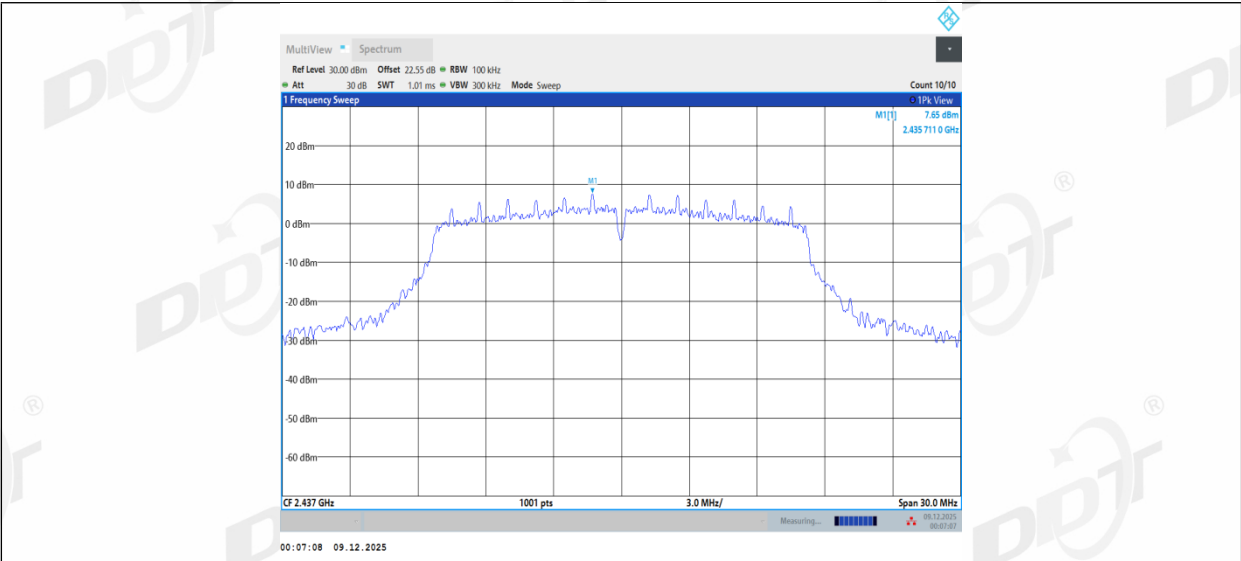


11G_Ant1_2437_30~1000

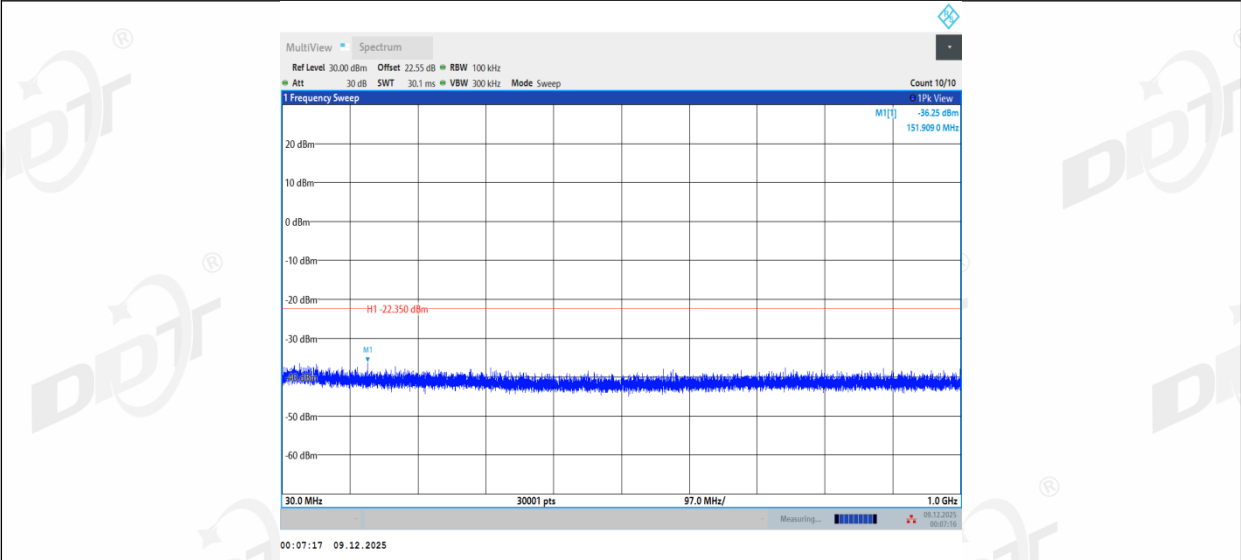


11G_Ant1_2437_1000~26500

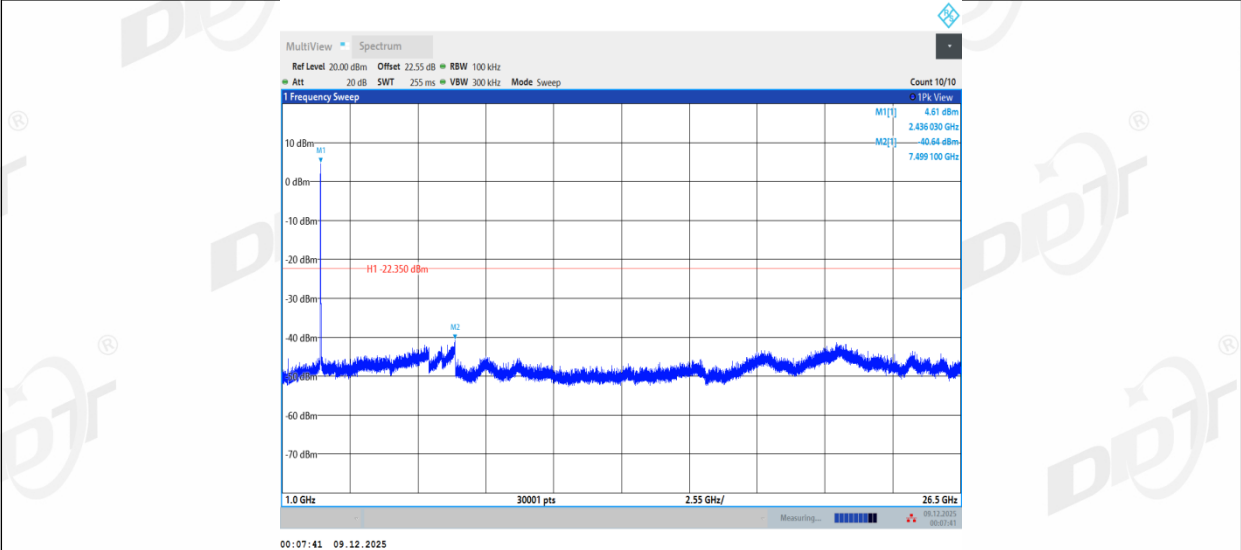


11G_Ant1_2462_0~Reference

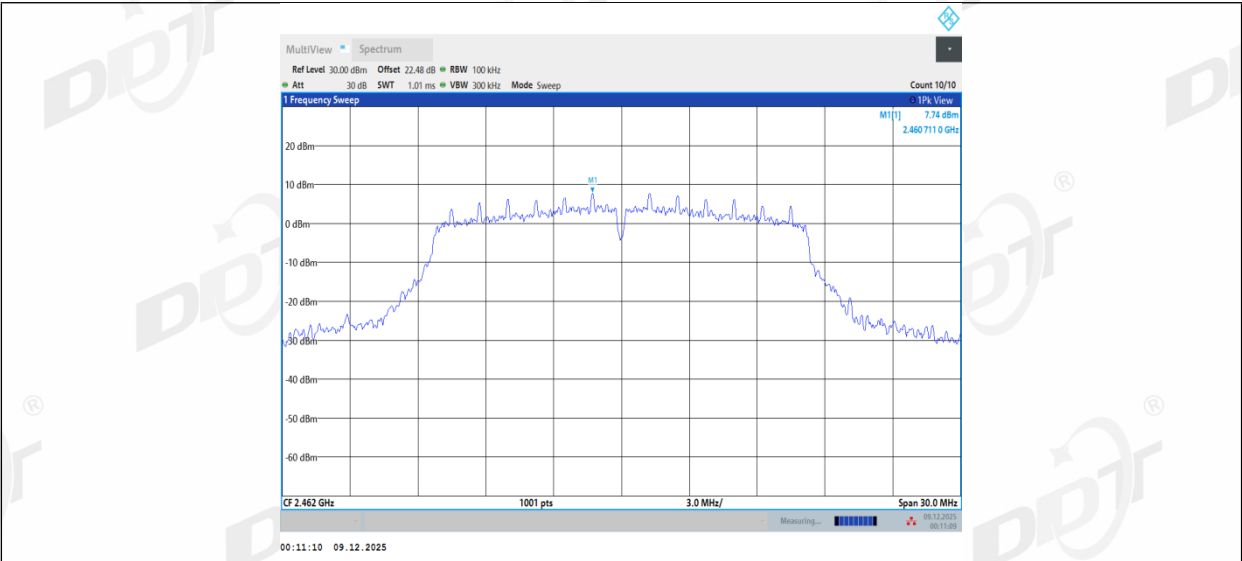


11G_Ant1_2462_30~1000

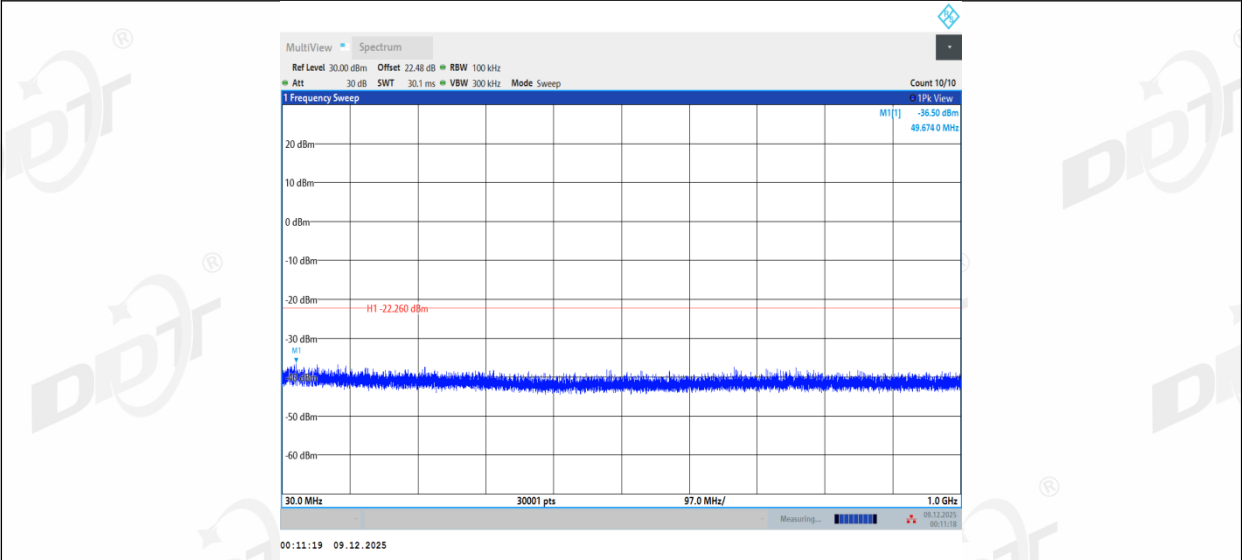


11G_Ant1_2462_1000~26500

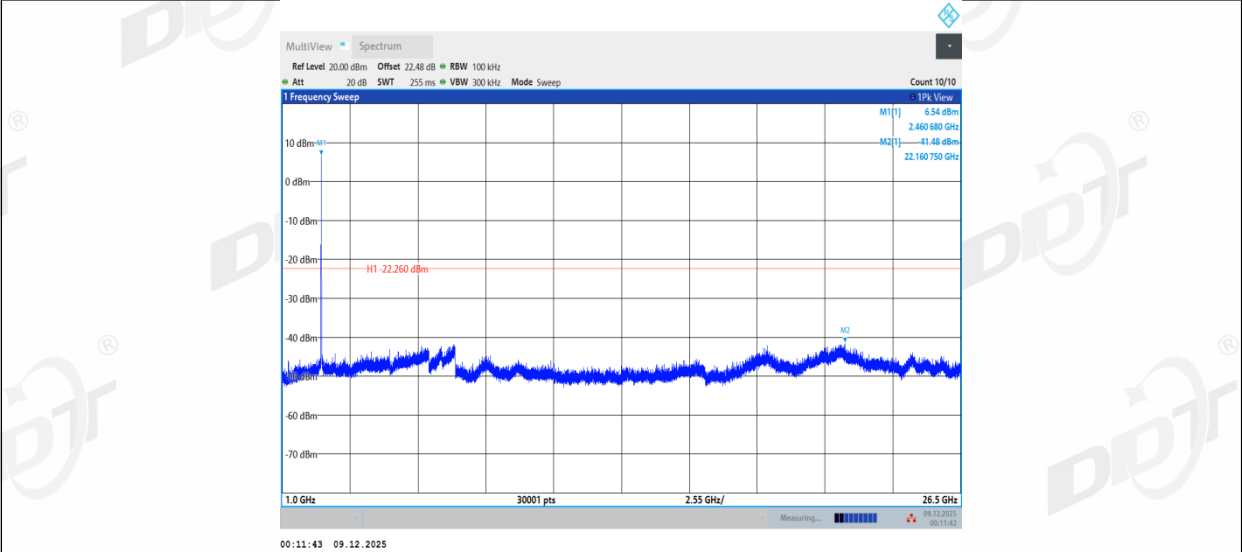


11N20SISO_Ant1_2412_0~Reference

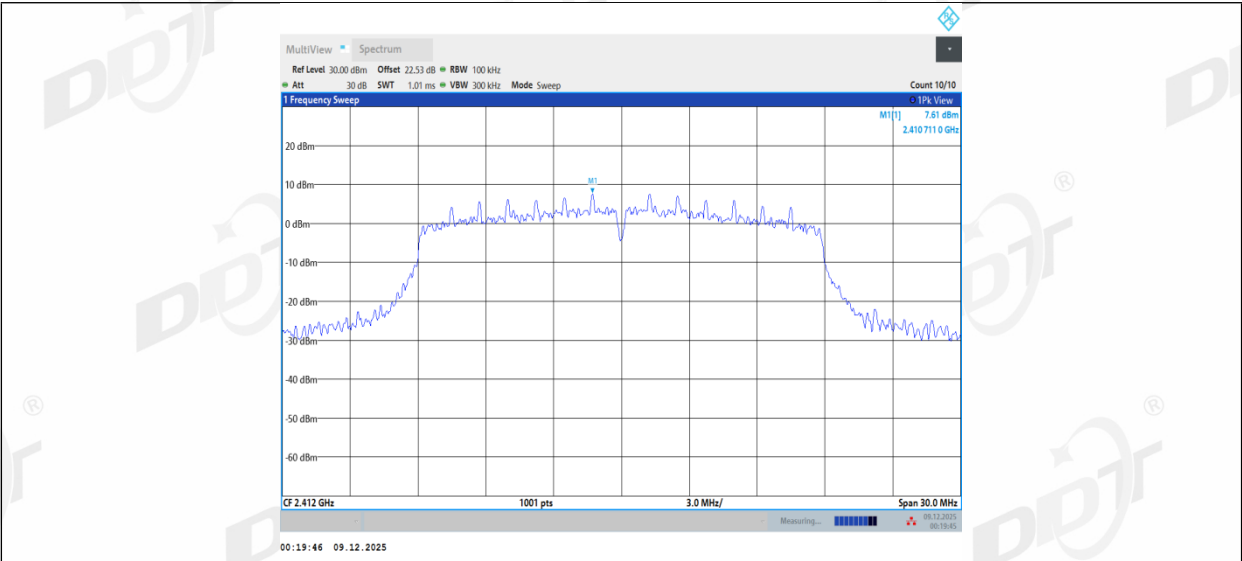


11N20SISO_Ant1_2412_30~1000

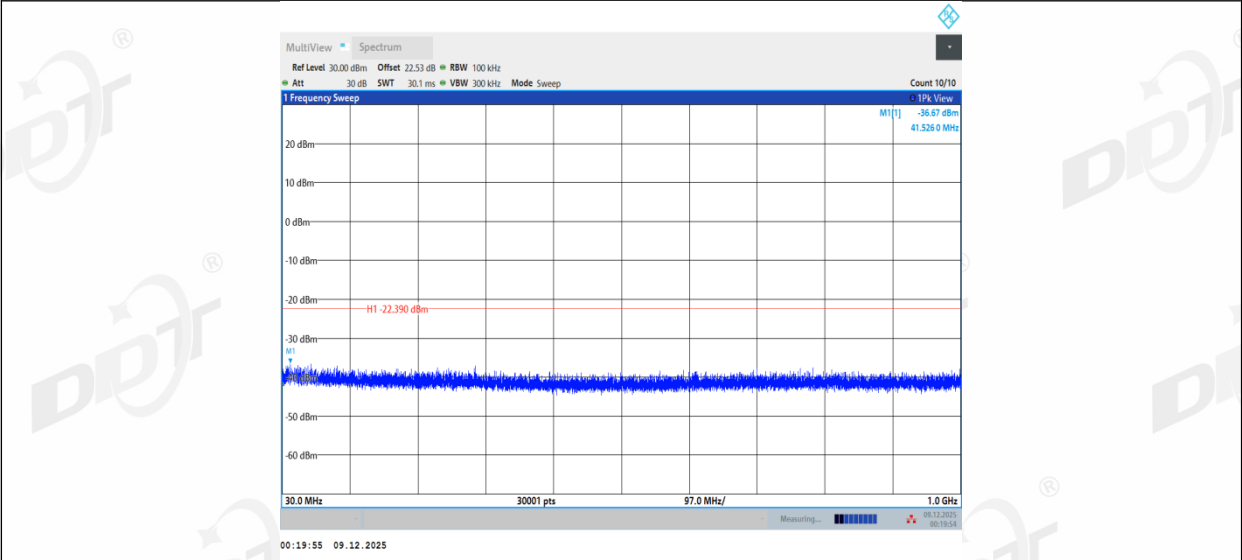


11N20SISO_Ant1_2412_1000~26500

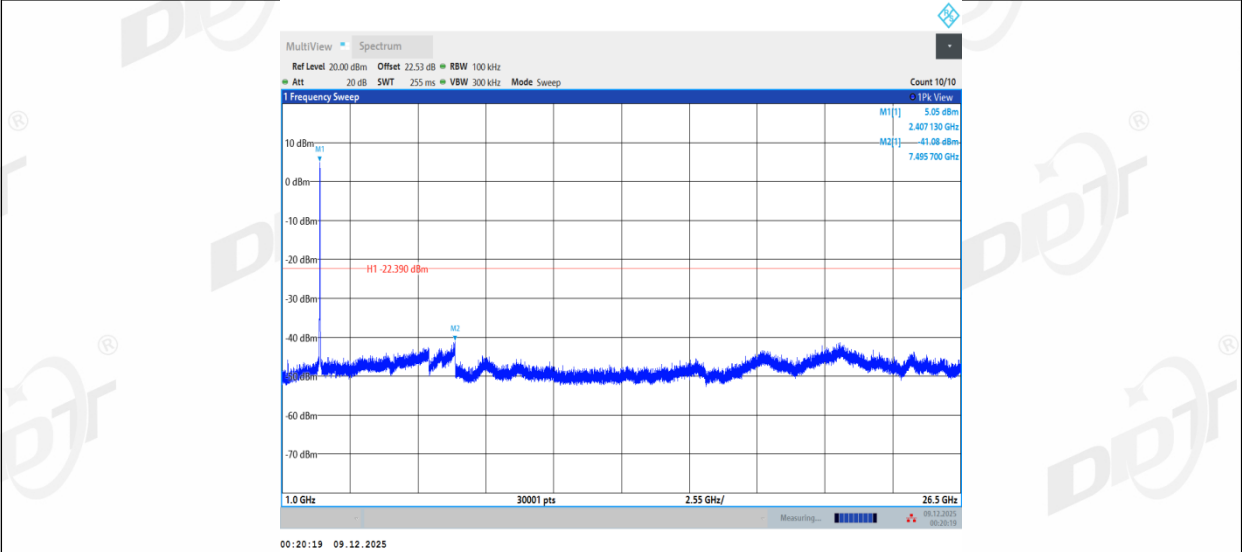


11N20SISO_Ant1_2437_0~Reference

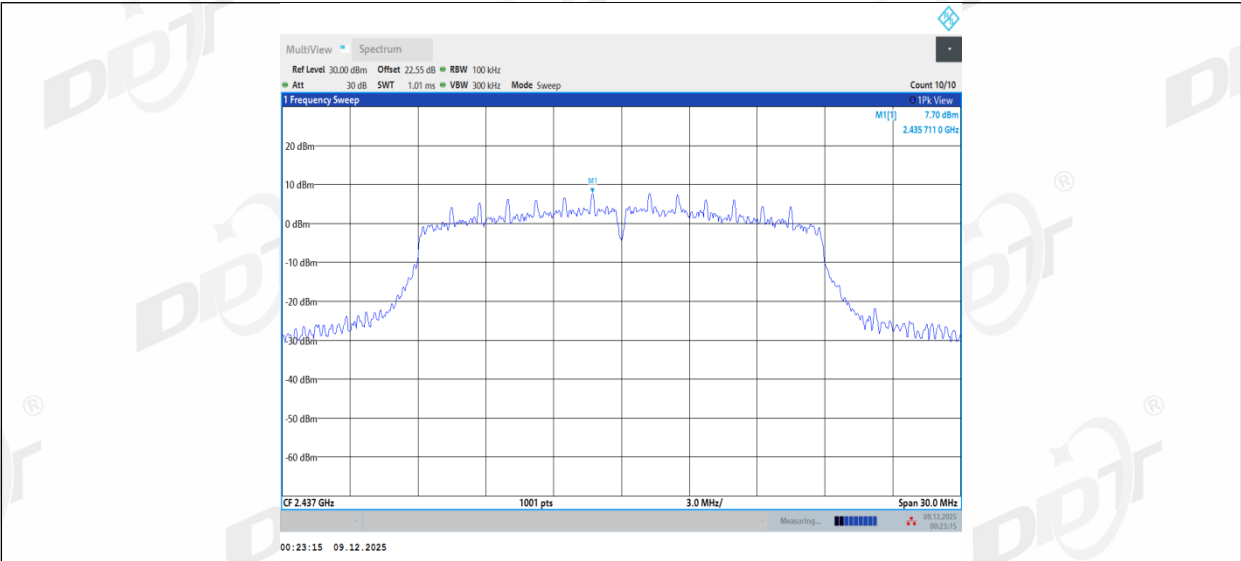

11N20SISO_Ant1_2437_30~1000

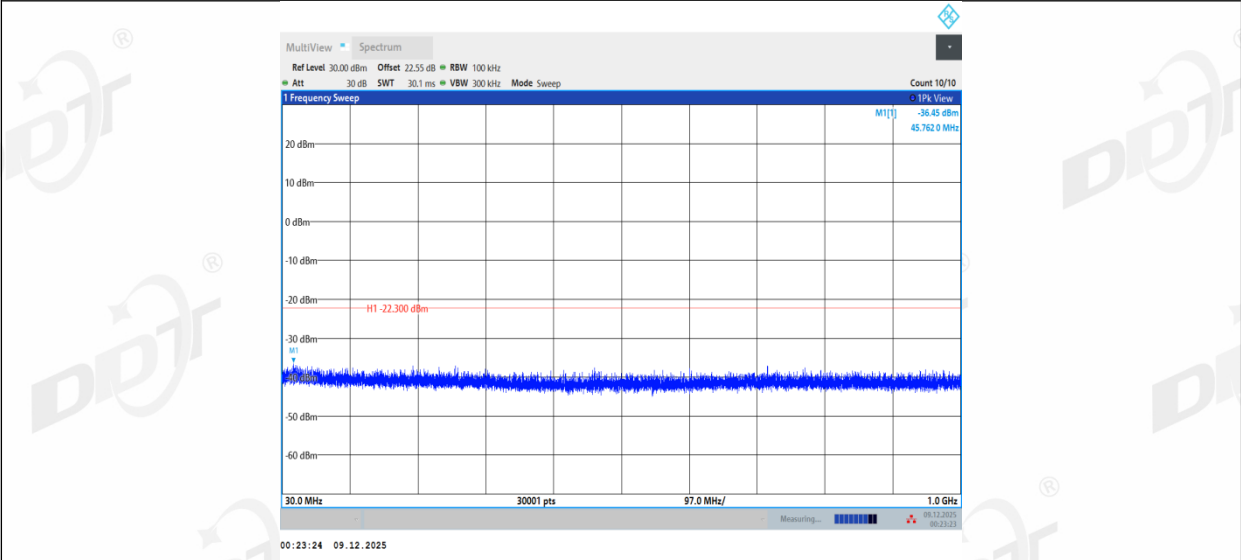

11N20SISO_Ant1_2437_1000~26500

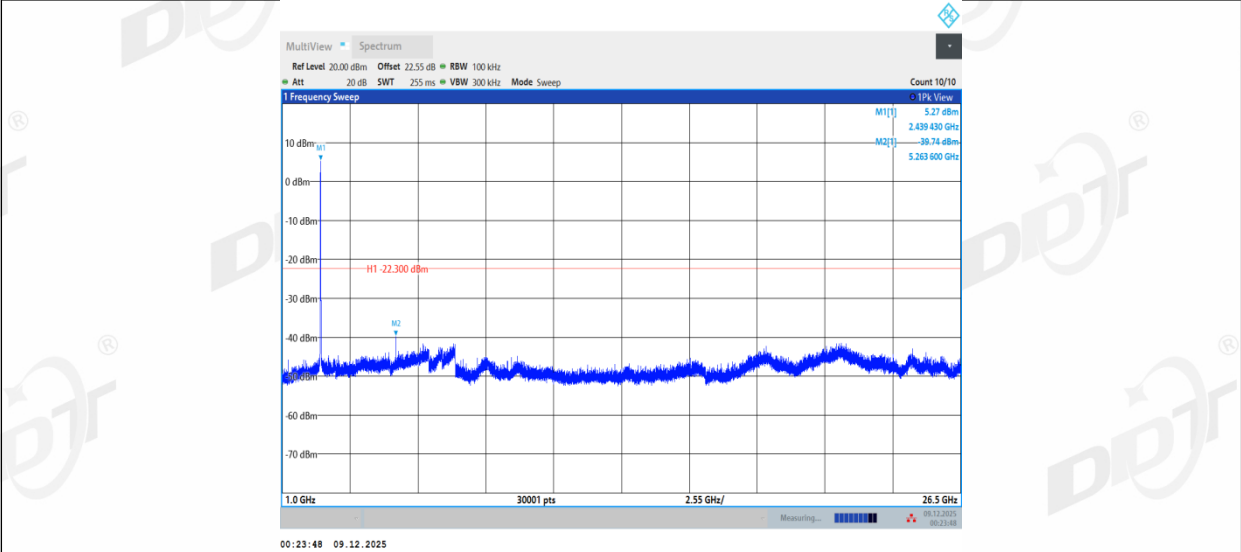

11N20SISO_Ant1_2462_0~Reference