



Wireless Bridge 5 GHz  
LynxPro

|       |                               |         |       |
|-------|-------------------------------|---------|-------|
| Input | 12V ~ 2.2 A                   | Version | V1.01 |
|       | 66-67 V ~ 0.5 A (PoE IN)      | Model   | L7U9  |
|       | 24 V ~ 0.5 A (Passive PoE IN) |         |       |

Barcode: 1 60900 200000 000000

CE, FCC, RoHS, and other regulatory markings.

CAUTION: DO NOT OPEN THE CASE. THE CASE IS NOT DESIGNED TO BE OPENED BY THE USER. IF THE CASE IS OPENED, THE WARRANTY WILL BE VOID. DO NOT ATTEMPT TO REPAIR OR MODIFY THE DEVICE. IF THE DEVICE IS DAMAGED, CONTACT YOUR LOCAL AUTHORITY FOR DISPOSAL.


© 2010 LynxPro Technology, Inc. All rights reserved. Made in China.

This device complies with Part 15 of the FCC rules and contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lysora Technology Inc.

Made in Vietnam/Fabriqu  au Vietnam/Hecho en Vietnam

## 固定来料部分

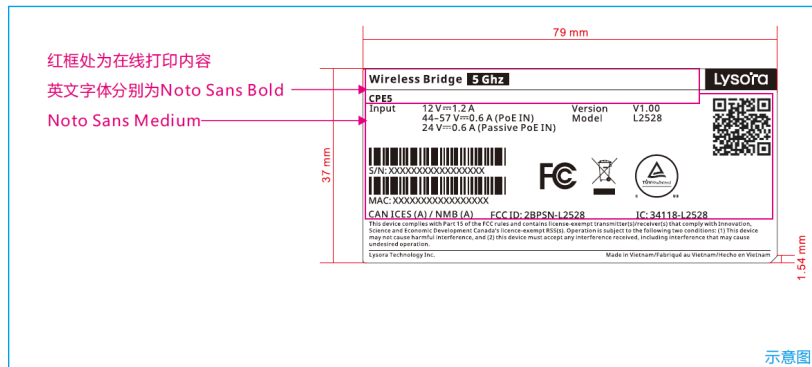

### 技术要求

1. 材质为50番偏白哑镜、覆哑膜，尺寸79x37mm，背胶类型应耐高温，不起泡。

要求标签使用耐酒精和正己烷测试的碳带规格

2. 黑白印刷

3. 公差+0.2mm,-0.2mm

4. N长度供货

5. 印刷不得有缺划、断划、毛刺等现象

6. 制品要经确认方可量产

标贴粘度需要满足耐高温最高100度/最低-40度的要求

7. 背网格胶，背胶类型应耐高温，耐起泡。

要求使用耐酒精和正己烷测试的碳带规格胶水应保证贴上去不能起泡，老化后不能起翘，不能爬墙，且测试要求满足LYSORA《标签测试规范》

(针对外协厂如果测试不起泡可以继续使用平纹胶)。