

11AX20MIMO	Ant3	5320	NV	30	-20000.00	-3.759398	20	PASS
11AX20MIMO	Ant3	5320	NV	40	-40000.00	-7.518797	20	PASS
11AX20MIMO	Ant1	5500	NV	0	-20000.00	-3.636364	20	PASS
11AX20MIMO	Ant1	5500	NV	10	-20000.00	-3.636364	20	PASS
11AX20MIMO	Ant1	5500	NV	20	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant1	5500	NV	30	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant1	5500	NV	40	-20000.00	-3.636364	20	PASS
11AX20MIMO	Ant2	5500	NV	0	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant2	5500	NV	10	-20000.00	-3.636364	20	PASS
11AX20MIMO	Ant2	5500	NV	20	-20000.00	-3.636364	20	PASS
11AX20MIMO	Ant2	5500	NV	30	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant2	5500	NV	40	0.00	0.000000	20	PASS
11AX20MIMO	Ant3	5500	NV	0	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant3	5500	NV	10	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant3	5500	NV	20	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant3	5500	NV	30	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant3	5500	NV	40	-40000.00	-7.272727	20	PASS
11AX20MIMO	Ant1	5580	NV	0	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant1	5580	NV	10	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant1	5580	NV	20	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant1	5580	NV	30	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant1	5580	NV	40	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant2	5580	NV	0	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant2	5580	NV	10	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant2	5580	NV	20	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant2	5580	NV	30	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant2	5580	NV	40	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant3	5580	NV	0	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant3	5580	NV	10	-20000.00	-3.584229	20	PASS
11AX20MIMO	Ant3	5580	NV	20	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant3	5580	NV	30	-40000.00	-7.168459	20	PASS
11AX20MIMO	Ant3	5580	NV	40	-40000.00	-7.168459	20	PASS

11AX20MIMO	Ant1	5700	NV	0	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant1	5700	NV	10	-20000.00	-3.508772	20	PASS
11AX20MIMO	Ant1	5700	NV	20	-20000.00	-3.508772	20	PASS
11AX20MIMO	Ant1	5700	NV	30	-20000.00	-3.508772	20	PASS
11AX20MIMO	Ant1	5700	NV	40	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant2	5700	NV	0	-20000.00	-3.508772	20	PASS
11AX20MIMO	Ant2	5700	NV	10	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant2	5700	NV	20	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant2	5700	NV	30	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant2	5700	NV	40	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant3	5700	NV	0	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant3	5700	NV	10	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant3	5700	NV	20	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant3	5700	NV	30	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant3	5700	NV	40	-40000.00	-7.017544	20	PASS
11AX20MIMO	Ant1	5720	NV	0	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant1	5720	NV	10	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant1	5720	NV	20	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant1	5720	NV	30	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant1	5720	NV	40	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant2	5720	NV	0	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant2	5720	NV	10	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant2	5720	NV	20	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant2	5720	NV	30	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant2	5720	NV	40	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant3	5720	NV	0	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant3	5720	NV	10	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant3	5720	NV	20	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant3	5720	NV	30	-20000.00	-3.496503	20	PASS
11AX20MIMO	Ant3	5720	NV	40	-40000.00	-6.993007	20	PASS
11AX20MIMO	Ant1	5745	NV	0	-20000.00	-3.481288	20	PASS
11AX20MIMO	Ant1	5745	NV	10	-40000.00	-6.962576	20	PASS

11AX20MIMO	Ant1	5745	NV	20	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant1	5745	NV	30	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant1	5745	NV	40	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant2	5745	NV	0	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant2	5745	NV	10	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant2	5745	NV	20	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant2	5745	NV	30	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant2	5745	NV	40	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant3	5745	NV	0	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant3	5745	NV	10	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant3	5745	NV	20	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant3	5745	NV	30	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant3	5745	NV	40	-40000.00	-6.962576	20	PASS
11AX20MIMO	Ant1	5785	NV	0	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant1	5785	NV	10	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant1	5785	NV	20	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant1	5785	NV	30	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant1	5785	NV	40	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant2	5785	NV	0	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant2	5785	NV	10	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant2	5785	NV	20	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant2	5785	NV	30	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant2	5785	NV	40	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant3	5785	NV	0	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant3	5785	NV	10	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant3	5785	NV	20	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant3	5785	NV	30	-40000.00	-6.914434	20	PASS
11AX20MIMO	Ant3	5785	NV	40	-20000.00	-3.457217	20	PASS
11AX20MIMO	Ant1	5825	NV	0	-20000.00	-3.433476	20	PASS
11AX20MIMO	Ant1	5825	NV	10	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant1	5825	NV	20	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant1	5825	NV	30	-20000.00	-3.433476	20	PASS

11AX20MIMO	Ant1	5825	NV	40	-20000.00	-3.433476	20	PASS
11AX20MIMO	Ant2	5825	NV	0	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant2	5825	NV	10	-20000.00	-3.433476	20	PASS
11AX20MIMO	Ant2	5825	NV	20	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant2	5825	NV	30	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant2	5825	NV	40	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant3	5825	NV	0	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant3	5825	NV	10	-20000.00	-3.433476	20	PASS
11AX20MIMO	Ant3	5825	NV	20	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant3	5825	NV	30	-40000.00	-6.866953	20	PASS
11AX20MIMO	Ant3	5825	NV	40	-40000.00	-6.866953	20	PASS
11AX40MIMO	Ant1	5190	NV	0	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant1	5190	NV	10	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant1	5190	NV	20	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant1	5190	NV	30	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant1	5190	NV	40	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant2	5190	NV	0	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant2	5190	NV	10	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant2	5190	NV	20	40000.00	7.707129	20	PASS
11AX40MIMO	Ant2	5190	NV	30	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant2	5190	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5190	NV	0	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant3	5190	NV	10	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant3	5190	NV	20	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5190	NV	30	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant3	5190	NV	40	-40000.00	-7.707129	20	PASS
11AX40MIMO	Ant1	5230	NV	0	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant1	5230	NV	10	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5230	NV	20	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant1	5230	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5230	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5230	NV	0	-40000.00	-7.648184	20	PASS

11AX40MIMO	Ant2	5230	NV	10	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5230	NV	20	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant2	5230	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5230	NV	40	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant3	5230	NV	0	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant3	5230	NV	10	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant3	5230	NV	20	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant3	5230	NV	30	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant3	5230	NV	40	-40000.00	-7.648184	20	PASS
11AX40MIMO	Ant1	5270	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5270	NV	10	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant1	5270	NV	20	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant1	5270	NV	30	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant1	5270	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5270	NV	0	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant2	5270	NV	10	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant2	5270	NV	20	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5270	NV	30	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant2	5270	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5270	NV	0	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant3	5270	NV	10	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant3	5270	NV	20	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant3	5270	NV	30	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant3	5270	NV	40	-40000.00	-7.590133	20	PASS
11AX40MIMO	Ant1	5310	NV	0	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant1	5310	NV	10	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant1	5310	NV	20	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant1	5310	NV	30	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant1	5310	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5310	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5310	NV	10	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant2	5310	NV	20	-40000.00	-7.532957	20	PASS

11AX40MIMO	Ant2	5310	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5310	NV	40	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant3	5310	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5310	NV	10	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5310	NV	20	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant3	5310	NV	30	-40000.00	-7.532957	20	PASS
11AX40MIMO	Ant3	5310	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5510	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5510	NV	10	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant1	5510	NV	20	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant1	5510	NV	30	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant1	5510	NV	40	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant2	5510	NV	0	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant2	5510	NV	10	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant2	5510	NV	20	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant2	5510	NV	30	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant2	5510	NV	40	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant3	5510	NV	0	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant3	5510	NV	10	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant3	5510	NV	20	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant3	5510	NV	30	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant3	5510	NV	40	-40000.00	-7.259528	20	PASS
11AX40MIMO	Ant1	5550	NV	0	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant1	5550	NV	10	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant1	5550	NV	20	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant1	5550	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5550	NV	40	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant2	5550	NV	0	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant2	5550	NV	10	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant2	5550	NV	20	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5550	NV	30	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant2	5550	NV	40	-40000.00	-7.207207	20	PASS

11AX40MIMO	Ant3	5550	NV	0	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant3	5550	NV	10	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant3	5550	NV	20	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant3	5550	NV	30	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant3	5550	NV	40	-40000.00	-7.207207	20	PASS
11AX40MIMO	Ant1	5670	NV	0	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant1	5670	NV	10	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5670	NV	20	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant1	5670	NV	30	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant1	5670	NV	40	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant2	5670	NV	0	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant2	5670	NV	10	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant2	5670	NV	20	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant2	5670	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5670	NV	40	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant3	5670	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5670	NV	10	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5670	NV	20	-40000.00	-7.054674	20	PASS
11AX40MIMO	Ant3	5670	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5670	NV	40	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5710	NV	0	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant1	5710	NV	10	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant1	5710	NV	20	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant1	5710	NV	30	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant1	5710	NV	40	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant2	5710	NV	0	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant2	5710	NV	10	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant2	5710	NV	20	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5710	NV	30	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant2	5710	NV	40	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant3	5710	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant3	5710	NV	10	-40000.00	-7.005254	20	PASS

11AX40MIMO	Ant3	5710	NV	20	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant3	5710	NV	30	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant3	5710	NV	40	-40000.00	-7.005254	20	PASS
11AX40MIMO	Ant1	5755	NV	0	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant1	5755	NV	10	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant1	5755	NV	20	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant1	5755	NV	30	-80000.00	-13.900956	20	PASS
11AX40MIMO	Ant1	5755	NV	40	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant2	5755	NV	0	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant2	5755	NV	10	40000.00	6.950478	20	PASS
11AX40MIMO	Ant2	5755	NV	20	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant2	5755	NV	30	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5755	NV	40	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant3	5755	NV	0	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant3	5755	NV	10	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant3	5755	NV	20	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant3	5755	NV	30	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant3	5755	NV	40	-40000.00	-6.950478	20	PASS
11AX40MIMO	Ant1	5795	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant1	5795	NV	10	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant1	5795	NV	20	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant1	5795	NV	30	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant1	5795	NV	40	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant2	5795	NV	0	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5795	NV	10	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant2	5795	NV	20	0.00	0.000000	20	PASS
11AX40MIMO	Ant2	5795	NV	30	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant2	5795	NV	40	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant3	5795	NV	0	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant3	5795	NV	10	-80000.00	-13.805004	20	PASS
11AX40MIMO	Ant3	5795	NV	20	-40000.00	-6.902502	20	PASS
11AX40MIMO	Ant3	5795	NV	30	-40000.00	-6.902502	20	PASS

11AX40MIMO	Ant3	5795	NV	40	-40000.00	-6.902502	20	PASS
11AX80MIMO	Ant1	5210	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5210	NV	10	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant1	5210	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5210	NV	30	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant1	5210	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5210	NV	0	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant2	5210	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5210	NV	20	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant2	5210	NV	30	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant2	5210	NV	40	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant3	5210	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5210	NV	10	80000.00	15.355086	20	PASS
11AX80MIMO	Ant3	5210	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5210	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5210	NV	40	-80000.00	-15.355086	20	PASS
11AX80MIMO	Ant1	5290	NV	0	80000.00	15.122873	20	PASS
11AX80MIMO	Ant1	5290	NV	10	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant1	5290	NV	20	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant1	5290	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5290	NV	40	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant2	5290	NV	0	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant2	5290	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5290	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5290	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5290	NV	40	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant3	5290	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5290	NV	10	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant3	5290	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5290	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5290	NV	40	-80000.00	-15.122873	20	PASS
11AX80MIMO	Ant1	5530	NV	0	0.00	0.000000	20	PASS

11AX80MIMO	Ant1	5530	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5530	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5530	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5530	NV	40	-80000.00	-14.466546	20	PASS
11AX80MIMO	Ant2	5530	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5530	NV	10	-80000.00	-14.466546	20	PASS
11AX80MIMO	Ant2	5530	NV	20	-80000.00	-14.466546	20	PASS
11AX80MIMO	Ant2	5530	NV	30	-80000.00	-14.466546	20	PASS
11AX80MIMO	Ant2	5530	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5530	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5530	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5530	NV	20	-80000.00	-14.466546	20	PASS
11AX80MIMO	Ant3	5530	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5530	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5610	NV	0	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant1	5610	NV	10	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant1	5610	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5610	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5610	NV	40	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant2	5610	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5610	NV	10	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant2	5610	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5610	NV	30	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant2	5610	NV	40	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant3	5610	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5610	NV	10	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant3	5610	NV	20	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant3	5610	NV	30	-80000.00	-14.260250	20	PASS
11AX80MIMO	Ant3	5610	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5690	NV	0	80000.00	14.059754	20	PASS
11AX80MIMO	Ant1	5690	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5690	NV	20	-80000.00	-14.059754	20	PASS

11AX80MIMO	Ant1	5690	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5690	NV	40	-80000.00	-14.059754	20	PASS
11AX80MIMO	Ant2	5690	NV	0	-80000.00	-14.059754	20	PASS
11AX80MIMO	Ant2	5690	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5690	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5690	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5690	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5690	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5690	NV	10	-80000.00	-14.059754	20	PASS
11AX80MIMO	Ant3	5690	NV	20	-80000.00	-14.059754	20	PASS
11AX80MIMO	Ant3	5690	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5690	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5775	NV	0	-80000.00	-13.852814	20	PASS
11AX80MIMO	Ant1	5775	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5775	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant1	5775	NV	30	80000.00	13.852814	20	PASS
11AX80MIMO	Ant1	5775	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant2	5775	NV	0	-80000.00	-13.852814	20	PASS
11AX80MIMO	Ant2	5775	NV	10	-80000.00	-13.852814	20	PASS
11AX80MIMO	Ant2	5775	NV	20	-80000.00	-13.852814	20	PASS
11AX80MIMO	Ant2	5775	NV	30	-80000.00	-13.852814	20	PASS
11AX80MIMO	Ant2	5775	NV	40	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5775	NV	0	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5775	NV	10	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5775	NV	20	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5775	NV	30	0.00	0.000000	20	PASS
11AX80MIMO	Ant3	5775	NV	40	0.00	0.000000	20	PASS

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result



The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

12.2. Block diagram of test setup

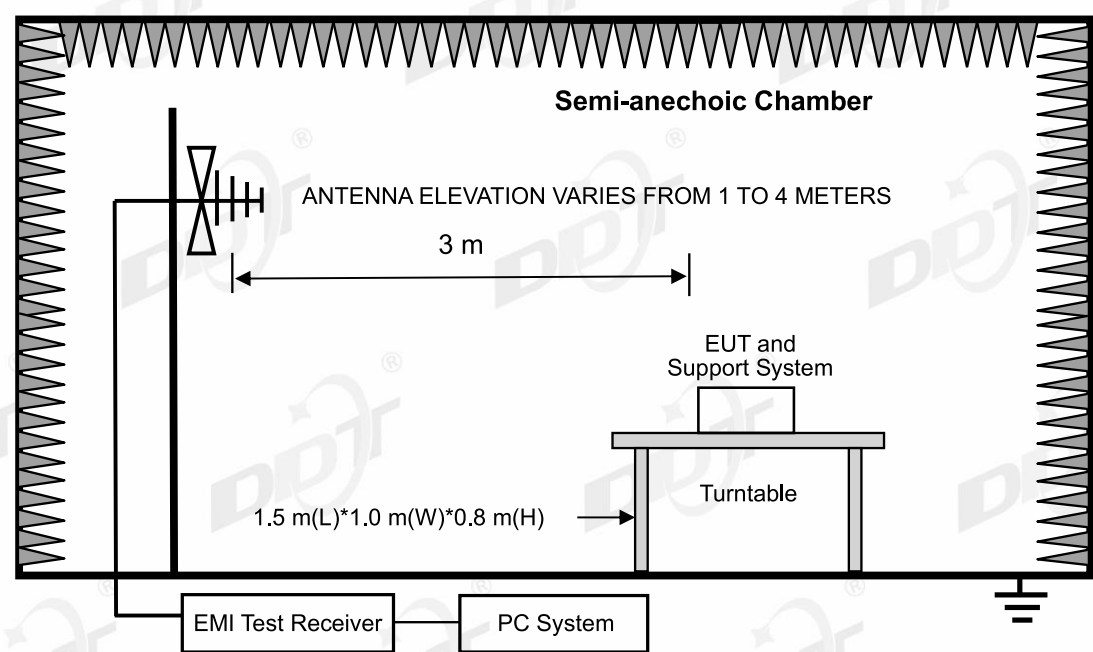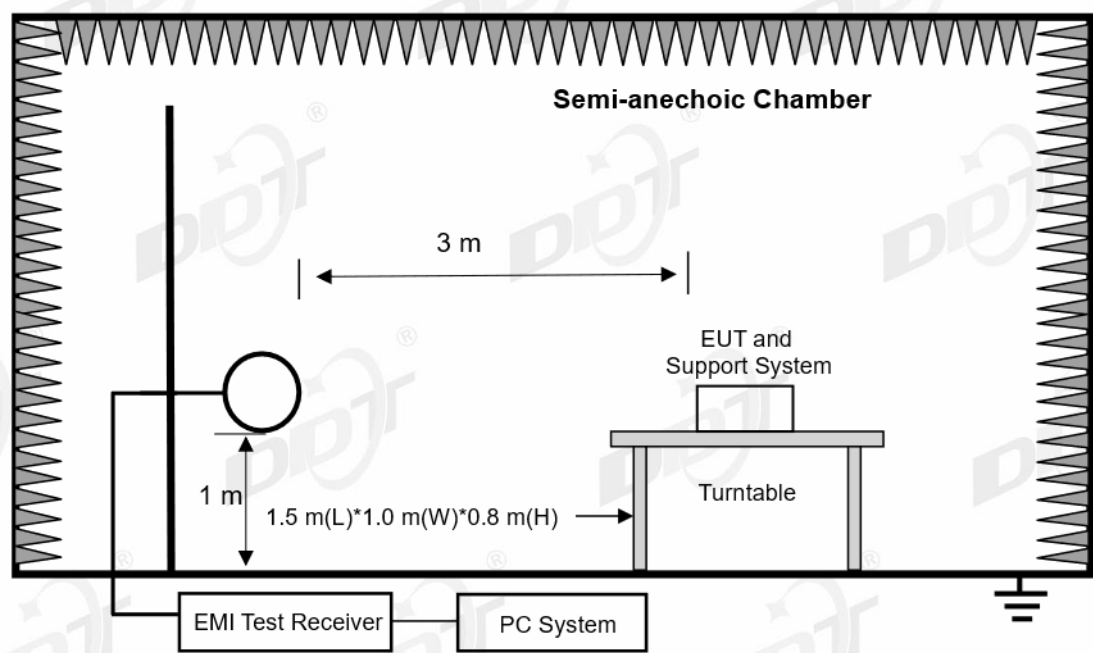

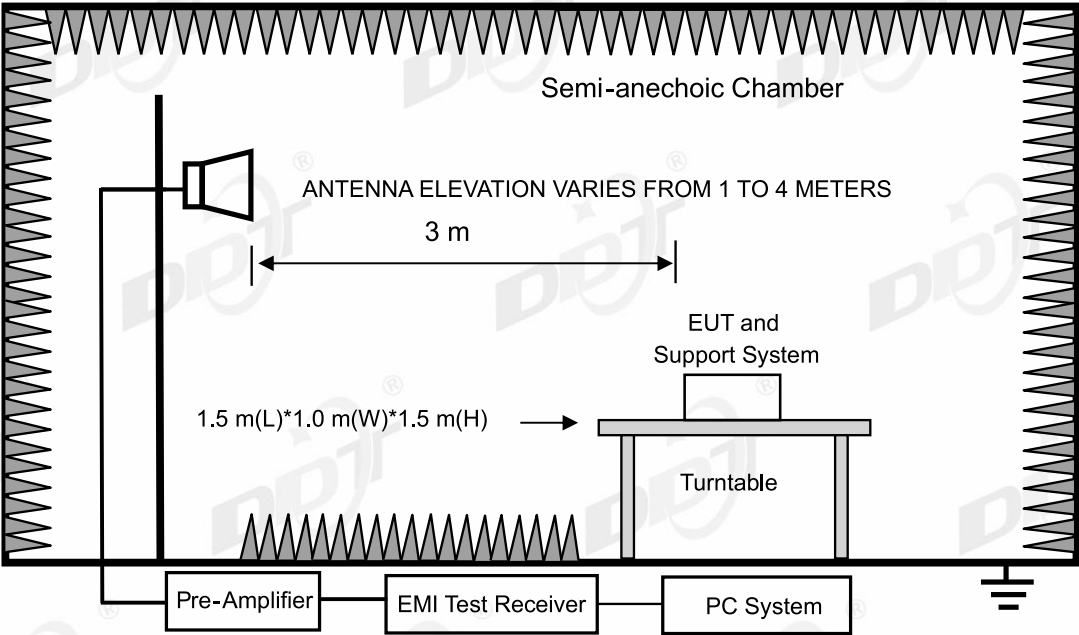

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2 Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	other
Dell laptops	Dell Technologies Inc.	I7-1255U MX550	/

12.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 40 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Below 1G\20250724-080218_H

Memo:

Sample Numbler:S25070107-004

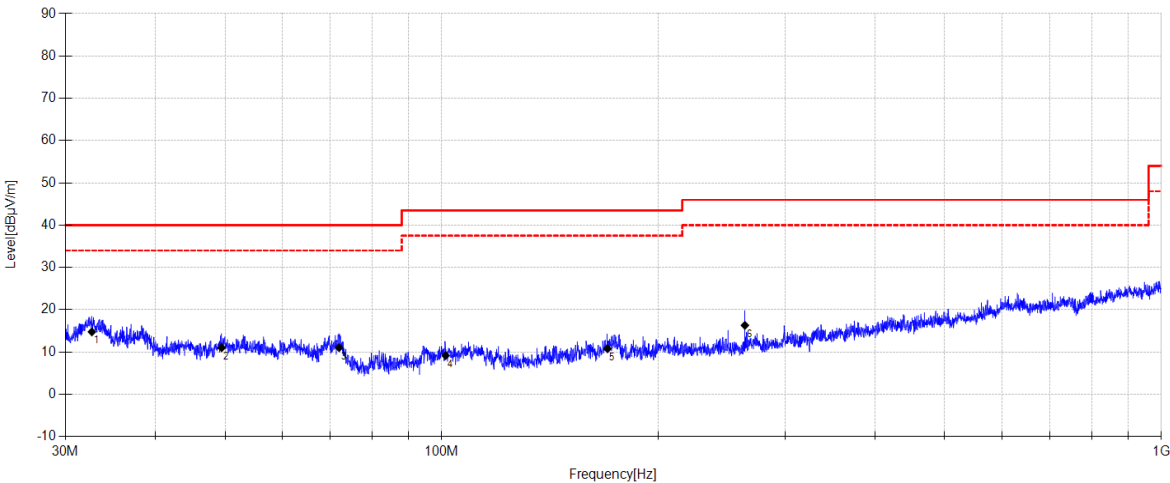

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.656	31.46	10.63	3.78	14.77	40.00	25.23	QP	Horizontal
2	49.458	25.4	12.84	3.88	11.02	40.00	28.98	QP	Horizontal
3	72.021	28.51	9.59	4.03	11.03	40.00	28.97	QP	Horizontal
4	101.264	25.52	10.51	4.23	9.16	43.50	34.34	QP	Horizontal
5	170.016	28.14	9.21	4.60	10.78	43.50	32.72	QP	Horizontal
6	263.889	30.93	11.66	5.05	16.31	46.00	29.69	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Below 1G\20250724-080241_V

Memo:

Sample Numbler:S25070107-004

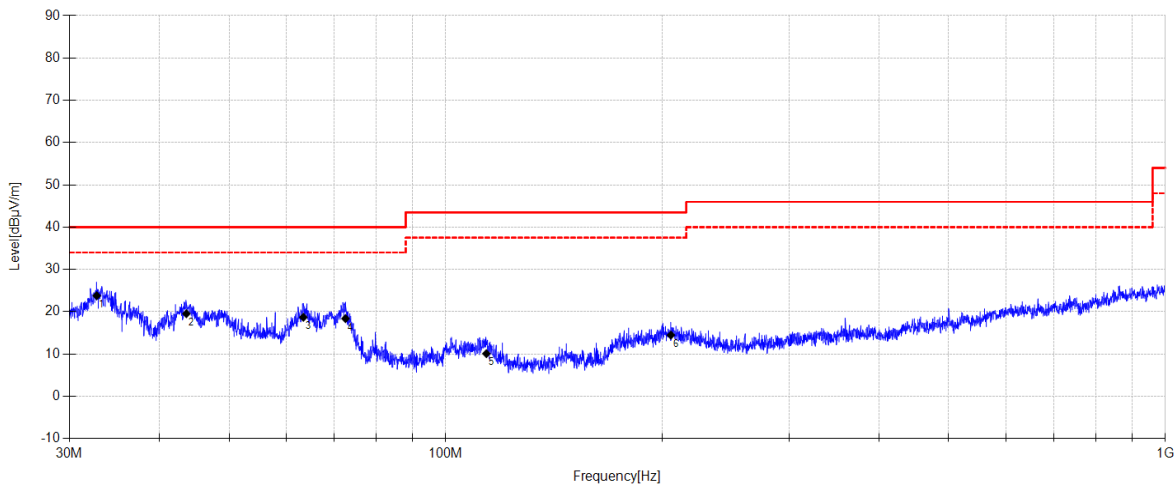

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.748	40.41	10.70	3.78	23.79	40.00	16.21	QP	Vertical
2	43.625	33.87	12.92	3.84	19.53	40.00	20.47	QP	Vertical
3	63.437	33.46	12.36	3.98	18.70	40.00	21.30	QP	Vertical
4	72.579	36.07	9.37	4.04	18.38	40.00	21.62	QP	Vertical
5	113.923	25.97	10.93	4.30	10.09	43.50	33.41	QP	Vertical
6	205.596	30.31	10.59	4.79	14.48	43.50	29.02	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Below 1G\20250724-080329_H

Memo:

Sample Numbler:S25070107-004

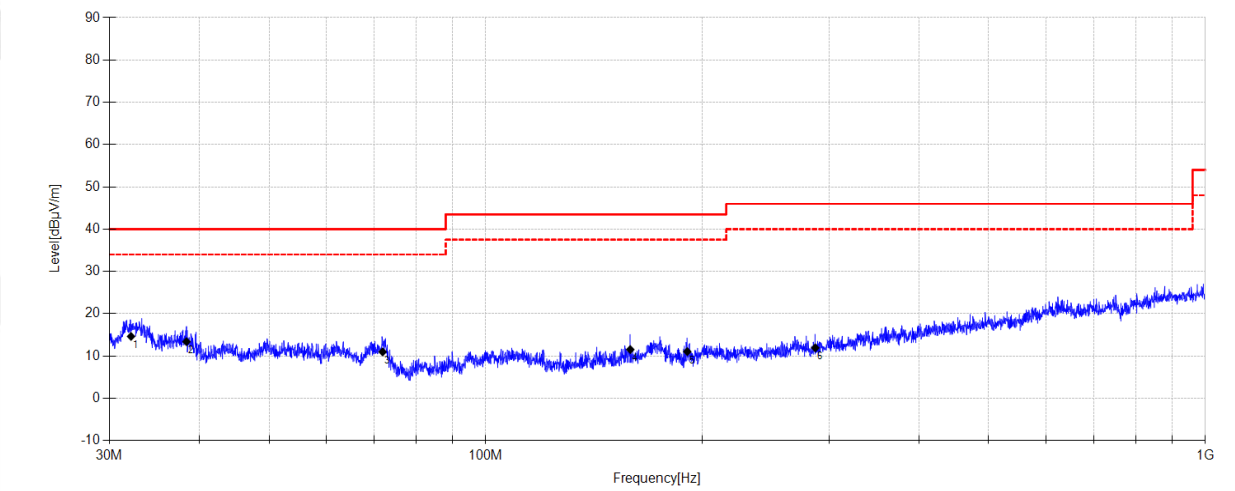

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.156	31.73	10.23	3.77	14.63	40.00	25.37	QP	Horizontal
2	38.398	29.24	11.44	3.81	13.39	40.00	26.61	QP	Horizontal
3	71.920	28.46	9.59	4.03	10.98	40.00	29.02	QP	Horizontal
4	158.838	29.58	8.57	4.54	11.53	43.50	31.97	QP	Horizontal
5	190.602	27.71	9.82	4.71	11.05	43.50	32.45	QP	Horizontal
6	287.054	25.53	12.61	5.16	11.93	46.00	34.07	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Below 1G\20250724-080358_V

Memo:

Sample Numbler:S25070107-004

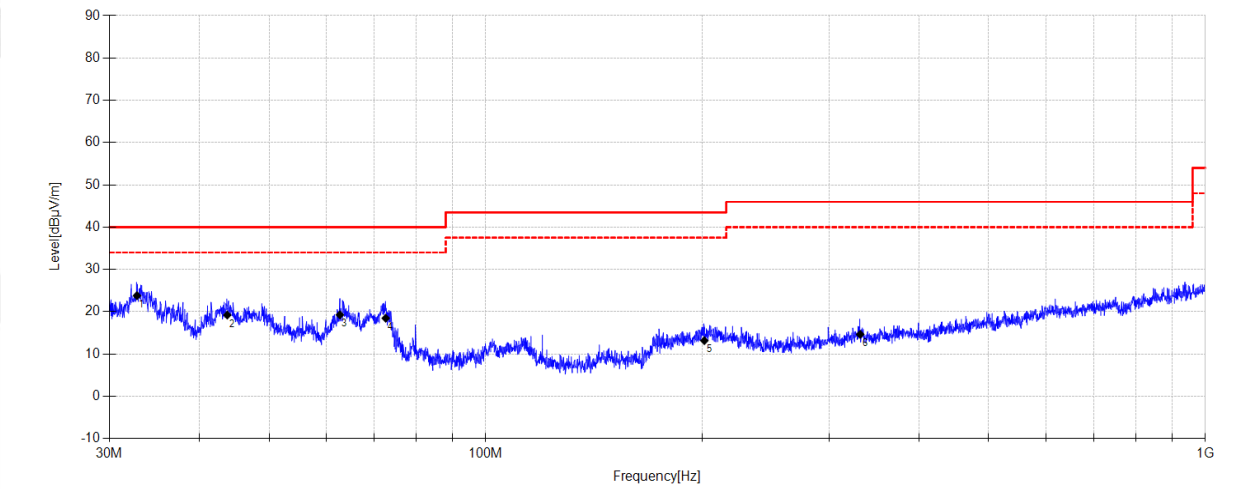

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.771	40.39	10.72	3.78	23.79	40.00	16.21	QP	Vertical
2	43.747	33.52	12.95	3.84	19.21	40.00	20.79	QP	Vertical
3	62.729	33.87	12.51	3.98	19.26	40.00	20.74	QP	Vertical
4	72.630	36.18	9.35	4.04	18.47	40.00	21.53	QP	Vertical
5	201.316	28.84	10.75	4.77	13.16	43.50	30.34	QP	Vertical
6	331.428	26.33	14.39	5.35	14.65	46.00	31.35	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-24 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2530

Test Mode: MIMO TX 11AX20 5180MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.8°C;Humi:57.5% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\58

Memo: Sample Numbre:S25070107-004

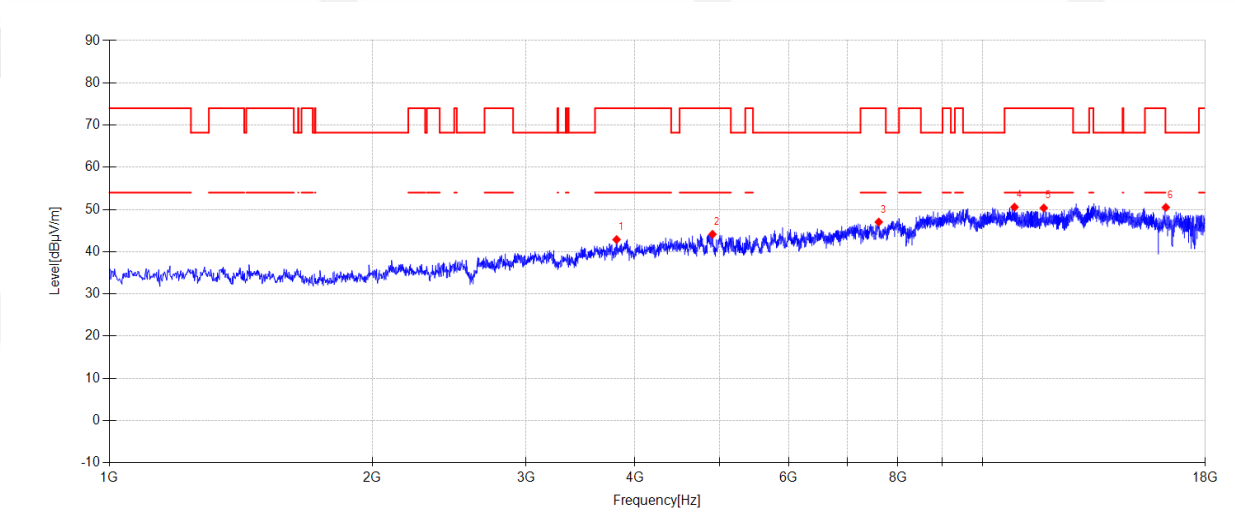

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3810.100	46.52	30.74	5.25	-39.63	42.88	74.00	31.12	PK	Horizontal
2	4906.600	44.34	33.01	6.39	-39.61	44.13	74.00	29.87	PK	Horizontal
3	7607.900	43.34	36.52	7.62	-40.45	47.03	74.00	26.97	PK	Horizontal
4	10882.100	41.93	39.32	8.38	-39.07	50.56	74.00	23.44	PK	Horizontal
5	11754.200	42.29	38.95	8.87	-39.75	50.36	74.00	23.64	PK	Horizontal
6	16218.400	41.85	37.80	10.40	-39.55	50.50	68.20	17.70	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\59

Memo:

Sample Numbler:S25070107-004

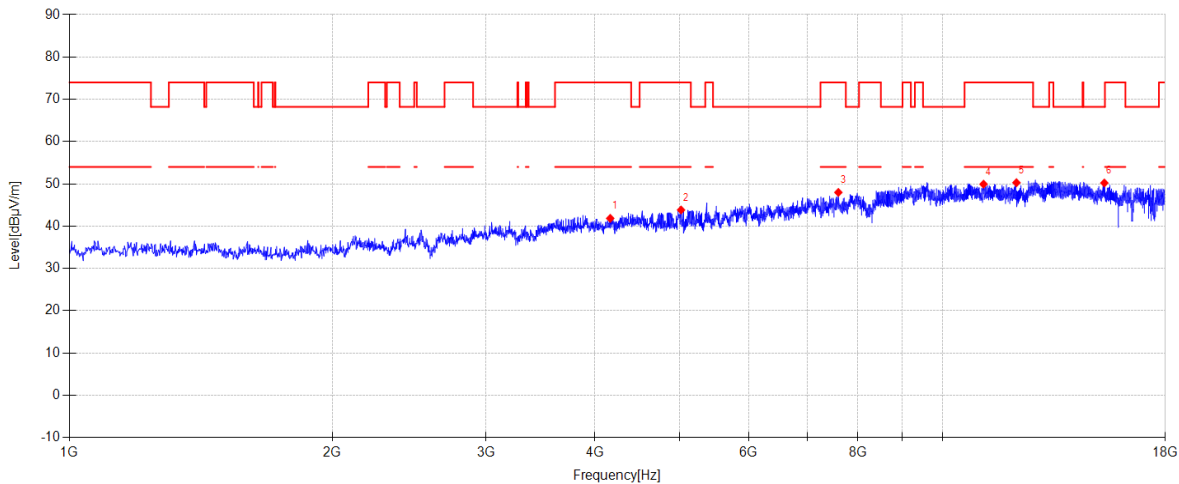

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4163.700	44.82	31.20	5.50	-39.67	41.85	74.00	32.15	PK	Vertical
2	5018.800	43.69	33.24	6.51	-39.60	43.84	74.00	30.16	PK	Vertical
3	7599.400	44.33	36.50	7.61	-40.46	47.98	74.00	26.02	PK	Vertical
4	11143.900	41.30	39.26	8.51	-39.14	49.93	74.00	24.07	PK	Vertical
5	12155.400	41.86	39.30	9.09	-39.97	50.28	74.00	23.72	PK	Vertical
6	15325.900	40.09	39.59	9.94	-39.40	50.22	68.20	17.98	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\60

Memo:

Sample Numbler:S25070107-004

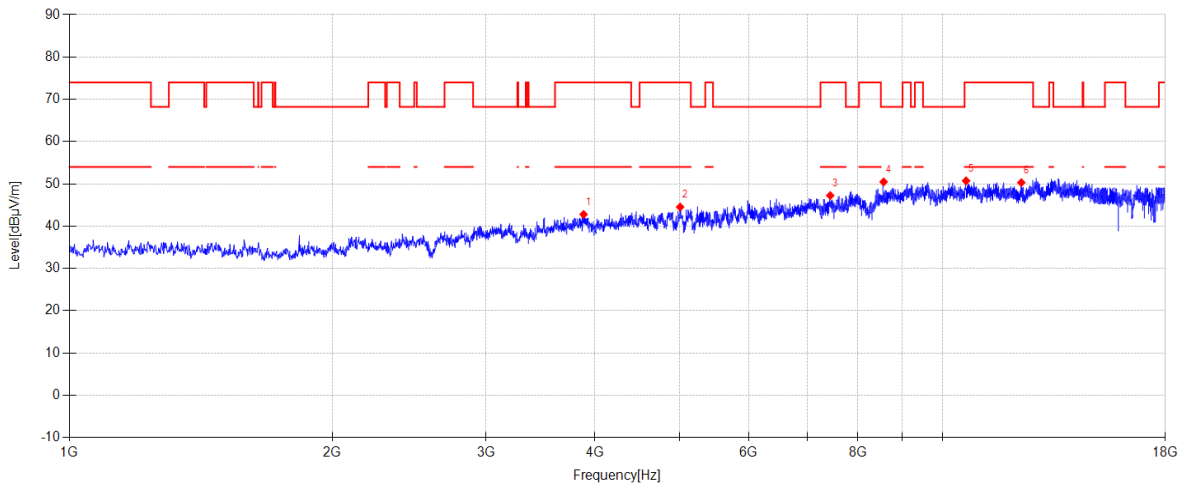


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3881.500	46.07	31.09	5.27	-39.65	42.78	74.00	31.22	PK	Horizontal
2	5006.900	44.42	33.21	6.50	-39.60	44.53	74.00	29.47	PK	Horizontal
3	7437.900	43.73	36.62	7.51	-40.61	47.25	74.00	26.75	PK	Horizontal
4	8563.300	43.95	37.87	8.02	-39.37	50.47	68.20	17.73	PK	Horizontal
5	10642.400	42.34	39.28	8.31	-39.21	50.72	74.00	23.28	PK	Horizontal
6	12311.800	41.78	39.30	9.16	-39.94	50.30	74.00	23.70	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-24 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2530
Test Mode: MIMO TX 11AX20 5320MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.8°C;Humi:57.5% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\61
Memo: Sample Numbler:S25070107-004

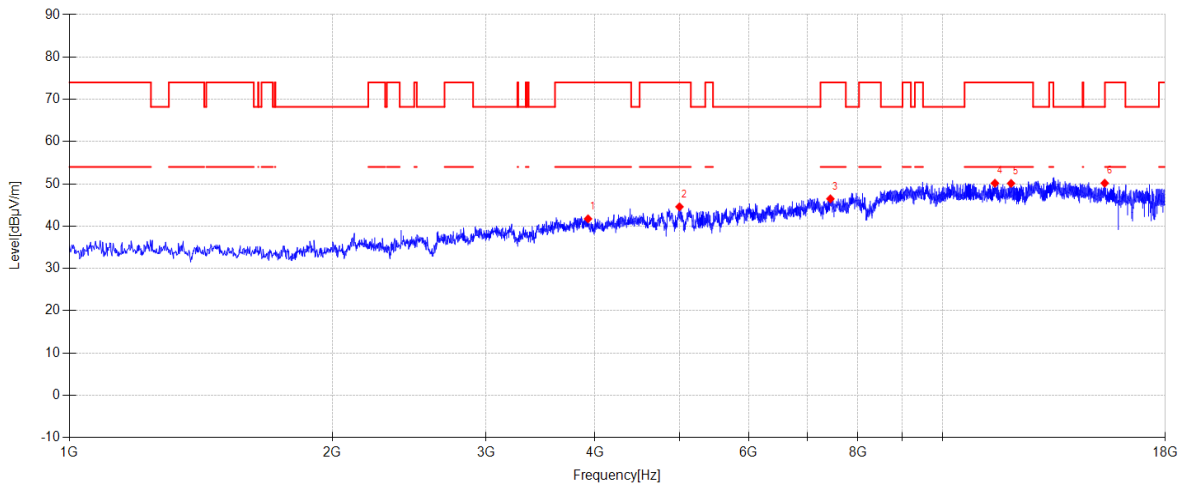

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3927.400	44.95	31.15	5.29	-39.66	41.73	74.00	32.27	PK	Vertical
2	4998.400	44.48	33.20	6.50	-39.60	44.58	74.00	29.42	PK	Vertical
3	7441.300	42.94	36.62	7.51	-40.60	46.47	74.00	27.53	PK	Vertical
4	11483.900	41.70	39.22	8.71	-39.48	50.15	74.00	23.85	PK	Vertical
5	11983.700	41.93	39.15	9.01	-39.98	50.11	74.00	23.89	PK	Vertical
6	15339.500	40.14	39.48	9.94	-39.40	50.16	68.20	18.04	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\62

Memo:

Sample Numbler:S25070107-004

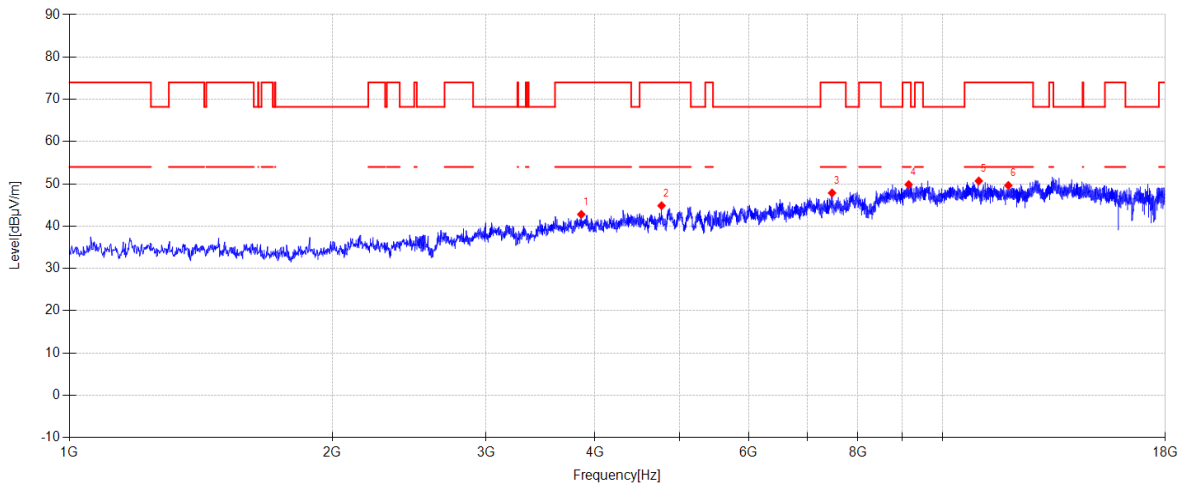


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3857.700	46.21	30.95	5.27	-39.65	42.78	74.00	31.22	PK	Horizontal
2	4767.200	45.87	32.37	6.22	-39.62	44.84	74.00	29.16	PK	Horizontal
3	7473.600	44.34	36.55	7.53	-40.57	47.85	74.00	26.15	PK	Horizontal
4	9148.100	42.14	38.50	8.13	-38.92	49.85	74.00	24.15	PK	Horizontal
5	11006.200	41.98	39.30	8.42	-39.01	50.69	74.00	23.31	PK	Horizontal
6	11897.000	41.67	38.90	8.96	-39.90	49.63	74.00	24.37	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-24 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2530
Test Mode: MIMO TX 11AX20 5500MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.8°C;Humi:57.5% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\63
Memo: Sample Numbler:S25070107-004

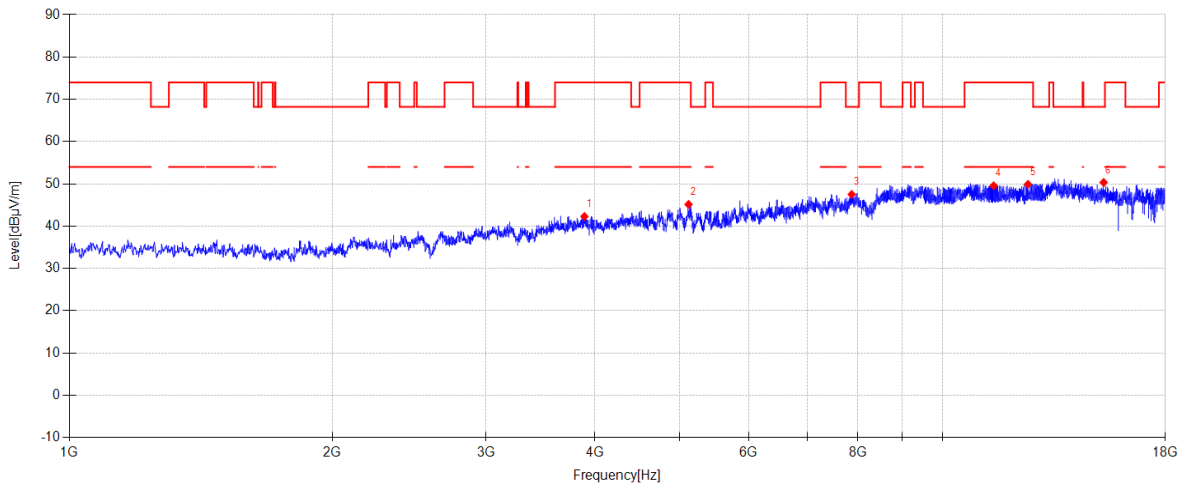

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3890.000	45.53	31.14	5.28	-39.65	42.30	74.00	31.70	PK	Vertical
2	5119.100	44.79	33.40	6.56	-39.60	45.15	74.00	28.85	PK	Vertical
3	7871.400	43.00	36.94	7.79	-40.22	47.51	68.20	20.69	PK	Vertical
4	11446.500	41.06	39.25	8.69	-39.45	49.55	74.00	24.45	PK	Vertical
5	12529.400	41.13	39.40	9.26	-39.89	49.90	74.00	24.10	PK	Vertical
6	15298.700	40.03	39.79	9.92	-39.40	50.34	68.20	17.86	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\64

Memo:

Sample Numbler:S25070107-004

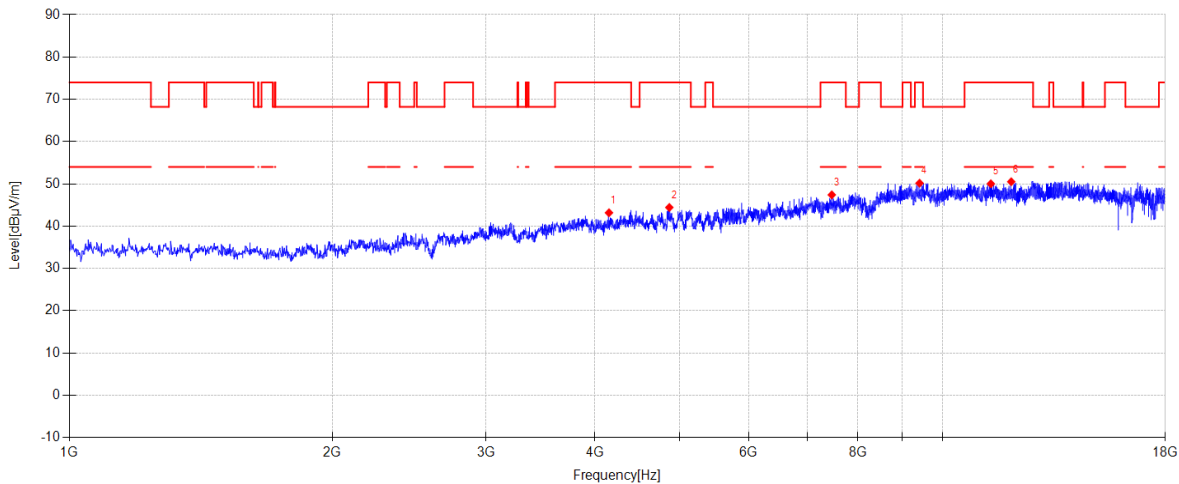

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4150.100	46.15	31.20	5.49	-39.67	43.17	74.00	30.83	PK	Horizontal
2	4865.800	44.14	33.55	6.34	-39.61	44.42	74.00	29.58	PK	Horizontal
3	7468.500	43.89	36.56	7.53	-40.58	47.40	74.00	26.60	PK	Horizontal
4	9413.300	42.47	38.70	8.12	-39.13	50.16	74.00	23.84	PK	Horizontal
5	11361.500	41.48	39.26	8.64	-39.36	50.02	74.00	23.98	PK	Horizontal
6	11988.800	42.32	39.17	9.01	-39.99	50.51	74.00	23.49	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\65

Memo:

Sample Numbler:S25070107-004

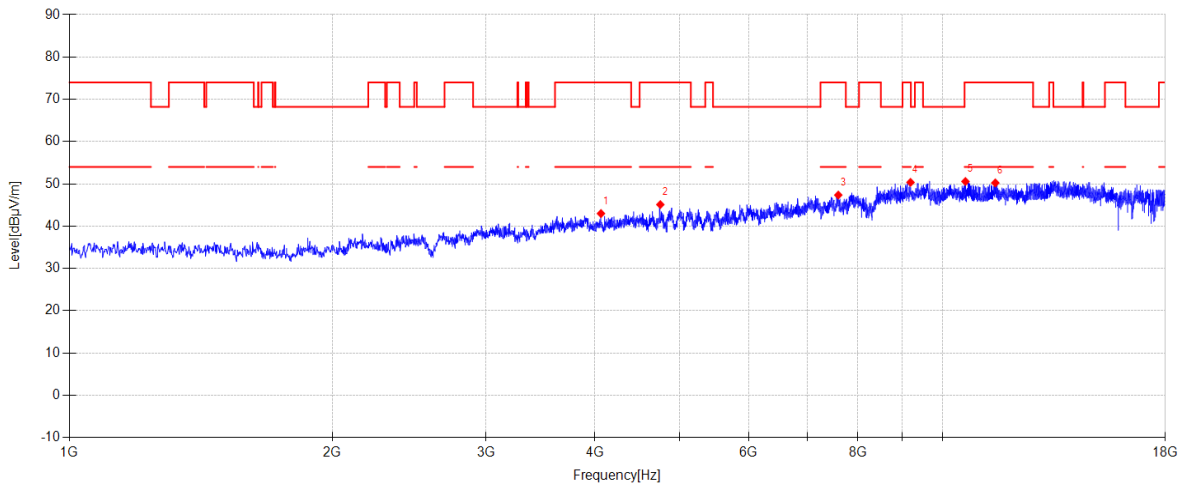

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4063.400	46.24	31.03	5.39	-39.67	42.99	74.00	31.01	PK	Vertical
2	4751.900	46.21	32.31	6.20	-39.62	45.10	74.00	28.90	PK	Vertical
3	7597.700	43.70	36.50	7.61	-40.46	47.35	74.00	26.65	PK	Vertical
4	9192.300	42.61	38.58	8.12	-38.95	50.36	74.00	23.64	PK	Vertical
5	10625.400	42.23	39.25	8.30	-39.22	50.56	74.00	23.44	PK	Vertical
6	11495.800	41.81	39.20	8.72	-39.50	50.23	74.00	23.77	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-24

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\66

Memo:

Sample Numbler:S25070107-004

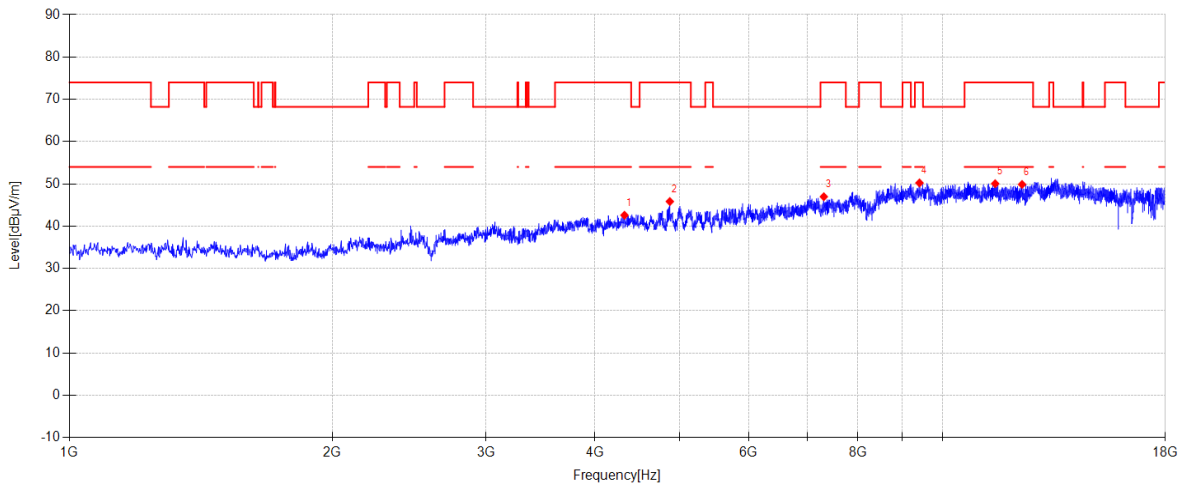


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4323.500	44.94	31.60	5.69	-39.65	42.58	74.00	31.42	PK	Horizontal
2	4872.600	45.65	33.44	6.35	-39.61	45.83	74.00	28.17	PK	Horizontal
3	7313.800	43.39	36.87	7.43	-40.72	46.97	74.00	27.03	PK	Horizontal
4	9411.600	42.54	38.70	8.12	-39.13	50.23	74.00	23.77	PK	Horizontal
5	11492.400	41.60	39.21	8.72	-39.49	50.04	74.00	23.96	PK	Horizontal
6	12335.600	41.33	39.30	9.17	-39.93	49.87	74.00	24.13	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-24 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2530
Test Mode: MIMO TX 11AX20 5720MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.8°C;Humi:57.5% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\67
Memo: Sample Numbler:S25070107-004

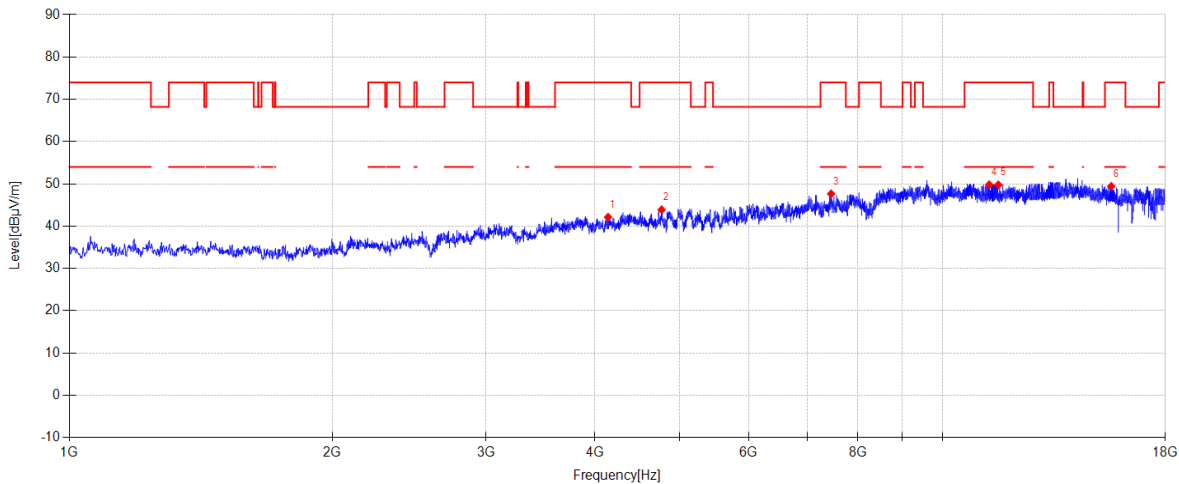


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4139.900	45.14	31.18	5.48	-39.67	42.13	74.00	31.87	PK	Vertical
2	4768.900	44.91	32.38	6.22	-39.62	43.89	74.00	30.11	PK	Vertical
3	7456.600	44.12	36.59	7.52	-40.59	47.64	74.00	26.36	PK	Vertical
4	11313.900	41.29	39.21	8.61	-39.31	49.80	74.00	24.20	PK	Vertical
5	11587.600	41.57	39.02	8.77	-39.59	49.77	74.00	24.23	PK	Vertical
6	15606.400	40.17	38.59	10.06	-39.40	49.42	74.00	24.58	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-08-10 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2530
Test Mode: MIMO TX 11AX20 5200MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.8°C;Humi:57.5% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\68
Memo: Sample Numbler:S25070107-004

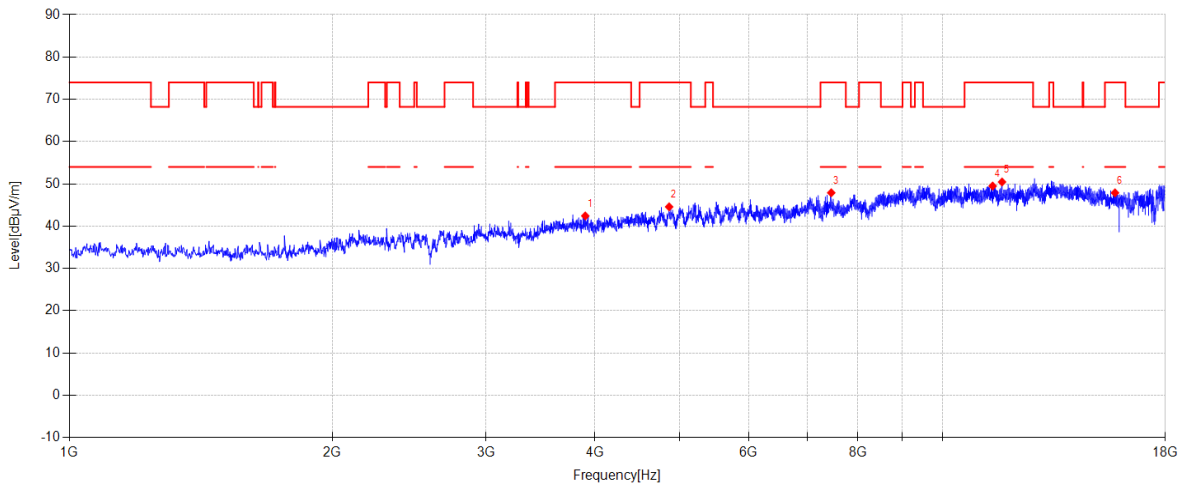

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3898.500	45.61	31.19	5.28	-39.66	42.42	74.00	31.58	PK	Horizontal
2	4864.100	44.27	33.57	6.34	-39.61	44.57	74.00	29.43	PK	Horizontal
3	7458.300	44.38	36.58	7.52	-40.59	47.89	74.00	26.11	PK	Horizontal
4	11415.900	40.96	39.28	8.67	-39.42	49.49	74.00	24.51	PK	Horizontal
5	11701.500	42.31	39.00	8.84	-39.70	50.45	74.00	23.55	PK	Horizontal
6	15762.800	38.78	38.37	10.13	-39.40	47.88	74.00	26.12	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5200MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\69

Memo:

Sample Numbler:S25070107-004

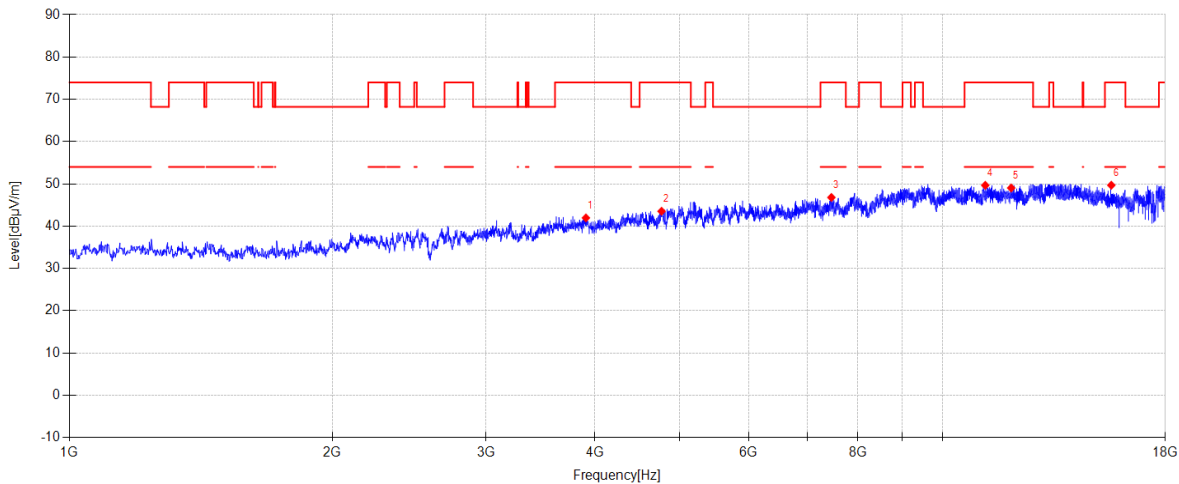

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3905.300	45.15	31.19	5.28	-39.66	41.96	74.00	32.04	PK	Vertical
2	4767.200	44.55	32.37	6.22	-39.62	43.52	74.00	30.48	PK	Vertical
3	7461.700	43.26	36.58	7.53	-40.58	46.79	74.00	27.21	PK	Vertical
4	11194.900	41.10	39.21	8.54	-39.19	49.66	74.00	24.34	PK	Vertical
5	11987.100	40.86	39.16	9.01	-39.99	49.04	74.00	24.96	PK	Vertical
6	15609.800	40.43	38.59	10.06	-39.40	49.68	74.00	24.32	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-08-10

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2530

Test Mode:MIMO TX 11AX20 5240MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.8°C;Humi:57.5%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\70

Memo:Sample Numbler:S25070107-004

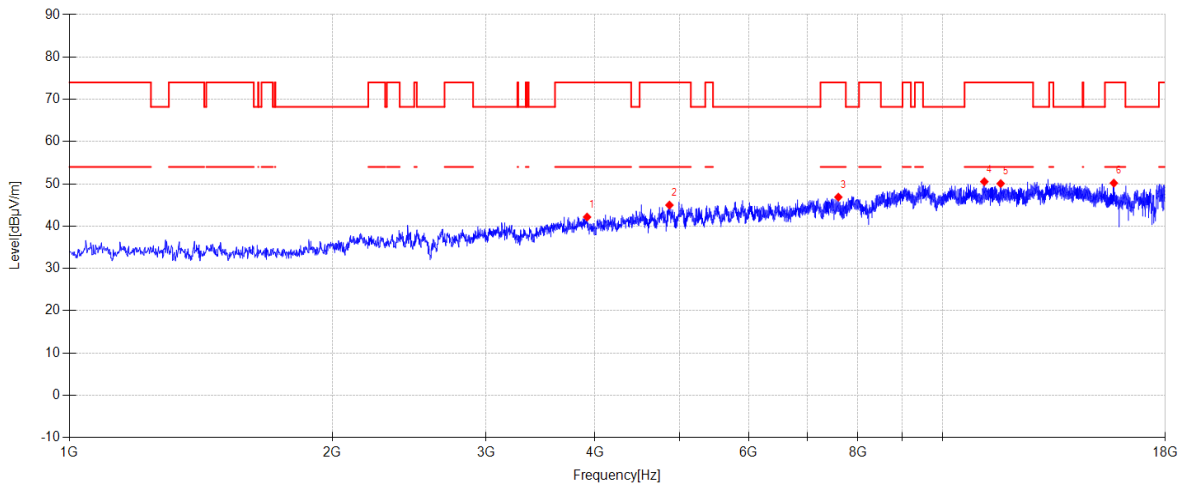

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3917.200	45.36	31.17	5.28	-39.66	42.15	74.00	31.85	PK	Horizontal
2	4867.500	44.73	33.52	6.34	-39.61	44.98	74.00	29.02	PK	Horizontal
3	7599.400	43.22	36.50	7.61	-40.46	46.87	74.00	27.13	PK	Horizontal
4	11167.700	41.94	39.23	8.52	-39.17	50.52	74.00	23.48	PK	Horizontal
5	11660.700	41.91	39.00	8.82	-39.66	50.07	74.00	23.93	PK	Horizontal
6	15715.200	41.00	38.47	10.11	-39.40	50.18	74.00	23.82	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5240MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\71

Memo:

Sample Numbler:S25070107-004

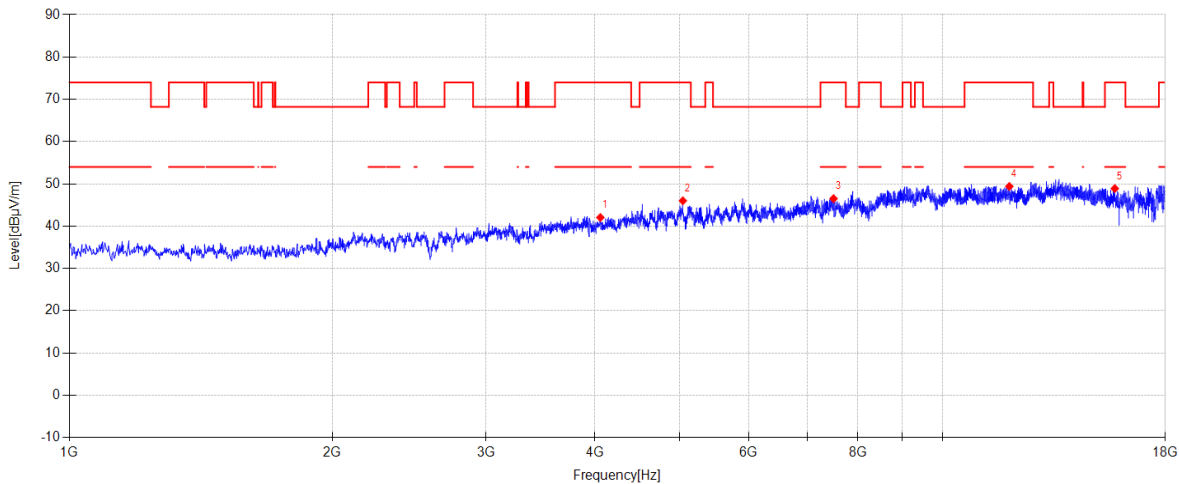

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4056.600	45.34	31.01	5.38	-39.68	42.05	74.00	31.95	PK	Vertical
2	5042.600	45.79	33.29	6.52	-39.60	46.00	74.00	28.00	PK	Vertical
3	7504.200	43.02	36.49	7.55	-40.55	46.51	74.00	27.49	PK	Vertical
4	11929.300	41.35	38.99	8.98	-39.93	49.39	74.00	24.61	PK	Vertical
5	15754.300	39.77	38.39	10.13	-39.40	48.89	74.00	25.11	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5260MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\72

Memo:

Sample Numbler:S25070107-004

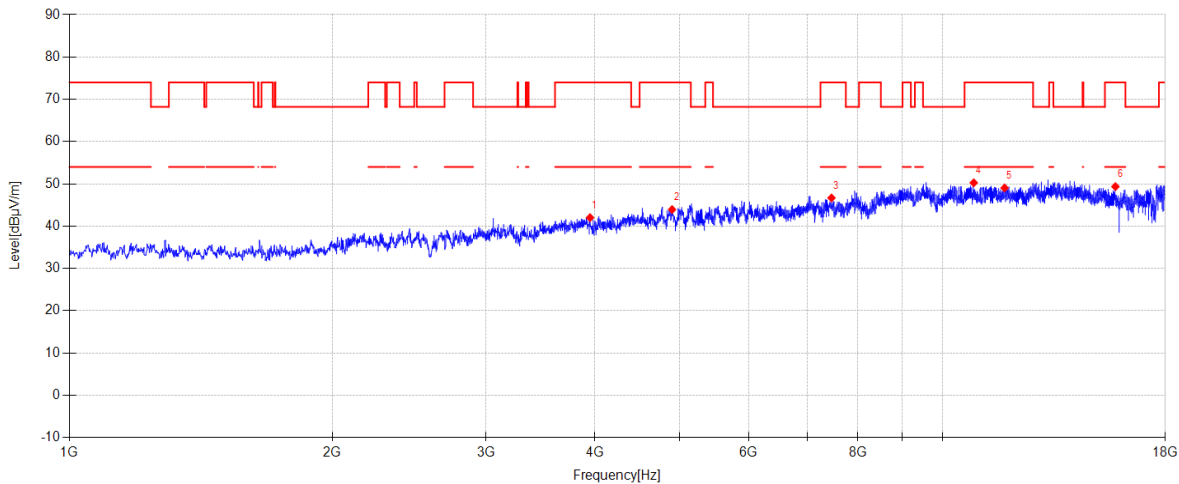

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3947.800	45.30	31.10	5.29	-39.67	42.02	74.00	31.98	PK	Horizontal
2	4901.500	44.16	33.00	6.38	-39.61	43.93	74.00	30.07	PK	Horizontal
3	7463.400	43.16	36.57	7.53	-40.58	46.68	74.00	27.32	PK	Horizontal
4	10860.000	41.62	39.34	8.38	-39.08	50.26	74.00	23.74	PK	Horizontal
5	11779.700	41.01	38.92	8.89	-39.78	49.04	74.00	24.96	PK	Horizontal
6	15781.500	40.27	38.34	10.14	-39.40	49.35	74.00	24.65	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5260MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\73

Memo:

Sample Numbler:S25070107-004

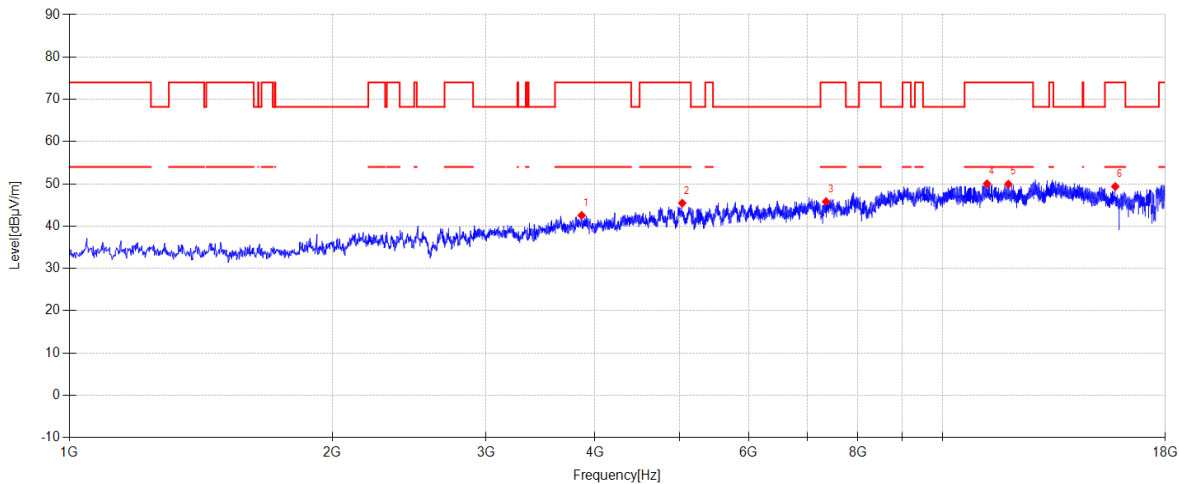

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3861.100	45.95	30.97	5.27	-39.65	42.54	74.00	31.46	PK	Vertical
2	5034.100	45.25	33.27	6.52	-39.60	45.44	74.00	28.56	PK	Vertical
3	7356.300	42.24	36.79	7.46	-40.68	45.81	74.00	28.19	PK	Vertical
4	11247.600	41.50	39.20	8.57	-39.25	50.02	74.00	23.98	PK	Vertical
5	11897.000	41.98	38.90	8.96	-39.90	49.94	74.00	24.06	PK	Vertical
6	15773.000	40.27	38.35	10.14	-39.40	49.36	74.00	24.64	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5280MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\74

Memo:

Sample Numbler:S25070107-004

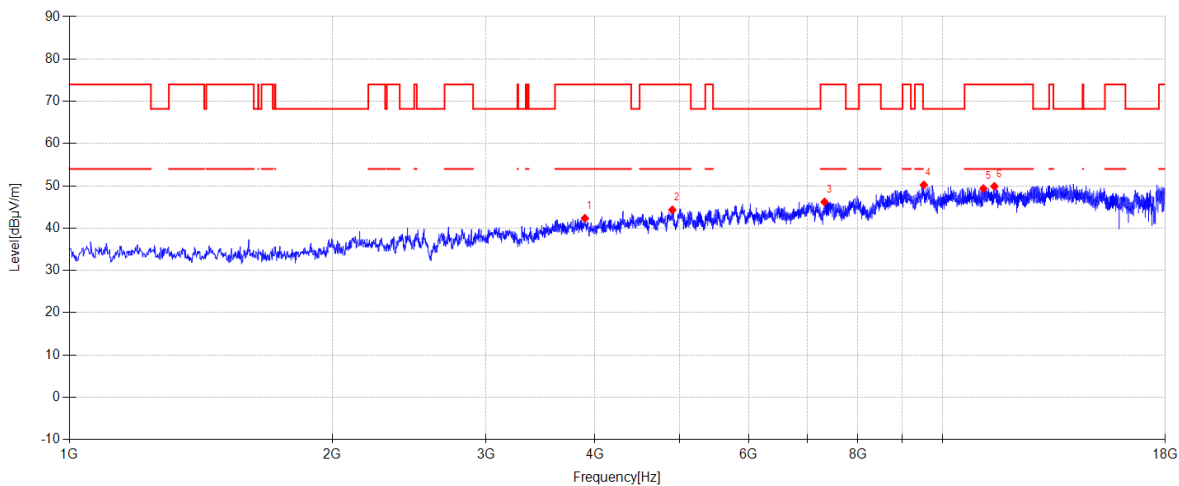

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3895.100	45.53	31.17	5.28	-39.65	42.33	74.00	31.67	PK	Horizontal
2	4904.900	44.52	33.01	6.39	-39.61	44.31	74.00	29.69	PK	Horizontal
3	7327.400	42.61	36.85	7.44	-40.71	46.19	74.00	27.81	PK	Horizontal
4	9520.400	42.67	38.66	8.11	-39.22	50.22	68.20	17.98	PK	Horizontal
5	11140.500	40.73	39.26	8.50	-39.14	49.35	74.00	24.65	PK	Horizontal
6	11466.900	41.43	39.23	8.70	-39.47	49.89	74.00	24.11	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-10

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2530

Test Mode:

MIMO TX 11AX20 5280MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.8°C;Humi:57.5%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25070107-1E\FCC Above 1G 5G\75

Memo:

Sample Numbler:S25070107-004

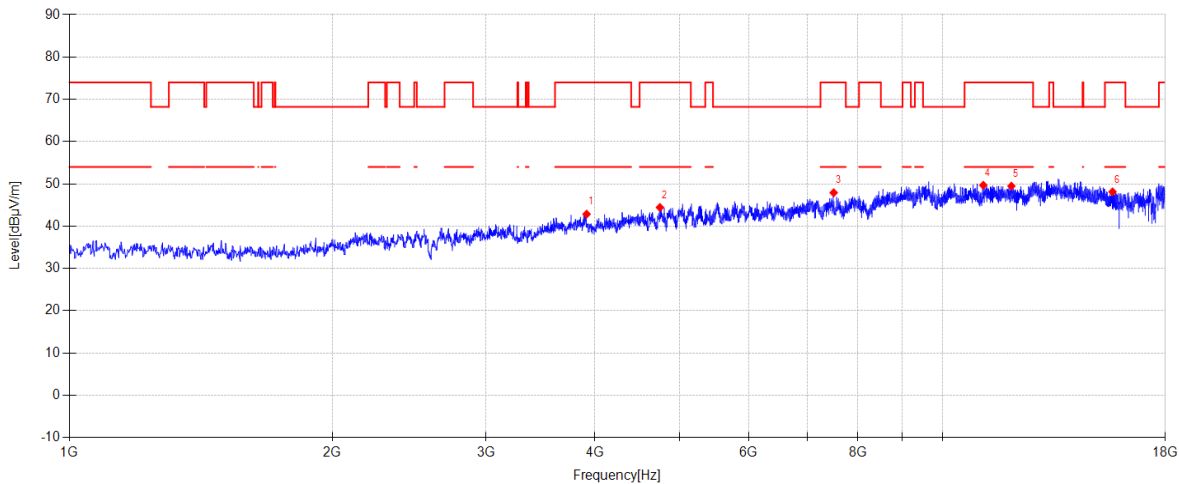

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3912.100	46.04	31.18	5.28	-39.66	42.84	74.00	31.16	PK	Vertical
2	4746.800	45.56	32.29	6.20	-39.62	44.43	74.00	29.57	PK	Vertical
3	7505.900	44.41	36.49	7.55	-40.54	47.91	74.00	26.09	PK	Vertical
4	11137.100	41.07	39.26	8.50	-39.14	49.69	74.00	24.31	PK	Vertical
5	11993.900	41.27	39.18	9.02	-39.99	49.48	74.00	24.52	PK	Vertical
6	15660.800	38.88	38.54	10.09	-39.40	48.11	74.00	25.89	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.