



RADIO TEST REPORT

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Access Point
Model No.	:	L2533
FCC ID	:	2BPSN-L2533
IC	:	34118-L2533
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020, RSS-247 Issue 4 July 24, 2025, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021), ANSI C63.10-2020+Cor.1-2023+C63.10a- 2024+Errata to C63.10a-2024
Report No.	:	DDT-RE25092316-2E01
Issue Date	:	2026/01/15
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	8
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	27
5.1.	Block diagram of test setup	27
5.2.	Limits	27
5.3.	Test procedure	27
5.4.	Test result.....	28
5.5.	Test graphs	29
6.	Conducted Output Power	41
6.1.	Block diagram of test setup	41
6.2.	Limits	41
6.3.	Test procedure	41
6.4.	Test result average.....	42
7.	Power Spectral Density	43
7.1.	Block diagram of test setup	43
7.2.	Limits	43
7.3.	Test procedure	43
7.4.	Test result.....	44
7.5.	Test graphs	45
8.	Band Edge Compliance (Conducted Method)	57
8.1.	Block diagram of test setup	57

8.2.	Limits	57
8.3.	Test procedure	57
8.4.	Test result.....	58
8.5.	Test graphs	59
9.	RF Conducted Spurious Emissions.....	67
9.1.	Block diagram of test setup	67
9.2.	Limits	67
9.3.	Test procedure	67
9.4.	Test result.....	68
9.5.	Test graphs	69
10.	Duty Cycle	105
10.1.	Block diagram of test setup	105
10.2.	Limit.....	105
10.3.	Test procedure	105
10.4.	Test result.....	106
10.5.	Test graphs	107
11.	Antenna Requirements.....	119
11.1.	Limit.....	119
11.2.	Result	119
12.	Radiated Emission	120
12.1.	Test equipment.....	120
12.2.	Block diagram of test setup	121
12.3.	Limits	122
12.4.	Assistant equipment used for test	124
12.5.	Test procedure	124
12.6.	Test result.....	126
12.7.	Test data	127
13.	Band Edge Compliance.....	137
13.1.	Test equipment.....	137
13.2.	Block diagram of test setup	138
13.3.	Limits	138
13.4.	Assistant equipment used for test	138
13.5.	Test procedure	138
13.6.	Test result.....	138
13.7.	Test data	139
14.	Power Line Conducted Emissions.....	171
14.1.	Test equipment.....	171
14.2.	Block diagram of test setup	171

14.3. Limits 171

14.4. Assistant equipment used for test 171

14.5. Test procedure 172

14.6. Test result.....172

14.7. Test data 173

15. Test Setup Photograph 177

16. Photos of the EUT 181

Test Report Declare

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Access Point
Model No.	:	L2533
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020,
RSS-247 Issue 4 July 24, 2025,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021),
ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25092316-2E01		
Date of Receipt:	2025/10/13	Date of Test:	2025/10/13 - 2026/01/09

Created: Tiger Mo	Reviewed: Johnson Huang	Approved: Ella Gong
		
2026/01/09	2026/01/15	2026/01/15

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/01/15	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	47 CFR Part 15 15.247(a)(2), RSS-247 clause 6.3.1(a), RSS-Gen clause 6.7	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3), RSS-247 clause 6.3.2	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.247(e), RSS-247 clause 6.3.1(b)	/	Pass
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d), RSS-247 clause 6.6	/	Pass
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
7	Power Line Conducted Emissions	47 CFR Part 15 15.207(a), RSS-Gen clause 8.8	/	Pass
8	Antenna Requirement	47 CFR Part 15 15.203, RSS-Gen clause 6.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: Wireless Access Point
Model Number	: L2533
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 12V2A or 44 - 57 V 0.6 A (PoE IN)
Antenna Type	: Built-In Omnidirectional
Max Antenna Gain(dBi)	: Antenna1: 4.38dBi, Antenna2: 3.2dBi

Radio Technology	: IEEE 802.11b/g/n/ax
Operation frequency	: IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz IEEE 802.11ax HE20: 2412MHz to 2462MHz IEEE 802.11ax HE40: 2422MHz to 2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool_Dbg.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	19.5	19.5	1	LCH: CH1	2412
	19.5	19.5	1	MCH: CH6	2437
	19.5	19.5	1	HCH: CH11	2462
IEEE 802.11g	17	17	6	LCH: CH1	2412
	17	17	6	MCH: CH6	2437
	17	17	6	HCH: CH11	2462
IEEE 802.11n HT20	15	15	MCS 8	LCH: CH1	2412
	15	15	MCS 8	MCH: CH6	2437
	15	15	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	14.5	14.5	MCS 8	LCH: CH3	2422
	14.5	14.5	MCS 8	MCH: CH6	2437
	14.5	14.5	MCS 8	HCH: CH9	2452
IEEE 802.11ax HE20	14.5	14.5	MCS 0	LCH: CH1	2412
	14.5	14.5	MCS 0	MCH: CH6	2437
	14.5	14.5	MCS 0	HCH: CH11	2462
IEEE 802.11ax HE40	11.5	11.5	MCS 0	LCH: CH3	2422
	11.5	11.5	MCS 0	MCH: CH6	2437
	11.5	11.5	MCS 0	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB ($9\text{ kHz} \leq f < 7\text{ GHz}$);
	3.31 dB ($7\text{ GHz} \leq f < 40\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2026/08/10
RF Control Unit	Tonscend	JS0806-2	21I8060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

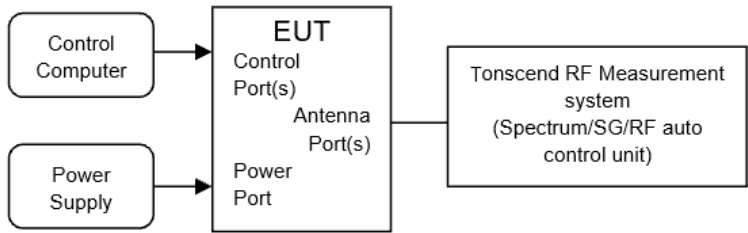

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:
 - RBW: 100 kHz
 - VBW: $\geq [3 \times \text{RBW}]$
 - Detector Mode: peak
 - Sweep time: auto
 - Trace mode max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.3-26.5℃,46.6-52.3%RH	Test Date:	2025.12.07-2025.12.08
Test Power Supply:	DC 12V	Sample Number:	S25092316-003


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.20	2407.92	2416.12	0.5	PASS
	Ant2	2412	8.20	2407.88	2416.08	0.5	PASS
	Ant1	2437	8.20	2432.88	2441.08	0.5	PASS
	Ant2	2437	8.20	2432.88	2441.08	0.5	PASS
	Ant1	2462	8.24	2457.88	2466.12	0.5	PASS
	Ant2	2462	8.24	2457.88	2466.12	0.5	PASS
11G	Ant1	2412	16.08	2403.84	2419.92	0.5	PASS
	Ant2	2412	16.20	2403.84	2420.04	0.5	PASS
	Ant1	2437	15.84	2429.00	2444.84	0.5	PASS
	Ant2	2437	16.00	2428.96	2444.96	0.5	PASS
	Ant1	2462	16.16	2453.92	2470.08	0.5	PASS
	Ant2	2462	16.04	2453.92	2469.96	0.5	PASS
11N20MIMO	Ant1	2412	17.44	2403.20	2420.64	0.5	PASS
	Ant2	2412	16.80	2403.60	2420.40	0.5	PASS
	Ant1	2437	17.20	2428.40	2445.60	0.5	PASS
	Ant2	2437	16.68	2428.64	2445.32	0.5	PASS
	Ant1	2462	16.76	2453.64	2470.40	0.5	PASS
	Ant2	2462	16.76	2453.60	2470.36	0.5	PASS
11N40MIMO	Ant1	2422	35.60	2404.40	2440.00	0.5	PASS
	Ant2	2422	35.52	2404.32	2439.84	0.5	PASS
	Ant1	2437	35.20	2419.56	2454.76	0.5	PASS
	Ant2	2437	35.28	2419.40	2454.68	0.5	PASS
	Ant1	2452	35.36	2434.32	2469.68	0.5	PASS
	Ant2	2452	35.44	2434.24	2469.68	0.5	PASS
11AX20MIMO	Ant1	2412	18.52	2402.80	2421.32	0.5	PASS
	Ant2	2412	18.48	2402.84	2421.32	0.5	PASS
	Ant1	2437	18.60	2427.64	2446.24	0.5	PASS
	Ant2	2437	18.44	2427.80	2446.24	0.5	PASS
	Ant1	2462	18.44	2452.68	2471.12	0.5	PASS
	Ant2	2462	17.92	2453.08	2471.00	0.5	PASS
11AX40MIMO	Ant1	2422	37.28	2403.36	2440.64	0.5	PASS
	Ant2	2422	37.60	2403.20	2440.80	0.5	PASS
	Ant1	2437	37.52	2418.28	2455.80	0.5	PASS
	Ant2	2437	37.36	2418.44	2455.80	0.5	PASS
	Ant1	2452	37.60	2433.20	2470.80	0.5	PASS
	Ant2	2452	37.12	2433.36	2470.48	0.5	PASS

4.5. Test graphs

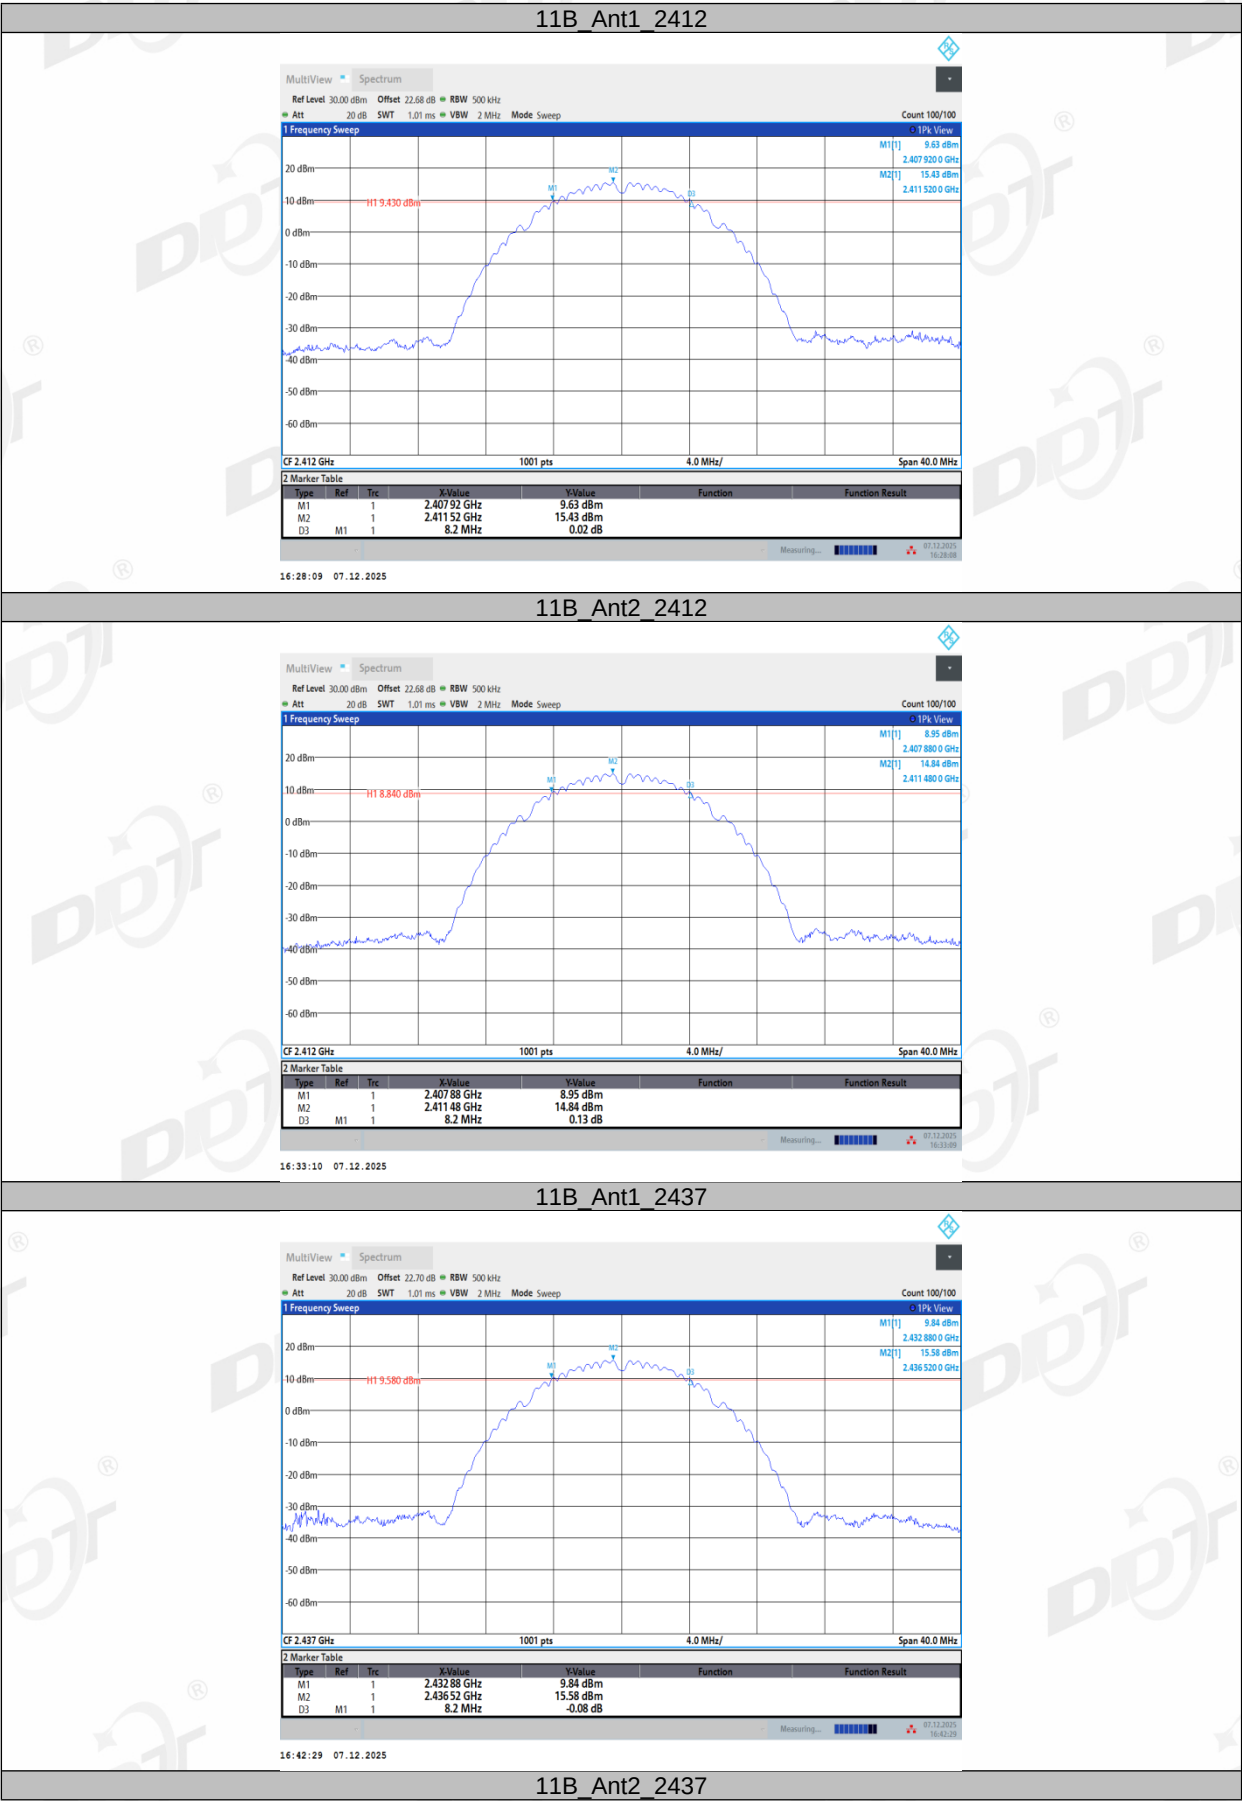


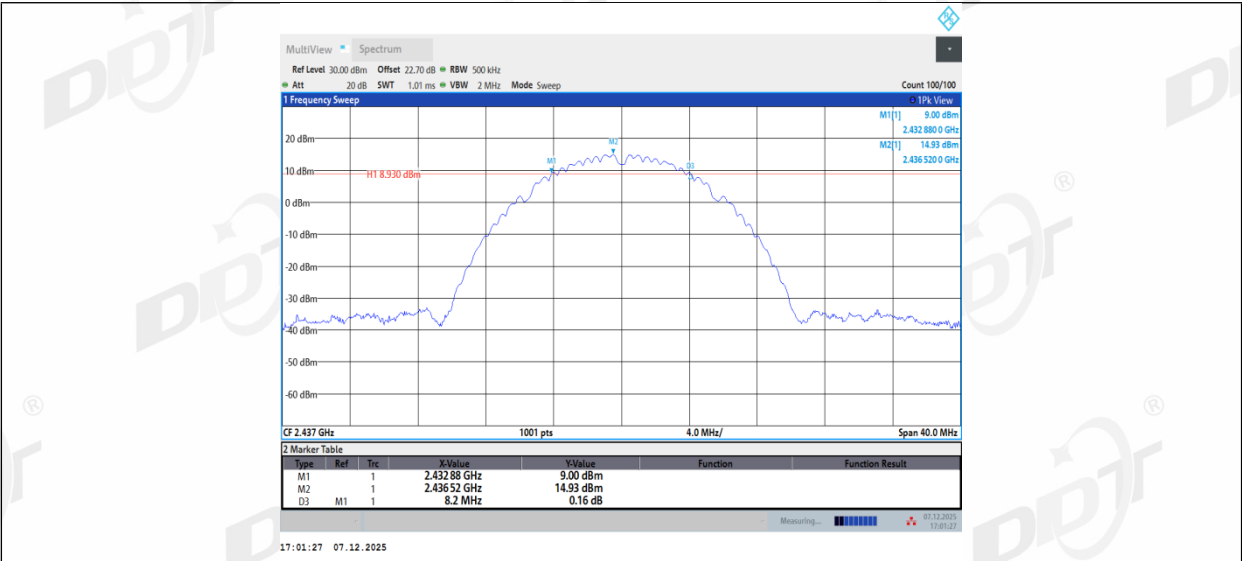


11B_Ant1_2462

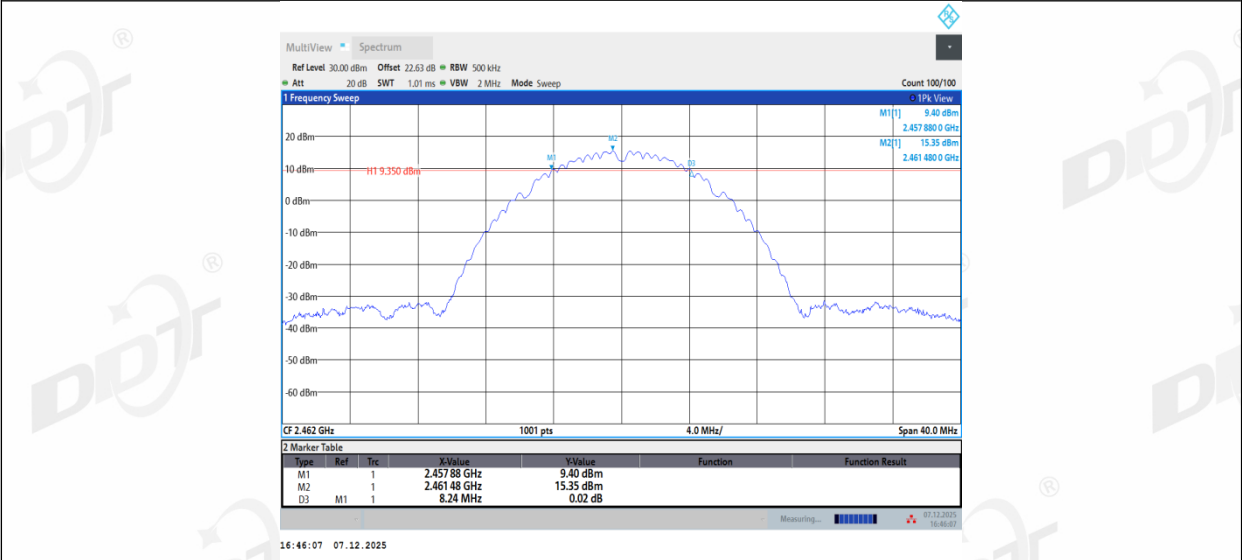


11B_Ant2_2462

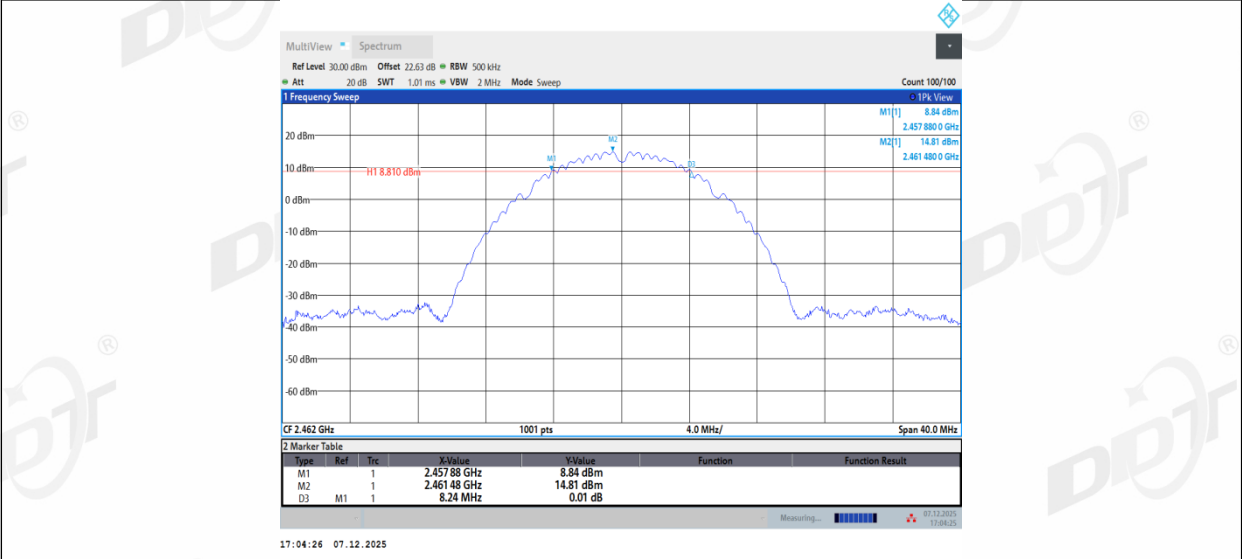


11G_Ant1_2412

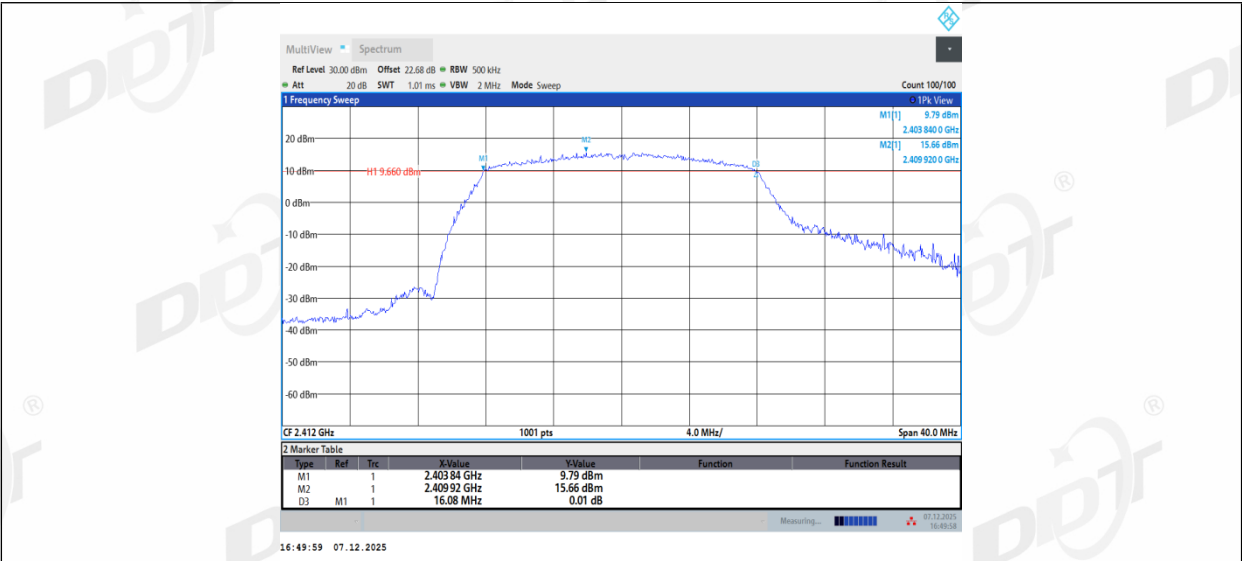


11G_Ant2_2412

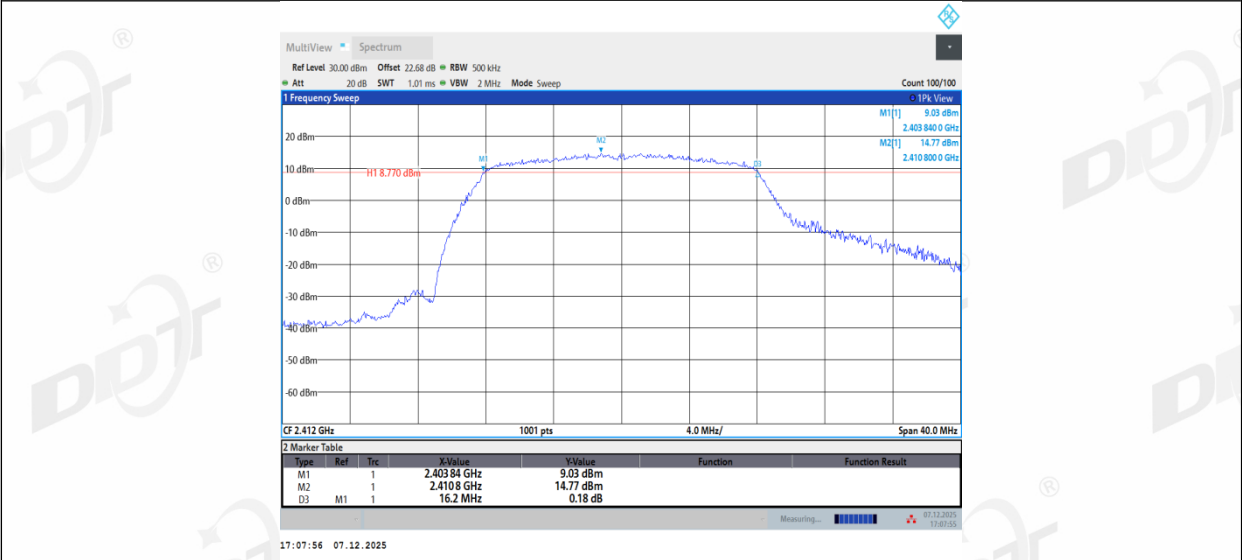


11G_Ant1_2437

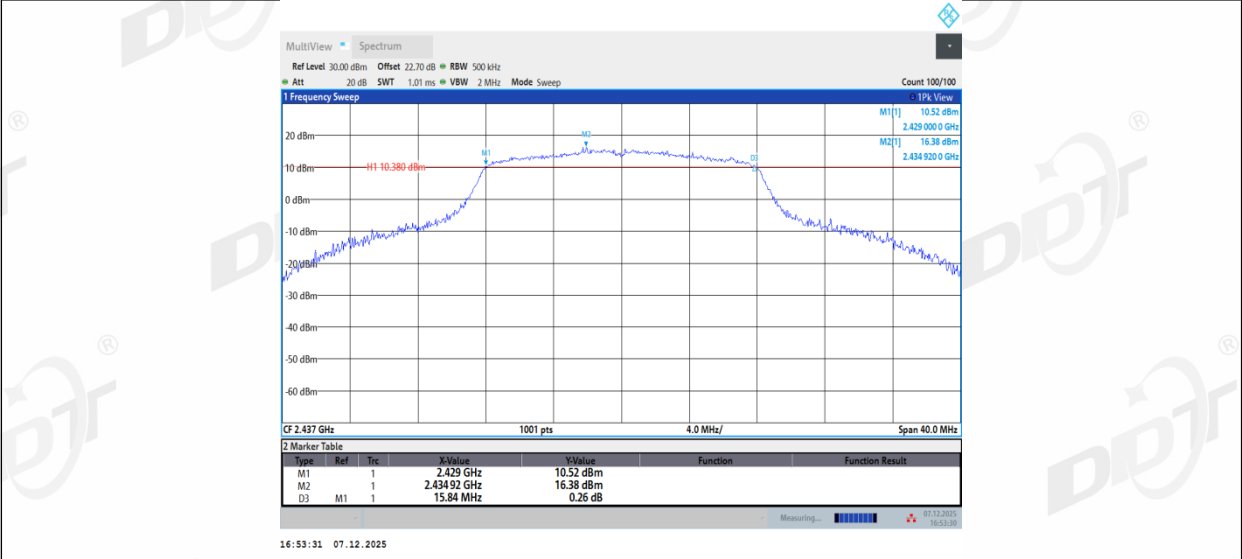


11G_Ant2_2437

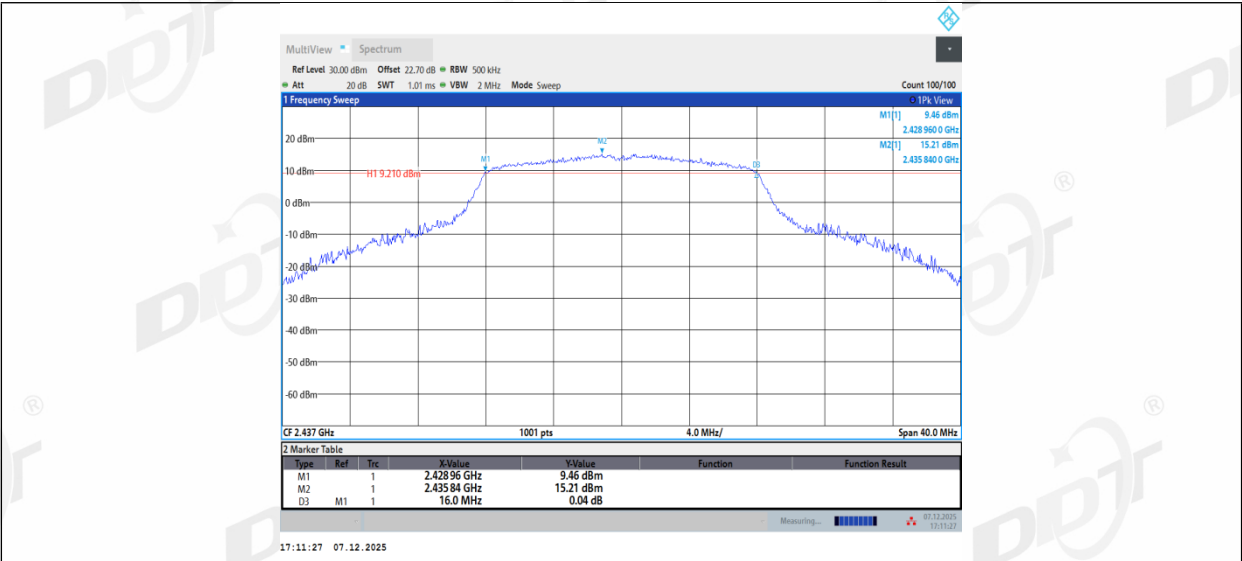


11G_Ant1_2462

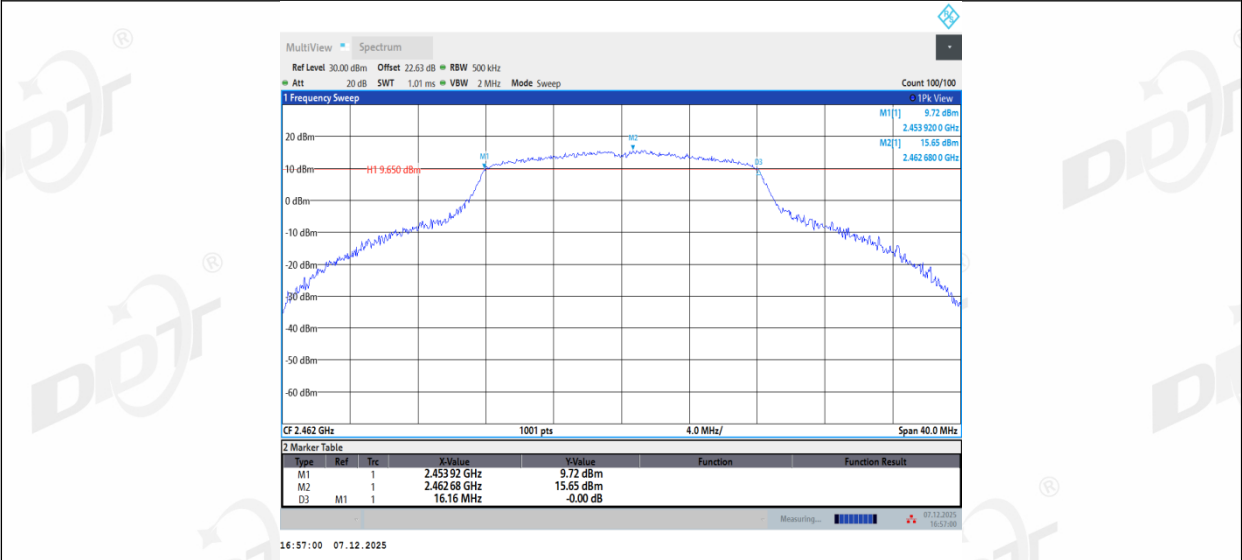


11G_Ant2_2462

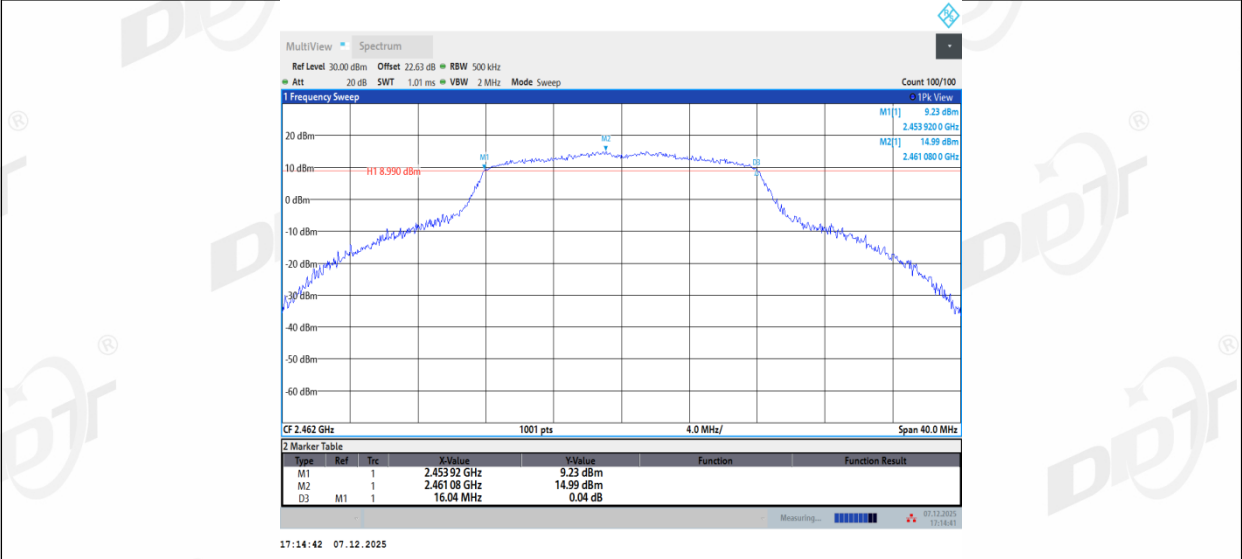


11N20MIMO_Ant1_2412

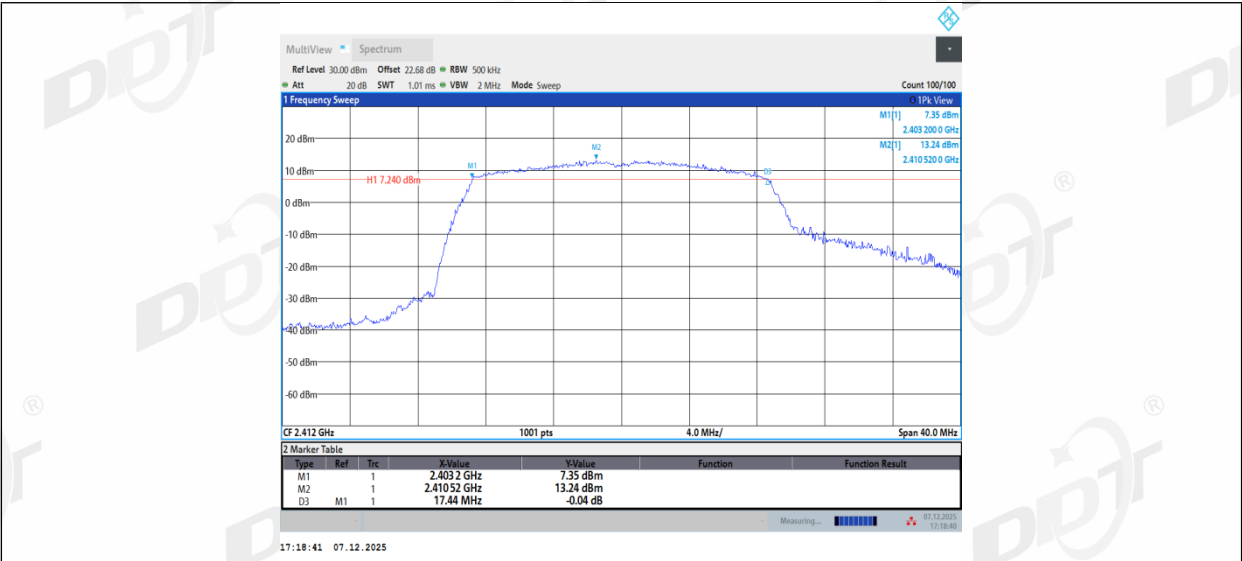


11N20MIMO_Ant2_2412

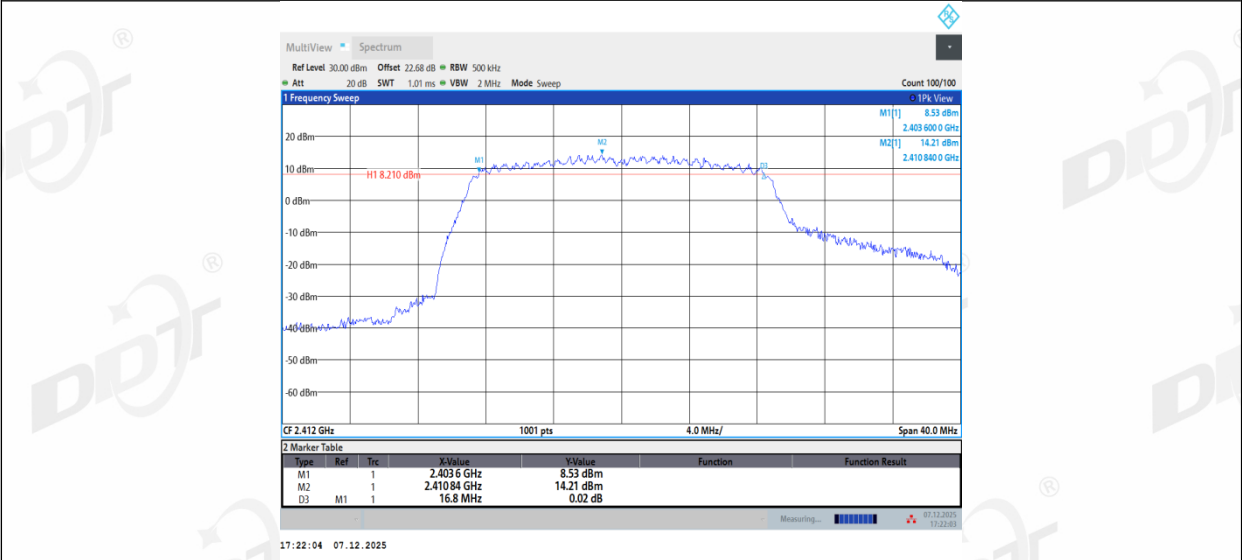


11N20MIMO_Ant1_2437

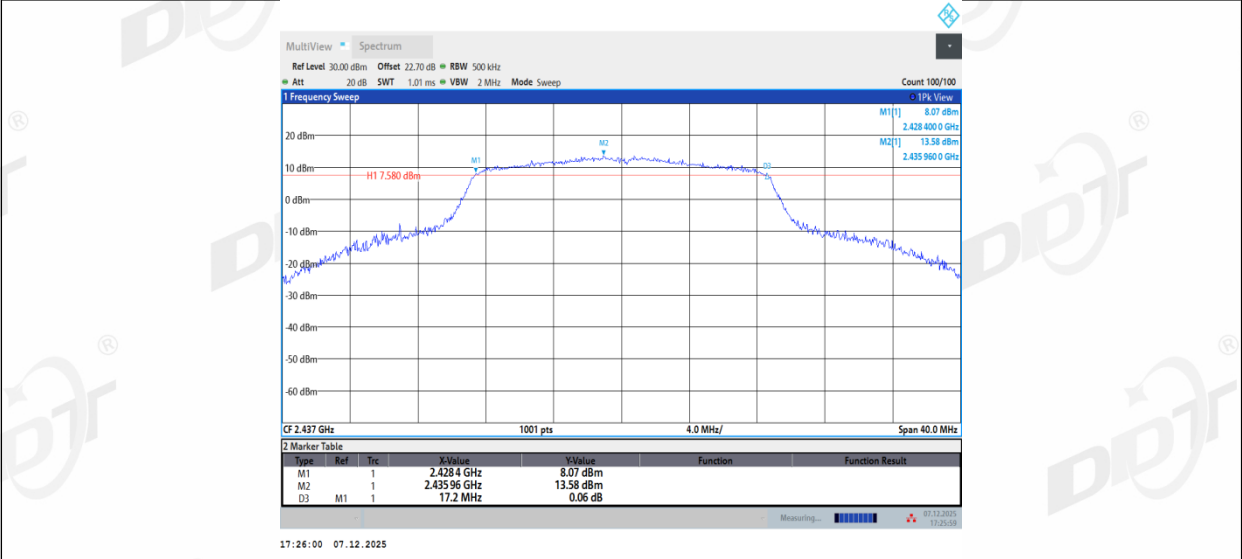


11N20MIMO_Ant2_2437

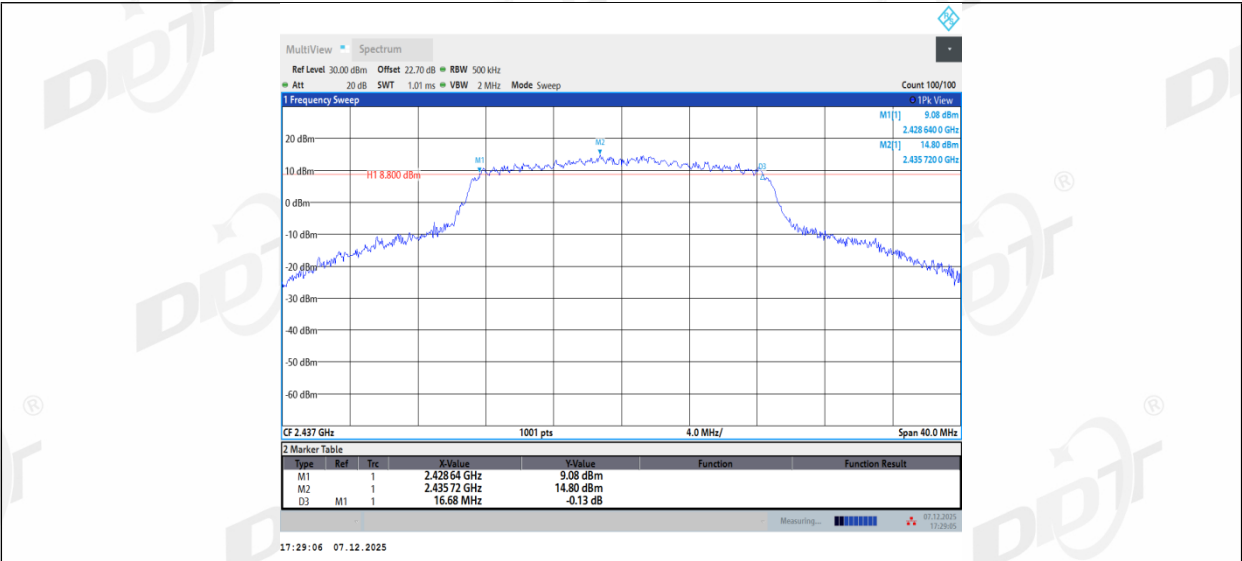


11N20MIMO_Ant1_2462

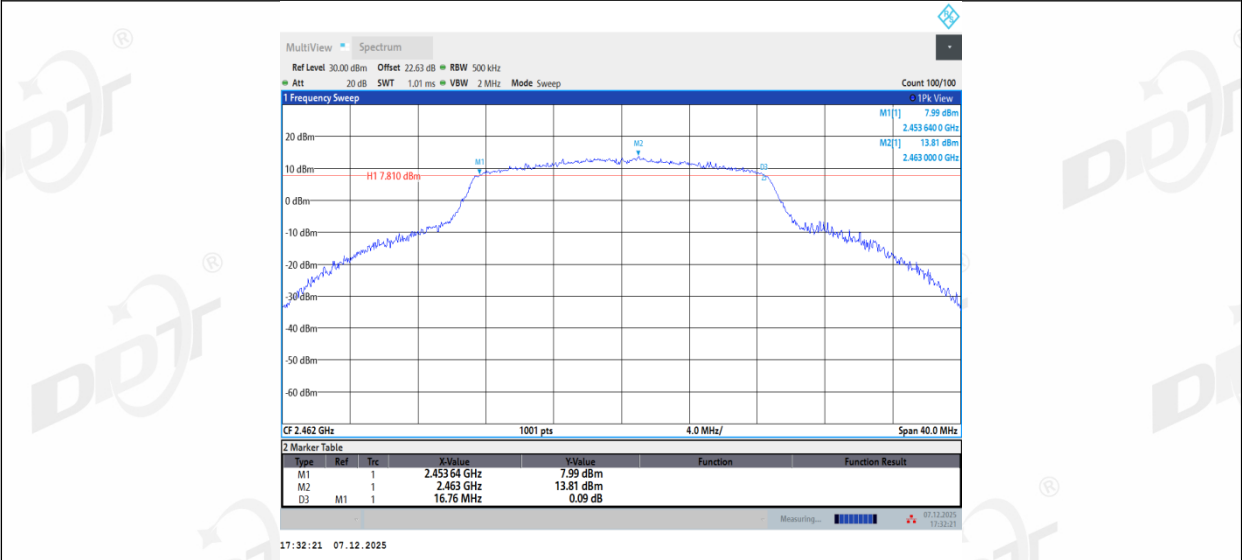


11N20MIMO_Ant2_2462

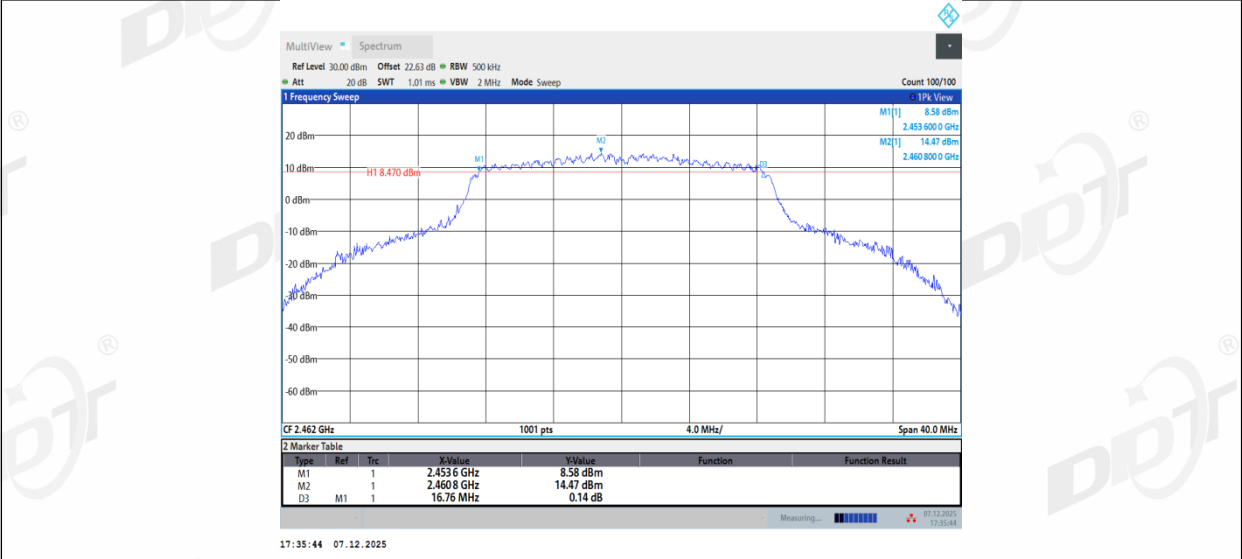


11N40MIMO_Ant1_2422

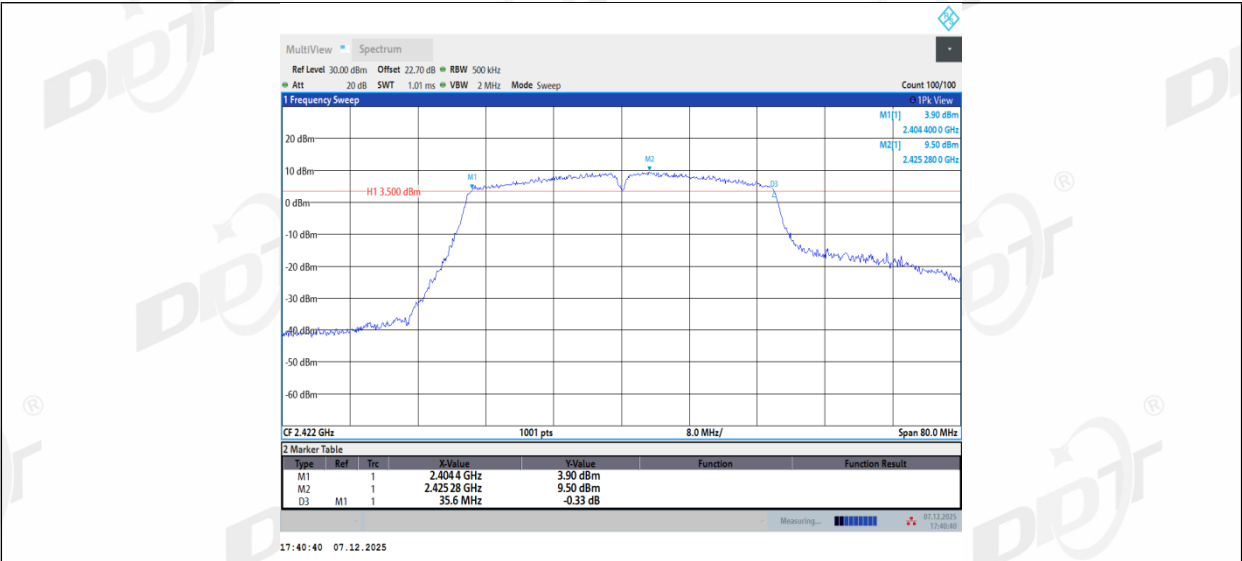


11N40MIMO_Ant2_2422

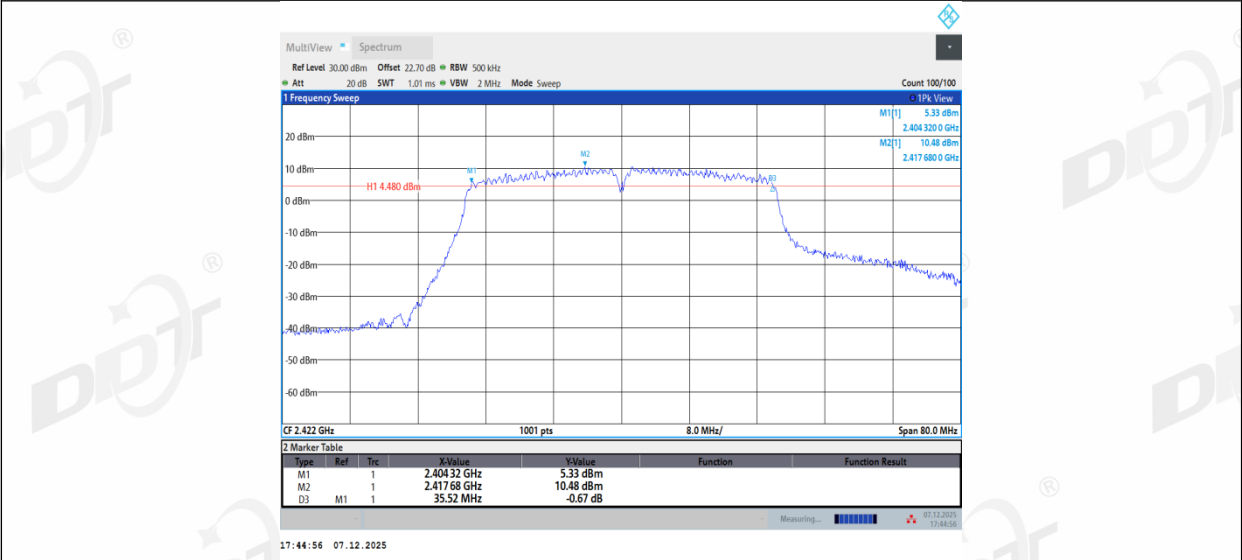


11N40MIMO_Ant1_2437

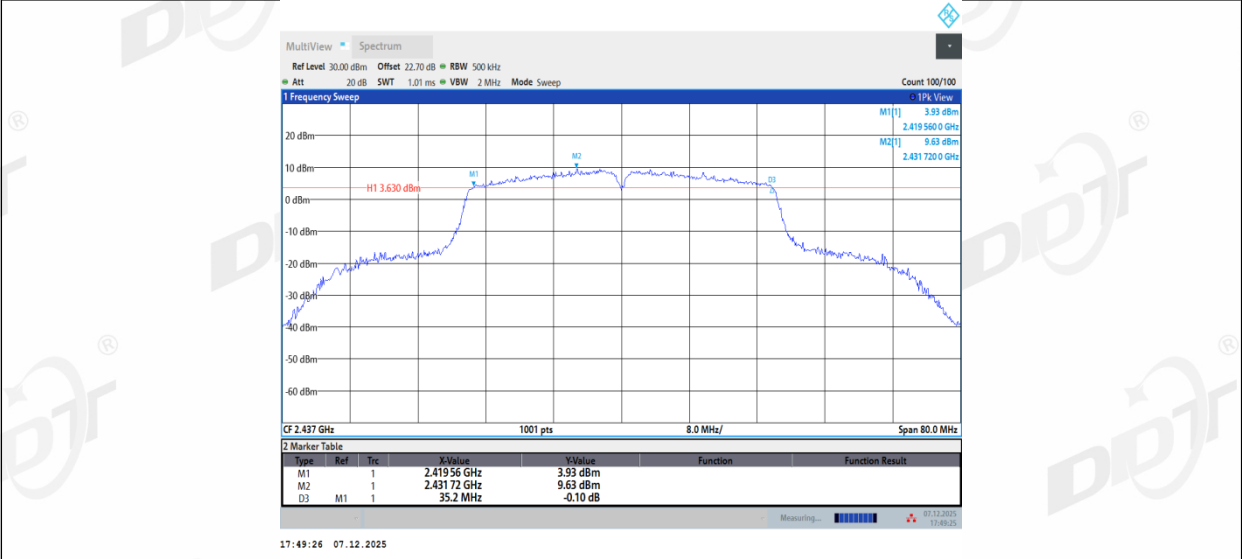


11N40MIMO_Ant2_2437

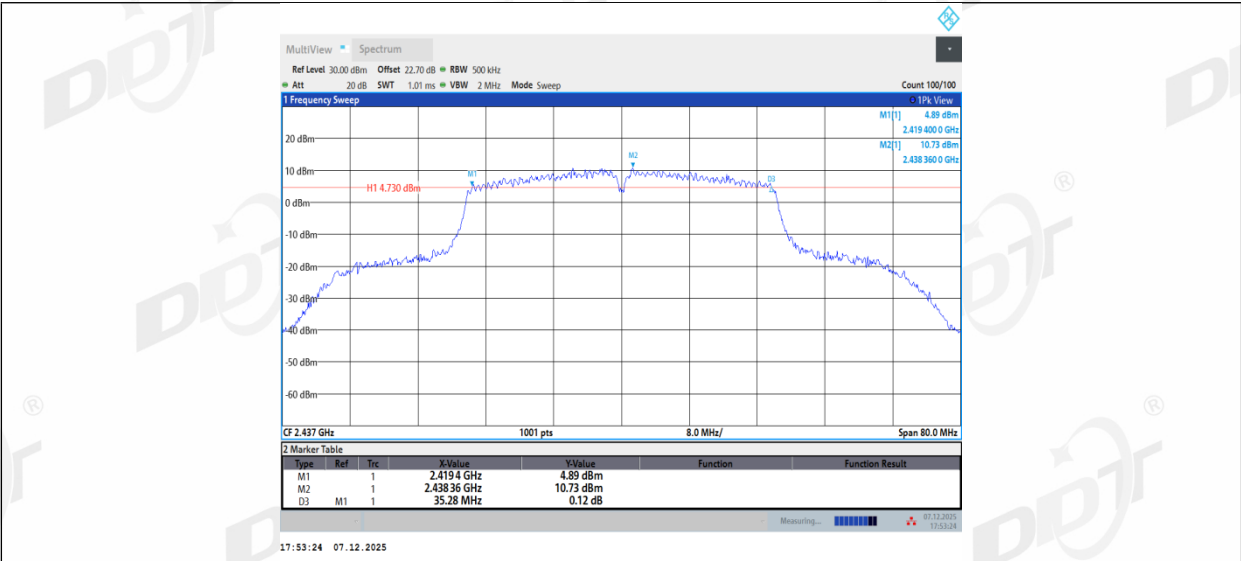


11N40MIMO_Ant1_2452

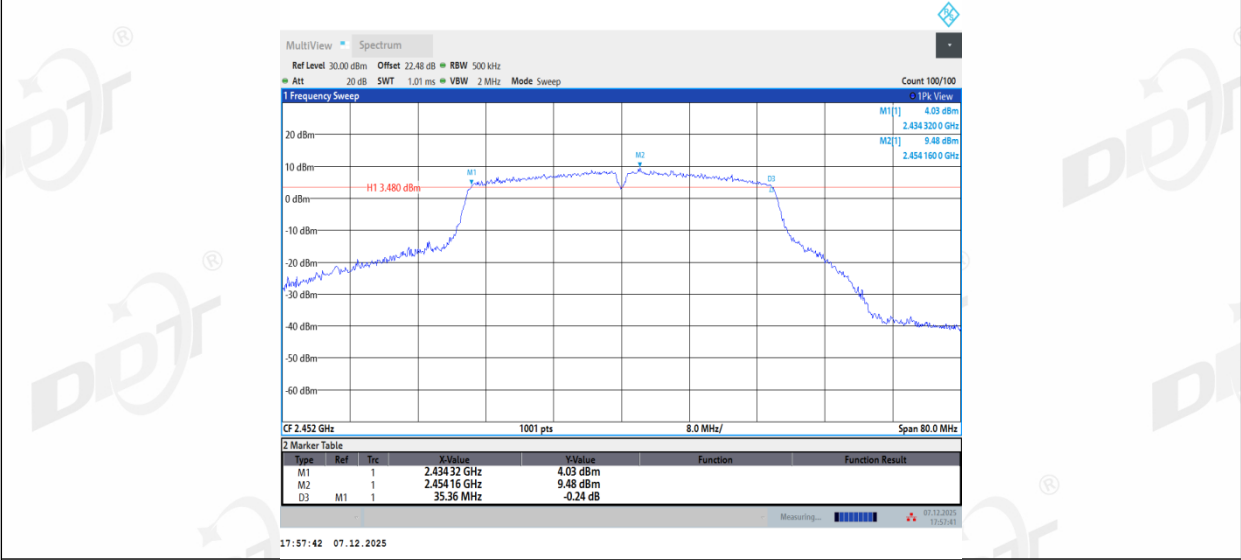


11N40MIMO_Ant2_2452

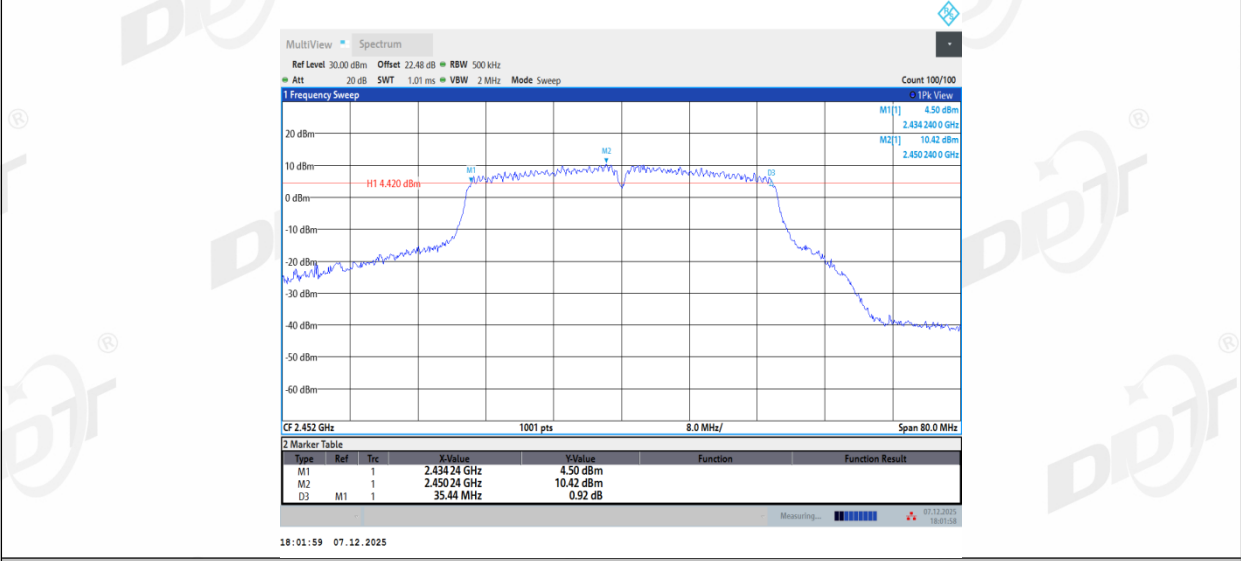


11AX20MIMO_Ant1_2412

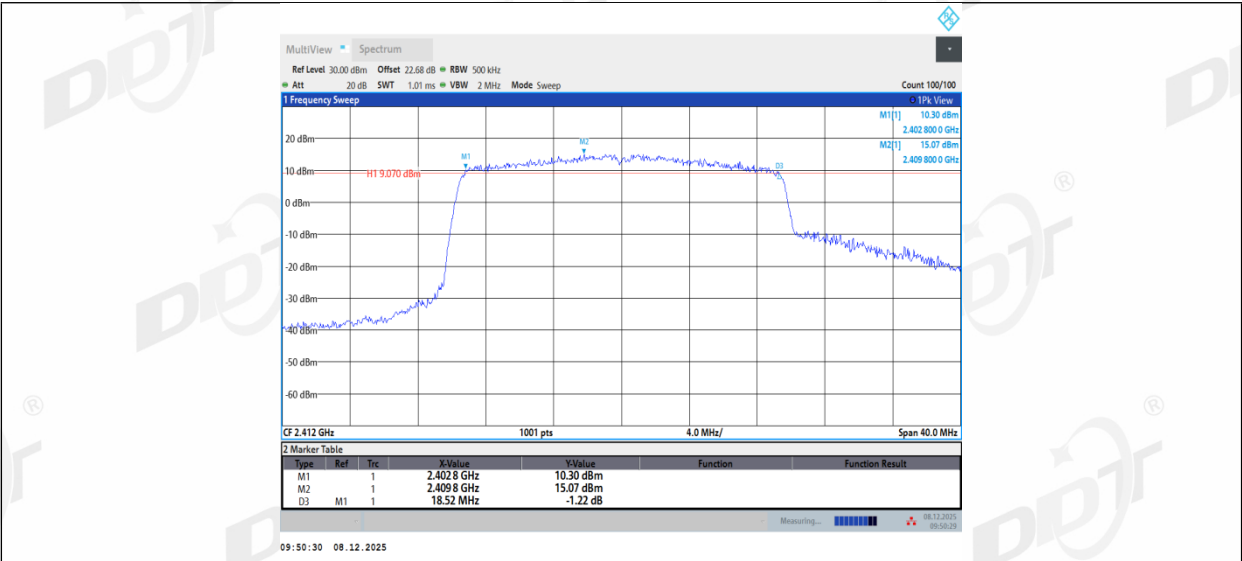


11AX20MIMO_Ant2_2412

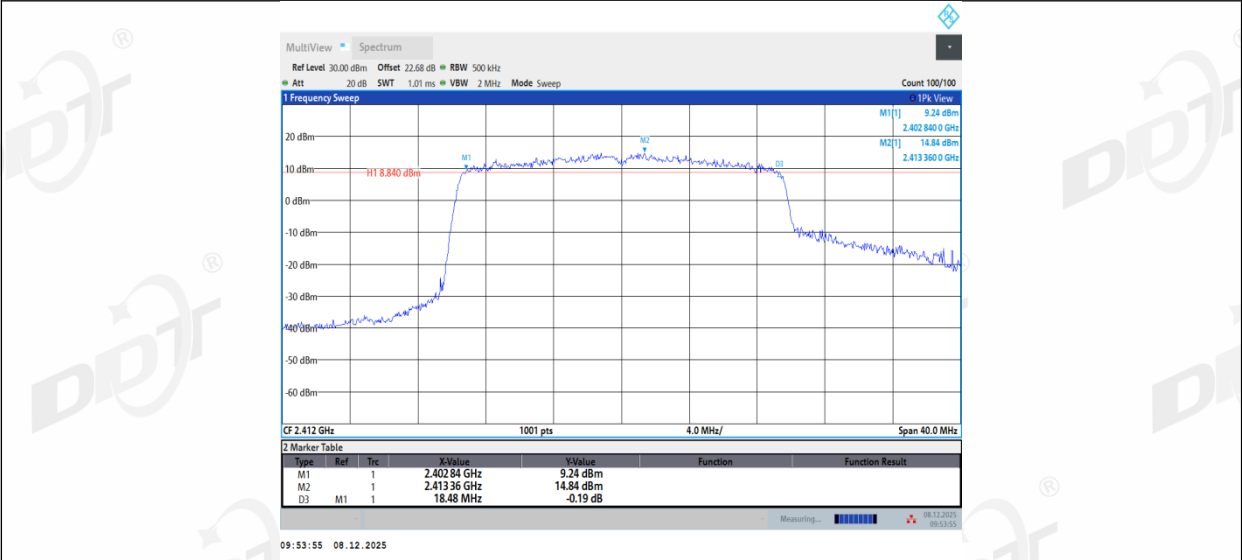


11AX20MIMO_Ant1_2437

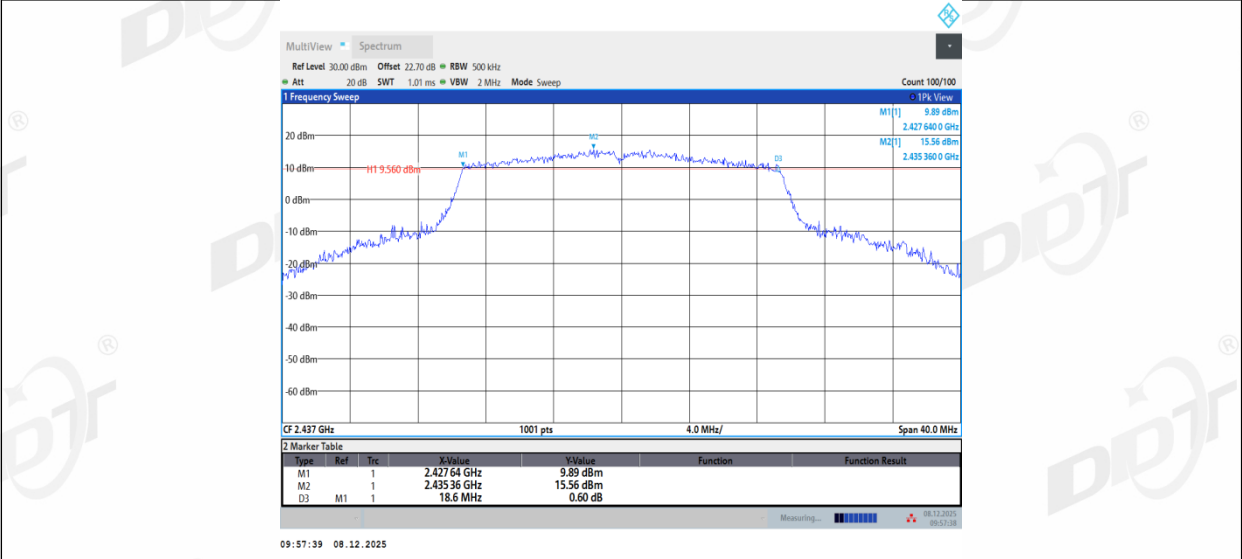


11AX20MIMO_Ant2_2437

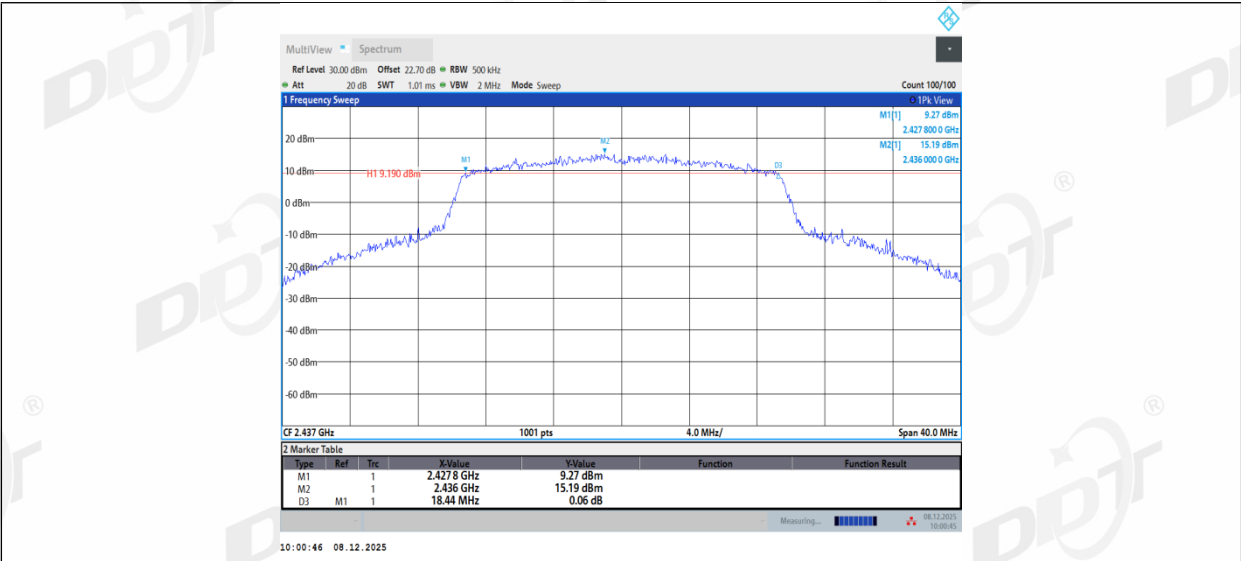


11AX20MIMO_Ant1_2462

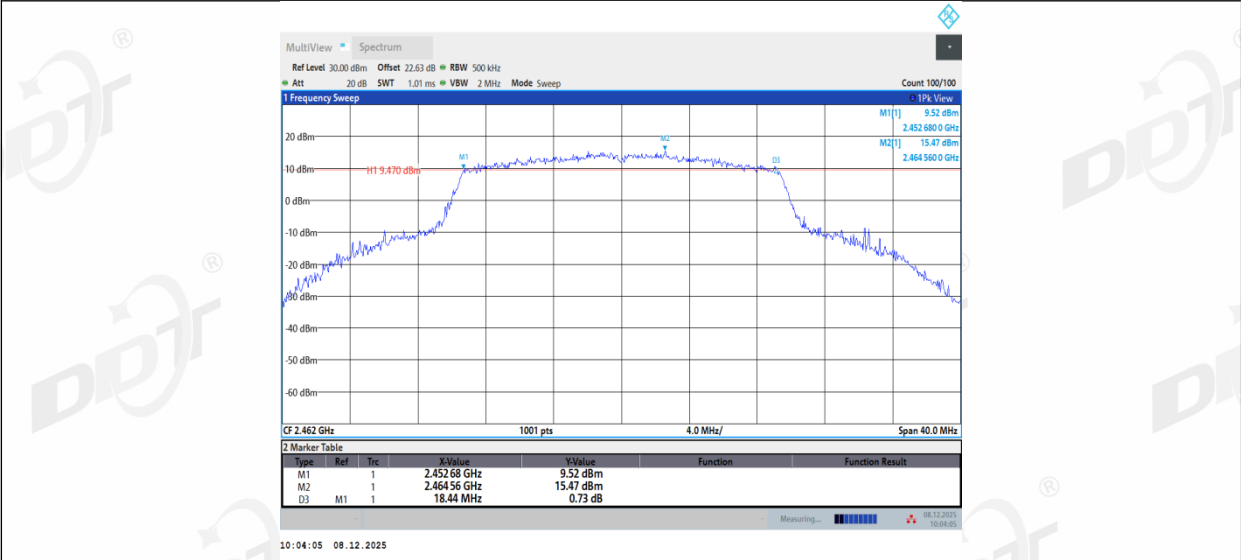


11AX20MIMO_Ant2_2462

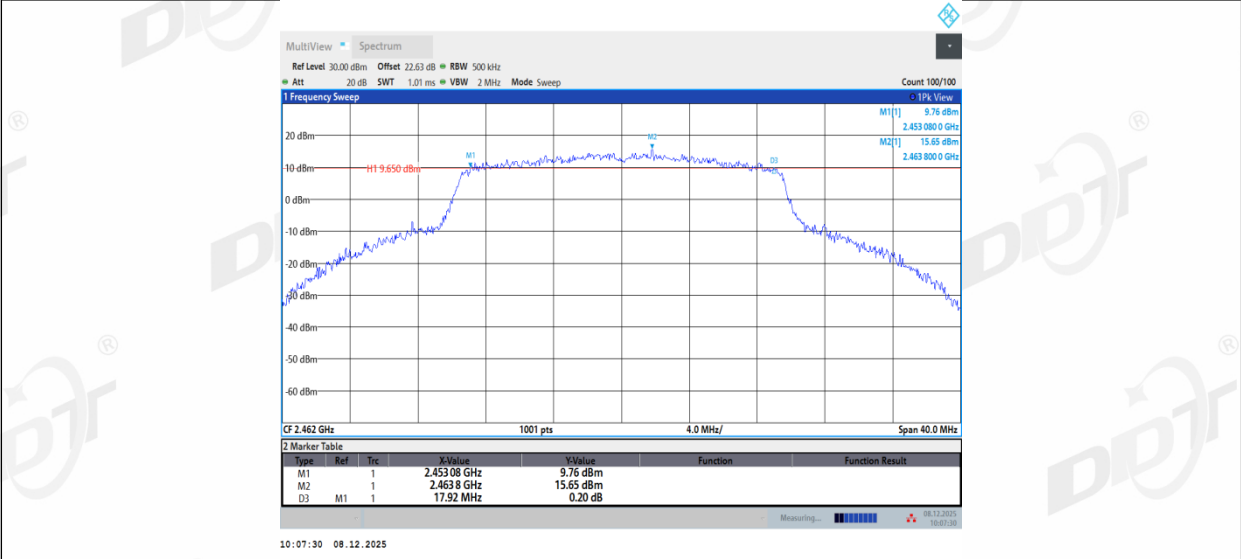


11AX40MIMO_Ant1_2422

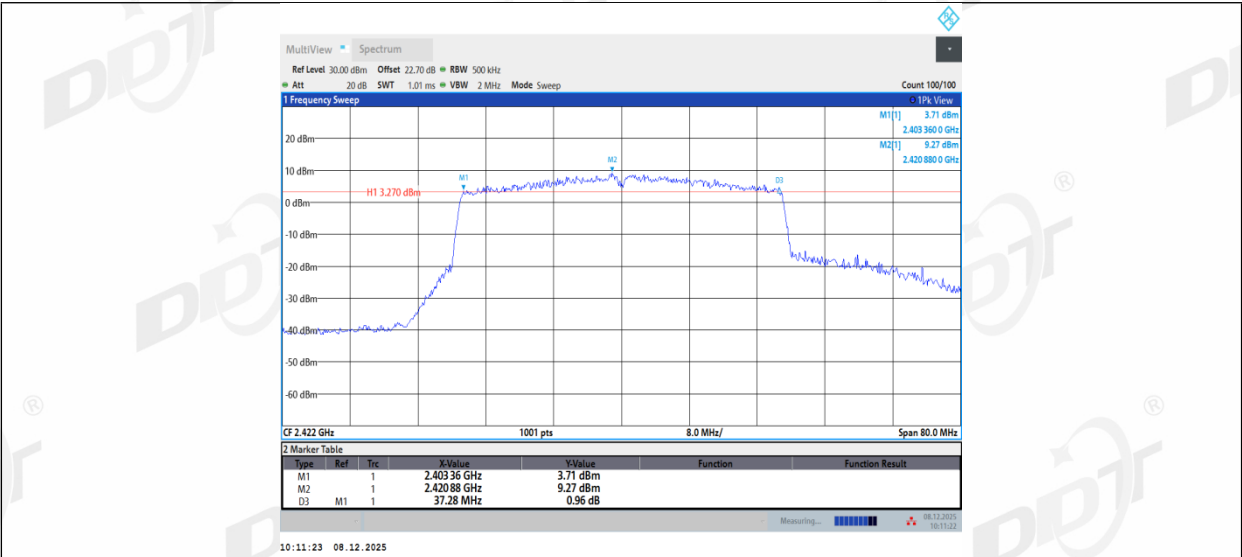


11AX40MIMO_Ant2_2422

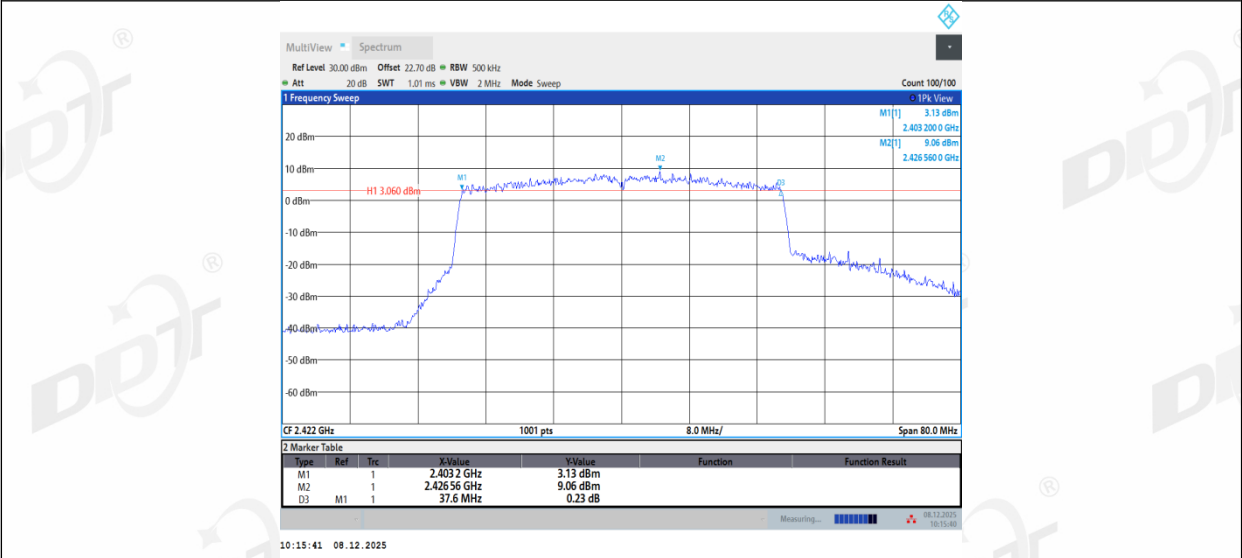


11AX40MIMO_Ant1_2437

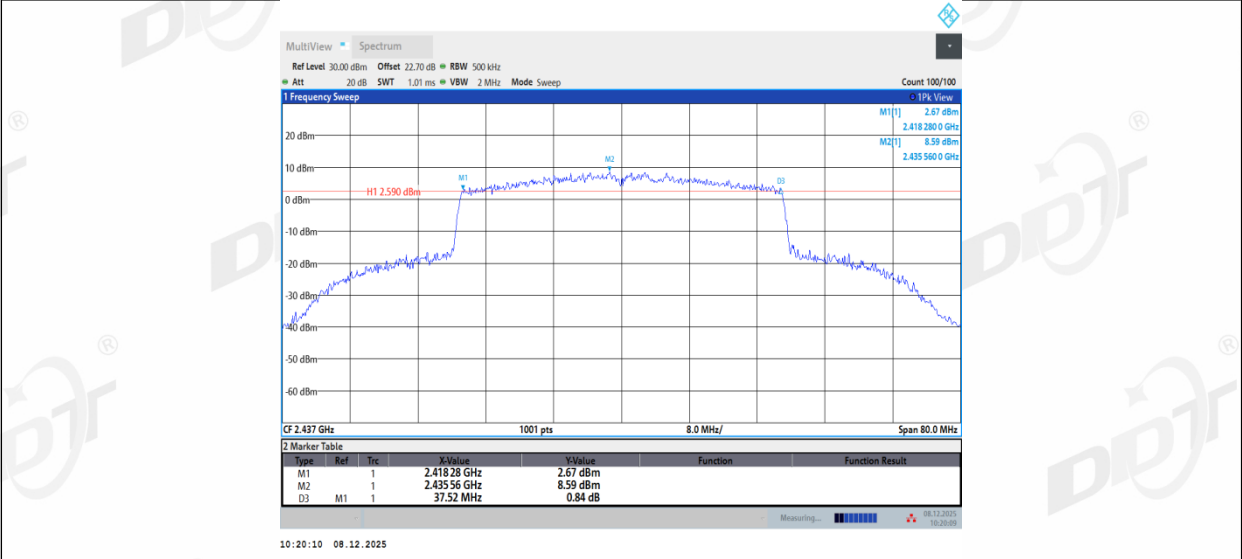

11AX40MIMO_Ant2_2437

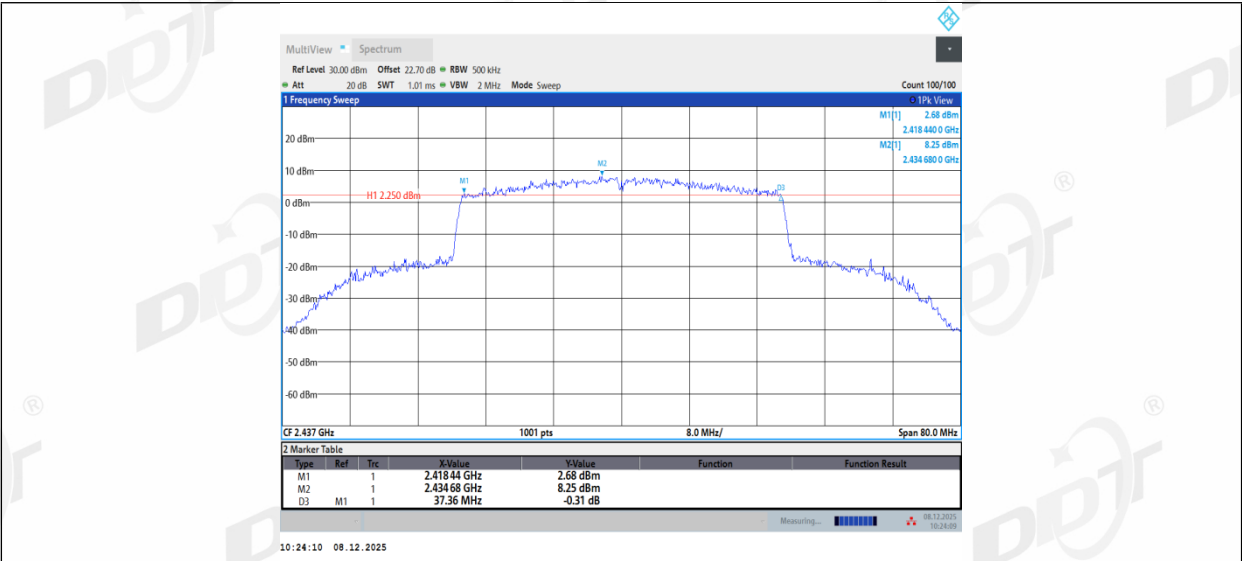

11AX40MIMO_Ant1_2452

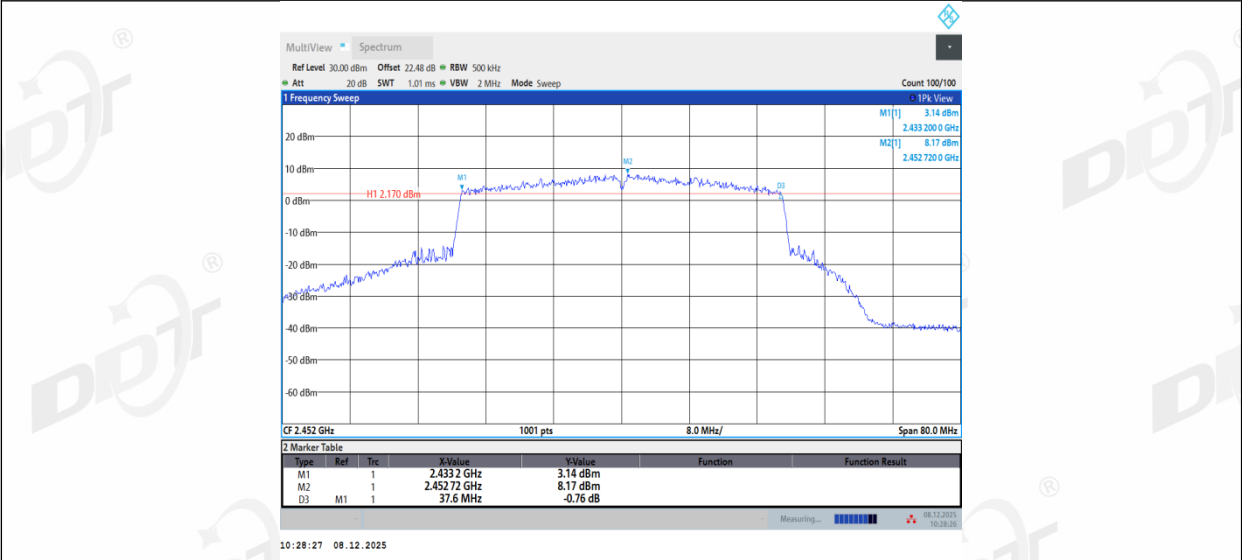


11AX40MIMO_Ant2_2452



5. 99% Bandwidth

5.1. Block diagram of test setup

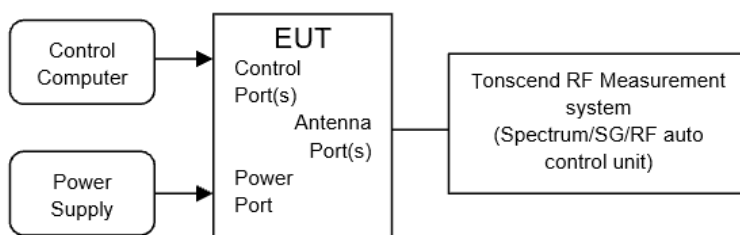

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.3-26.5℃,46.6-52.3%RH	Test Date:	2025.12.07-2025.12.08
Test Power Supply:	DC 12V	Sample Number:	S25092316-003


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.328	2405.8763	2418.2045	---	---
	Ant2	2412	12.338	2405.8191	2418.1573	---	---
	Ant1	2437	12.392	2430.7641	2443.1562	---	---
	Ant2	2437	12.340	2430.8100	2443.1496	---	---
	Ant1	2462	12.417	2455.7883	2468.2057	---	---
	Ant2	2462	12.341	2455.8180	2468.1590	---	---
11G	Ant1	2412	17.180	2403.4447	2420.6248	---	---
	Ant2	2412	17.227	2403.4527	2420.6801	---	---
	Ant1	2437	17.173	2428.3888	2445.5620	---	---
	Ant2	2437	17.144	2428.4007	2445.5449	---	---
	Ant1	2462	17.139	2453.4084	2470.5474	---	---
	Ant2	2462	17.115	2453.3863	2470.5016	---	---
11N20MIMO	Ant1	2412	18.044	2403.0107	2421.0544	---	---
	Ant2	2412	17.829	2403.1102	2420.9397	---	---
	Ant1	2437	18.257	2427.8395	2446.0961	---	---
	Ant2	2437	17.914	2428.0296	2445.9434	---	---
	Ant1	2462	18.153	2452.9148	2471.0681	---	---
	Ant2	2462	17.872	2453.0239	2470.8960	---	---
11N40MIMO	Ant1	2422	36.542	2403.8909	2440.4328	---	---
	Ant2	2422	36.417	2403.8935	2440.3101	---	---
	Ant1	2437	36.525	2418.7430	2455.2683	---	---
	Ant2	2437	36.558	2418.7766	2455.3346	---	---
	Ant1	2452	36.546	2433.6759	2470.2218	---	---
	Ant2	2452	36.475	2433.6589	2470.1340	---	---
11AX20MIMO	Ant1	2412	18.821	2402.5914	2421.4128	---	---
	Ant2	2412	18.843	2402.5931	2421.4357	---	---
	Ant1	2437	19.057	2427.4595	2446.5165	---	---
	Ant2	2437	19.049	2427.4740	2446.5225	---	---
	Ant1	2462	19.004	2452.4742	2471.4781	---	---
	Ant2	2462	19.020	2452.4728	2471.4926	---	---
11AX40MIMO	Ant1	2422	37.795	2403.1584	2440.9538	---	---
	Ant2	2422	37.771	2403.1873	2440.9581	---	---
	Ant1	2437	37.839	2418.0963	2455.9350	---	---
	Ant2	2437	37.798	2418.1194	2455.9178	---	---
	Ant1	2452	37.799	2433.0523	2470.8516	---	---
	Ant2	2452	37.746	2433.0303	2470.7764	---	---

5.5. Test graphs

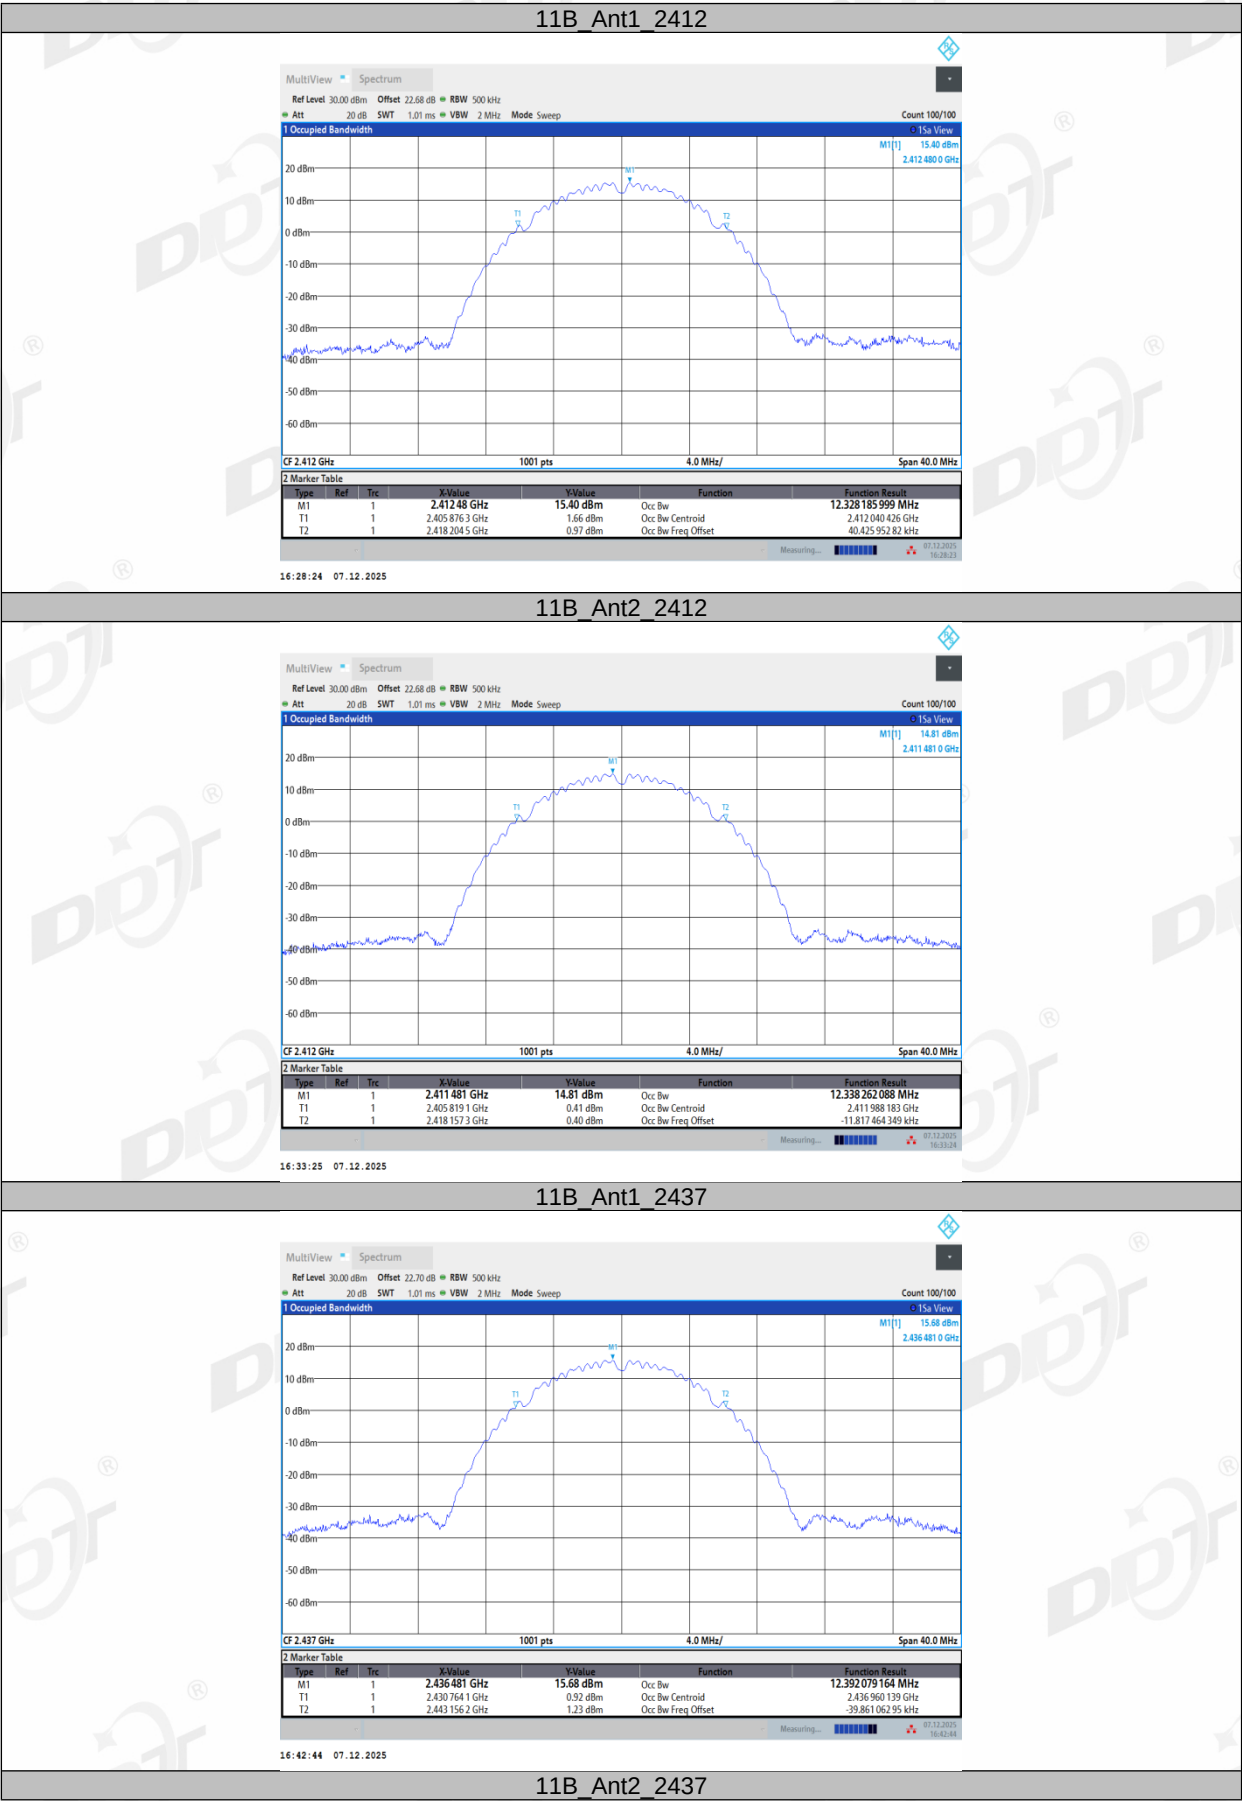


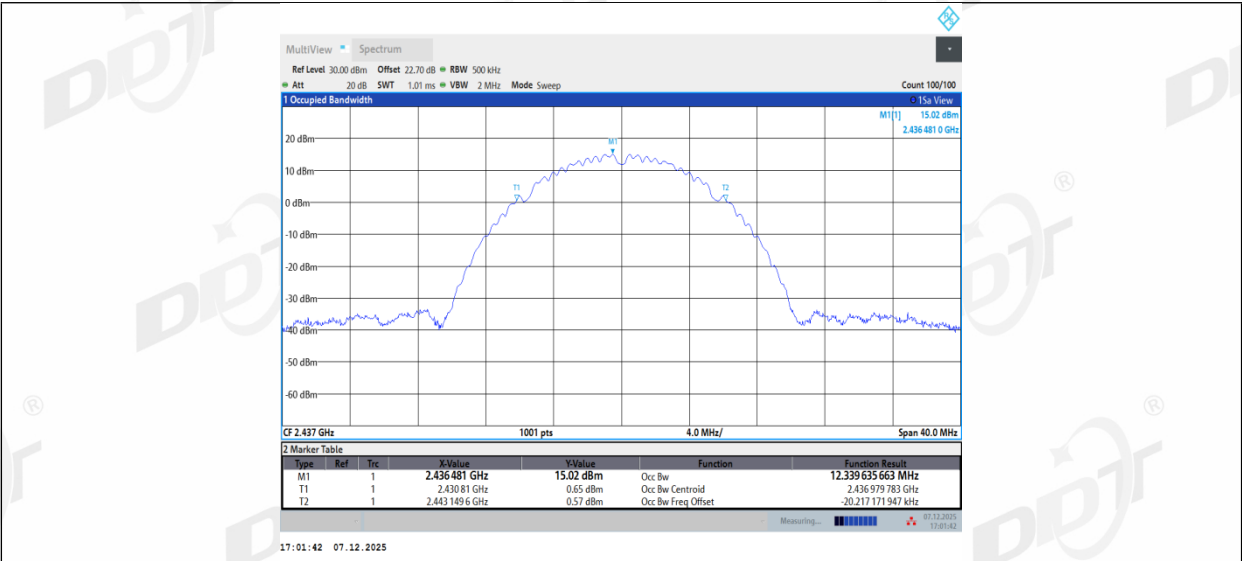


11B_Ant1_2462

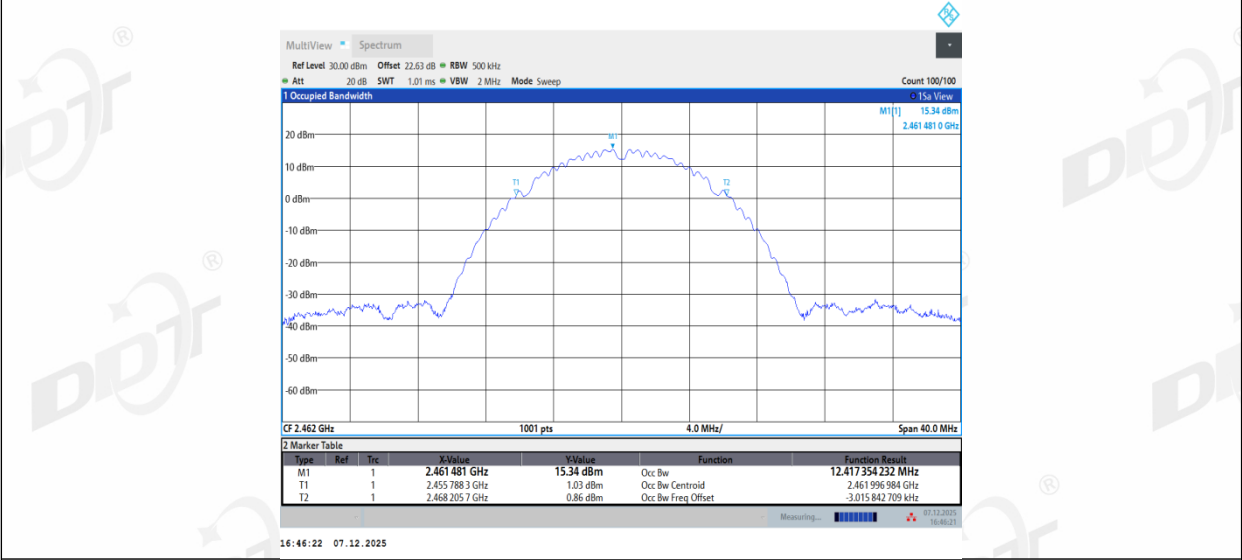


11B_Ant2_2462

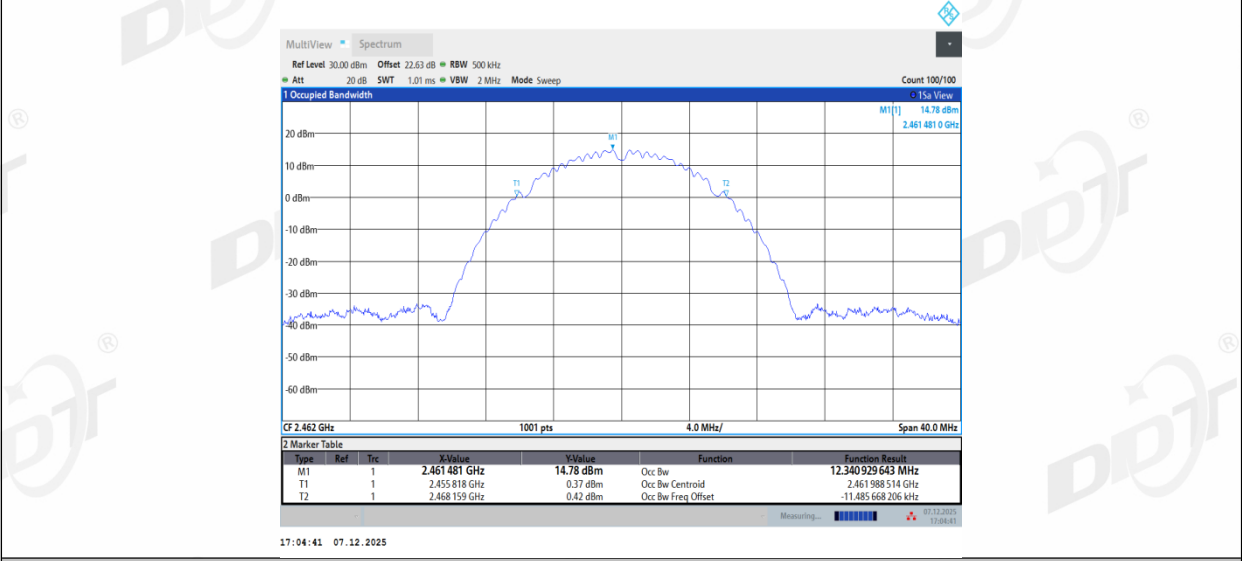


11G_Ant1_2412

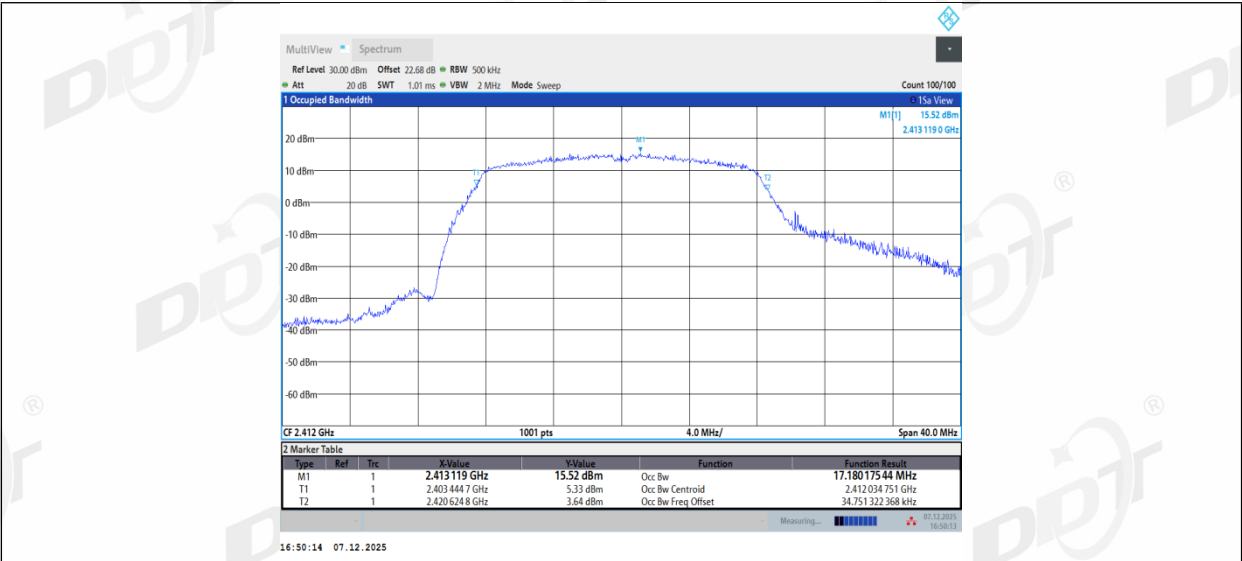


11G_Ant2_2412

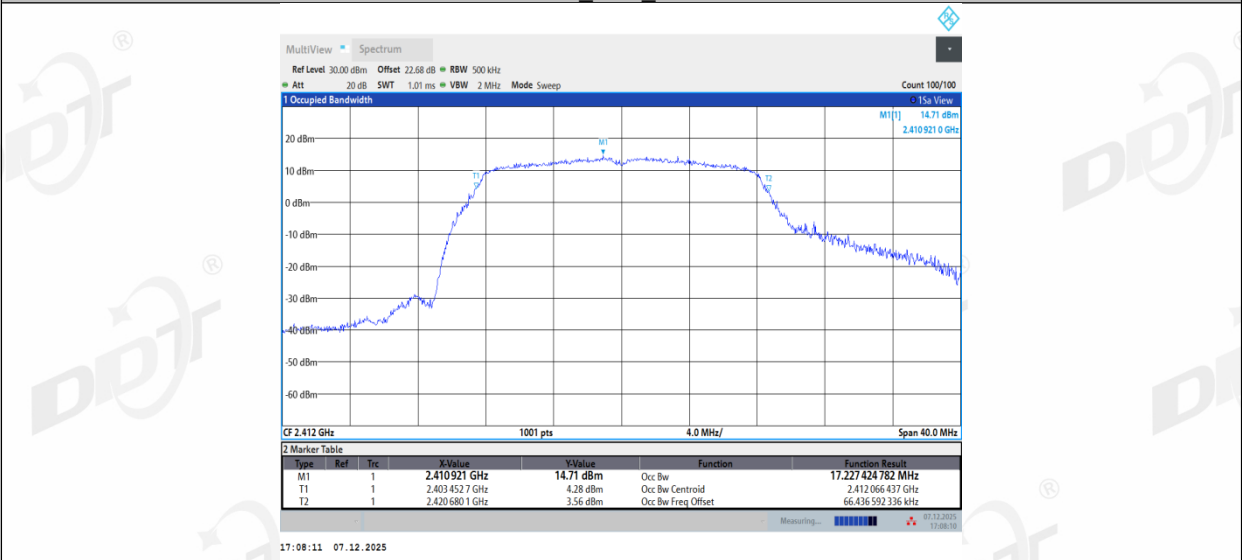


11G_Ant1_2437

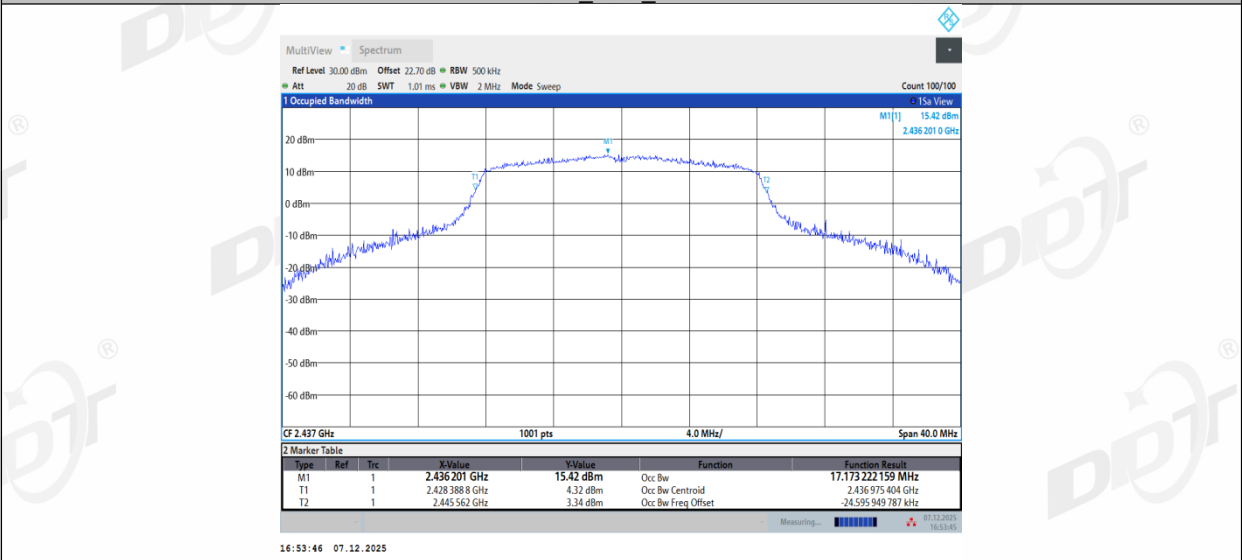


11G_Ant2_2437

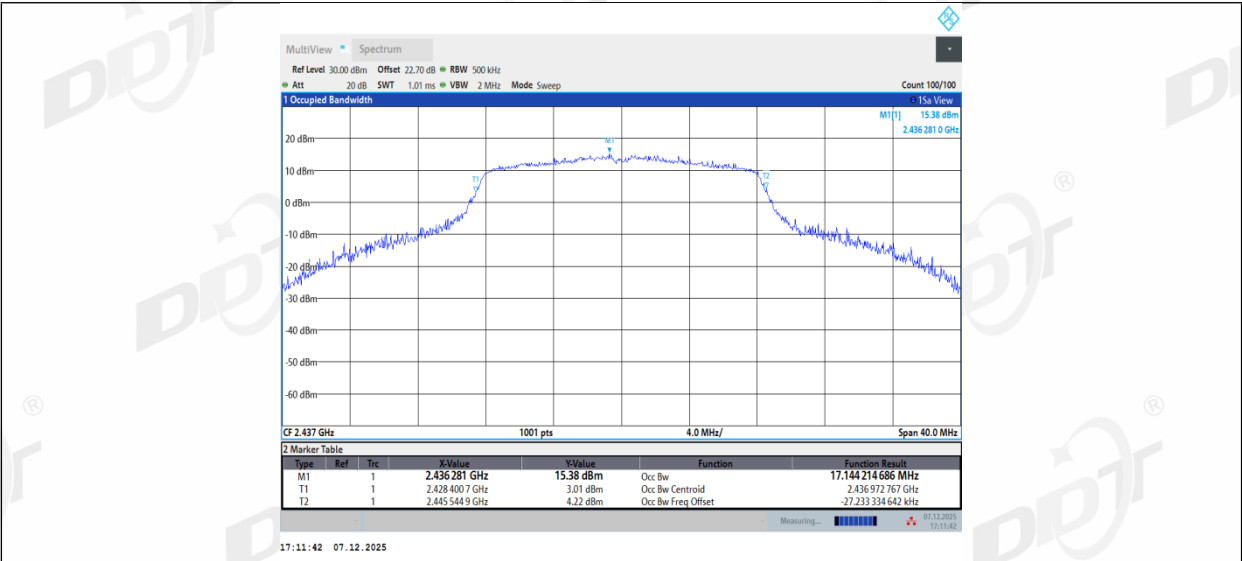


11G_Ant1_2462

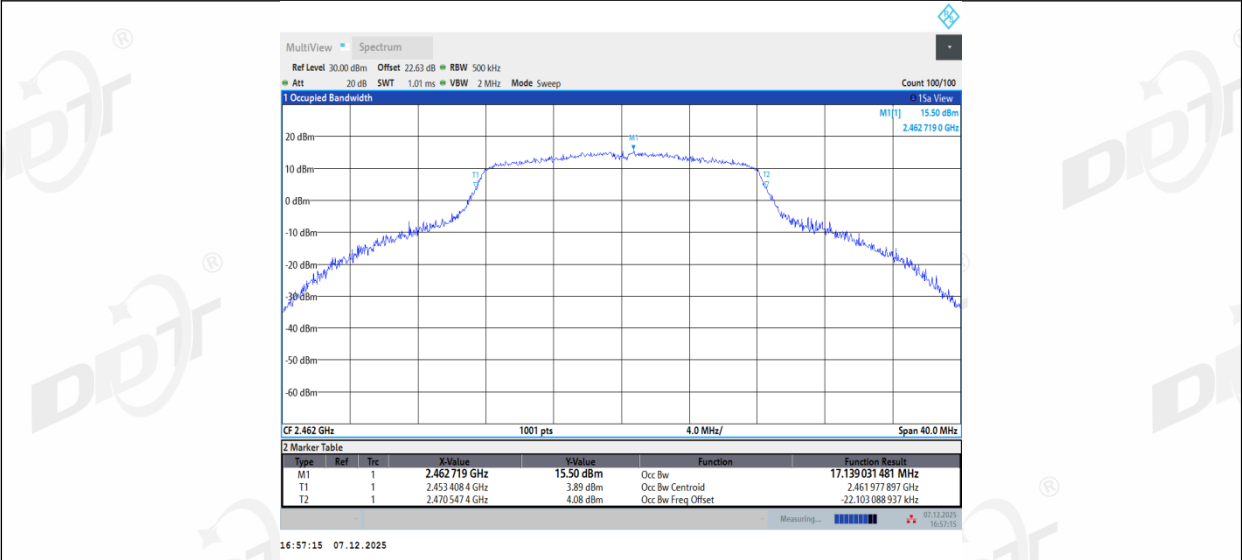


11G_Ant2_2462

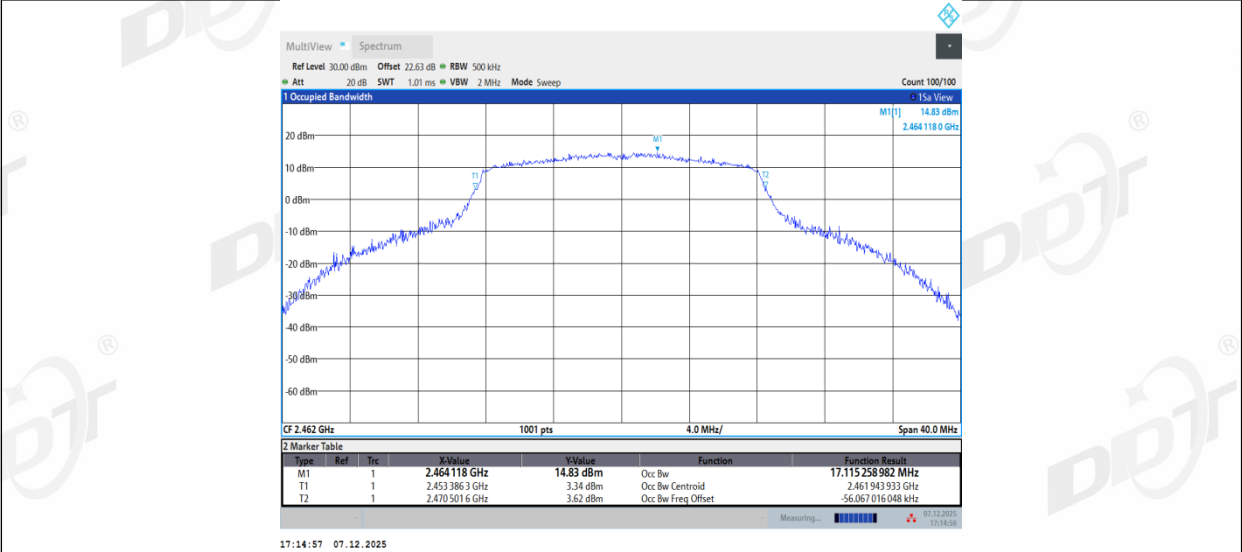


11N20MIMO_Ant1_2412

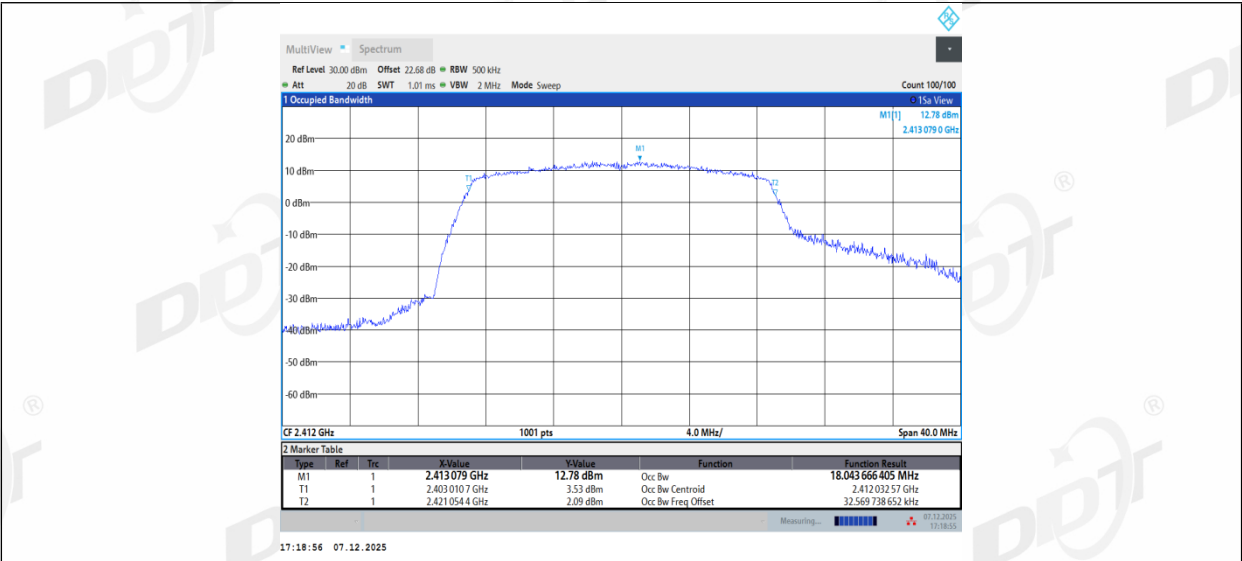


11N20MIMO_Ant2_2412

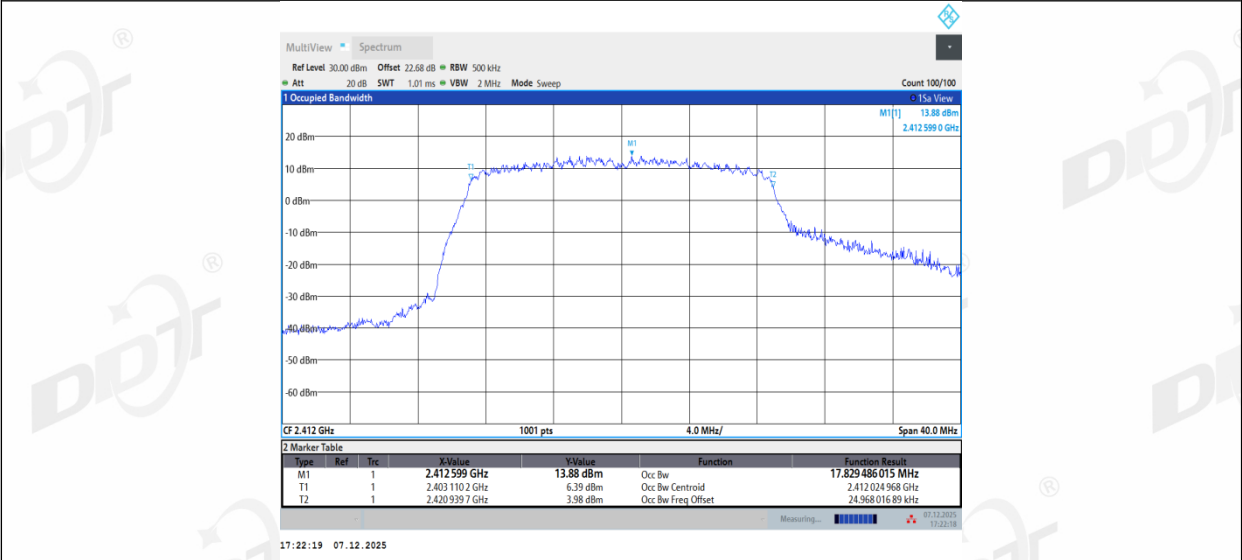


11N20MIMO_Ant1_2437

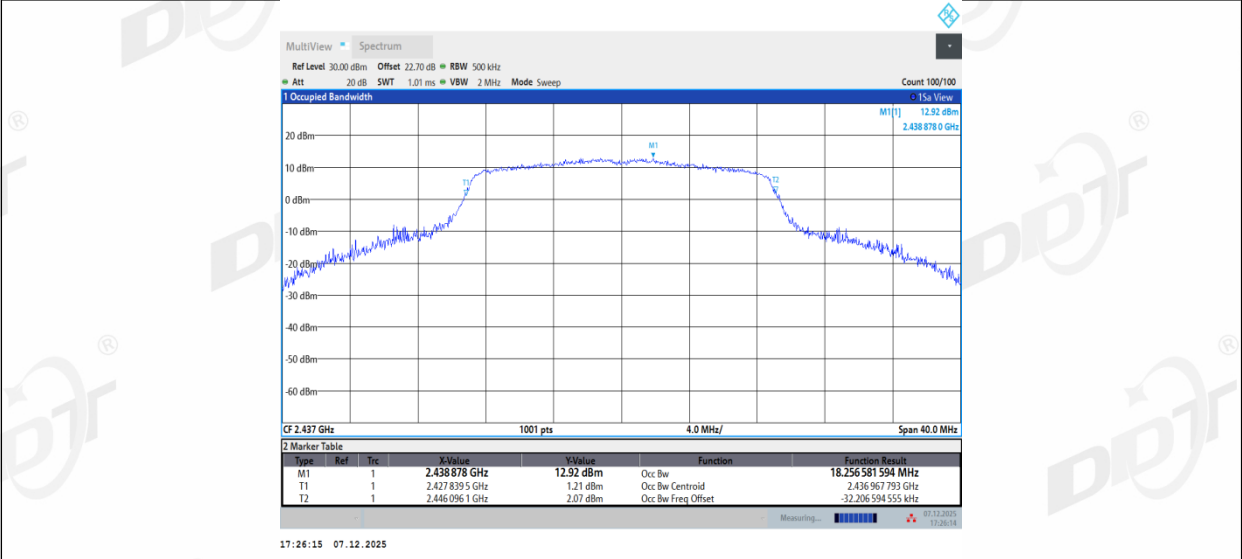


11N20MIMO_Ant2_2437

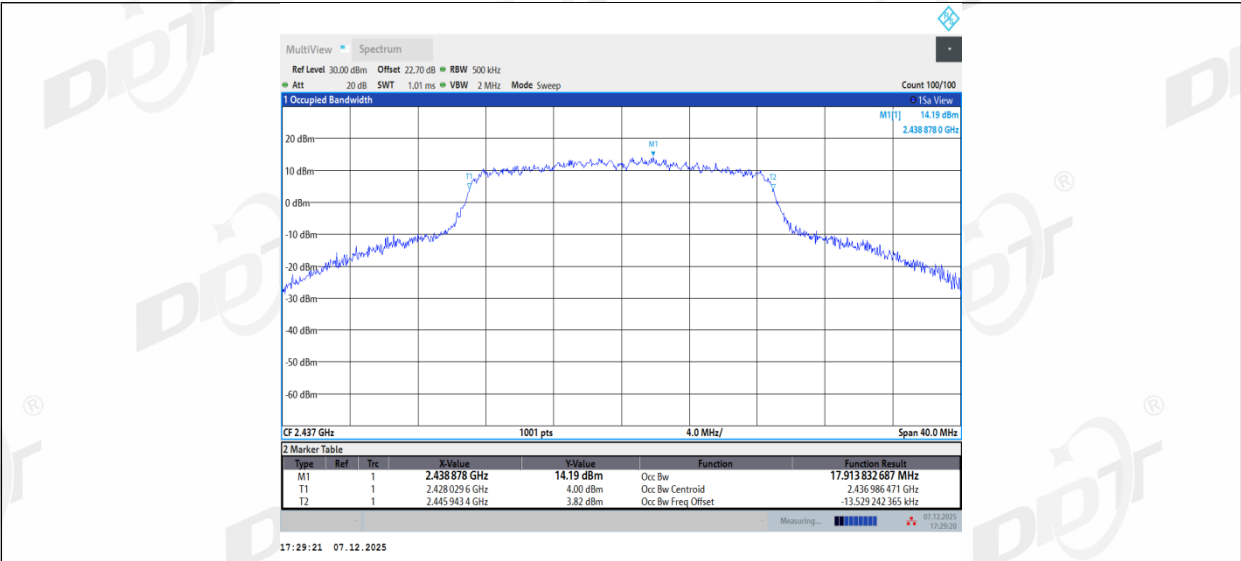


11N20MIMO_Ant1_2462

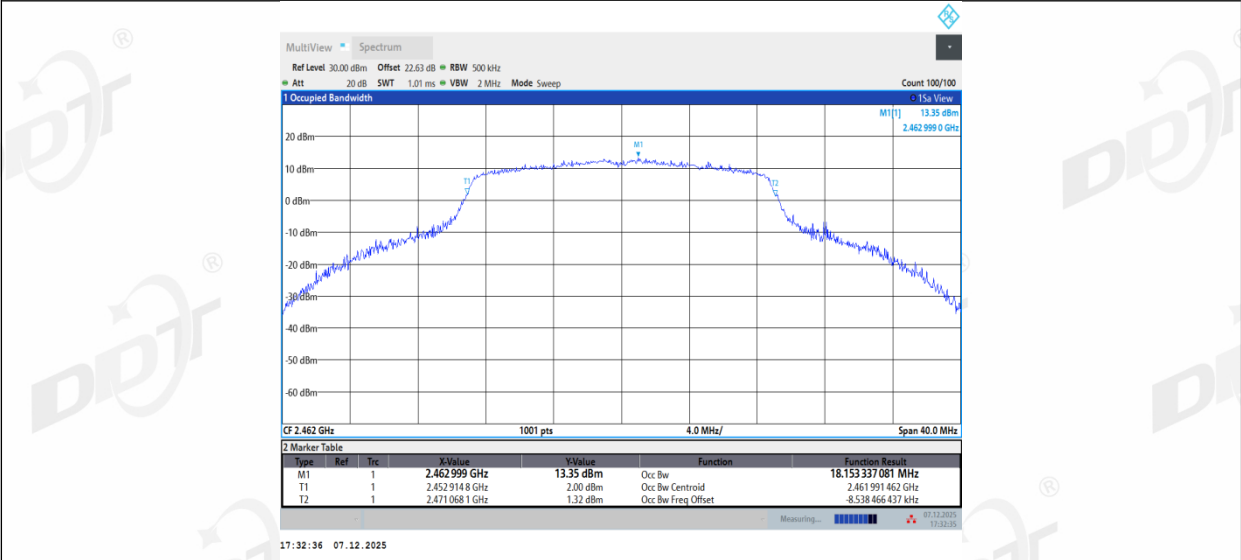


11N20MIMO_Ant2_2462

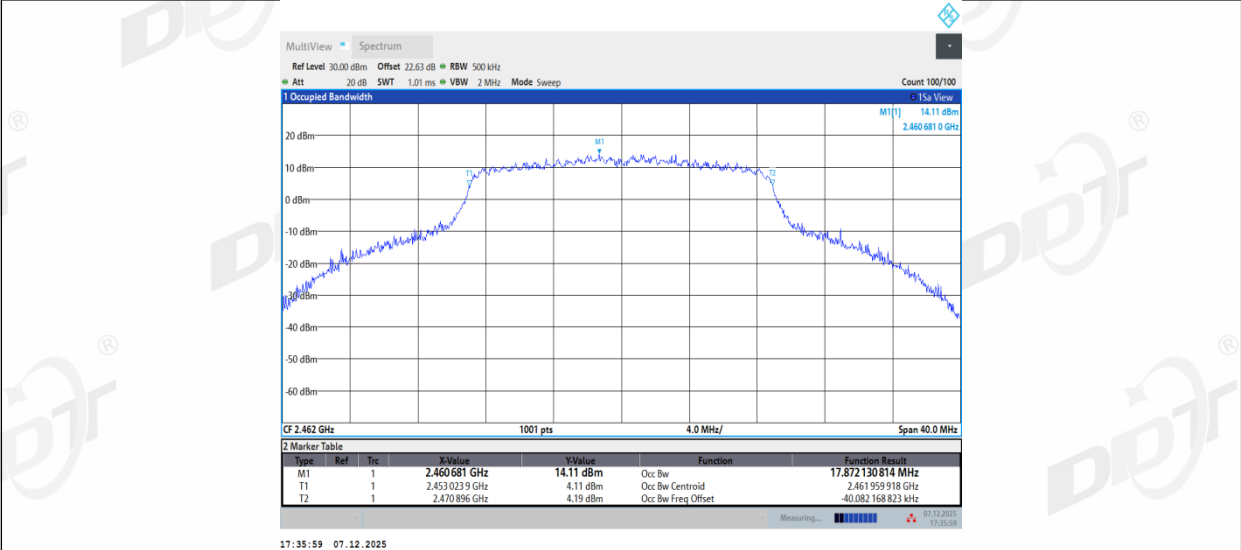


11N40MIMO_Ant1_2422

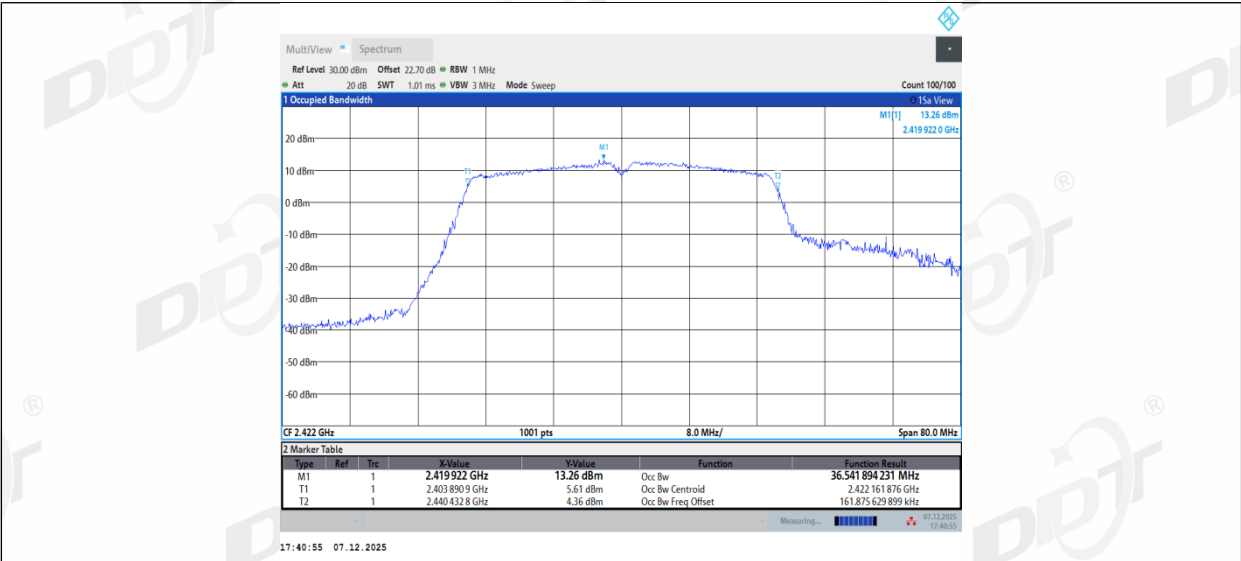


11N40MIMO_Ant2_2422

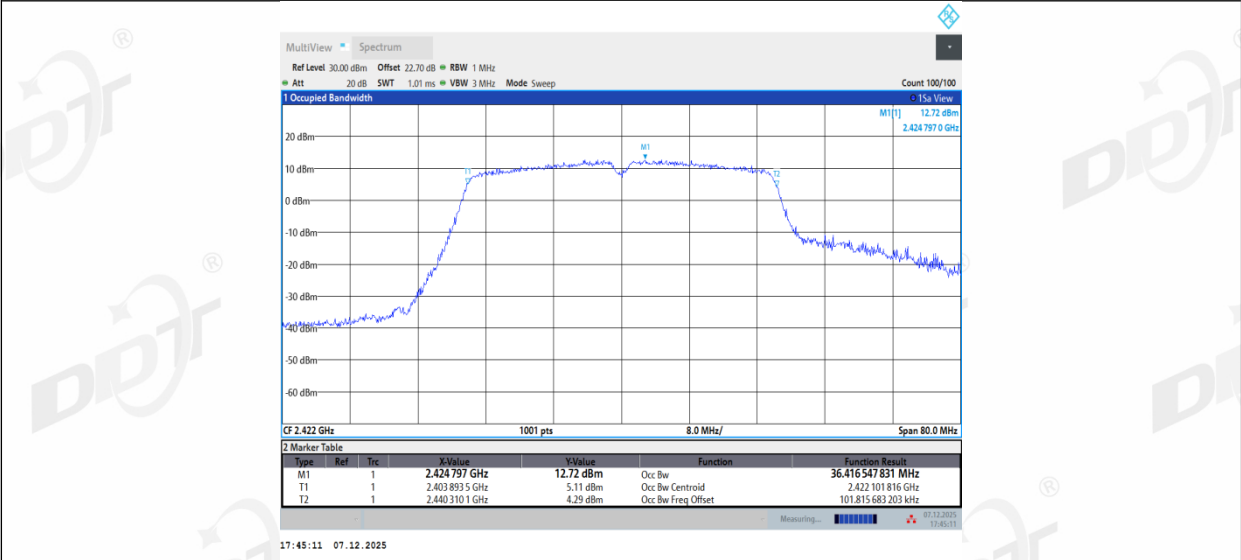


11N40MIMO_Ant1_2437

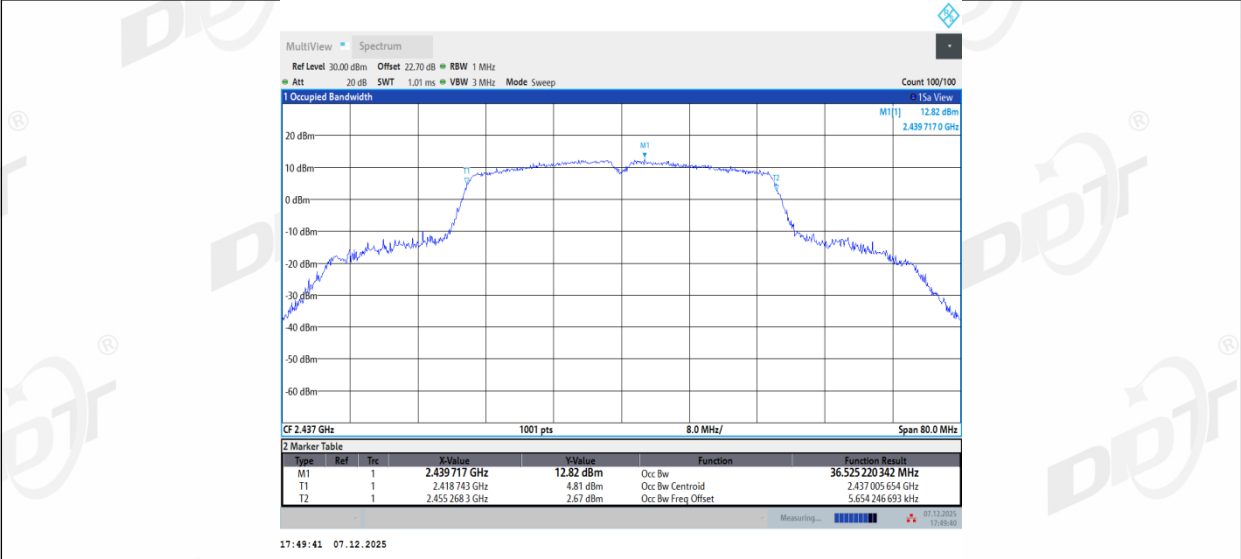


11N40MIMO_Ant2_2437

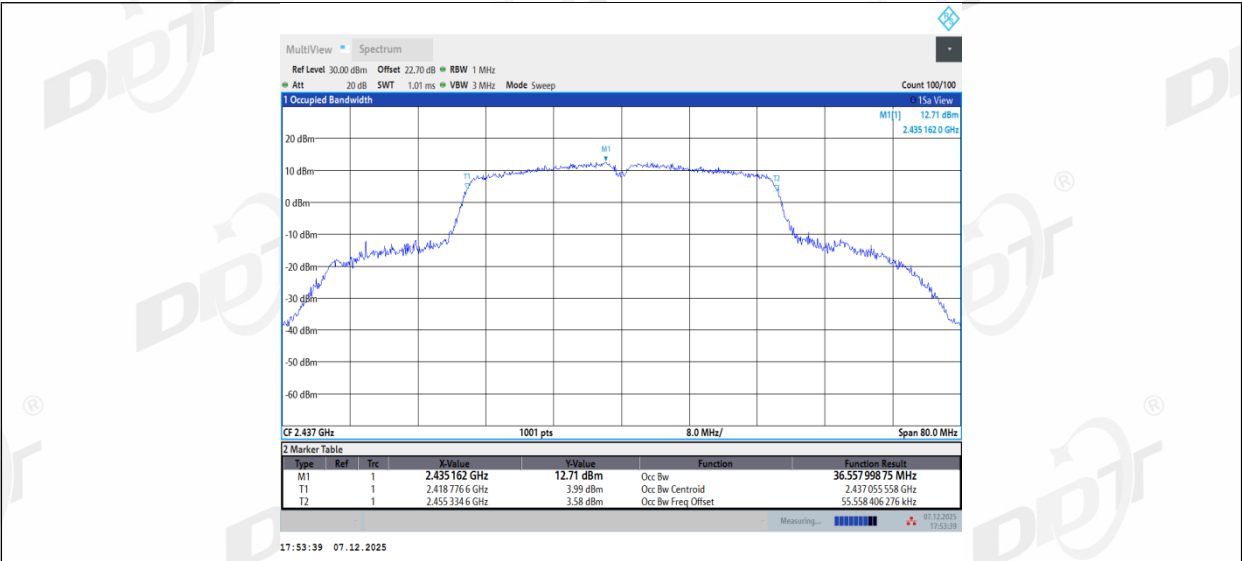


11N40MIMO_Ant1_2452

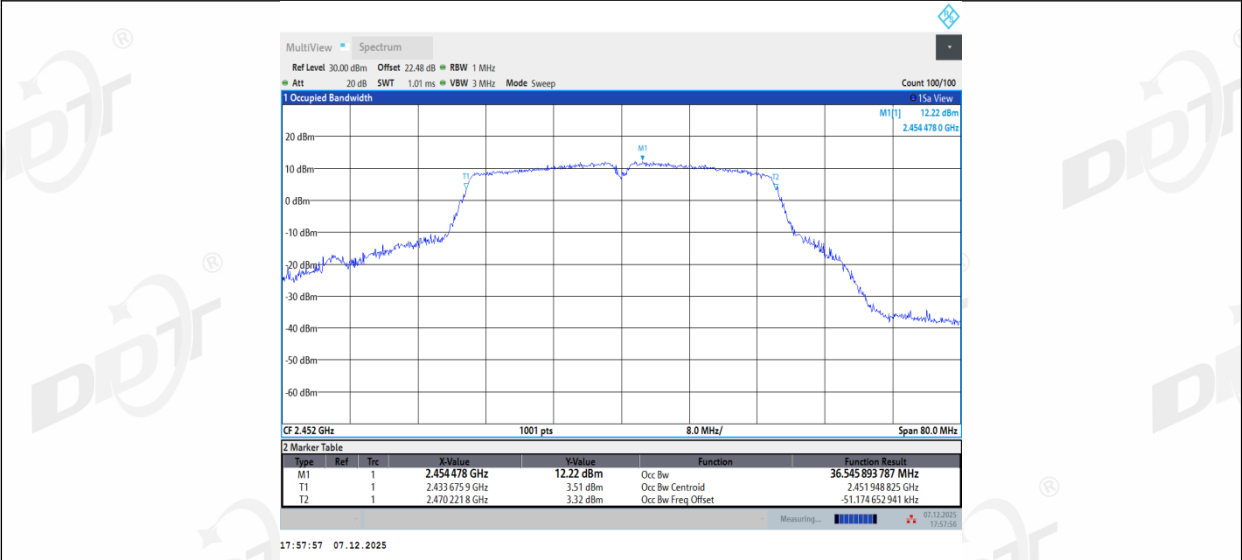


11N40MIMO_Ant2_2452

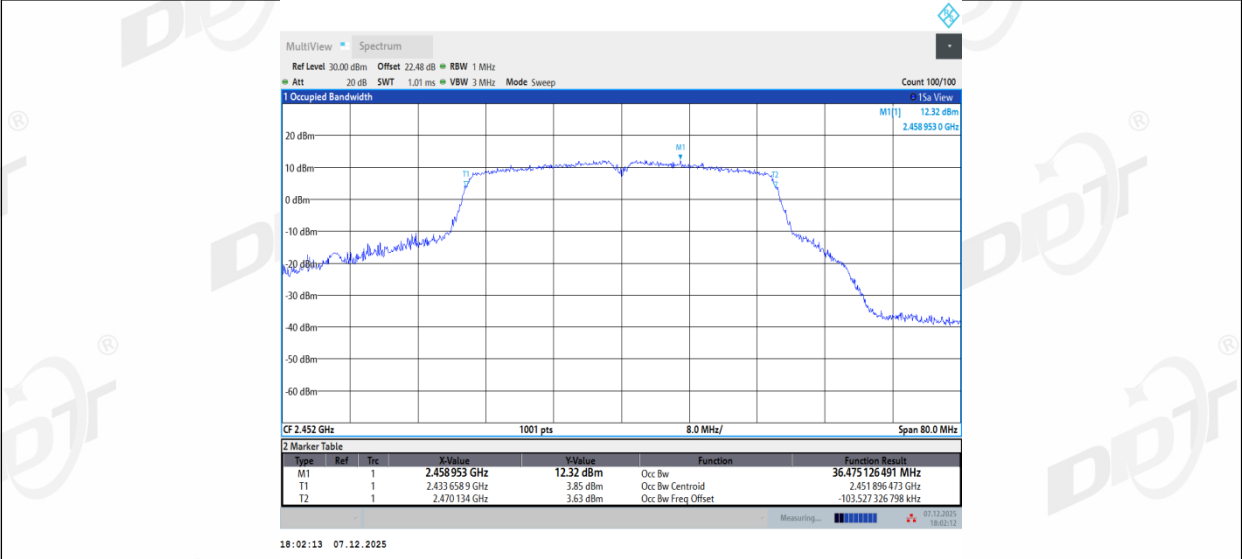


11AX20MIMO_Ant1_2412

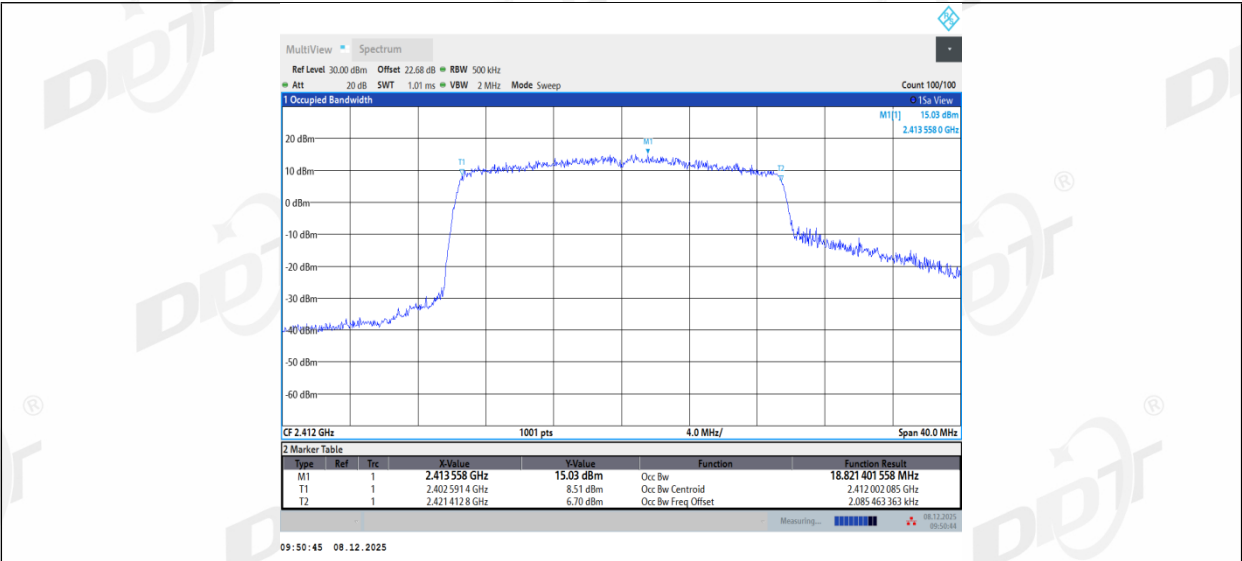


11AX20MIMO_Ant2_2412

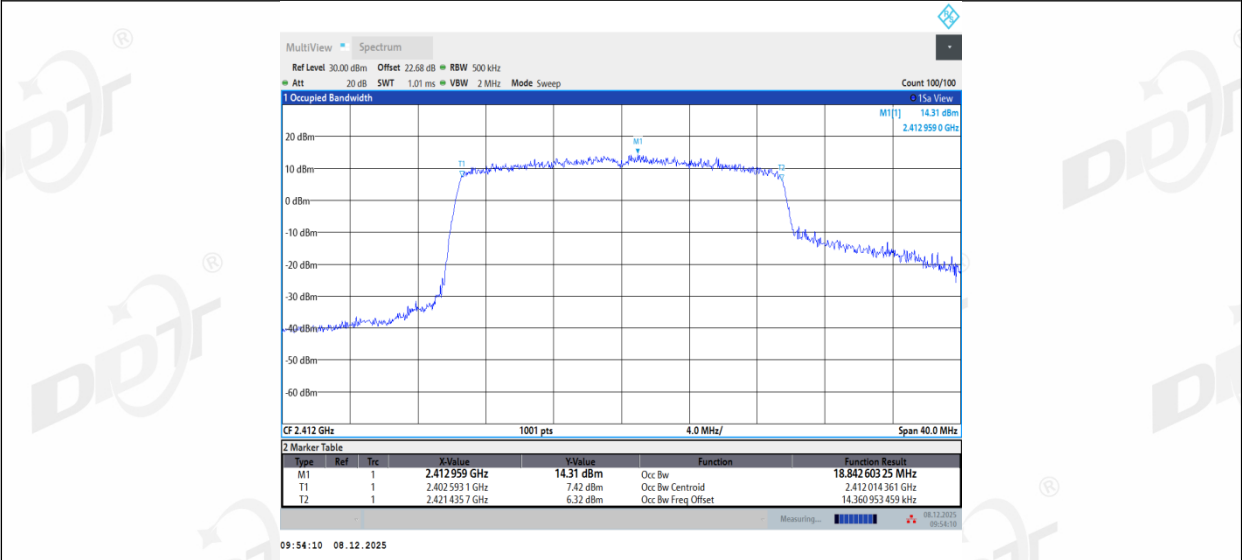


11AX20MIMO_Ant1_2437

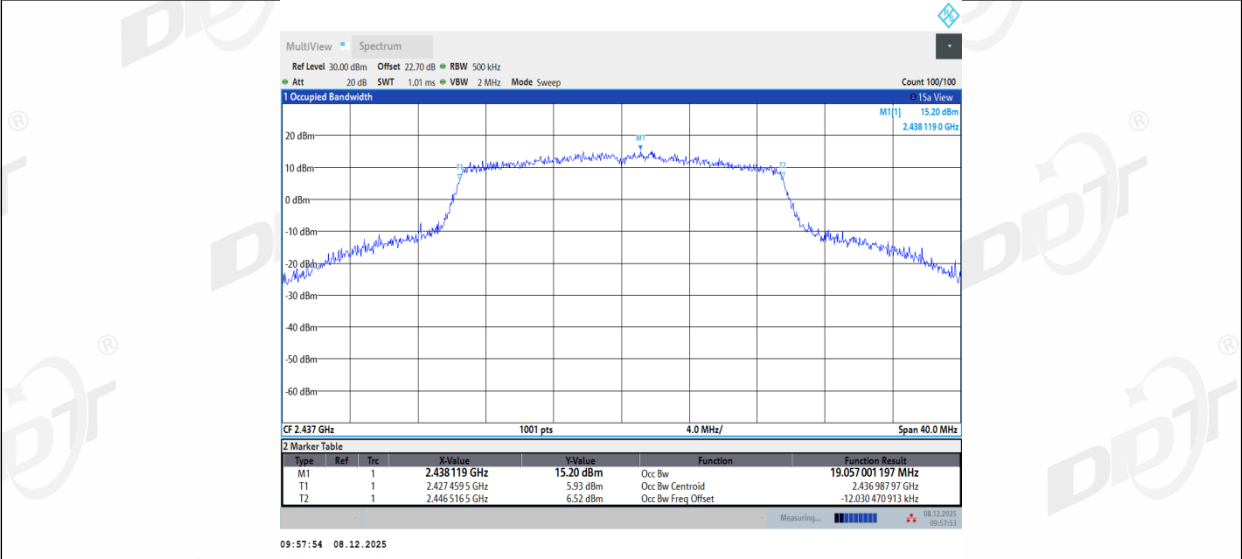


11AX20MIMO_Ant2_2437

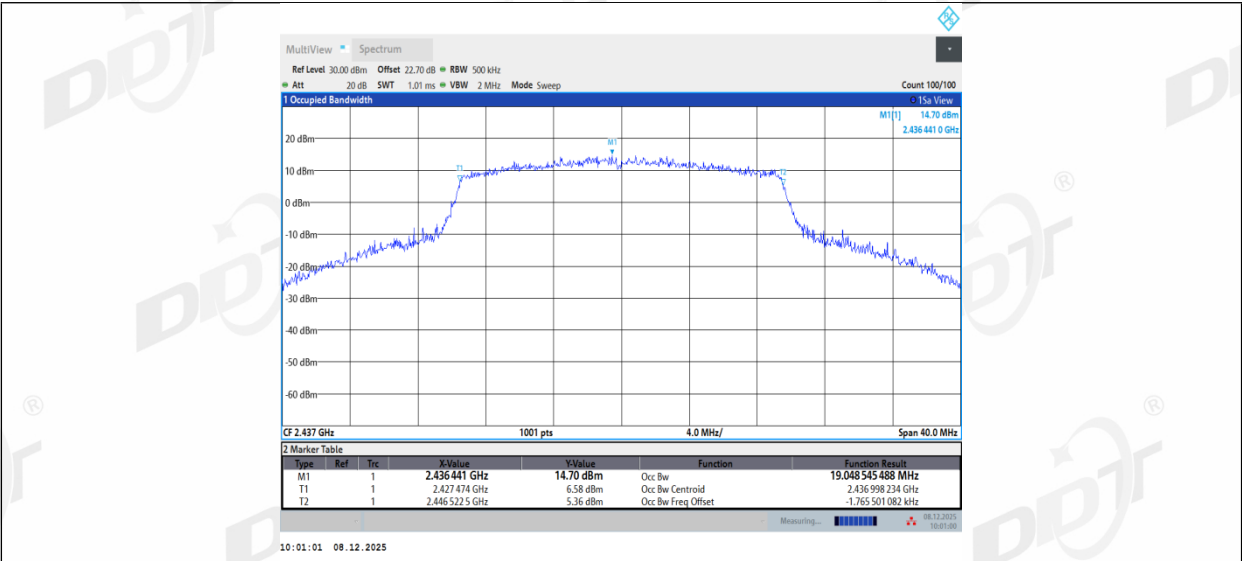


11AX20MIMO_Ant1_2462

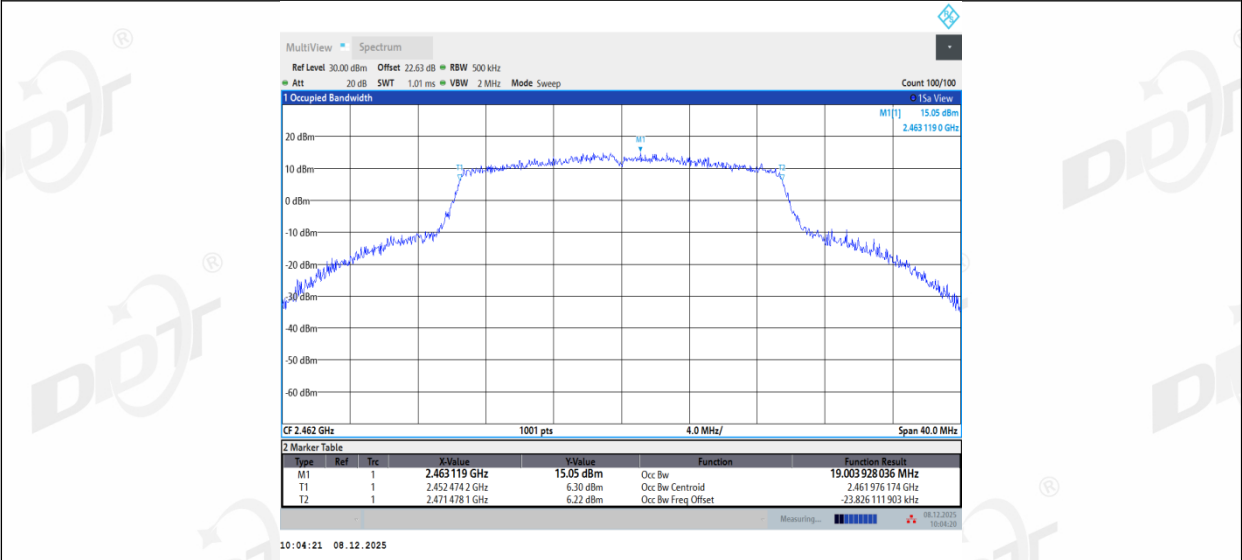


11AX20MIMO_Ant2_2462

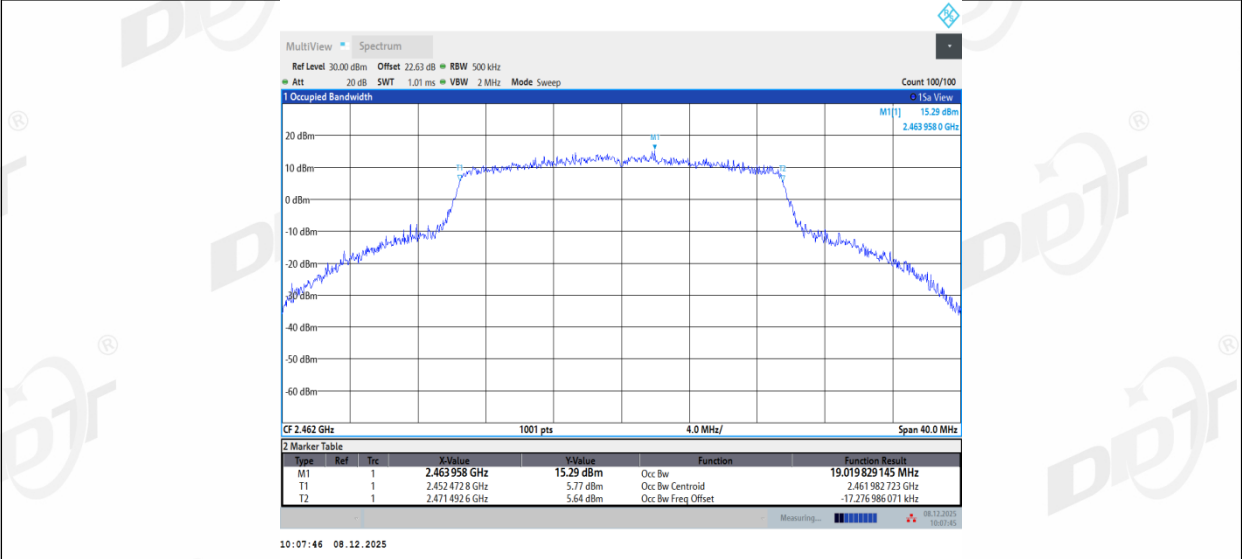


11AX40MIMO_Ant1_2422

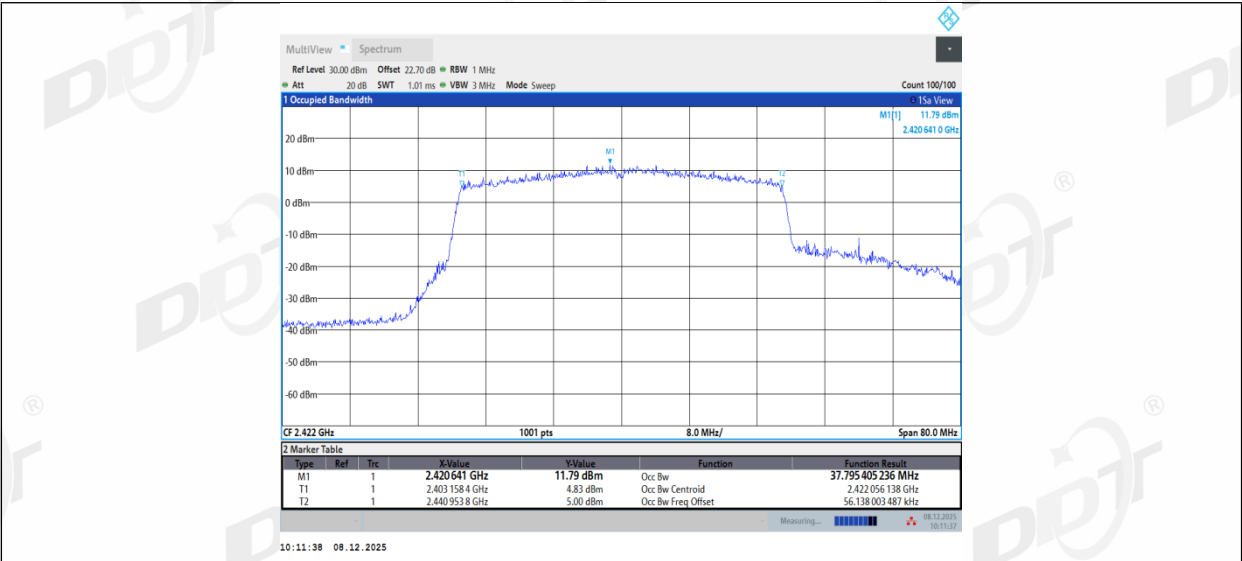

11AX40MIMO_Ant2_2422

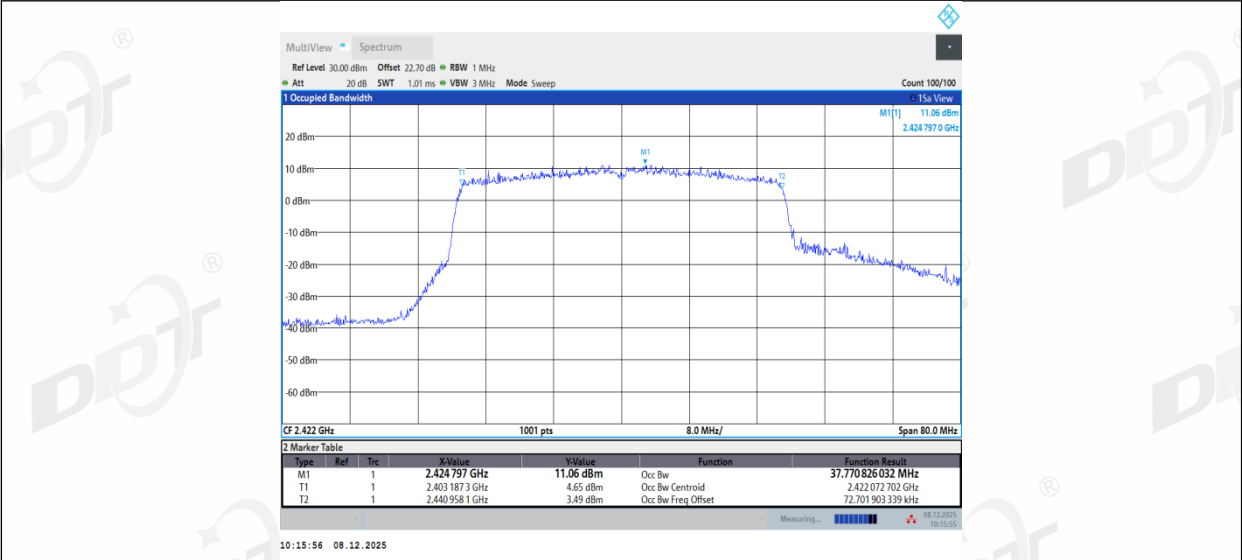

11AX40MIMO_Ant1_2437

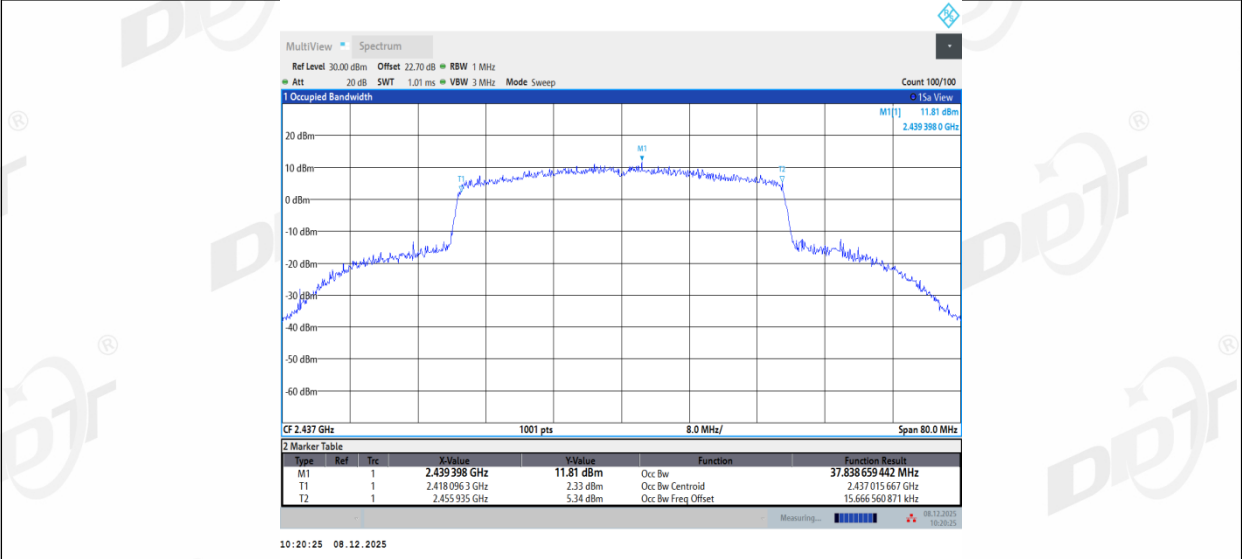

11AX40MIMO_Ant2_2437