

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\154

Memo:

Sample Numbler:S25082524-003 Power Setting:15

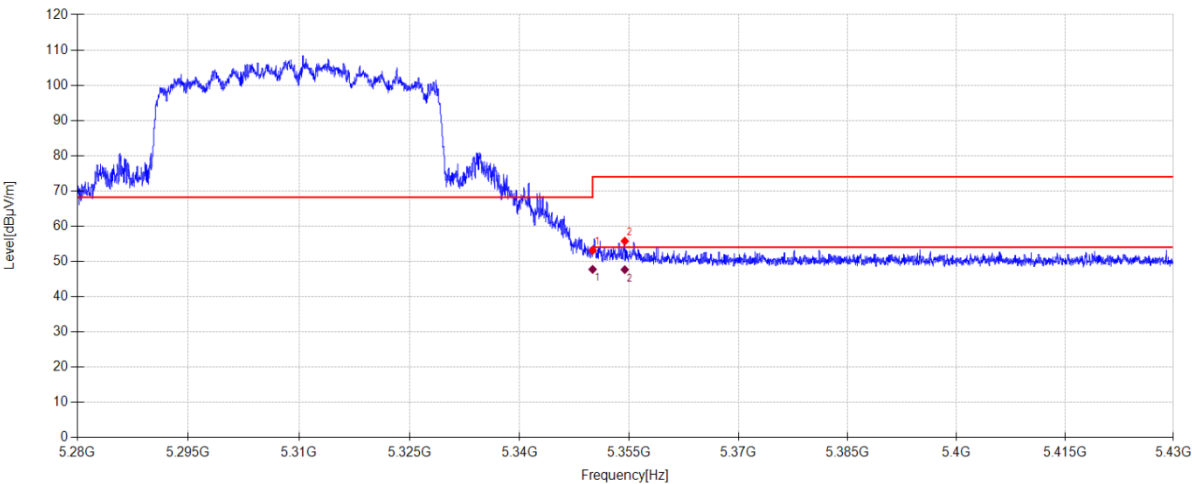

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.22	32.50	5.14	-29.73	53.13	68.20	15.07	PK	Horizontal
2	5354.400	47.80	32.54	5.14	-29.73	55.75	74.00	18.25	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.83	32.50	5.14	47.74	54.00	6.26	AV	Horizontal	
2	5354.400	39.71	32.54	5.14	47.66	54.00	6.34	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\155

Memo:

Sample Numbler:S25082524-003 Power Setting:15

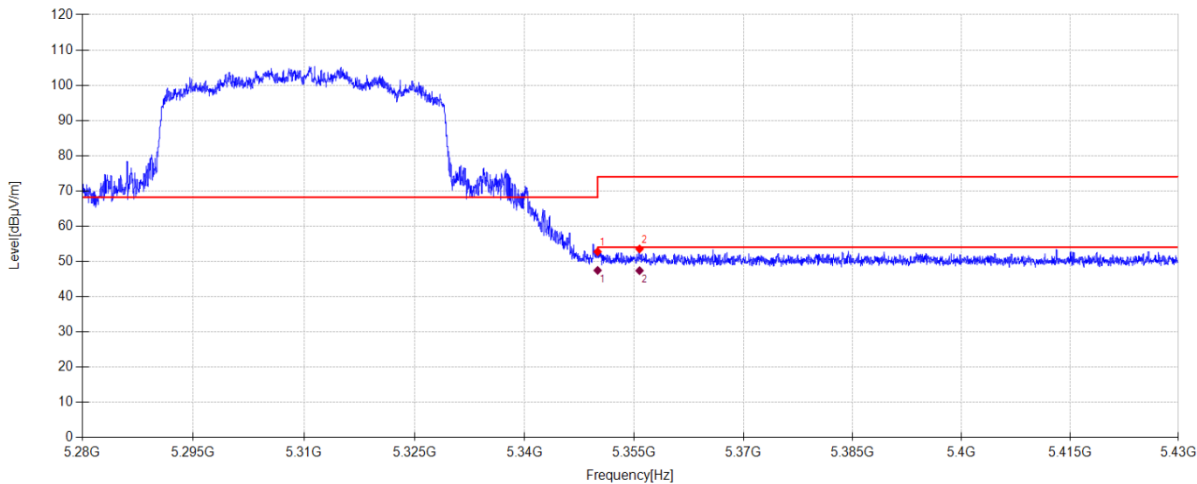

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.83	32.50	5.14	-29.73	52.74	68.20	15.46	PK	Vertical
2	5355.735	45.57	32.55	5.14	-29.73	53.53	74.00	20.47	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.54	32.50	5.14	47.45	54.00	6.55	AV	Vertical	
2	5355.735	39.42	32.55	5.14	47.38	54.00	6.62	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\152

Memo:

Sample Numbler:S25082524-003 Power Setting:15

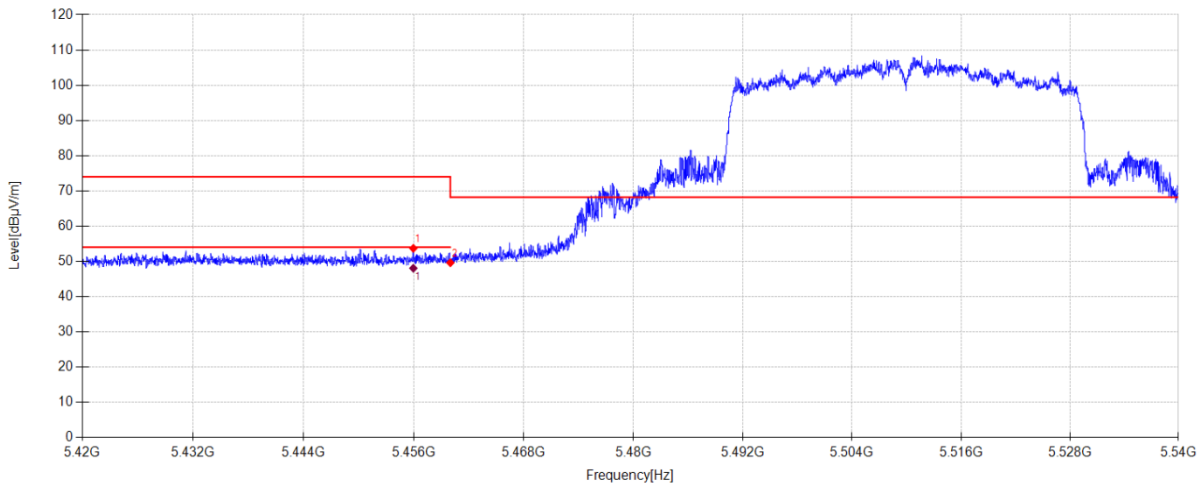

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.964	45.37	32.86	5.19	-29.71	53.71	74.00	20.29	PK	Horizontal
2	5460.000	41.23	32.90	5.19	-29.71	49.61	68.20	18.59	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.964	39.72	32.86	5.19	48.06	54.00	5.94	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\153

Memo:

Sample Numbler:S25082524-003 Power Setting:15

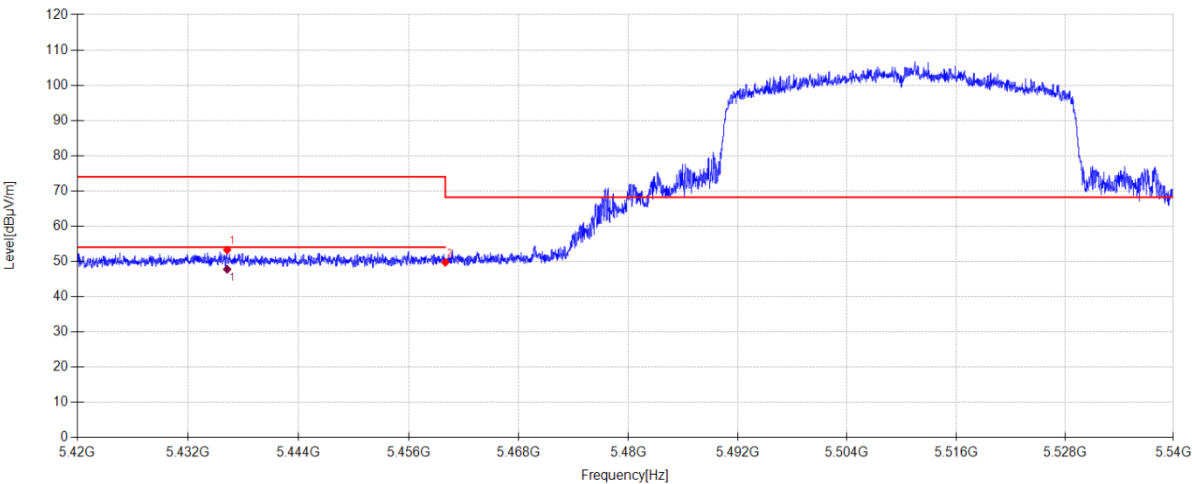

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.248	44.95	32.83	5.18	-29.71	53.25	74.00	20.75	PK	Vertical
2	5460.000	41.35	32.90	5.19	-29.71	49.73	68.20	18.47	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5436.248	39.47	32.83	5.18	47.77	54.00	6.23	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\150

Memo:

Sample Numbler:S25082524-003 Power Setting:15

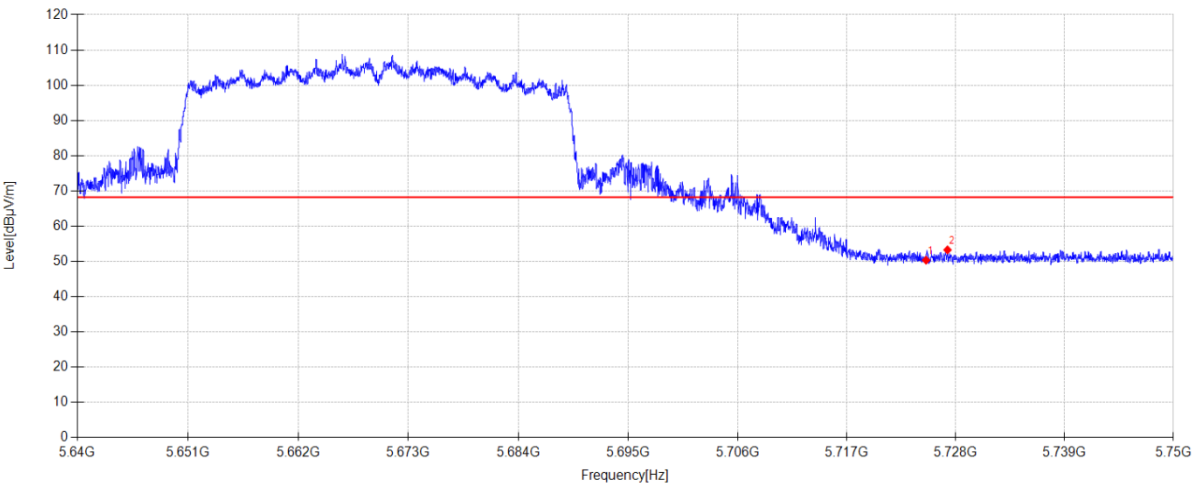

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.22	33.45	5.32	-29.65	50.34	68.20	17.86	PK	Horizontal
2	5727.164	44.11	33.48	5.32	-29.65	53.26	68.20	14.94	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\151

Memo:

Sample Numbler:S25082524-003 Power Setting:15

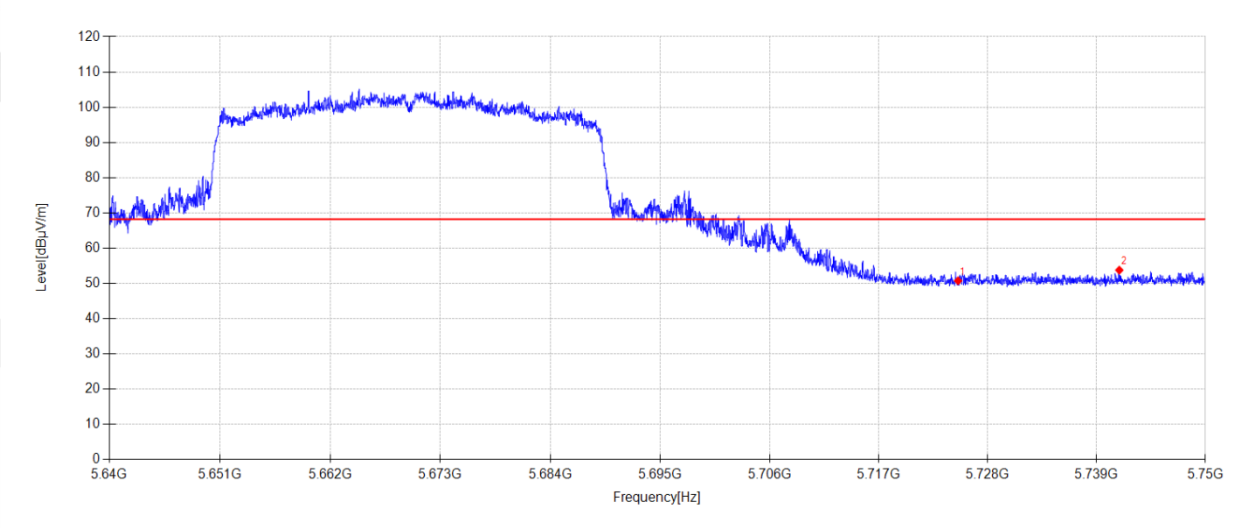

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.62	33.45	5.32	-29.65	50.74	68.20	17.46	PK	Vertical
2	5741.288	44.40	33.68	5.33	-29.65	53.76	68.20	14.44	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-23 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11BE80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\158
Memo: Sample Numbler:S25082524-003 Power Setting:15

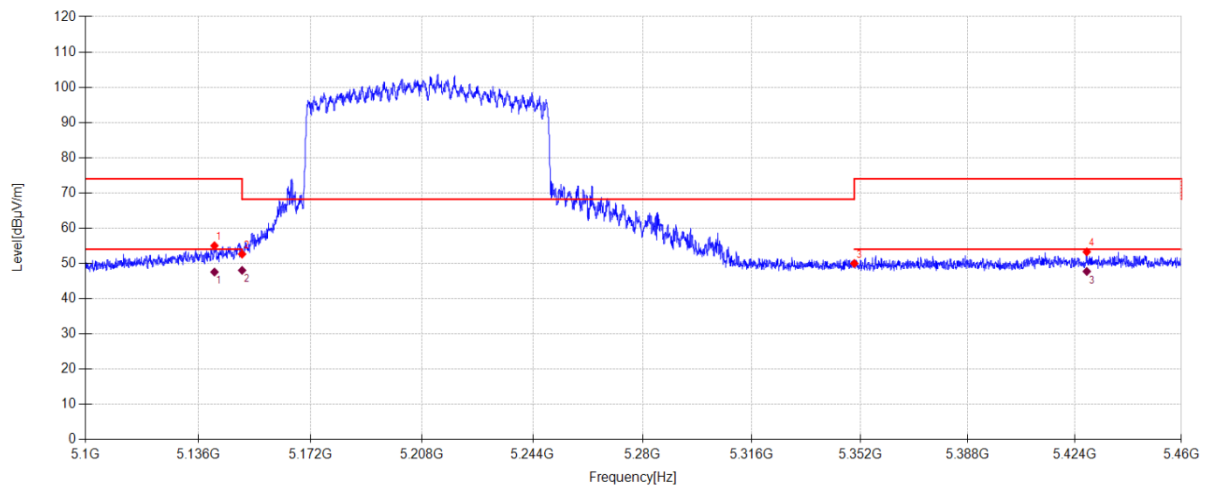**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.148	46.93	32.83	5.03	-29.77	55.02	74.00	18.98	PK	Horizontal
2	5150.000	44.46	32.90	5.04	-29.77	52.63	68.20	15.57	PK	Horizontal
3	5350.000	42.07	32.50	5.14	-29.73	49.98	68.20	18.22	PK	Horizontal
4	5427.960	44.97	32.84	5.17	-29.71	53.27	74.00	20.73	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.148	39.46	32.83	5.03	47.55	54.00	6.45	AV	Horizontal
2	5150.000	39.85	32.90	5.04	48.02	54.00	5.98	AV	Horizontal
3	5427.960	39.42	32.84	5.17	47.72	54.00	6.28	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\159

Memo:

Sample Numbler:S25082524-003 Power Setting:15

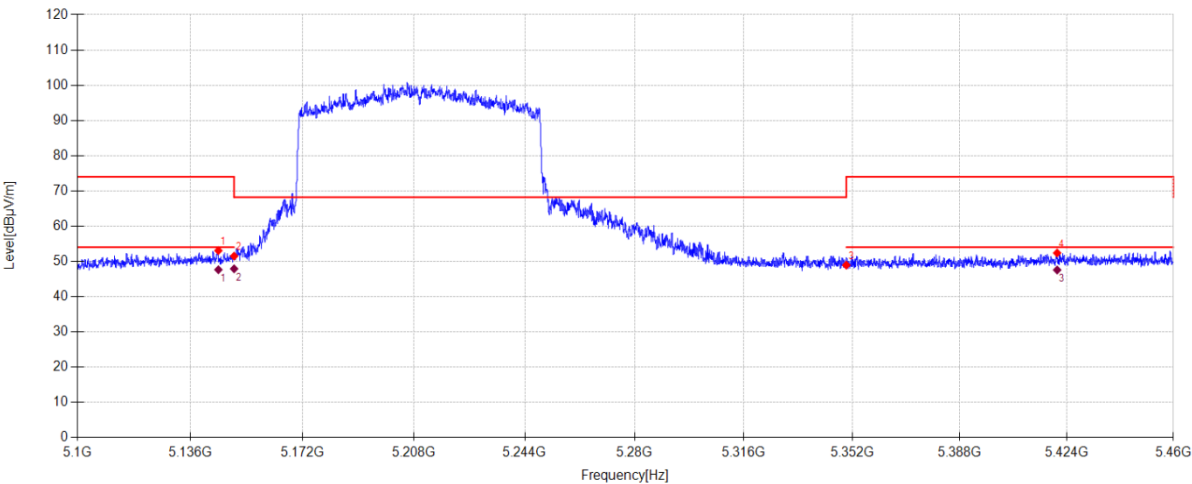

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.964	44.95	32.86	5.03	-29.77	53.07	74.00	20.93	PK	Vertical
2	5150.000	43.33	32.90	5.04	-29.77	51.50	68.20	16.70	PK	Vertical
3	5350.000	41.03	32.50	5.14	-29.73	48.94	68.20	19.26	PK	Vertical
4	5420.652	44.08	32.86	5.17	-29.72	52.39	74.00	21.61	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.964	39.53	32.86	5.03	47.65	54.00	6.35	AV	Vertical
2	5150.000	39.74	32.90	5.04	47.91	54.00	6.09	AV	Vertical
3	5420.652	39.26	32.86	5.17	47.57	54.00	6.43	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\160

Memo:

Sample Numbler:S25082524-003 Power Setting:15

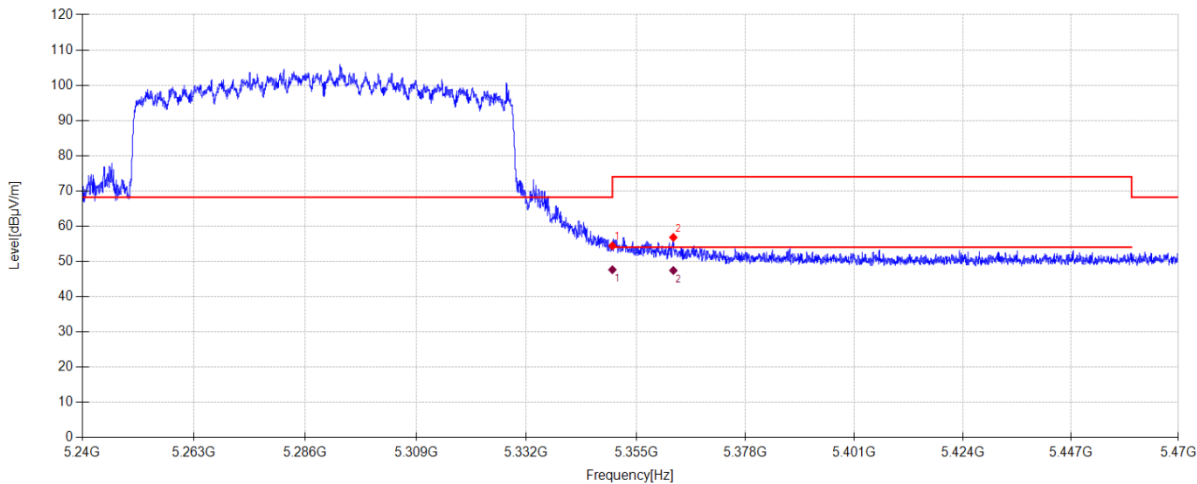

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.52	32.50	5.14	-29.73	54.43	68.20	13.77	PK	Horizontal
2	5362.797	48.79	32.60	5.14	-29.73	56.80	74.00	17.20	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.73	32.50	5.14	47.64	54.00	6.36	AV	Horizontal	
2	5362.797	39.41	32.60	5.14	47.42	54.00	6.58	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\161

Memo:

Sample Numbler:S25082524-003 Power Setting:15

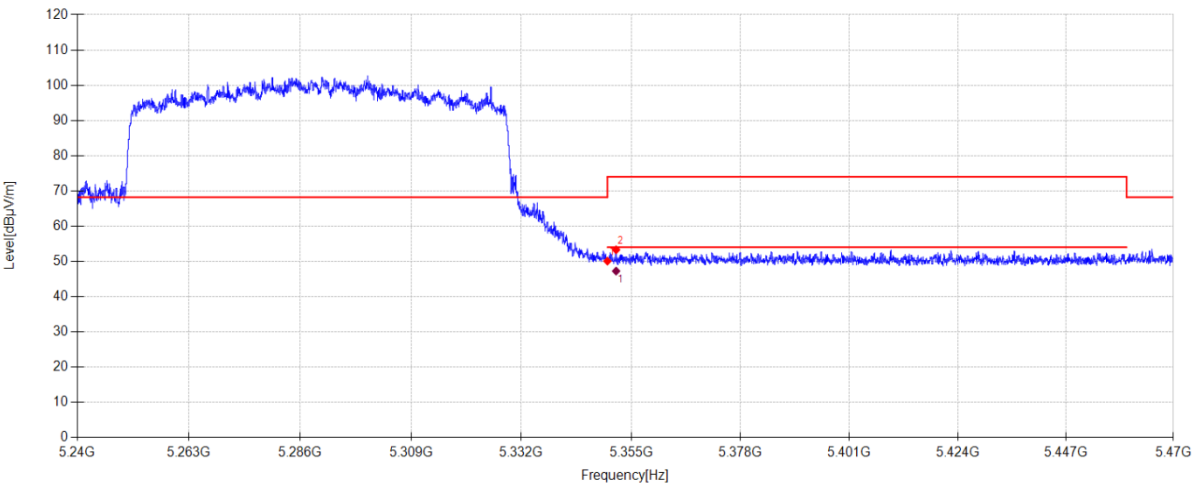

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.18	32.50	5.14	-29.73	50.09	68.20	18.11	PK	Vertical
2	5351.826	45.38	32.51	5.14	-29.73	53.30	74.00	20.70	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5351.826	39.34	32.51	5.14	47.26	54.00	6.74	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\162

Memo:

Sample Numbler:S25082524-003 Power Setting:15

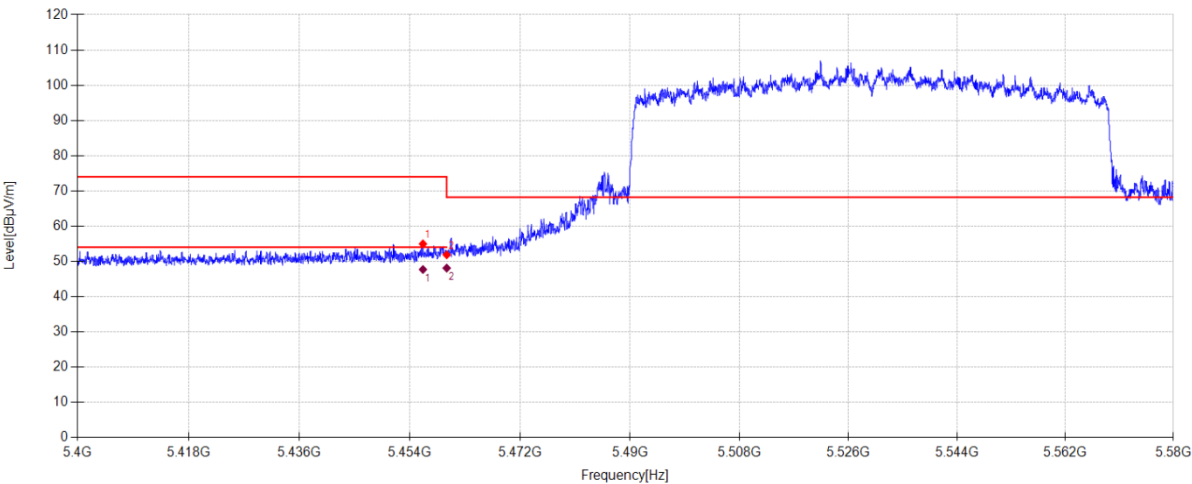

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.124	46.62	32.86	5.19	-29.71	54.96	74.00	19.04	PK	Horizontal
2	5460.000	43.49	32.90	5.19	-29.71	51.87	68.20	16.33	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.124	39.36	32.86	5.19	47.70	54.00	6.30	AV	Horizontal	
2	5460.000	39.72	32.90	5.19	48.10	54.00	5.90	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\163

Memo:

Sample Numbler:S25082524-003 Power Setting:15

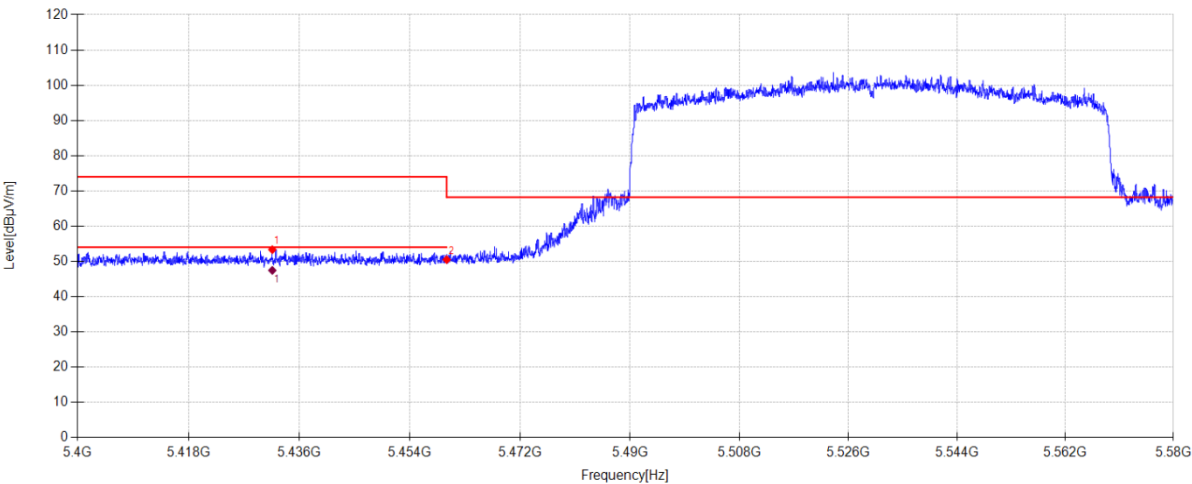

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5431.590	45.02	32.84	5.18	-29.71	53.33	74.00	20.67	PK	Vertical
2	5460.000	42.12	32.90	5.19	-29.71	50.50	68.20	17.70	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5431.590	39.14	32.84	5.18	47.45	54.00	6.55	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\164

Memo:

Sample Numbler:S25082524-003 Power Setting:15

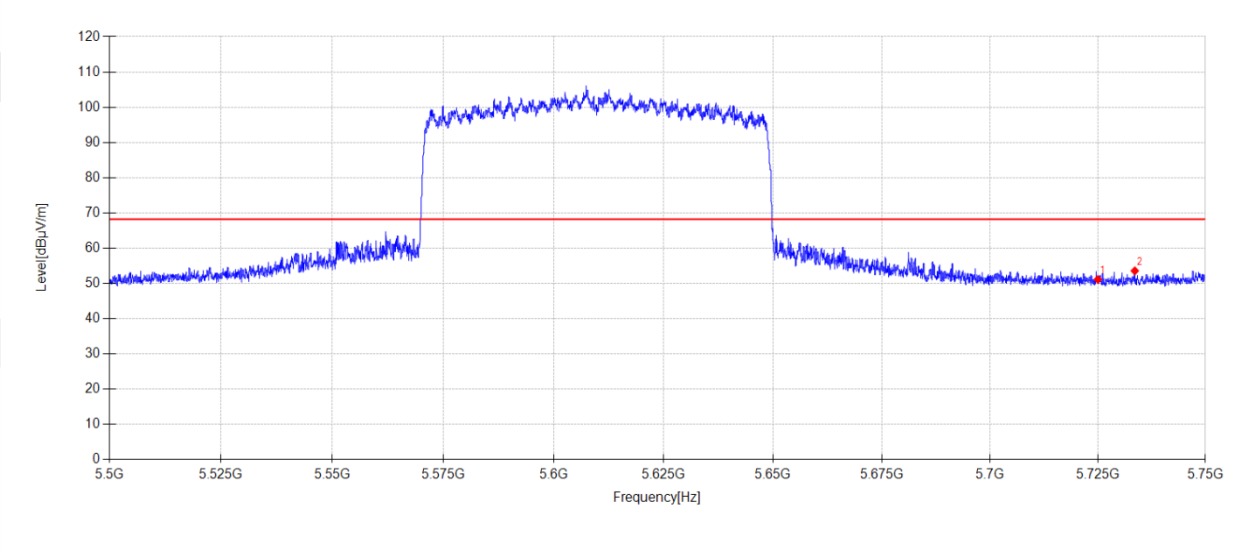

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.01	33.45	5.32	-29.66	51.12	68.20	17.08	PK	Horizontal
2	5733.575	44.31	33.57	5.33	-29.65	53.56	68.20	14.64	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\165

Memo:

Sample Numbler:S25082524-003 Power Setting:15

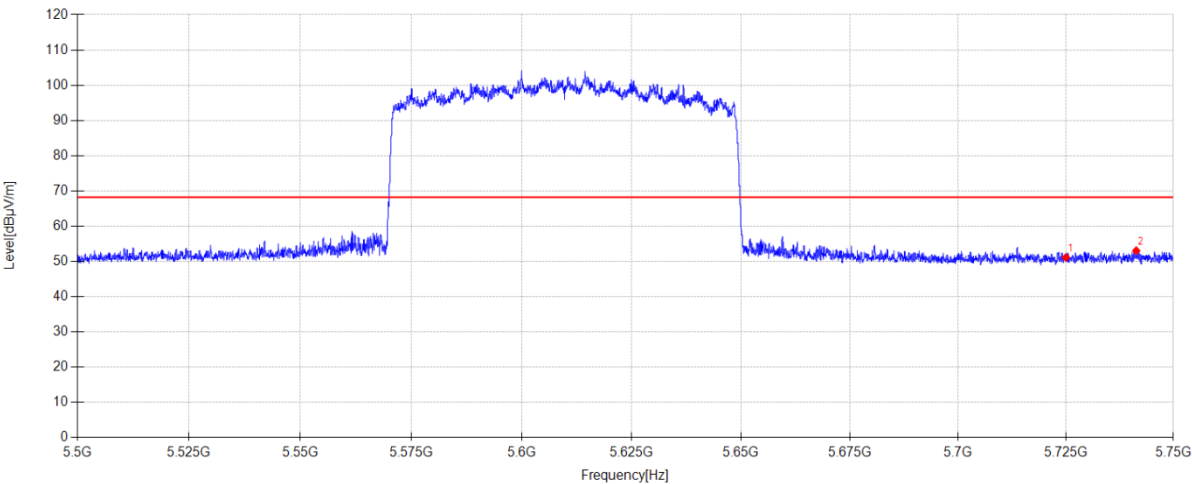

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.00	33.45	5.32	-29.66	51.11	68.20	17.09	PK	Vertical
2	5741.350	43.68	33.68	5.33	-29.65	53.04	68.20	15.16	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE160 5250MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\166

Memo:

Sample Numble:S25082524-003 Power Setting:15

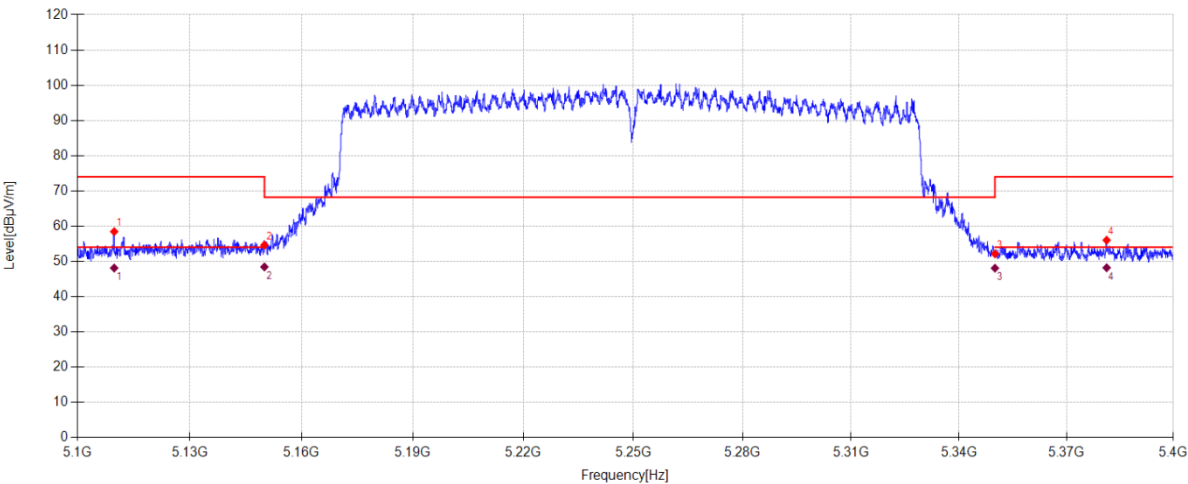

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5109.810	50.64	32.58	5.01	-29.78	58.45	74.00	15.55	PK	Horizontal
2	5150.000	46.46	32.90	5.04	-29.77	54.63	68.20	13.57	PK	Horizontal
3	5350.000	44.23	32.50	5.14	-29.73	52.14	68.20	16.06	PK	Horizontal
4	5381.250	47.84	32.75	5.15	-29.72	56.02	74.00	17.98	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5109.810	40.31	32.58	5.01	48.12	54.00	5.88	AV	Horizontal	
2	5150.000	40.26	32.90	5.04	48.43	54.00	5.57	AV	Horizontal	
3	5350.000	40.17	32.50	5.14	48.08	54.00	5.92	AV	Horizontal	
4	5381.250	40.02	32.75	5.15	48.20	54.00	5.80	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-23 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11BE160 5250MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\167
Memo: Sample Numbler:S25082524-003 Power Setting:15

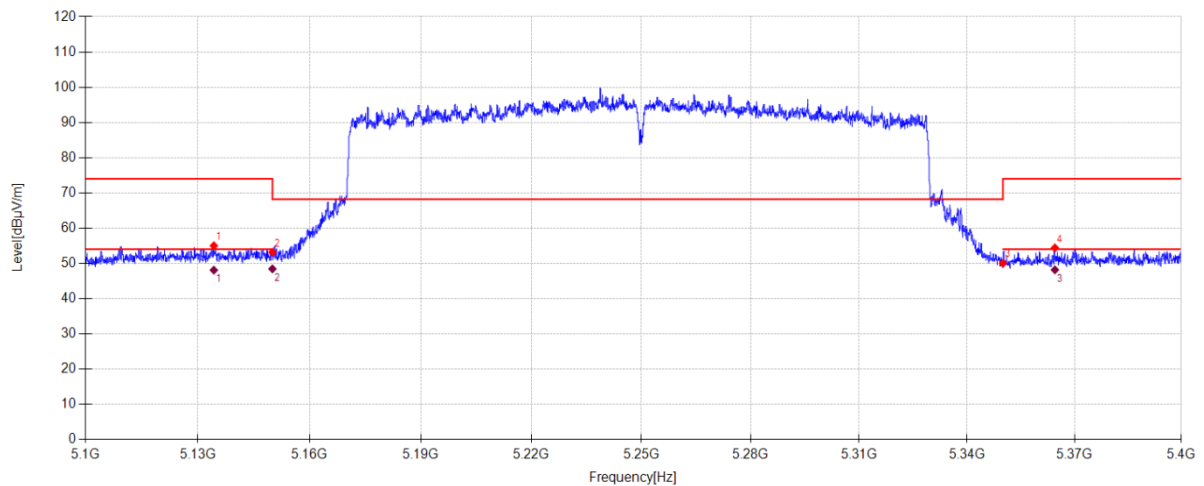**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.290	46.98	32.77	5.03	-29.77	55.01	74.00	18.99	PK	Vertical
2	5150.000	45.01	32.90	5.04	-29.77	53.18	68.20	15.02	PK	Vertical
3	5350.000	42.14	32.50	5.14	-29.73	50.05	68.20	18.15	PK	Vertical
4	5364.510	46.37	32.62	5.14	-29.73	54.40	74.00	19.60	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.290	40.06	32.77	5.03	48.09	54.00	5.91	AV	Vertical
2	5150.000	40.27	32.90	5.04	48.44	54.00	5.56	AV	Vertical
3	5364.510	40.14	32.62	5.14	48.17	54.00	5.83	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE160 5570MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\168

Memo:

Sample Numbler:S25082524-003 Power Setting:15

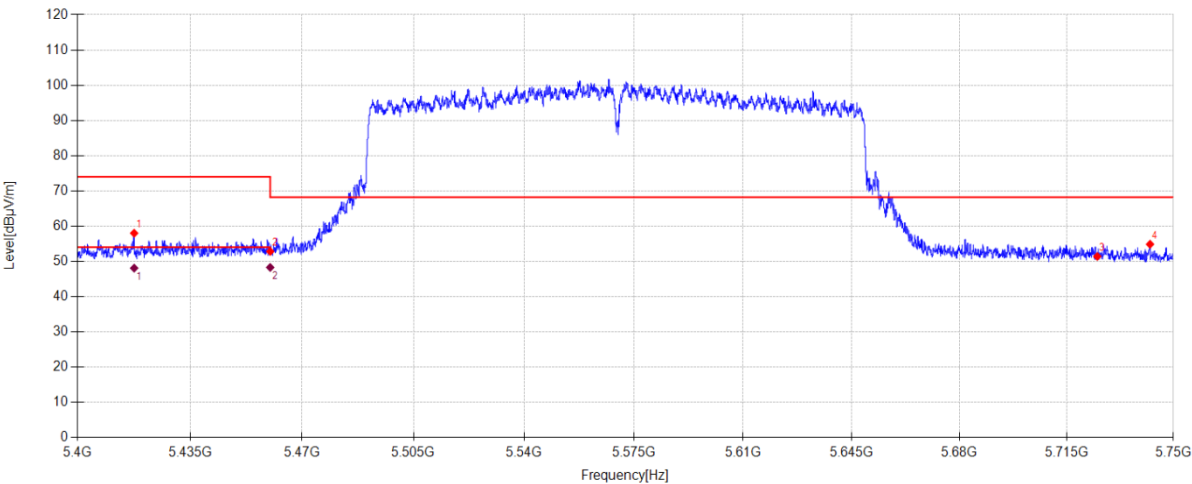

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5417.605	49.69	32.86	5.17	-29.72	58.00	74.00	16.00	PK	Horizontal
2	5460.000	44.45	32.90	5.19	-29.71	52.83	68.20	15.37	PK	Horizontal
3	5725.000	42.28	33.45	5.32	-29.65	51.40	68.20	16.80	PK	Horizontal
4	5742.335	45.50	33.69	5.33	-29.65	54.87	68.20	13.33	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5417.605	39.78	32.86	5.17	48.09	54.00	5.91	AV	Horizontal	
2	5460.000	39.91	32.90	5.19	48.29	54.00	5.71	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-23

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE160 5570MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5G\169

Memo:

Sample Numbler:S25082524-003 Power Setting:15

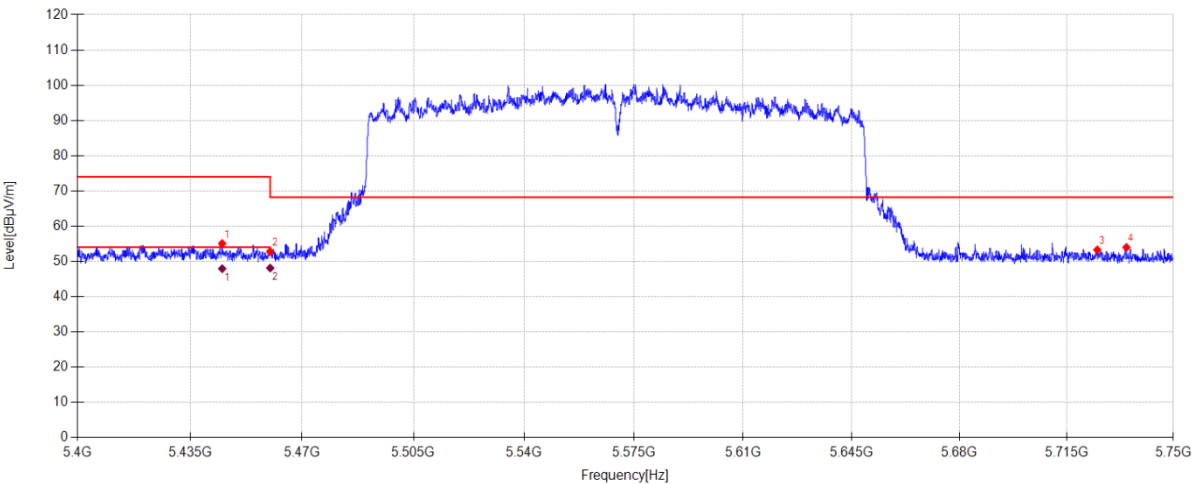

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.010	46.81	32.81	5.18	-29.71	55.09	74.00	18.91	PK	Vertical
2	5460.000	44.44	32.90	5.19	-29.71	52.82	68.20	15.38	PK	Vertical
3	5725.000	44.15	33.45	5.32	-29.65	53.27	68.20	14.93	PK	Vertical
4	5734.565	44.72	33.58	5.33	-29.65	53.98	68.20	14.22	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5445.010	39.65	32.81	5.18	47.93	54.00	6.07	AV	Vertical	
2	5460.000	39.73	32.90	5.19	48.11	54.00	5.89	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU38+RU1
5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\12

Memo:

Sample Numbler:S25082524-003 Power Setting:19

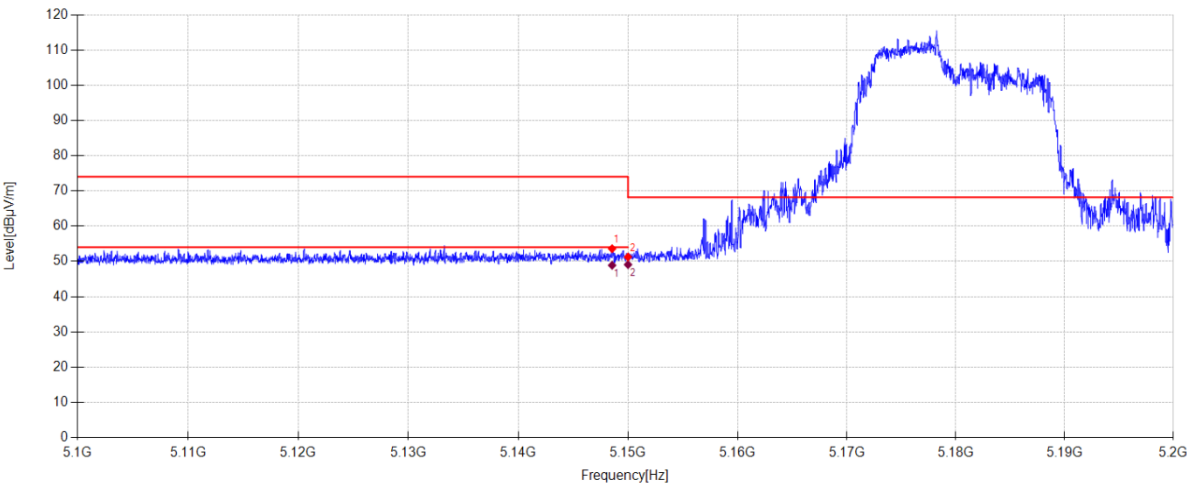

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5148.550	45.41	32.89	5.08	-29.77	53.61	74.00	20.39	PK	Horizontal
2	5150.000	43.04	32.90	5.09	-29.77	51.26	68.20	16.94	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5148.550	40.69	32.89	5.08	48.89	54.00	5.11	AV	Horizontal	
2	5150.000	40.87	32.90	5.09	49.09	54.00	4.91	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU38+RU1
5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\13

Memo:

Sample Numbler:S25082524-003 Power Setting:19

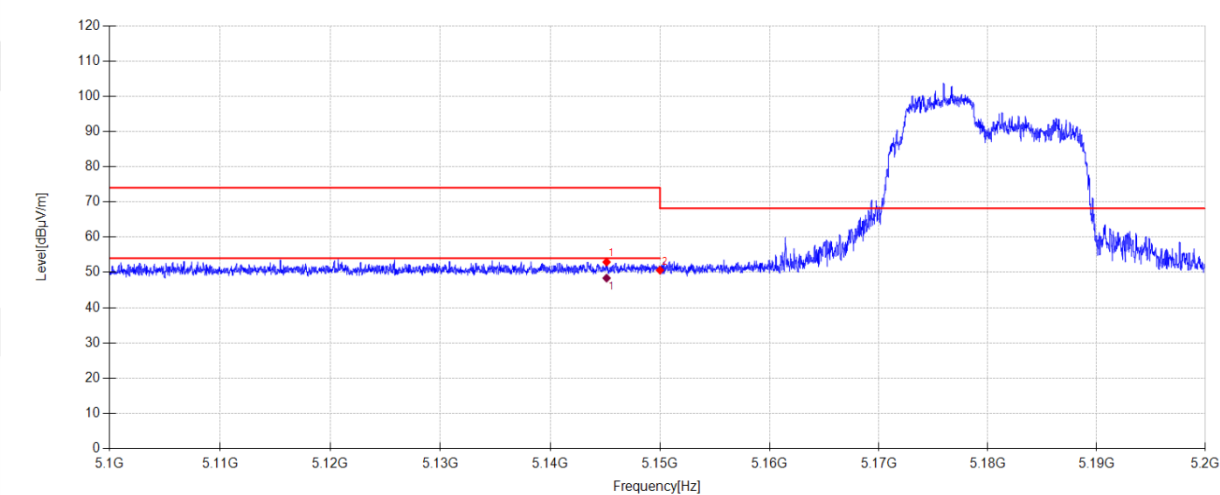

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.130	44.76	32.86	5.08	-29.77	52.93	74.00	21.07	PK	Vertical
2	5150.000	42.40	32.90	5.09	-29.77	50.62	68.20	17.58	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.130	40.21	32.86	5.08	48.38	54.00	5.62	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU39+RU7
5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\14

Memo:

Sample Numbler:S25082524-003 Power Setting:19

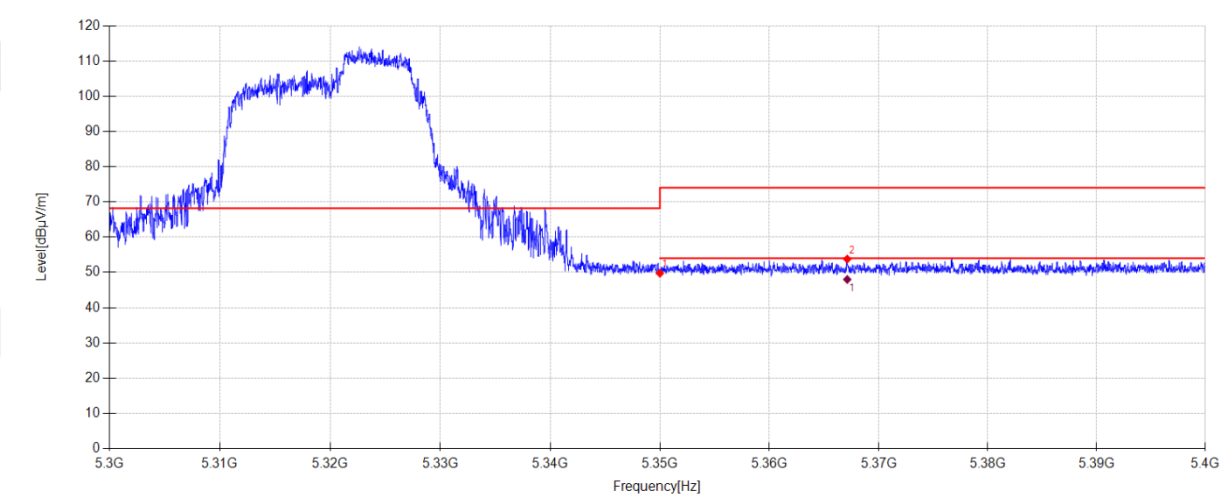

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.80	32.50	5.18	-29.73	49.75	68.20	18.45	PK	Horizontal
2	5367.120	45.69	32.64	5.18	-29.73	53.78	74.00	20.22	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5367.120	39.91	32.64	5.18	48.00	54.00	6.00	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU39+RU7
5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\15

Memo:

Sample Numbler:S25082524-003 Power Setting:19

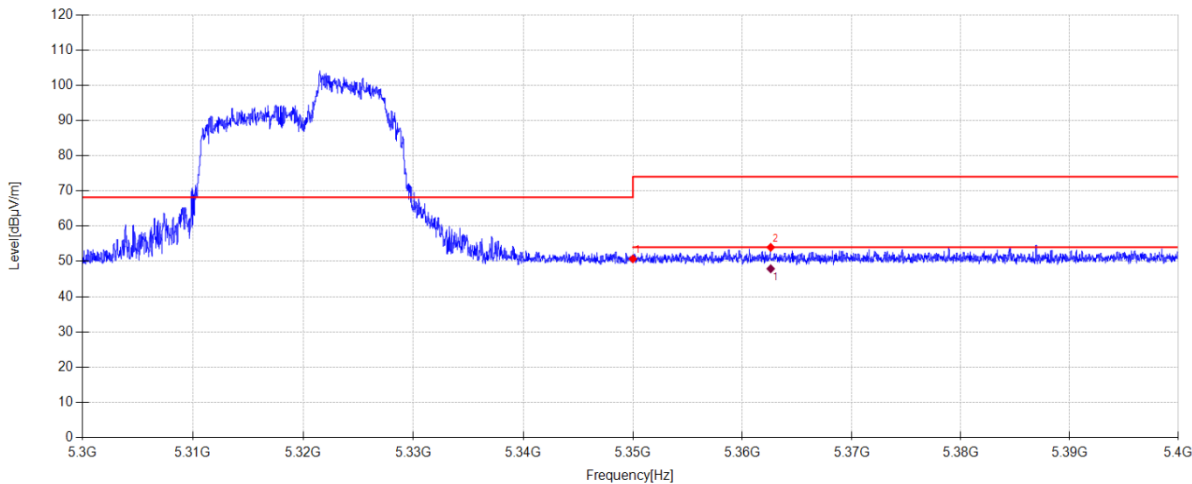

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.76	32.50	5.18	-29.73	50.71	68.20	17.49	PK	Vertical
2	5362.590	45.94	32.60	5.18	-29.73	53.99	74.00	20.01	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5362.590	39.85	32.60	5.18	47.90	54.00	6.10	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU38+RU1
5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\16

Memo:

Sample Numbler:S25082524-003 Power Setting:19

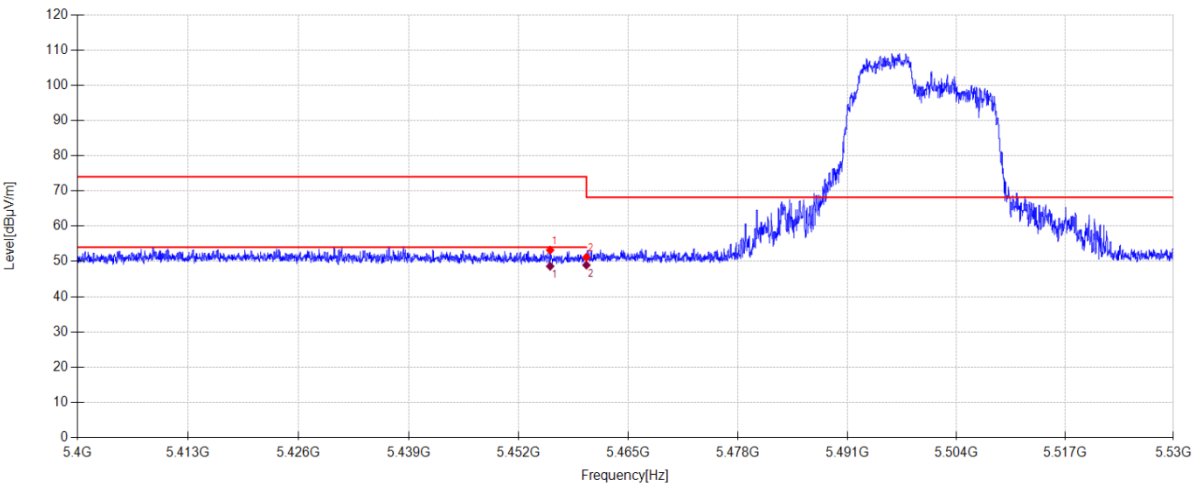

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.705	44.84	32.86	5.22	-29.71	53.21	74.00	20.79	PK	Horizontal
2	5460.000	42.76	32.90	5.23	-29.71	51.18	68.20	17.02	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.705	40.25	32.86	5.22	48.62	54.00	5.38	AV	Horizontal	
2	5460.000	40.53	32.90	5.23	48.95	54.00	5.05	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU38+RU1
5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\17

Memo:

Sample Numbler:S25082524-003 Power Setting:19

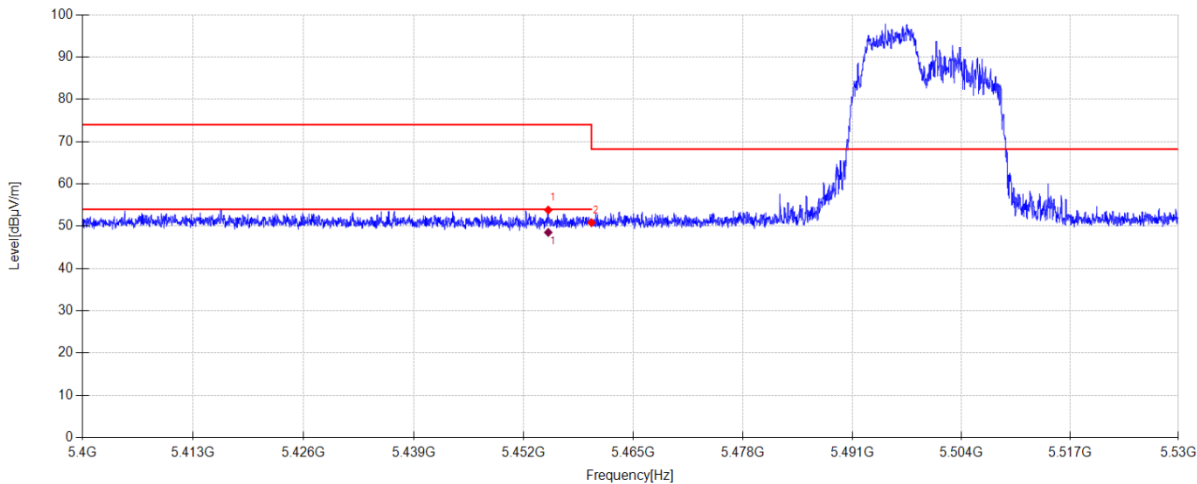

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.886	45.45	32.85	5.22	-29.71	53.81	74.00	20.19	PK	Vertical
2	5460.000	42.42	32.90	5.23	-29.71	50.84	68.20	17.36	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.886	40.16	32.85	5.22	48.52	54.00	5.48	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU39+RU7
5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\18

Memo:

Sample Numbler:S25082524-003 Power Setting:19

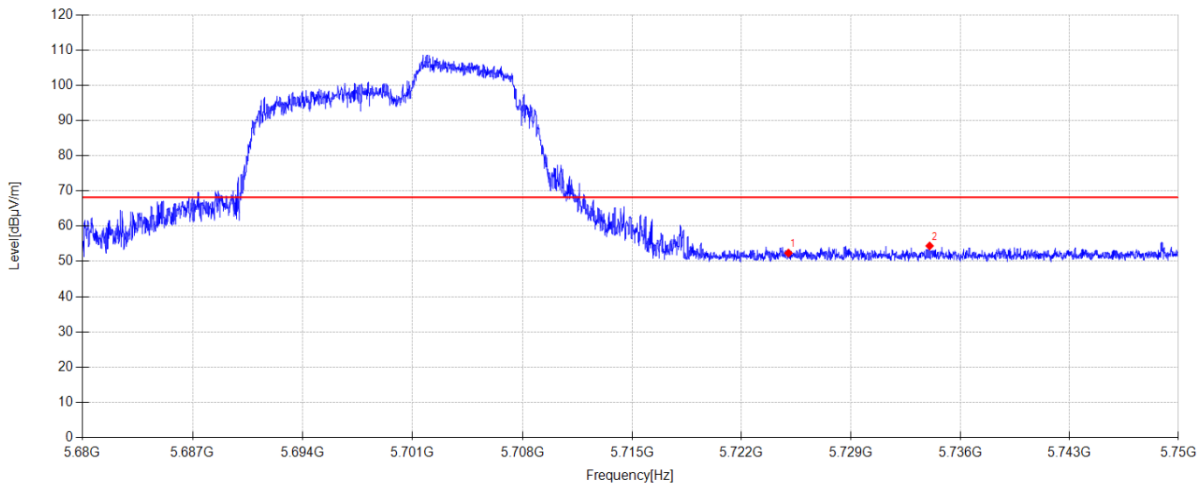

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.23	33.45	5.35	-29.65	52.38	68.20	15.82	PK	Horizontal
2	5734.040	45.11	33.58	5.35	-29.65	54.39	68.20	13.81	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE20 RU39+RU7
5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\19

Memo:

Sample Numbler:S25082524-003 Power Setting:19

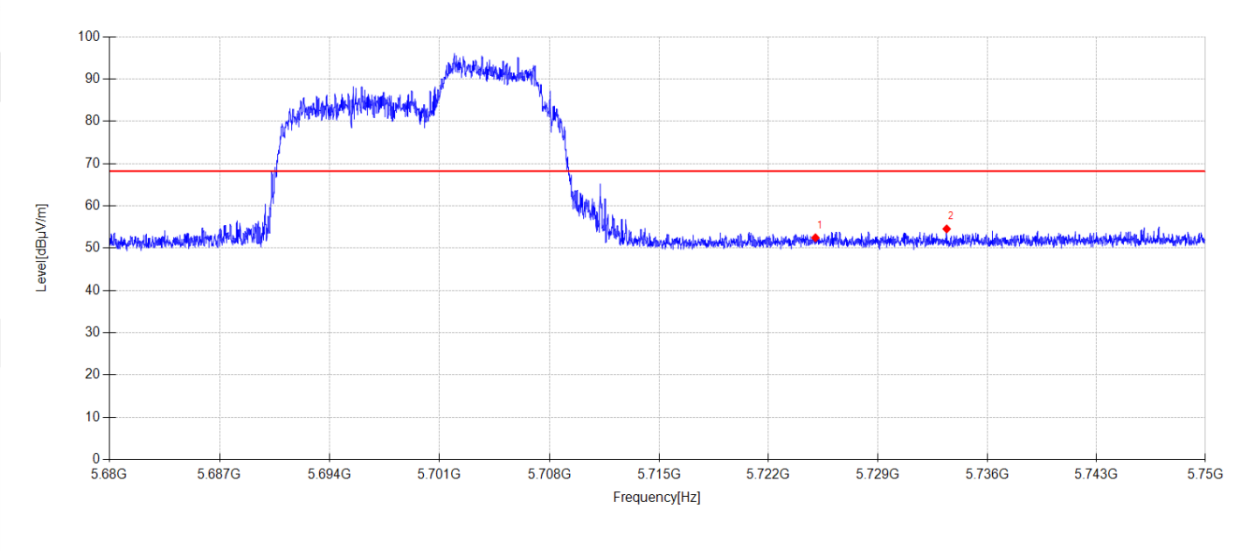

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.31	33.45	5.35	-29.65	52.46	68.20	15.74	PK	Vertical
2	5733.403	45.28	33.57	5.35	-29.65	54.55	68.20	13.65	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU53+RU4
5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\26

Memo:

Sample Numbler:S25082524-003 Power Setting:19

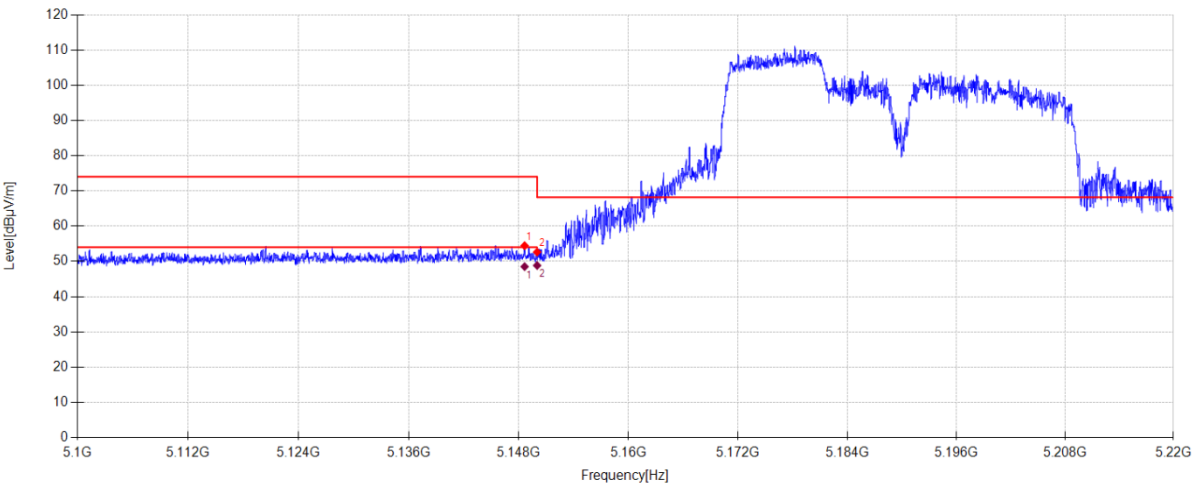

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.636	46.26	32.89	5.08	-29.77	54.46	74.00	19.54	PK	Horizontal
2	5150.000	44.43	32.90	5.09	-29.77	52.65	68.20	15.55	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.636	40.32	32.89	5.08	48.52	54.00	5.48	AV	Horizontal	
2	5150.000	40.62	32.90	5.09	48.84	54.00	5.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU53+RU4
5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\27

Memo:

Sample Numbler:S25082524-003 Power Setting:19

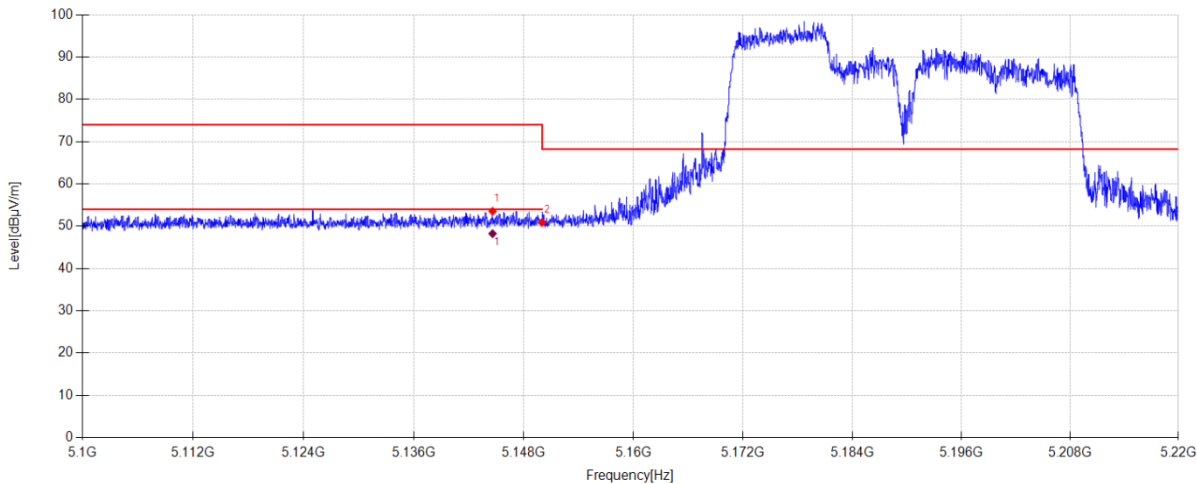

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.592	45.36	32.86	5.08	-29.77	53.53	74.00	20.47	PK	Vertical
2	5150.000	42.68	32.90	5.09	-29.77	50.90	68.20	17.30	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5144.592	40.06	32.86	5.08	48.23	54.00	5.77	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU56+RU13
5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\24

Memo:

Sample Numbler:S25082524-003 Power Setting:19

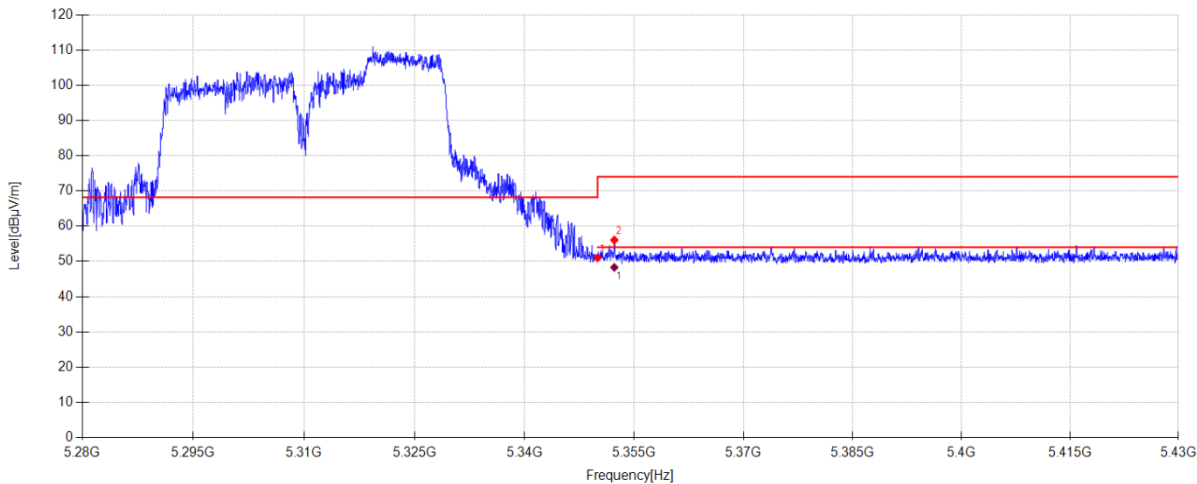

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.02	32.50	5.18	-29.73	50.97	68.20	17.23	PK	Horizontal
2	5352.285	48.10	32.52	5.18	-29.73	56.07	74.00	17.93	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5352.285	40.33	32.52	5.18	48.30	54.00	5.70	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU56+RU13
5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\25

Memo:

Sample Numbler:S25082524-003 Power Setting:19

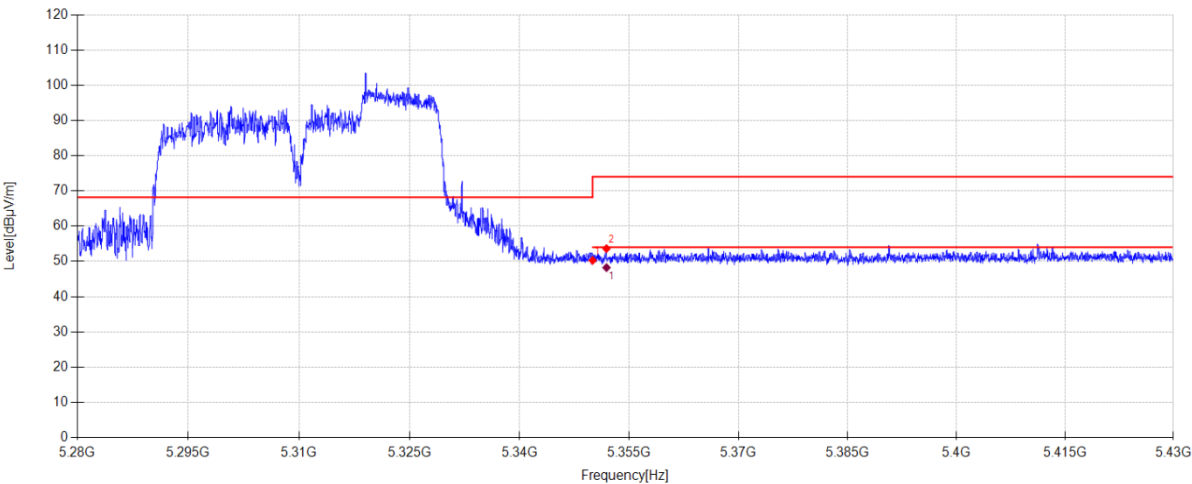

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.34	32.50	5.18	-29.73	50.29	68.20	17.91	PK	Vertical
2	5351.895	45.66	32.52	5.18	-29.73	53.63	74.00	20.37	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5351.895	40.27	32.52	5.18	48.24	54.00	5.76	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU53+RU4
5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\22

Memo:

Sample Numble:S25082524-003 Power Setting:19

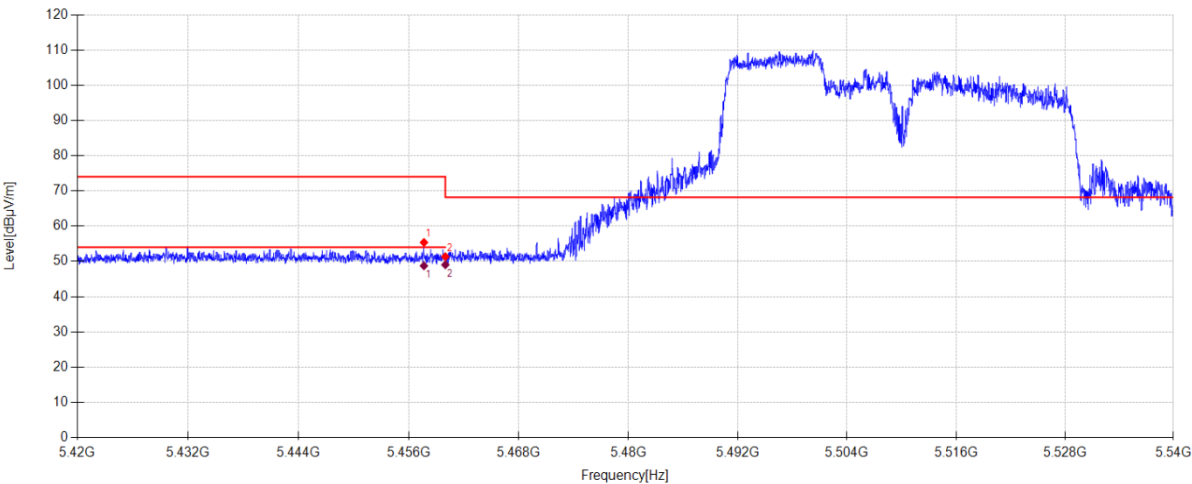

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.668	46.99	32.88	5.23	-29.71	55.39	74.00	18.61	PK	Horizontal
2	5460.000	42.92	32.90	5.23	-29.71	51.34	68.20	16.86	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.668	40.34	32.88	5.23	48.74	54.00	5.26	AV	Horizontal	
2	5460.000	40.63	32.90	5.23	49.05	54.00	4.95	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU53+RU4
5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\23

Memo:

Sample Numbler:S25082524-003 Power Setting:19

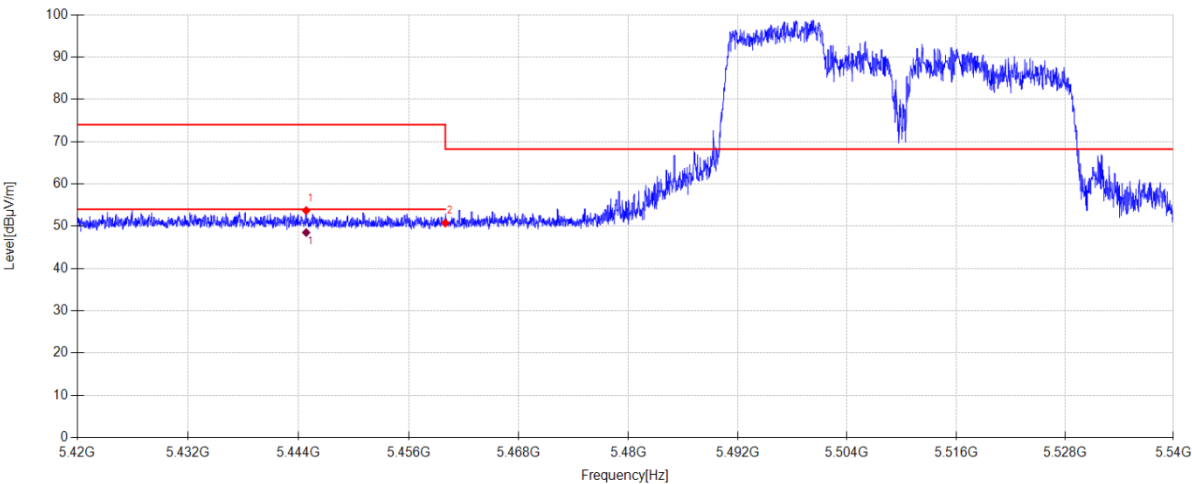

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.840	45.37	32.81	5.22	-29.71	53.69	74.00	20.31	PK	Vertical
2	5460.000	42.30	32.90	5.23	-29.71	50.72	68.20	17.48	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5444.840	40.18	32.81	5.22	48.50	54.00	5.50	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU56+RU13
5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\20

Memo:

Sample Numbler:S25082524-003 Power Setting:19

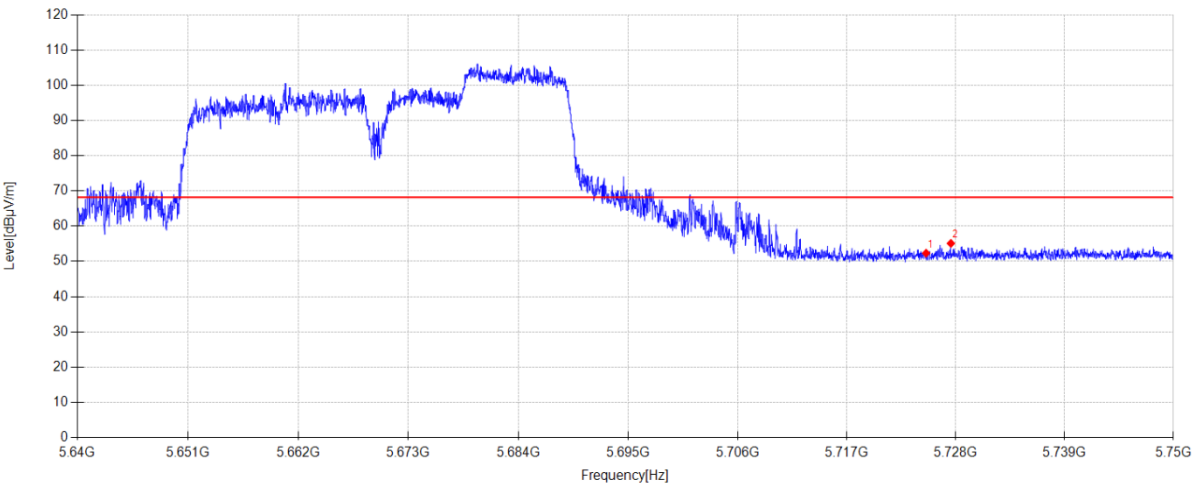

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.18	33.45	5.35	-29.65	52.33	68.20	15.87	PK	Horizontal
2	5727.505	45.92	33.49	5.35	-29.65	55.11	68.20	13.09	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE40 RU56+RU13
5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\21

Memo:

Sample Numbler:S25082524-003 Power Setting:19

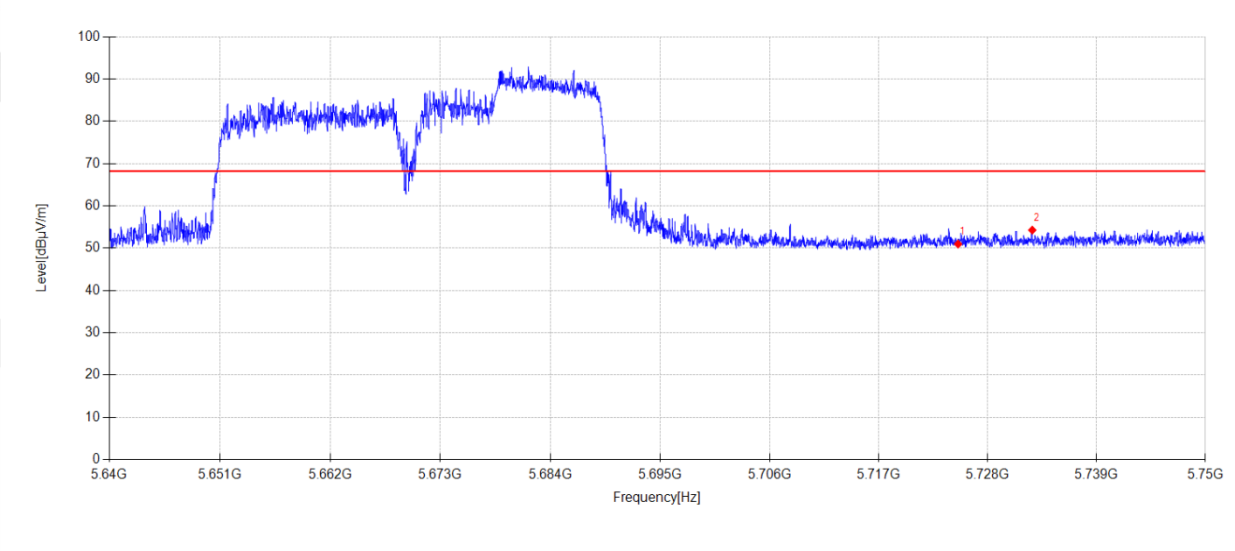

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.82	33.45	5.35	-29.65	50.97	68.20	17.23	PK	Vertical
2	5732.488	45.02	33.55	5.35	-29.65	54.27	68.20	13.93	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU65+RU63
5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\32

Memo:

Sample Numbler:S25082524-003 Power Setting:13

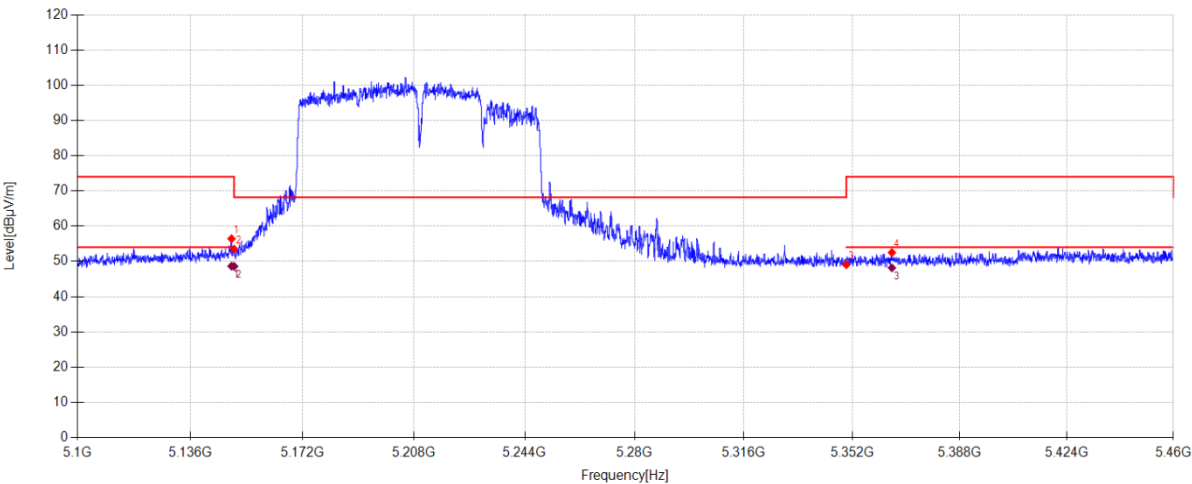

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.176	48.23	32.89	5.08	-29.77	56.43	74.00	17.57	PK	Horizontal
2	5150.000	45.27	32.90	5.09	-29.77	53.49	68.20	14.71	PK	Horizontal
3	5350.000	41.10	32.50	5.18	-29.73	49.05	68.20	19.15	PK	Horizontal
4	5365.212	44.44	32.62	5.18	-29.73	52.51	74.00	21.49	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5149.176	40.45	32.89	5.08	48.65	54.00	5.35	AV	Horizontal	
2	5150.000	40.37	32.90	5.09	48.59	54.00	5.41	AV	Horizontal	
3	5365.212	40.10	32.62	5.18	48.17	54.00	5.83	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU65+RU63
5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\33

Memo:

Sample Numbler:S25082524-003 Power Setting:13

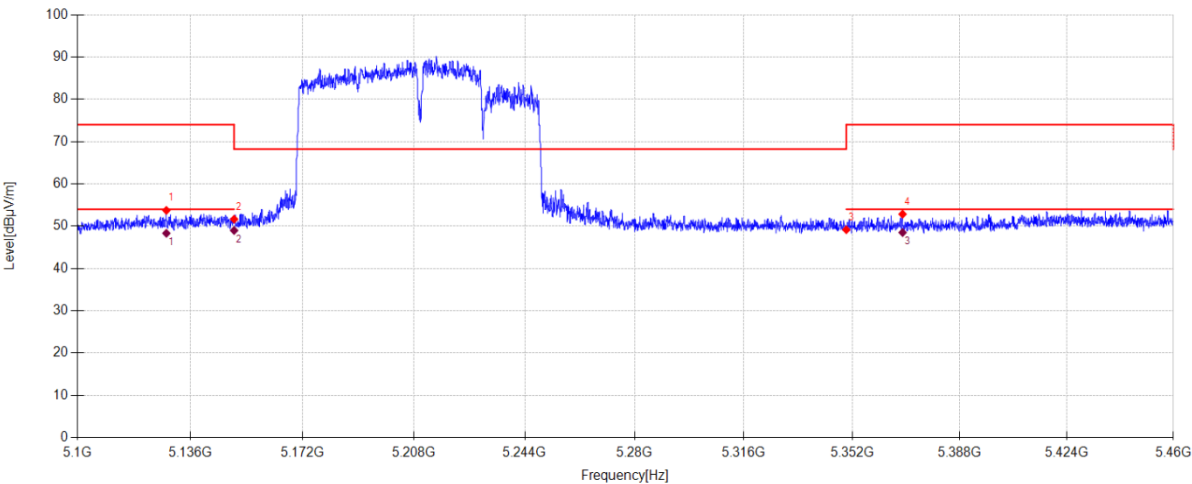

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5128.332	45.69	32.73	5.08	-29.77	53.73	74.00	20.27	PK	Vertical
2	5150.000	43.43	32.90	5.09	-29.77	51.65	68.20	16.55	PK	Vertical
3	5350.000	41.20	32.50	5.18	-29.73	49.15	68.20	19.05	PK	Vertical
4	5368.776	44.73	32.65	5.19	-29.73	52.84	74.00	21.16	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5128.332	40.27	32.73	5.08	48.31	54.00	5.69	AV	Vertical	
2	5150.000	40.76	32.90	5.09	48.98	54.00	5.02	AV	Vertical	
3	5368.776	40.38	32.65	5.19	48.49	54.00	5.51	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU66+RU62
5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\28

Memo:

Sample Numble:S25082524-003 Power Setting:13

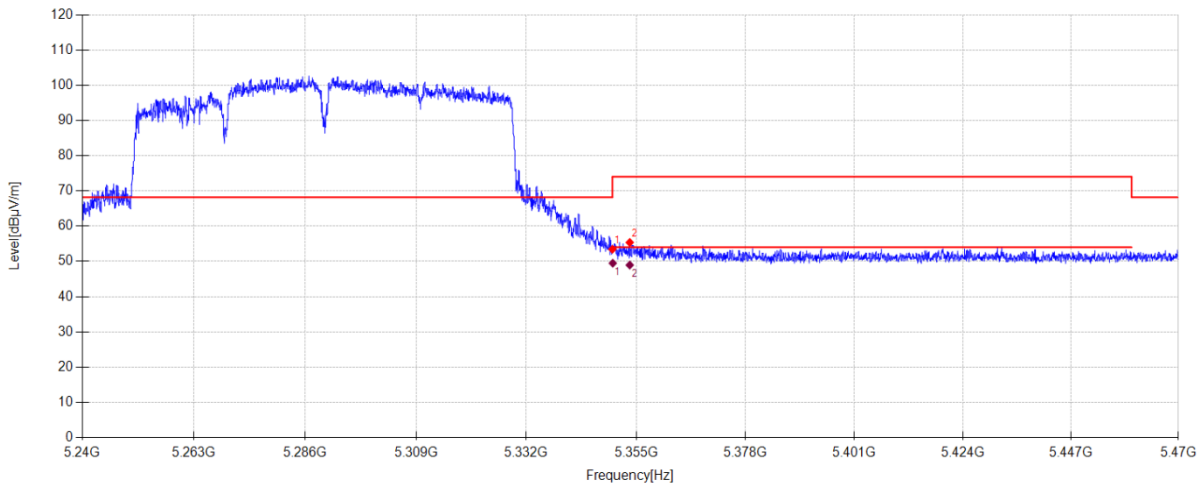

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.49	32.50	5.18	-29.73	53.44	68.20	14.76	PK	Horizontal
2	5353.643	47.40	32.53	5.18	-29.73	55.38	74.00	18.62	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.081	41.53	32.50	5.18	49.48	54.00	4.52	AV	Horizontal	
2	5353.643	40.98	32.53	5.18	48.96	54.00	5.04	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU66+RU62
5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\29

Memo:

Sample Numbler:S25082524-003 Power Setting:13

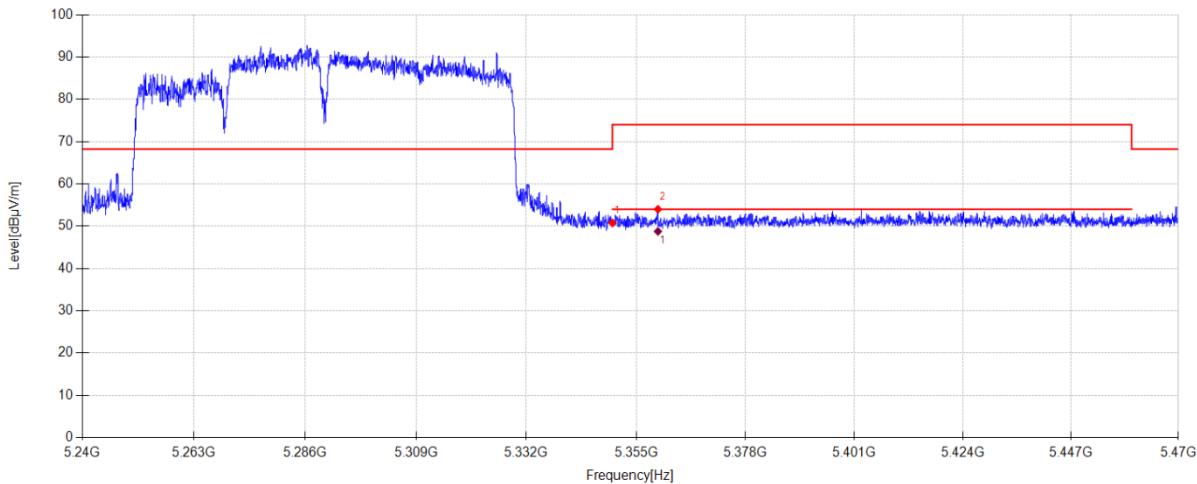

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.81	32.50	5.18	-29.73	50.76	68.20	17.44	PK	Vertical
2	5359.554	45.98	32.58	5.18	-29.73	54.01	74.00	19.99	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5359.554	40.73	32.58	5.18	48.76	54.00	5.24	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-29 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11BE80 RU65+RU63 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\34
Memo: Sample Numble:S25082524-003 Power Setting:13

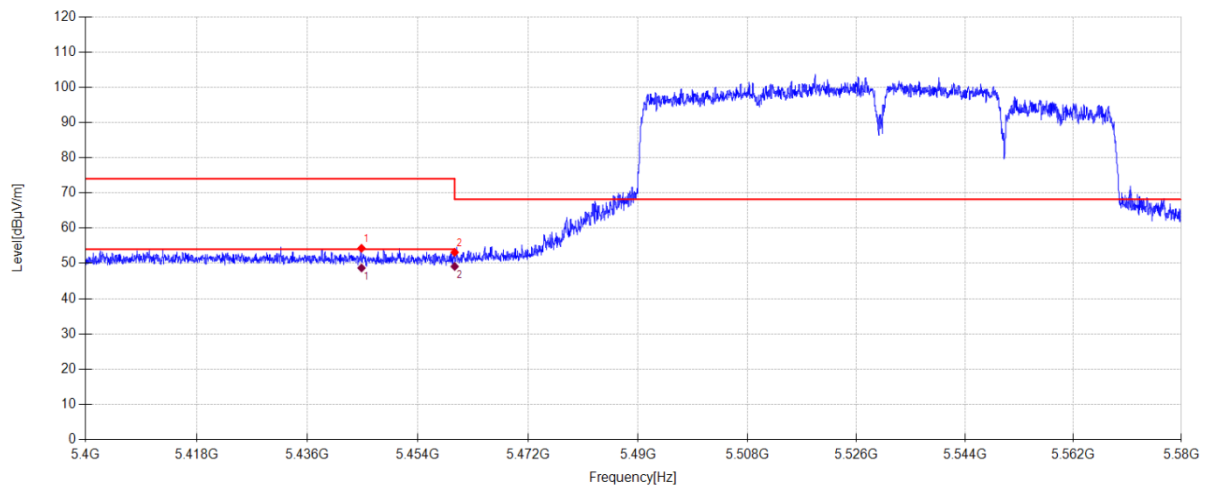**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.802	45.97	32.81	5.22	-29.71	54.29	74.00	19.71	PK	Horizontal
2	5460.000	44.73	32.90	5.23	-29.71	53.15	68.20	15.05	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.802	40.38	32.81	5.22	48.70	54.00	5.30	AV	Horizontal
2	5460.000	40.71	32.90	5.23	49.13	54.00	4.87	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-29 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11BE80 RU65+RU63 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\35
Memo: Sample Numbler:S25082524-003 Power Setting:13

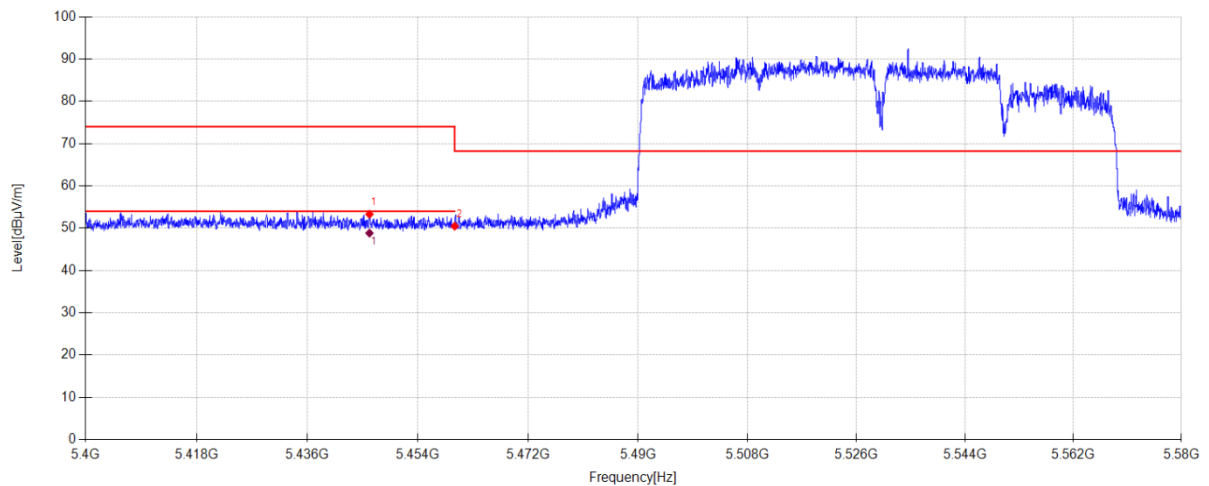**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.098	44.96	32.81	5.22	-29.71	53.28	74.00	20.72	PK	Vertical
2	5460.000	42.05	32.90	5.23	-29.71	50.47	68.20	17.73	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.098	40.51	32.81	5.22	48.83	54.00	5.17	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU66+RU62
5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\30

Memo:

Sample Numbler:S25082524-003 Power Setting:13

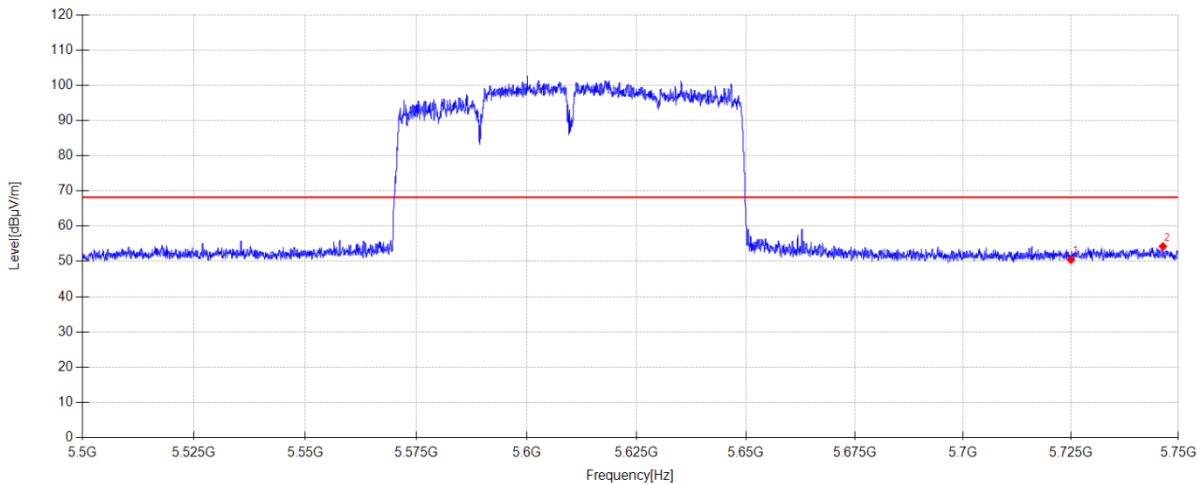

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.32	33.45	5.35	-29.66	50.46	68.20	17.74	PK	Horizontal
2	5746.400	44.79	33.75	5.36	-29.65	54.25	68.20	13.95	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11BE80 RU66+RU62
5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC ABOVE1G 5GMRU\31

Memo:

Sample Numbler:S25082524-003 Power Setting:13

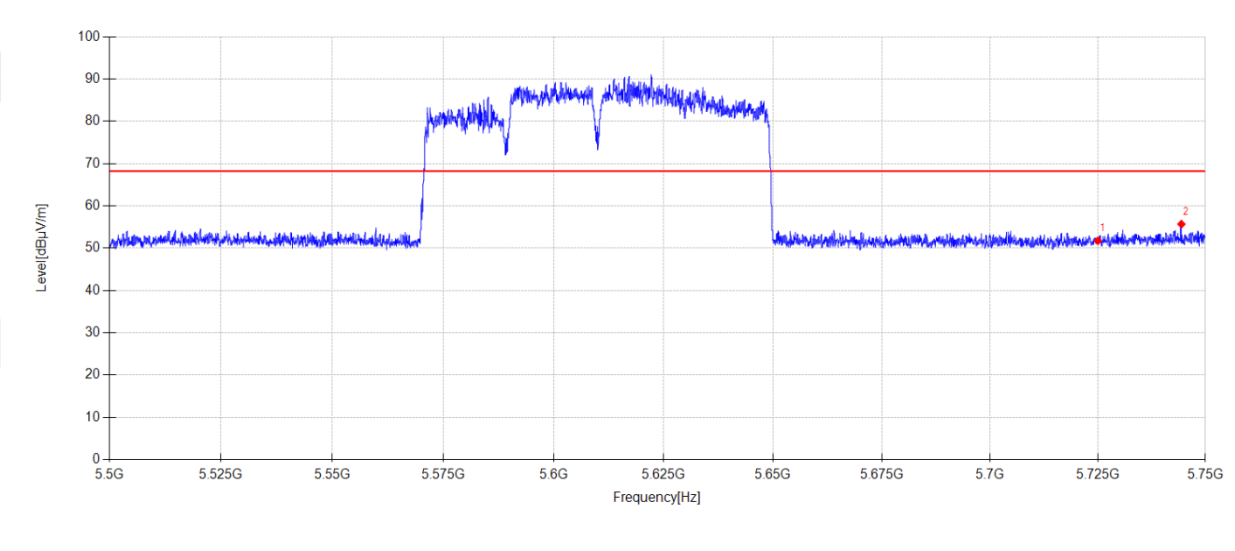

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.60	33.45	5.35	-29.66	51.74	68.20	16.46	PK	Vertical
2	5744.425	46.25	33.72	5.36	-29.65	55.68	68.20	12.52	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11A ANT1 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\47

Memo:

Sample Numbler:S25082524-003 Power Setting:19

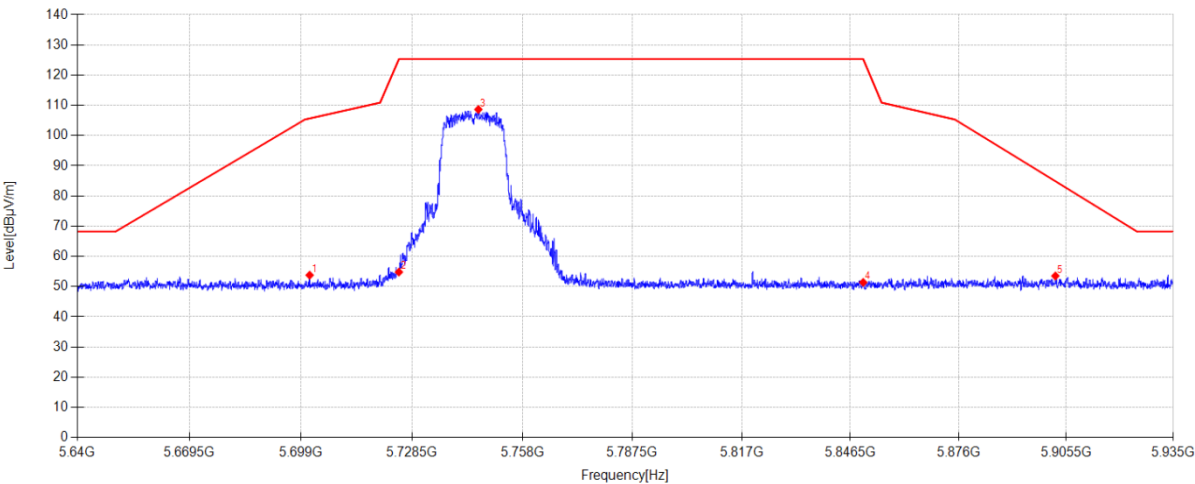

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5701.272	45.88	33.12	4.43	-29.66	53.77	105.66	51.89	PK	Horizontal
2	5725.000	46.56	33.45	4.44	-29.65	54.80	125.30	70.50	PK	Horizontal
3	5746.200	100.08	33.75	4.45	-29.65	108.63	125.30	16.67	PK	Horizontal
4	5850.000	42.60	33.90	4.51	-29.63	51.38	125.30	73.92	PK	Horizontal
5	5902.521	44.28	34.31	4.54	-29.62	53.51	84.88	31.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11A ANT1 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\48

Memo:

Sample Numbler:S25082524-003 Power Setting:19

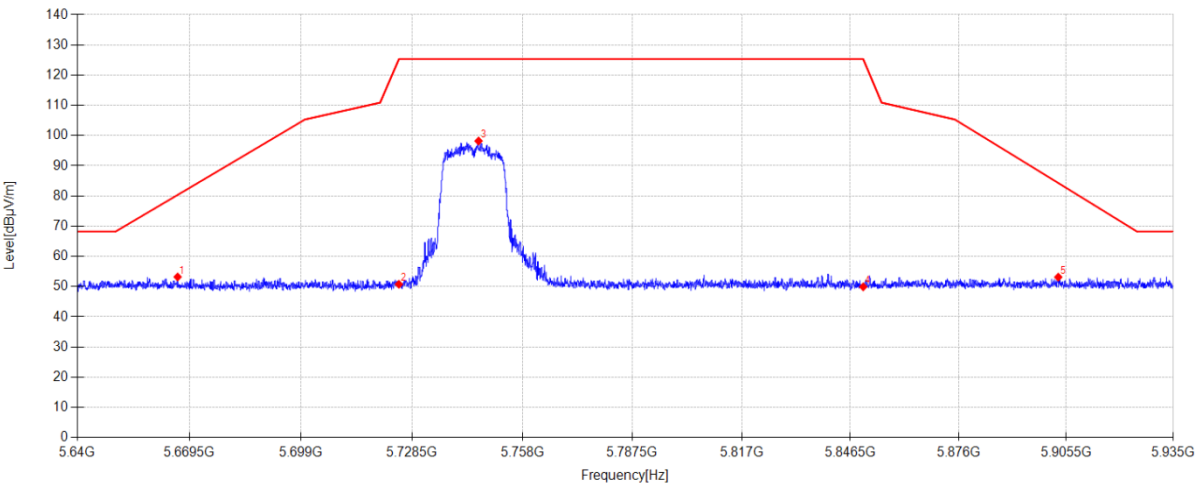

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5666.373	45.08	33.37	4.41	-29.67	53.19	80.35	27.16	PK	Vertical
2	5725.000	42.52	33.45	4.44	-29.65	50.76	125.30	74.54	PK	Vertical
3	5746.259	89.65	33.75	4.45	-29.65	98.20	125.30	27.10	PK	Vertical
4	5850.000	41.13	33.90	4.51	-29.63	49.91	125.30	75.39	PK	Vertical
5	5903.317	43.89	34.31	4.54	-29.62	53.12	84.29	31.17	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11A ANT1 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\45

Memo:

Sample Numbler:S25082524-003 Power Setting:19

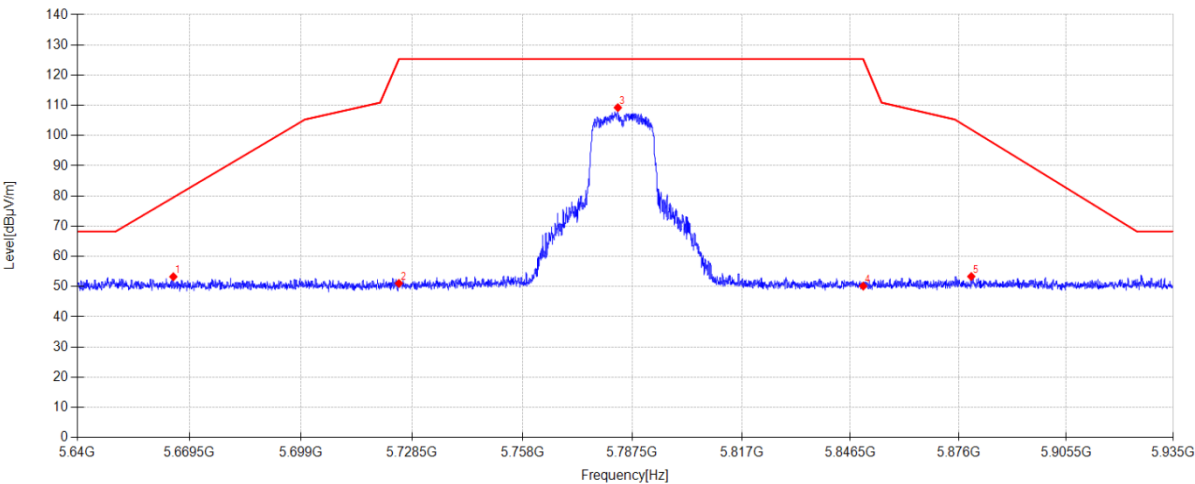

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5665.252	45.14	33.38	4.41	-29.67	53.26	79.52	26.26	PK	Horizontal
2	5725.000	42.83	33.45	4.44	-29.65	51.07	125.30	74.23	PK	Horizontal
3	5783.606	100.54	33.87	4.47	-29.64	109.24	125.30	16.06	PK	Horizontal
4	5850.000	41.36	33.90	4.51	-29.63	50.14	125.30	75.16	PK	Horizontal
5	5879.481	44.29	34.14	4.53	-29.62	53.34	101.98	48.64	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-29 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11A ANT1 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\46
Memo: Sample Numbler:S25082524-003 Power Setting:19

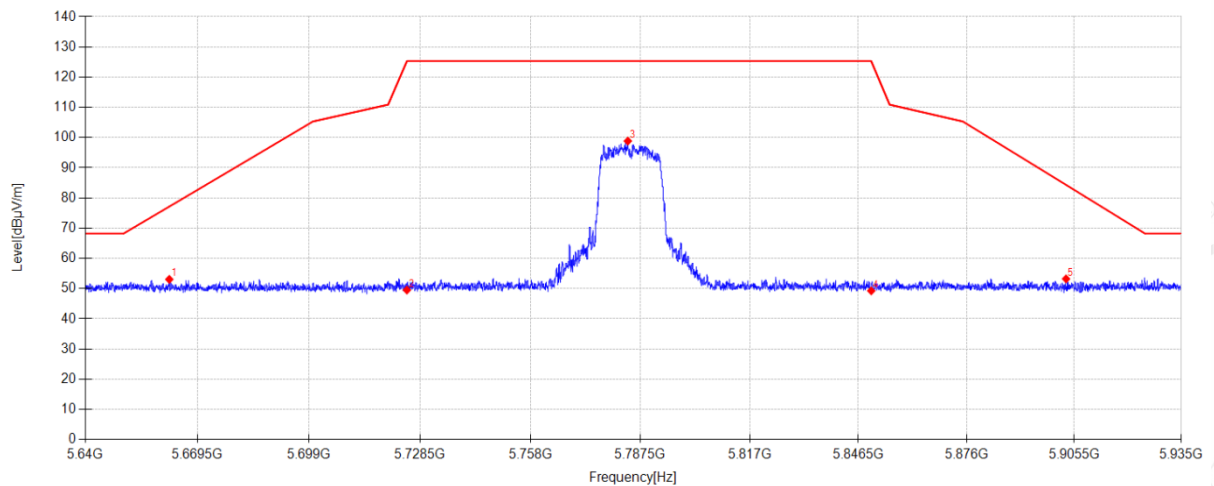**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.066	44.92	33.40	4.40	-29.67	53.05	77.15	24.10	PK	Vertical
2	5725.000	41.27	33.45	4.44	-29.65	49.51	125.30	75.79	PK	Vertical
3	5784.137	90.15	33.87	4.47	-29.64	98.85	125.30	26.45	PK	Vertical
4	5850.000	40.48	33.90	4.51	-29.63	49.26	125.30	76.04	PK	Vertical
5	5903.258	43.99	34.31	4.54	-29.62	53.22	84.33	31.11	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-29 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11A ANT1 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\35
Memo: Sample Numbler:S25082524-003 Power Setting:19

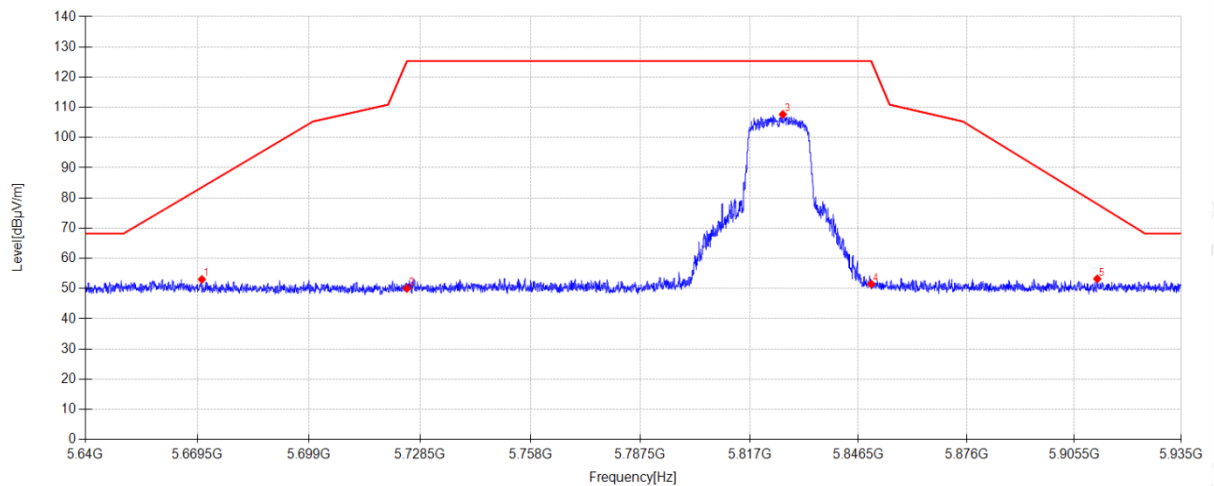**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5670.651	44.95	33.33	4.41	-29.67	53.02	83.52	30.50	PK	Horizontal
2	5725.000	41.79	33.45	4.44	-29.65	50.03	125.30	75.27	PK	Horizontal
3	5825.998	98.89	33.90	4.50	-29.63	107.66	125.30	17.64	PK	Horizontal
4	5850.000	42.75	33.90	4.51	-29.63	51.53	125.30	73.77	PK	Horizontal
5	5911.843	43.96	34.32	4.55	-29.62	53.21	77.96	24.75	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-29

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2534

Test Mode:

MIMO TX 11A ANT1 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\36

Memo:

Sample Numbler:S25082524-003 Power Setting:19

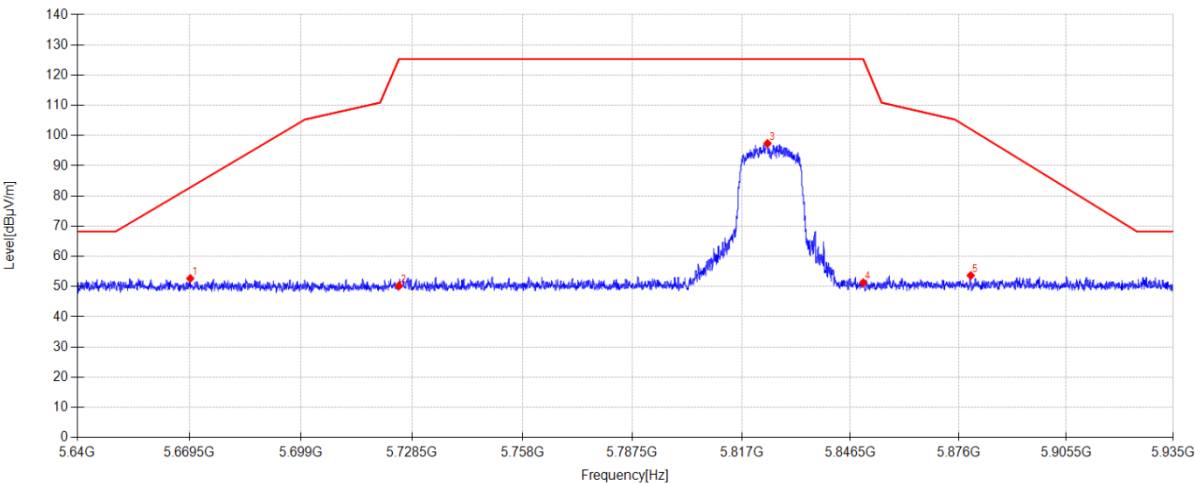

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5669.707	44.60	33.34	4.41	-29.67	52.68	82.82	30.14	PK	Vertical
2	5725.000	41.99	33.45	4.44	-29.65	50.23	125.30	75.07	PK	Vertical
3	5824.021	88.63	33.90	4.50	-29.64	97.39	125.30	27.91	PK	Vertical
4	5850.000	42.52	33.90	4.51	-29.63	51.30	125.30	74.00	PK	Vertical
5	5879.334	44.63	34.13	4.53	-29.62	53.67	102.08	48.41	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-29 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2534
Test Mode: MIMO TX 11A ANT2 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25082524-1E\FCC Above 1G 5.8G\49
Memo: Sample Numbler:S25082524-003 Power Setting:19

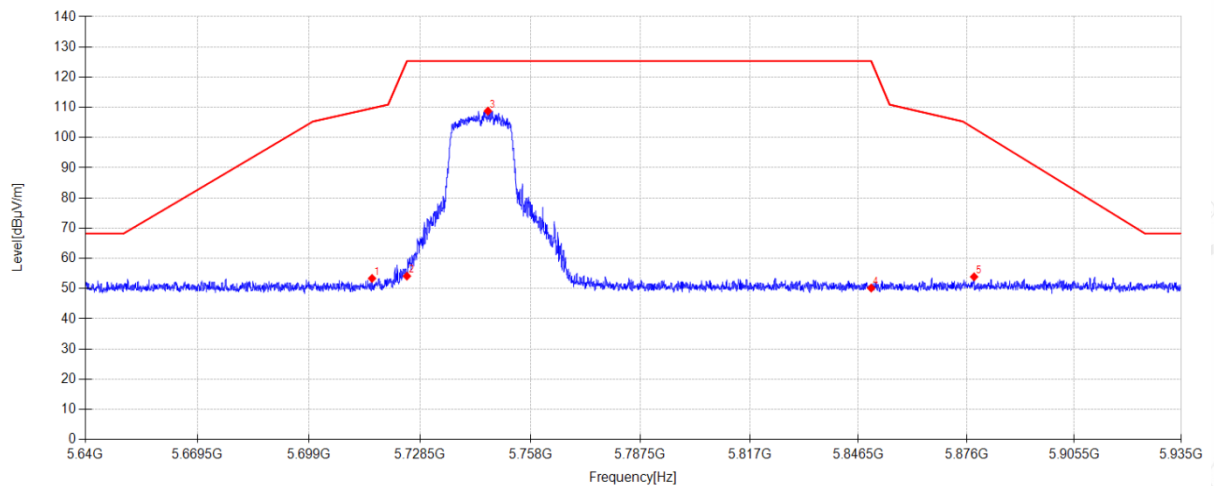**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.727	45.26	33.32	4.44	-29.66	53.36	109.70	56.34	PK	Horizontal
2	5725.000	45.88	33.45	4.44	-29.65	54.12	125.30	71.18	PK	Horizontal
3	5746.613	100.22	33.75	4.45	-29.65	108.77	125.30	16.53	PK	Horizontal
4	5850.000	41.39	33.90	4.51	-29.63	50.17	125.30	75.13	PK	Horizontal
5	5878.065	44.87	34.12	4.53	-29.62	53.90	103.03	49.13	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.