


13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

13.2. Block diagram of test setup

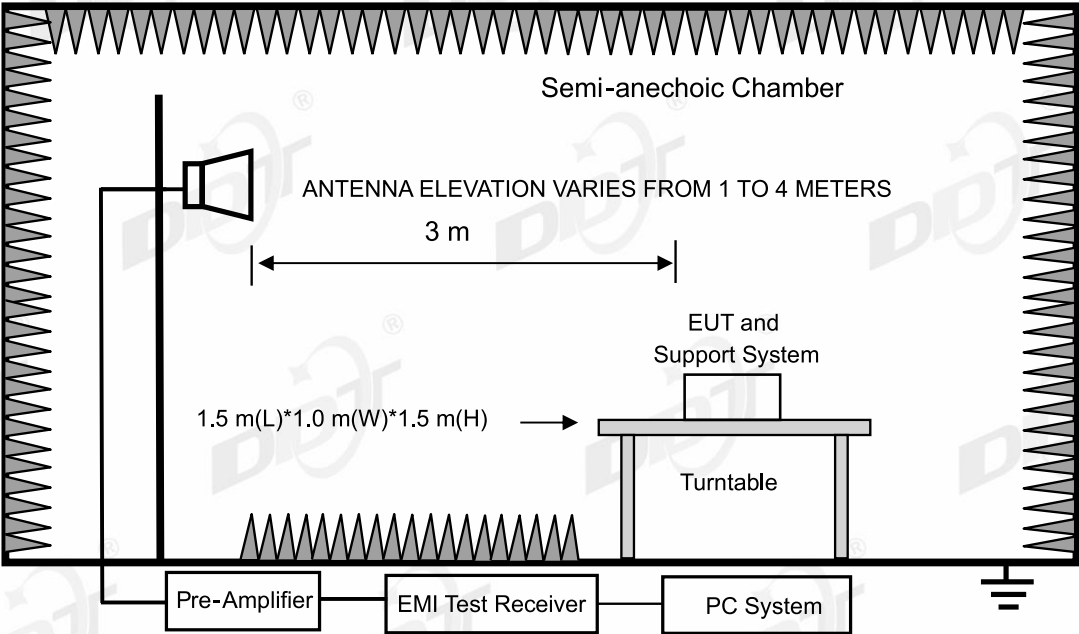

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
emark: All restriction band have been tested, and only the worst case is shown in report. According to the results of the radiated Emission test, it can be judged that the Horizontal direction is the Worst case.


13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT1 TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\32
Memo: Sample Number:S25061925-003 Power Setting:23

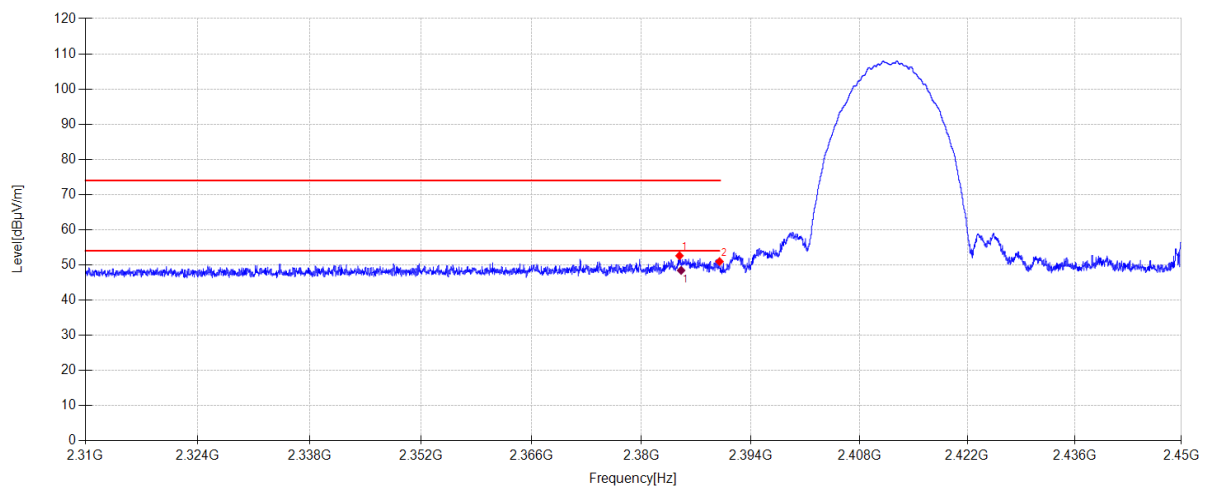

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.872	21.79	27.24	3.57	0.00	52.60	74.00	21.40	PK	Horizontal
2	2390.000	20.11	27.26	3.57	0.00	50.94	74.00	23.06	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.081	17.62	27.24	3.57	48.43	54.00	5.57	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT1 TX 11B 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\31
Memo: Sample Number:S25061925-003 Power Setting:23

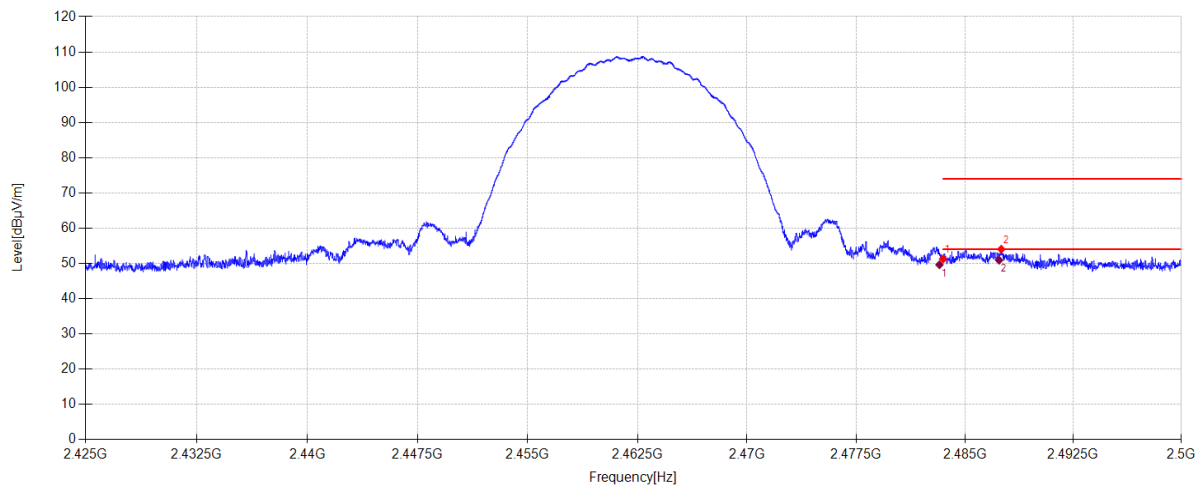

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.11	27.53	3.62	0.00	51.26	74.00	22.74	PK	Horizontal
2	2487.520	22.86	27.55	3.62	0.00	54.03	74.00	19.97	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.250	18.47	27.53	3.62	49.62	54.00	4.38	AV	Horizontal
2	2487.370	19.74	27.55	3.62	50.91	54.00	3.09	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT2 TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\34
Memo: Sample Number:S25061925-003 Power Setting:22

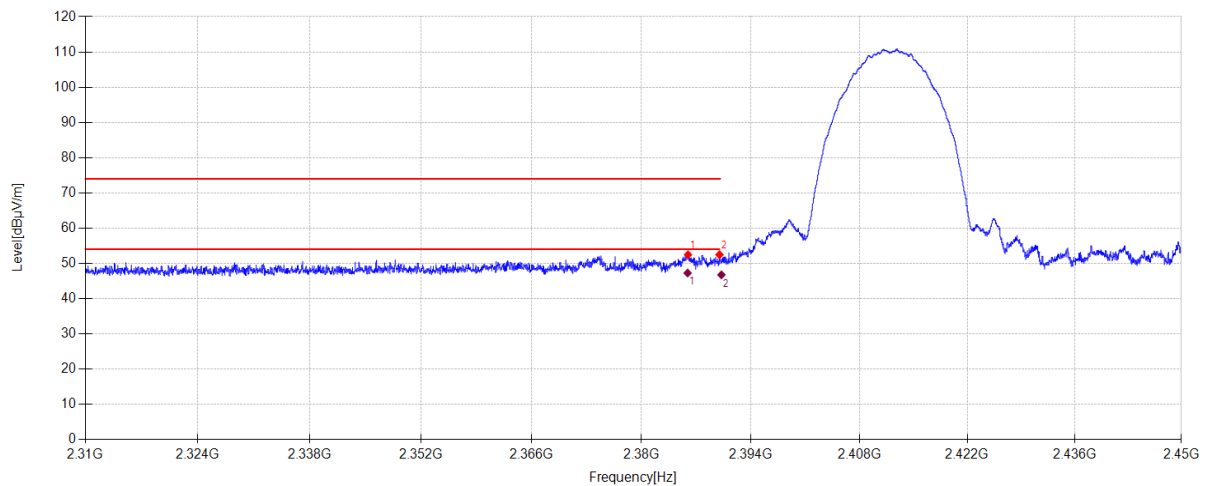

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.964	21.66	27.24	3.57	0.00	52.47	74.00	21.53	PK	Horizontal
2	2390.000	21.64	27.26	3.57	0.00	52.47	74.00	21.53	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.914	16.46	27.24	3.57	47.27	54.00	6.73	AV	Horizontal
2	2390.250	15.92	27.26	3.57	46.75	51.97	5.22	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT2 TX 11B 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\33
Memo: Sample Number:S25061925-003 Power Setting:22

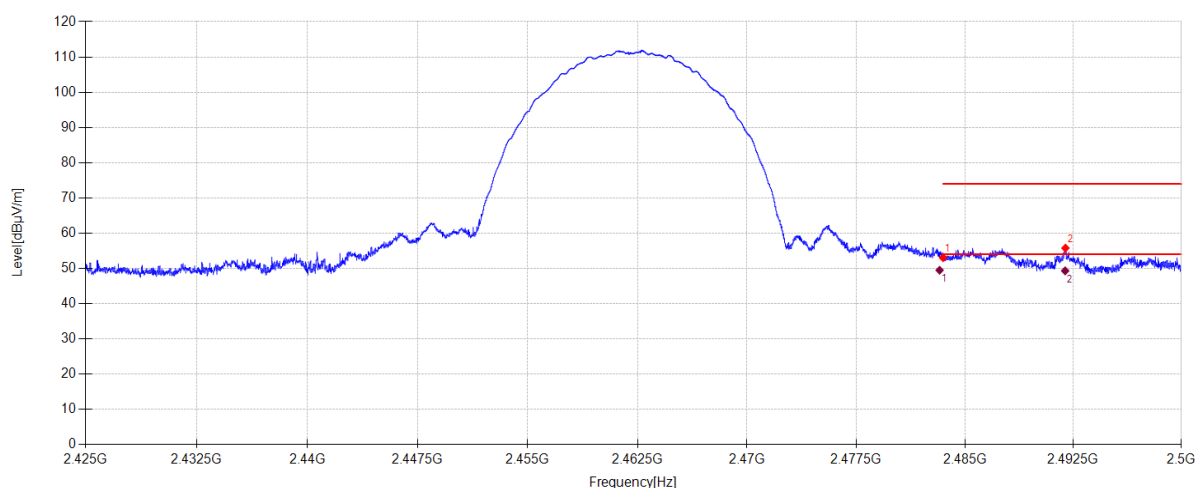

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.89	27.53	3.62	0.00	53.04	74.00	20.96	PK	Horizontal
2	2491.960	24.56	27.57	3.63	0.00	55.76	74.00	18.24	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.261	18.34	27.53	3.62	49.49	54.00	4.51	AV	Horizontal
2	2491.941	18.10	27.57	3.63	49.30	54.00	4.70	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT1 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\38
Memo: Sample Number:S25061925-003 Power Setting:16

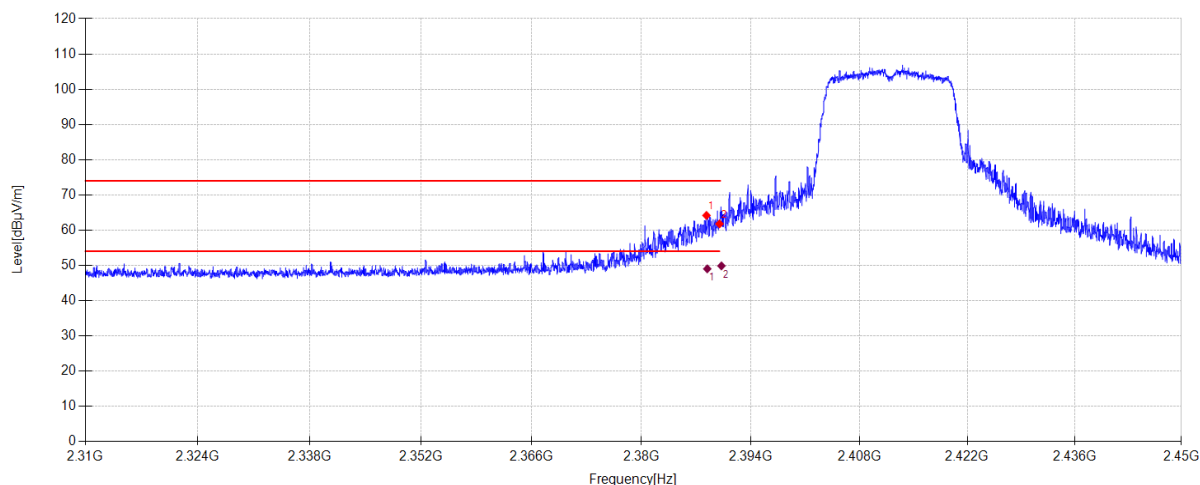

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.330	33.36	27.25	3.57	0.00	64.18	74.00	9.82	PK	Horizontal
2	2390.000	30.95	27.26	3.57	0.00	61.78	74.00	12.22	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.432	18.20	27.25	3.57	49.02	54.00	4.98	AV	Horizontal
2	2390.250	19.03	27.26	3.57	49.86	54.00	4.14	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT1 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\37
Memo: Sample Number:S25061925-003 Power Setting:16

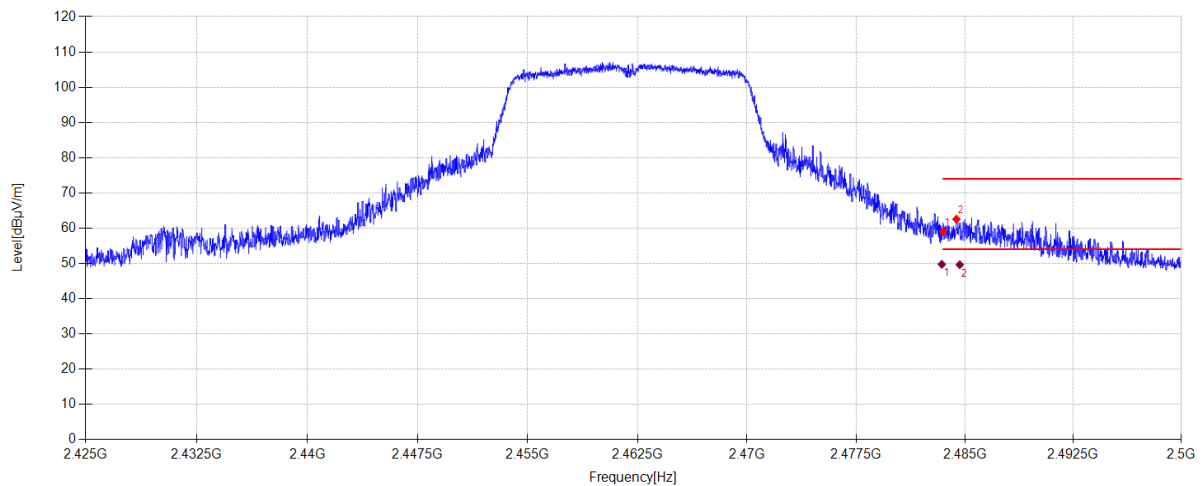

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	27.88	27.53	3.62	0.00	59.03	74.00	14.97	PK	Horizontal
2	2484.423	31.38	27.54	3.62	0.00	62.54	74.00	11.46	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.414	18.59	27.53	3.62	49.74	54.00	4.26	AV	Horizontal
2	2484.654	18.45	27.54	3.62	49.61	54.00	4.39	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT2 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\36
Memo: Sample Number:S25061925-003 Power Setting:14

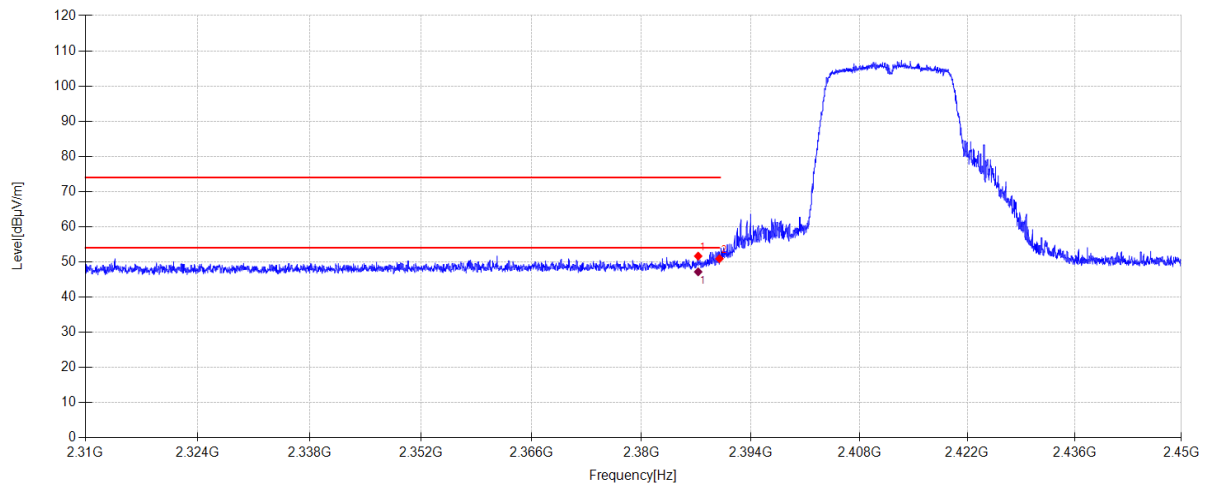

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.266	20.83	27.25	3.57	0.00	51.65	74.00	22.35	PK	Horizontal
2	2390.000	20.07	27.26	3.57	0.00	50.90	74.00	23.10	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.266	16.36	27.25	3.57	47.18	54.00	6.82	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: ANT2 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\35
Memo: Sample Number:S25061925-003 Power Setting:14

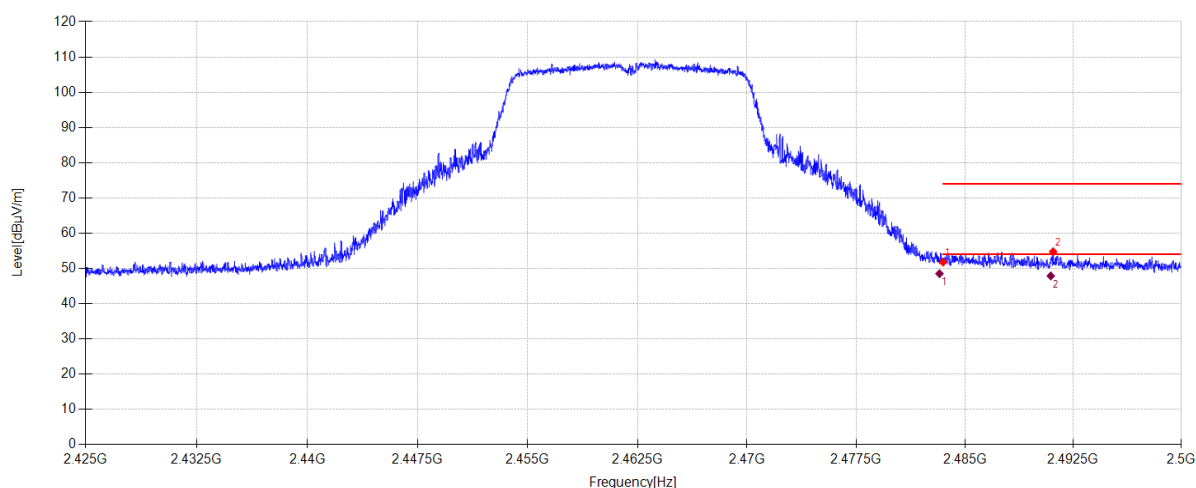

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.63	27.53	3.62	0.00	51.78	74.00	22.22	PK	Horizontal
2	2491.113	23.55	27.56	3.63	0.00	54.74	74.00	19.26	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.255	17.36	27.53	3.62	48.51	54.00	5.49	AV	Horizontal
2	2490.948	16.67	27.56	3.63	47.86	54.00	6.14	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\39
Memo: Sample Number:S25061925-003 Power Setting:13

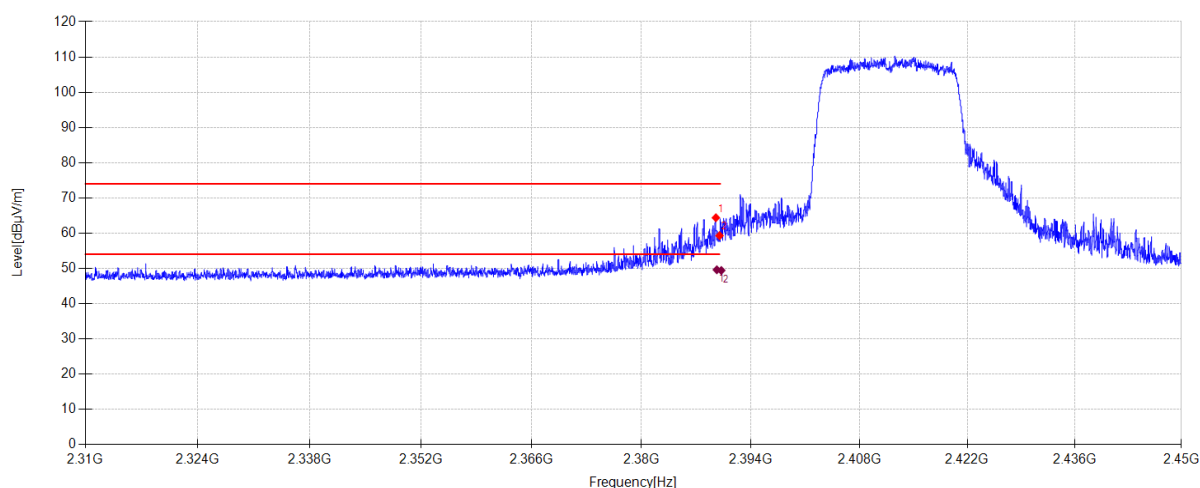

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.534	33.55	27.26	3.57	0.00	64.38	74.00	9.62	PK	Horizontal
2	2390.000	28.46	27.26	3.57	0.00	59.29	74.00	14.71	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.656	18.78	27.26	3.57	49.61	54.00	4.39	AV	Horizontal
2	2390.230	18.59	27.26	3.57	49.42	54.00	4.58	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\40
Memo: Sample Number:S25061925-003 Power Setting:13

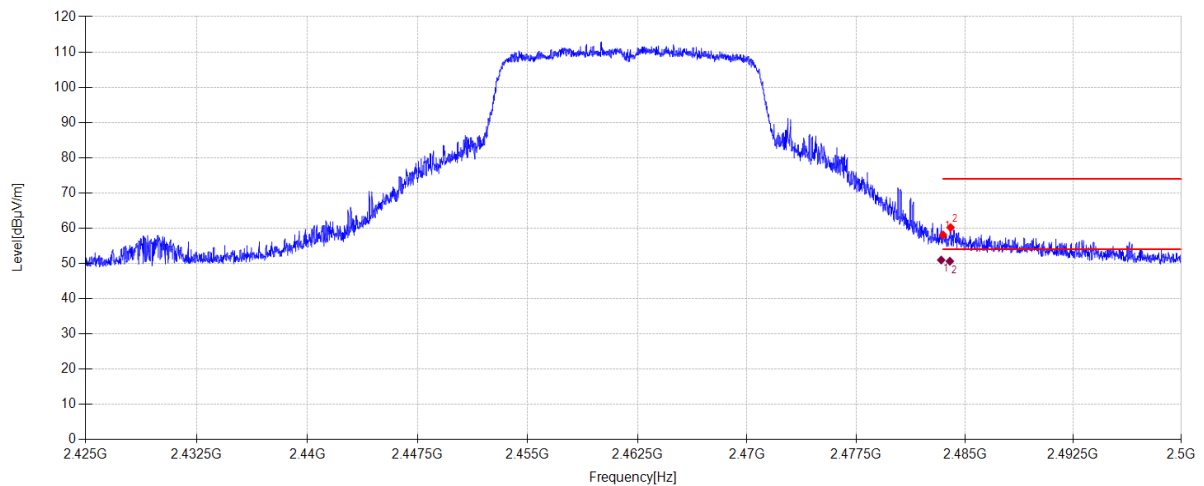

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	26.92	27.53	3.62	0.00	58.07	74.00	15.93	PK	Horizontal
2	2484.018	29.01	27.54	3.62	0.00	60.17	74.00	13.83	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.370	19.81	27.53	3.62	50.96	54.00	3.04	AV	Horizontal
2	2483.968	19.46	27.54	3.62	50.62	54.00	3.38	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\42
Memo: Sample Number:S25061925-003 Power Setting:10

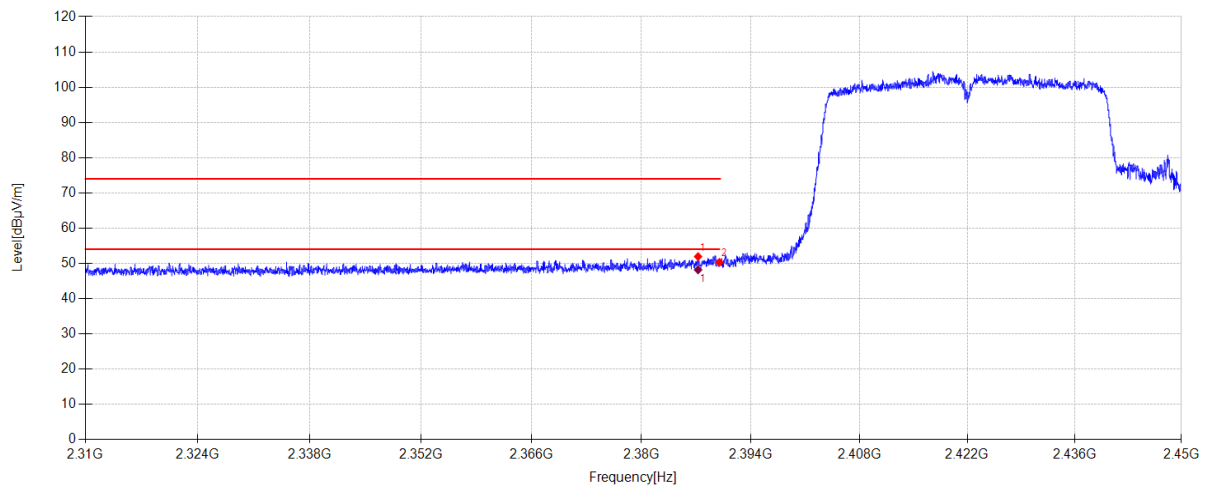

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.252	21.12	27.25	3.57	0.00	51.94	74.00	22.06	PK	Horizontal
2	2390.000	19.48	27.26	3.57	0.00	50.31	74.00	23.69	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.252	17.35	27.25	3.57	48.17	54.00	5.83	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\41
Memo: Sample Number:S25061925-003 Power Setting:10

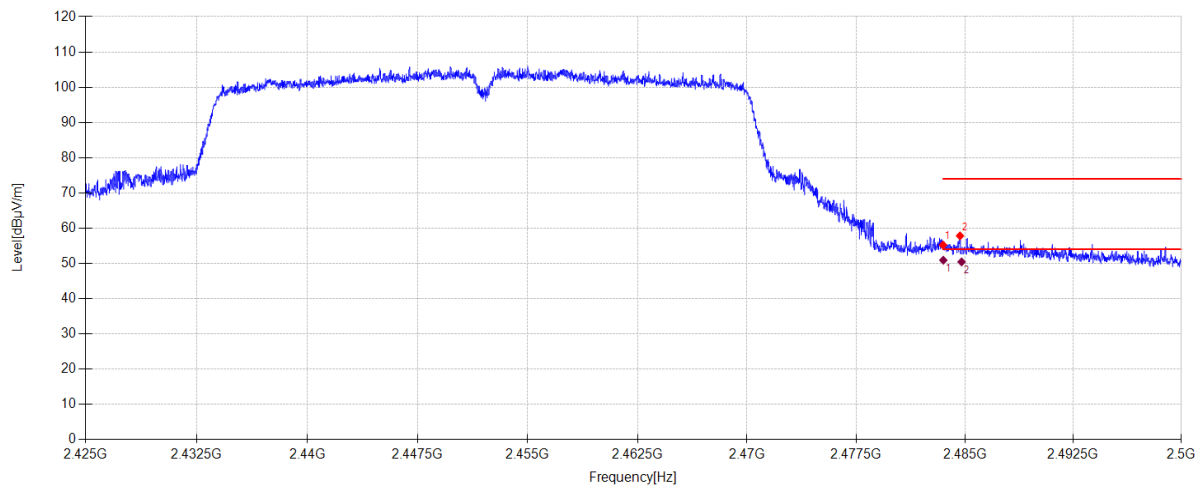

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	24.06	27.53	3.62	0.00	55.21	74.00	18.79	PK	Horizontal
2	2484.670	26.66	27.54	3.62	0.00	57.82	74.00	16.18	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.517	19.76	27.53	3.62	50.91	54.00	3.09	AV	Horizontal
2	2484.776	19.27	27.54	3.62	50.43	54.00	3.57	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\44
Memo: Sample Number:S25061925-003 Power Setting:13.5

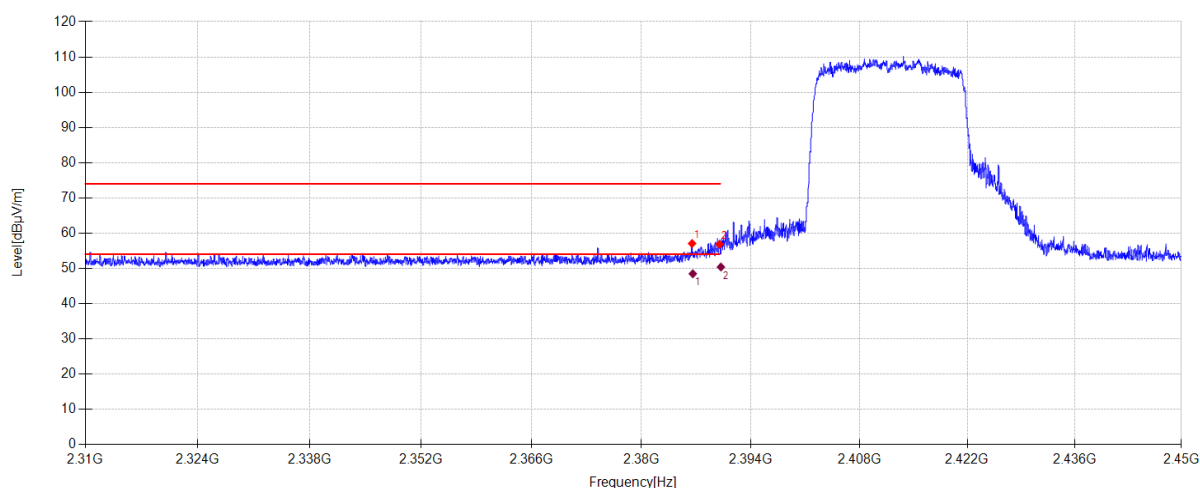

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.482	26.25	27.25	3.57	0.00	57.07	74.00	16.93	PK	Horizontal
2	2390.000	26.00	27.26	3.57	0.00	56.83	74.00	17.17	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.581	17.66	27.25	3.57	48.48	54.00	5.52	AV	Horizontal
2	2390.182	19.56	27.26	3.57	50.39	54.00	3.61	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\43
Memo: Sample Number:S25061925-003 Power Setting:13.5

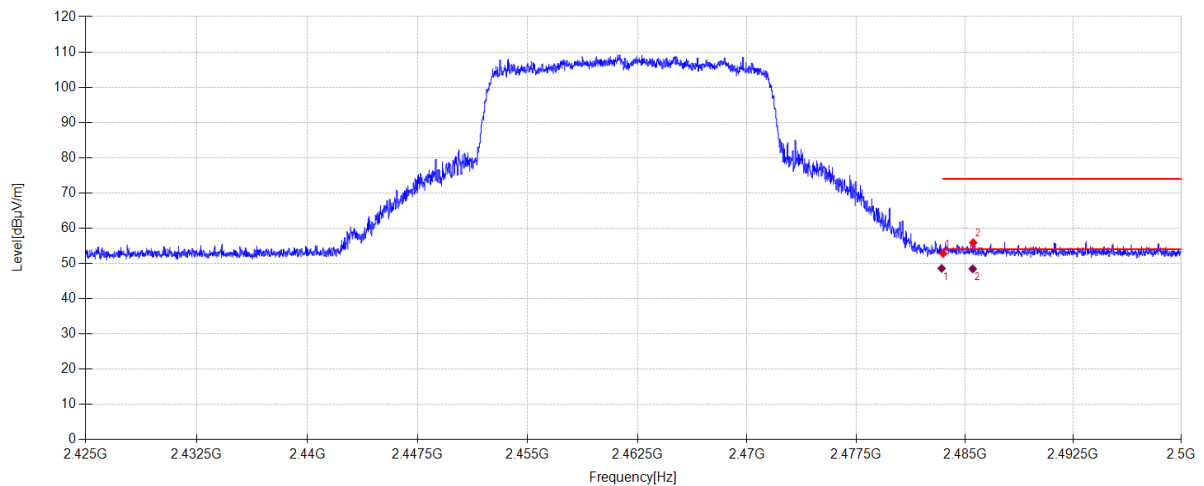

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.64	27.53	3.62	0.00	52.79	74.00	21.21	PK	Horizontal
2	2485.578	24.73	27.54	3.62	0.00	55.89	74.00	18.11	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.401	17.43	27.53	3.62	48.58	54.00	5.42	AV	Horizontal
2	2485.549	17.30	27.54	3.62	48.46	54.00	5.54	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11AX40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\45
Memo: Sample Number:S25061925-003 Power Setting:9.5

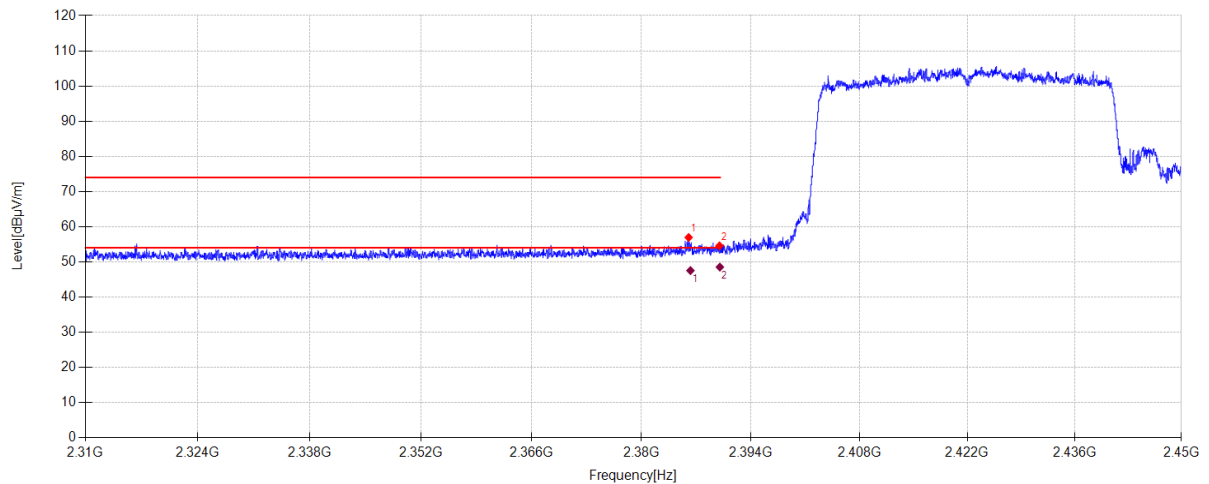

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.048	26.14	27.24	3.57	0.00	56.95	74.00	17.05	PK	Horizontal
2	2390.000	23.74	27.26	3.57	0.00	54.57	74.00	19.43	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.276	16.73	27.24	3.57	47.54	54.00	6.46	AV	Horizontal
2	2390.049	17.70	27.26	3.57	48.53	54.00	5.47	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11AX40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\46
Memo: Sample Number:S25061925-003 Power Setting:9.5

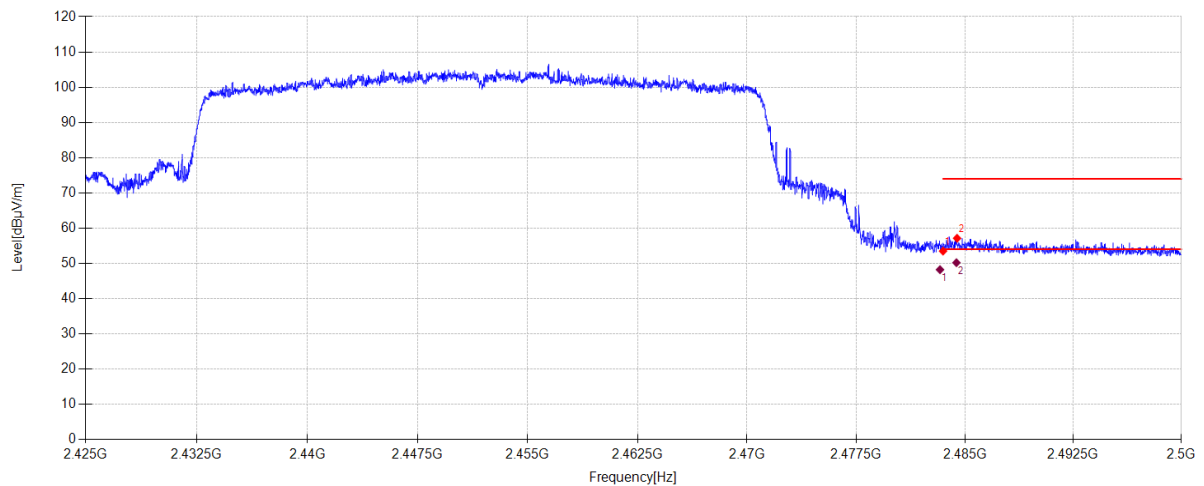

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.35	27.53	3.62	0.00	53.50	74.00	20.50	PK	Horizontal
2	2484.468	25.98	27.54	3.62	0.00	57.14	74.00	16.86	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.288	17.08	27.53	3.62	48.23	54.00	5.77	AV	Horizontal
2	2484.423	19.04	27.54	3.62	50.20	54.00	3.80	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\48
Memo: Sample Number:S25061925-003 Power Setting:13

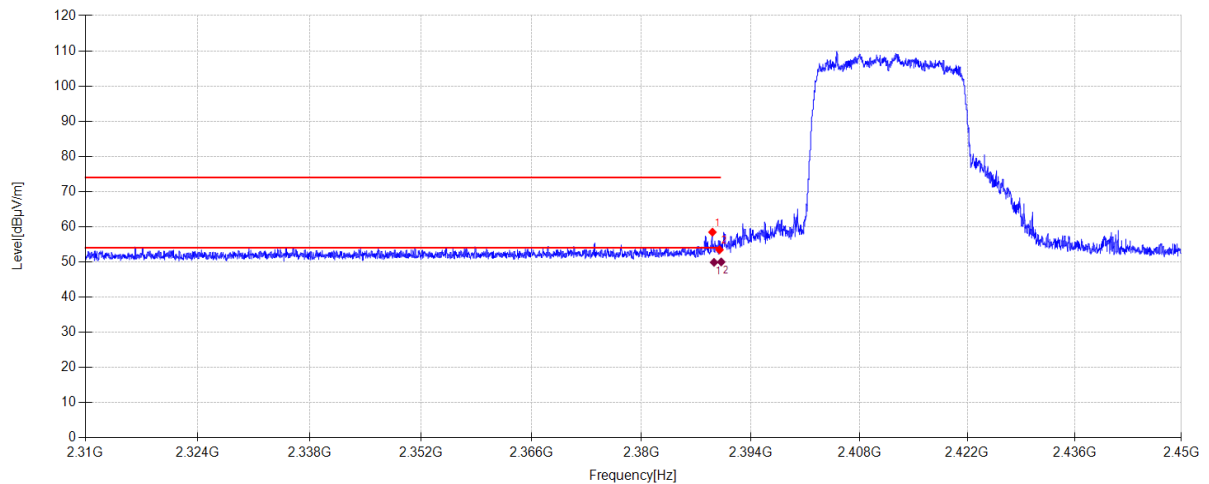

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.100	27.62	27.26	3.57	0.00	58.45	74.00	15.55	PK	Horizontal
2	2390.000	22.62	27.26	3.57	0.00	53.45	74.00	20.55	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.296	19.04	27.26	3.57	49.87	54.00	4.13	AV	Horizontal
2	2390.222	19.16	27.26	3.57	49.99	54.00	4.01	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\47
Memo: Sample Number:S25061925-003 Power Setting:13

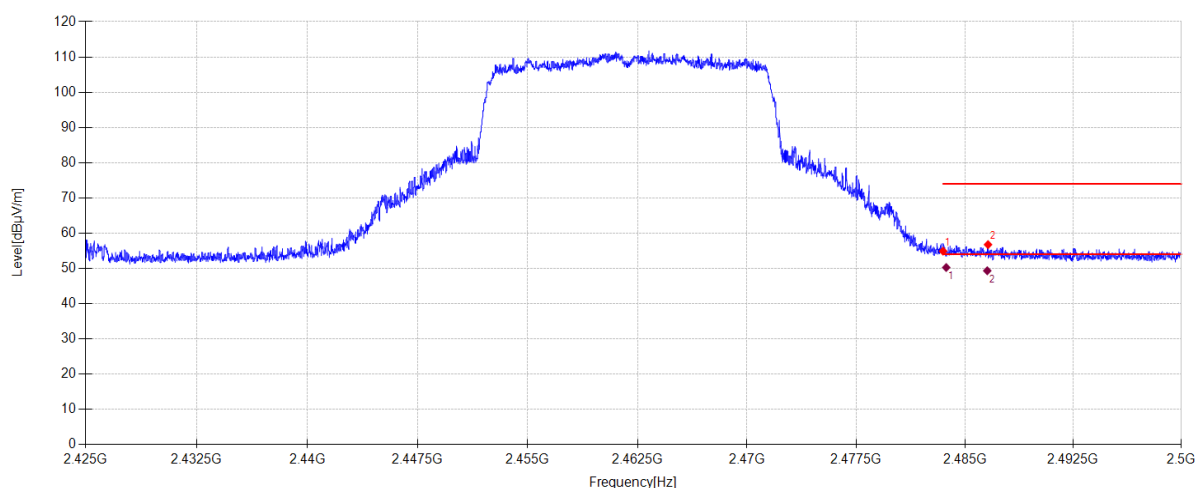

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.75	27.53	3.62	0.00	54.90	74.00	19.10	PK	Horizontal
2	2486.605	25.58	27.55	3.62	0.00	56.75	74.00	17.25	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.718	19.11	27.53	3.62	50.26	54.00	3.74	AV	Horizontal
2	2486.552	18.16	27.55	3.62	49.33	54.00	4.67	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\49
Memo: Sample Number:S25061925-003 Power Setting:9

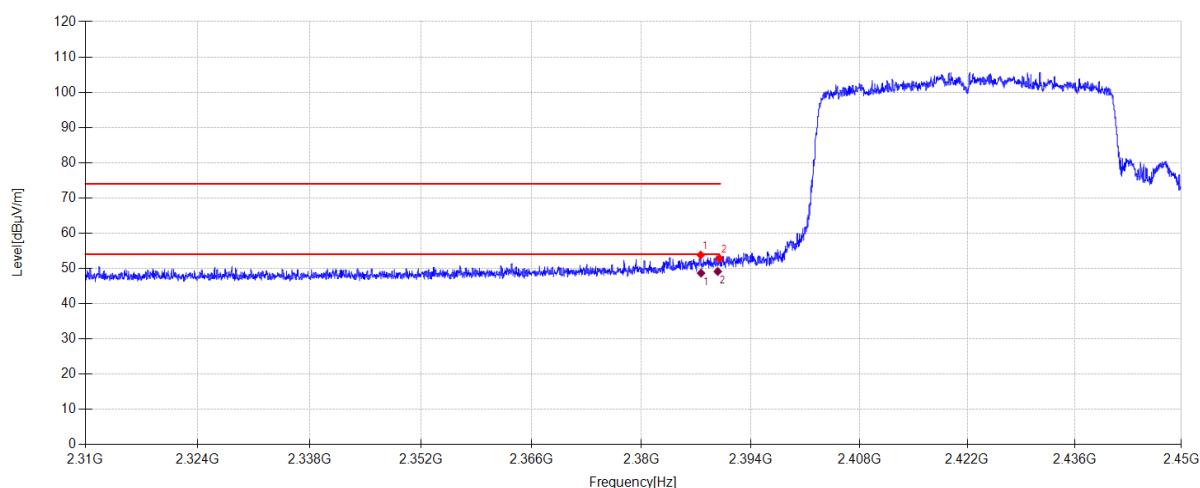

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.588	22.97	27.25	3.57	0.00	53.79	74.00	20.21	PK	Horizontal
2	2390.000	21.99	27.26	3.57	0.00	52.82	74.00	21.18	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.633	17.84	27.25	3.57	48.66	54.00	5.34	AV	Horizontal
2	2389.781	18.29	27.26	3.57	49.12	54.00	4.88	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-18 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC Above 1G 2.4G\50
Memo: Sample Number:S25061925-003 Power Setting:9

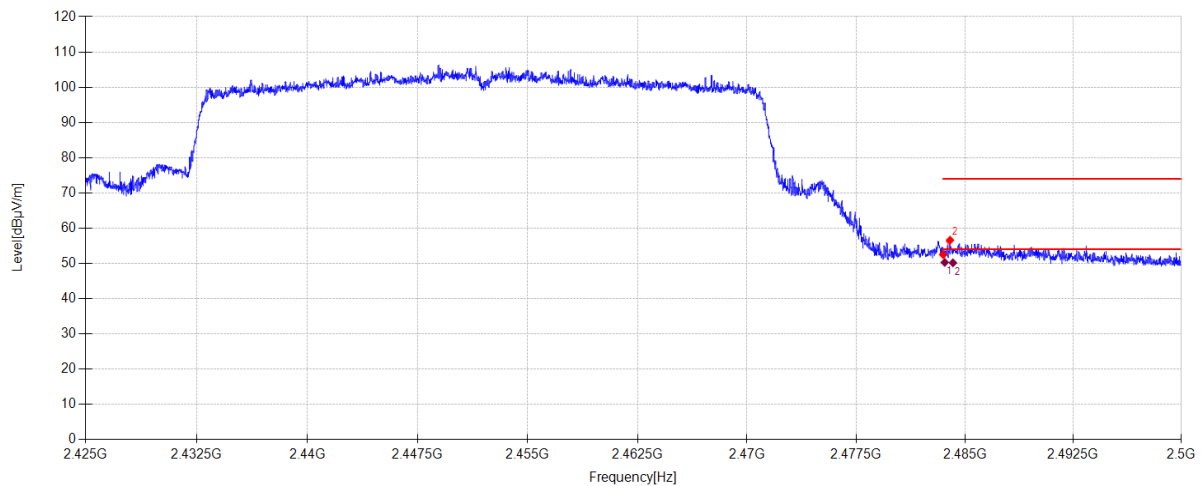

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.36	27.53	3.62	0.00	52.51	74.00	21.49	PK	Horizontal
2	2483.980	25.43	27.54	3.62	0.00	56.59	74.00	17.41	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.617	19.14	27.53	3.62	50.29	54.00	3.71	AV	Horizontal
2	2484.183	19.00	27.54	3.62	50.16	54.00	3.84	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-08-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE20 2412MHz TX 52+26-tone MRU1 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC ABOVE1G 2.4GMRU1
Memo: Sample Number:S25061925-003 Power Setting:13

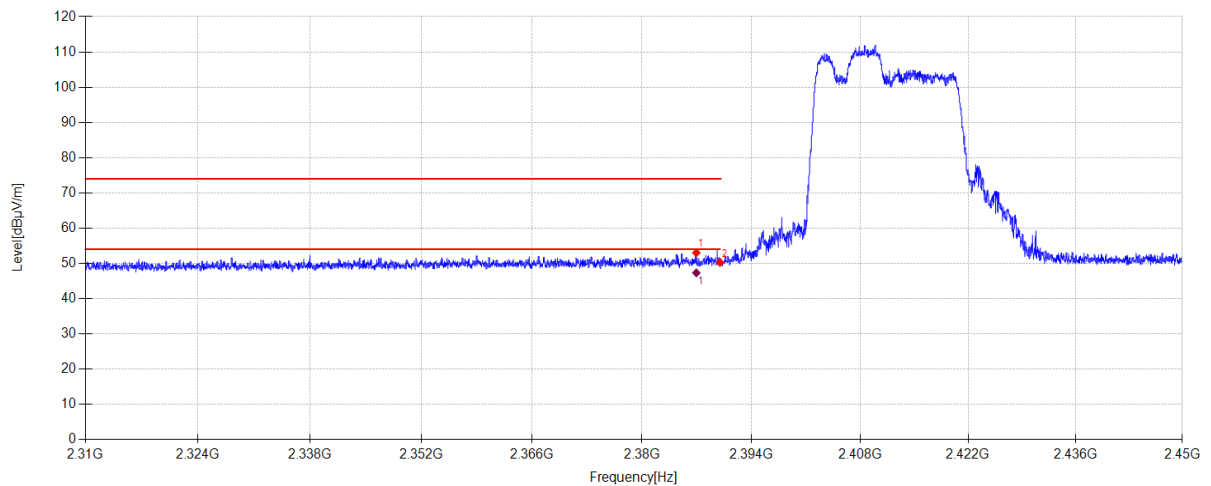

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.958	20.94	27.25	4.83	0.00	53.02	74.00	20.98	PK	Horizontal
2	2390.000	18.16	27.26	4.84	0.00	50.26	74.00	23.74	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.958	15.24	27.25	4.83	47.32	54.00	6.68	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-08-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE20 2462MHz 52+26-tone MRU3 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC ABOVE1G 2.4GMRU2
Memo: Sample Number:S25061925-003 Power Setting:13

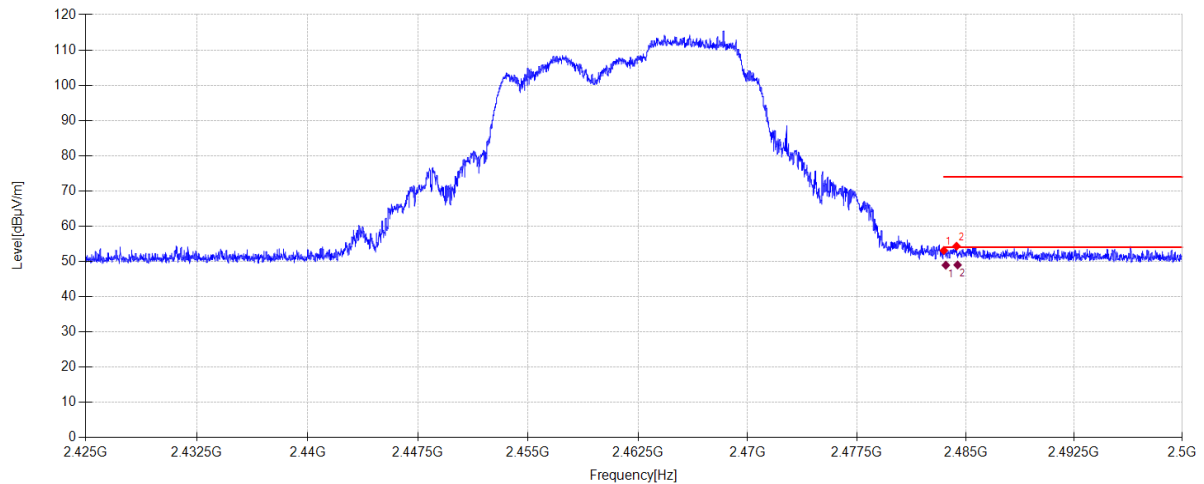

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.68	27.53	4.89	0.00	53.10	74.00	20.90	PK	Horizontal
2	2484.378	21.87	27.54	4.90	0.00	54.31	74.00	19.69	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.636	16.50	27.53	4.89	48.92	54.00	5.08	AV	Horizontal
2	2484.450	16.55	27.54	4.90	48.99	54.00	5.01	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-08-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE40 2422MHz TX
106+26-tone MRU1 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1E\FCC ABOVE1G 2.4GMRU4
Memo: Sample Number:S25061925-003 Power Setting:9

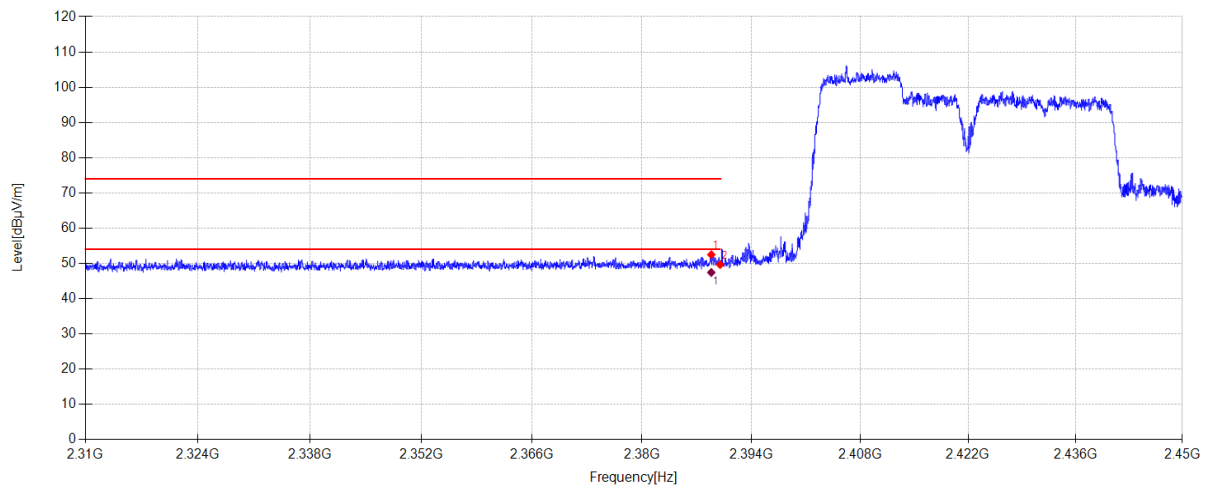

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.876	20.39	27.26	4.83	0.00	52.48	74.00	21.52	PK	Horizontal
2	2390.000	17.56	27.26	4.84	0.00	49.66	74.00	24.34	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.876	15.34	27.26	4.83	47.43	54.00	6.57	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-08-17 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2535
Test Mode: MIMO TX 11BE40 2452MHz 106+26-tone MRU4 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.1°C;Humi:44.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25061925-1\FCC ABOVE1G 2.4GMRU3
Memo: Sample Number:S25061925-003 Power Setting:9

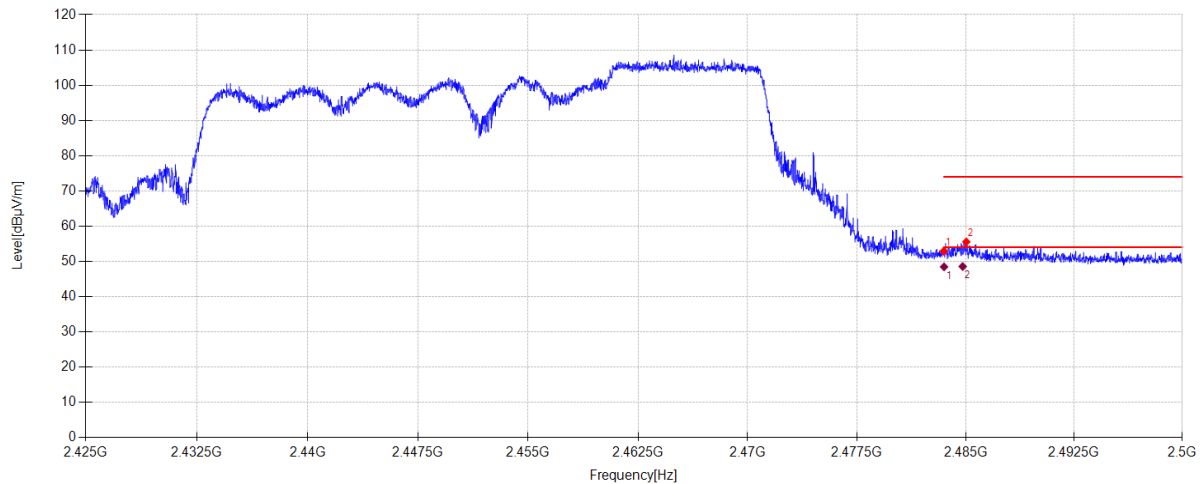

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.49	27.53	4.89	0.00	52.91	74.00	21.09	PK	Horizontal
2	2485.053	23.10	27.54	4.90	0.00	55.54	74.00	18.46	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.517	16.03	27.53	4.89	48.45	54.00	5.55	AV	Horizontal
2	2484.803	16.11	27.54	4.90	48.55	54.00	5.45	AV	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC01972	2026/03/28
Two Line V-Network	R&S	ENV216	DDT-ZC00586	2026/07/06
Pulse Limiter	R&S	KH43101	DDT-ZC00747	2026/03/28
Coaxial signal signal cable	H&S	RG214-5	DDT-ZC01817	2026/03/28
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Two Line V-Network	R&S	ENV216	DDT-ZC02058	2026/07/06

14.2. Block diagram of test setup

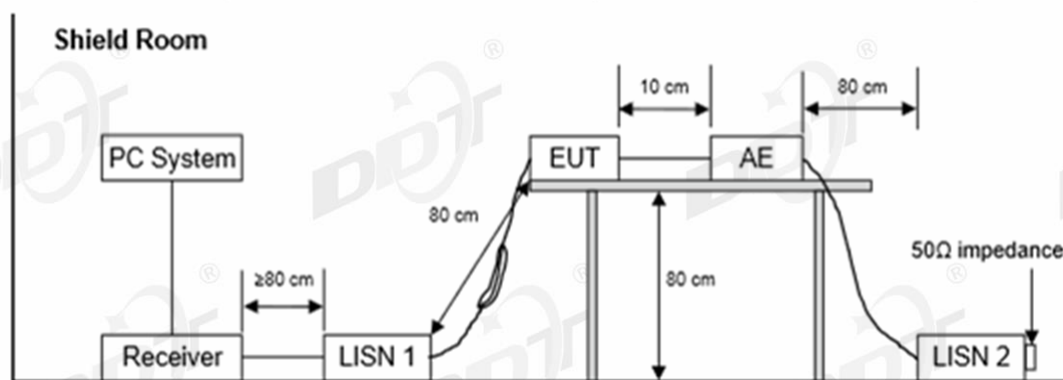

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room

D:\2025 report data\Q25061925-1E\EM6.EM6

Test Date : 2025-07-23

Tested By : Nan Zhong

EUT : Wireless Access Point

Model Number : L2535


Power Supply : AC 120V/60Hz

Test Mode : TX 2.4G Mode

Condition : Temp:21.3°C,Humi:42.8%

LISN : 2023 ENV216 2#/NEUTRAL

Memo : S25061925-003

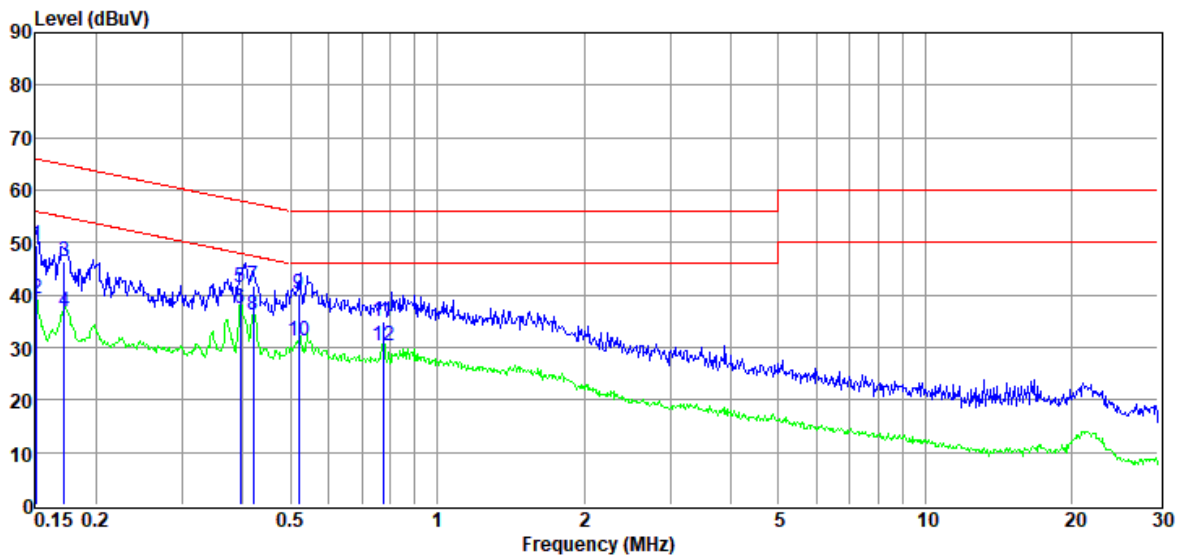

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.15	29.43	9.92	0.09	10.06	49.50	65.96	-16.46	QP	NEUTRAL
2	0.15	19.33	9.92	0.09	10.06	39.40	55.96	-16.56	Average	NEUTRAL
3	0.17	26.15	9.97	0.09	10.06	46.27	64.86	-18.59	QP	NEUTRAL
4	0.17	16.54	9.97	0.09	10.06	36.66	54.86	-18.20	Average	NEUTRAL
5	0.40	21.30	10.03	0.10	10.07	41.50	57.95	-16.45	QP	NEUTRAL
6	0.40	17.36	10.03	0.10	10.07	37.56	47.95	-10.39	Average	NEUTRAL
7	0.42	21.45	10.02	0.10	10.07	41.64	57.46	-15.82	QP	NEUTRAL
8	0.42	15.97	10.02	0.10	10.07	36.16	47.46	-11.30	Average	NEUTRAL
9	0.52	20.16	9.98	0.10	10.07	40.31	56.00	-15.69	QP	NEUTRAL
10	0.52	11.07	9.98	0.10	10.07	31.22	46.00	-14.78	Average	NEUTRAL
11	0.78	14.94	9.97	0.10	10.06	35.07	56.00	-20.93	QP	NEUTRAL
12	0.78	10.31	9.97	0.10	10.06	30.44	46.00	-15.56	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room
Test Date : 2025-07-23
EUT : Wireless Access Point
Power Supply : AC 120V/60Hz
Condition : Temp:21.3°C,Humi:42.8%
Memo : S25061925-003

D:\2025 report data\Q25061925-1E\EM6.EM6
Tested By : Nan Zhong
Model Number : L2535
Test Mode : TX 2.4G Mode
LISN : 2023 ENV216 2#/LINE

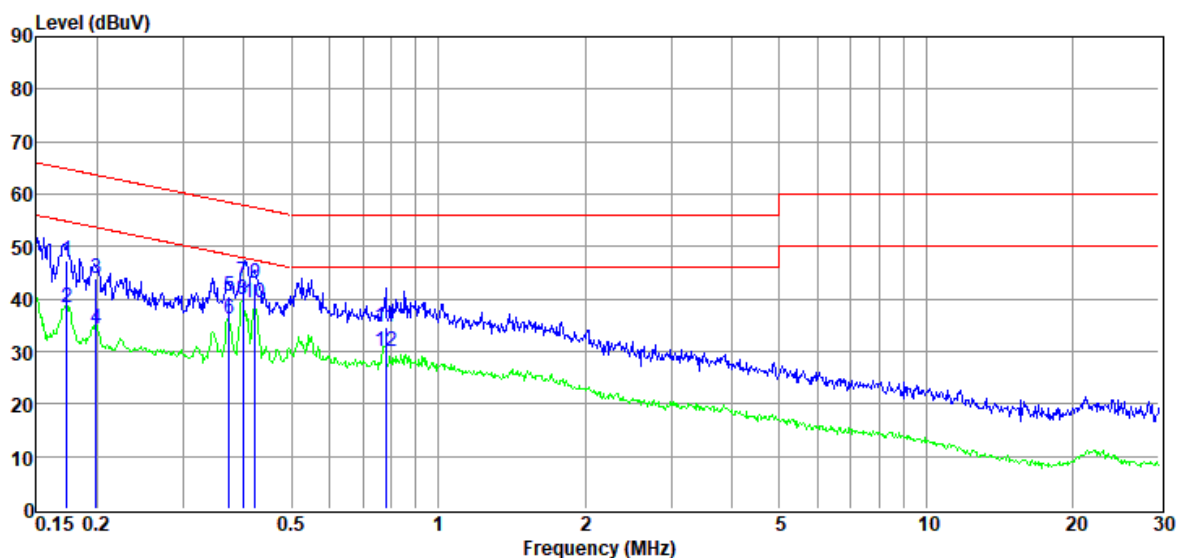

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	27.27	9.96	0.09	10.06	47.38	64.81	-17.43	QP	LINE
2	0.17	18.17	9.96	0.09	10.06	38.28	54.81	-16.53	Average	LINE
3	0.20	23.79	9.92	0.09	10.06	43.86	63.67	-19.81	QP	LINE
4	0.20	14.38	9.92	0.09	10.06	34.45	53.67	-19.22	Average	LINE
5	0.37	20.33	9.95	0.09	10.07	40.44	58.43	-17.99	QP	LINE
6	0.37	15.98	9.95	0.09	10.07	36.09	48.43	-12.34	Average	LINE
7	0.40	23.23	10.00	0.10	10.07	43.40	57.90	-14.50	QP	LINE
8	0.40	19.59	10.00	0.10	10.07	39.76	47.90	-8.14	Average	LINE
9	0.42	22.96	10.01	0.10	10.07	43.14	57.42	-14.28	QP	LINE
10	0.42	19.00	10.01	0.10	10.07	39.18	47.42	-8.24	Average	LINE
11	0.78	14.66	9.97	0.10	10.06	34.79	56.00	-21.21	QP	LINE
12	0.78	9.95	9.97	0.10	10.06	30.08	46.00	-15.92	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q25061925-2E appendix I

-----End Report-----