

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT2 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\43

Memo:

Sample Numbler:S25081330-003 Power Setting:15

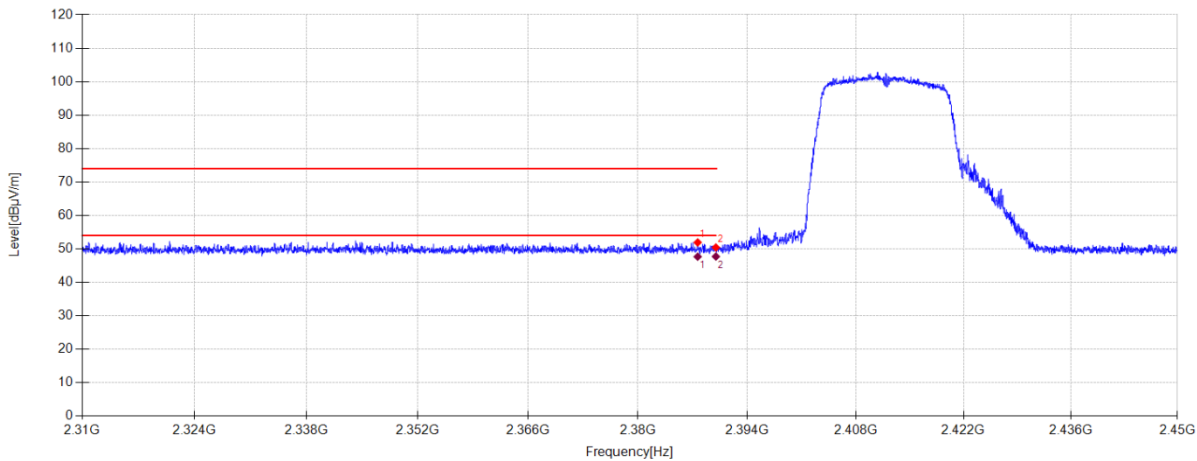

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.658	19.63	27.47	4.83	0.00	51.93	74.00	22.07	PK	Horizontal
2	2390.000	18.12	27.46	4.84	0.00	50.42	74.00	23.58	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2387.658	15.37	27.47	4.83	47.67	54.00	6.33	AV	Horizontal	
2	2390.000	15.41	27.46	4.84	47.71	54.00	6.29	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT2 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\44

Memo:

Sample Numbler:S25081330-003 Power Setting:15

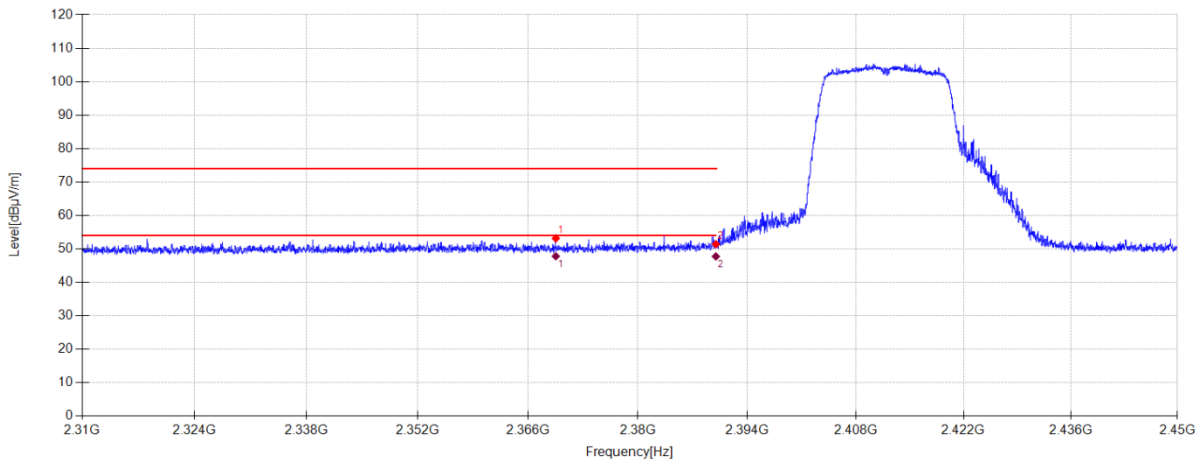

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2369.528	20.74	27.58	4.82	0.00	53.14	74.00	20.86	PK	Vertical
2	2390.000	19.10	27.46	4.84	0.00	51.40	74.00	22.60	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2369.528	15.39	27.58	4.82	47.79	54.00	6.21	AV	Vertical	
2	2390.000	15.44	27.46	4.84	47.74	54.00	6.26	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT2 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\45

Memo:

Sample Numbler:S25081330-003 Power Setting:15

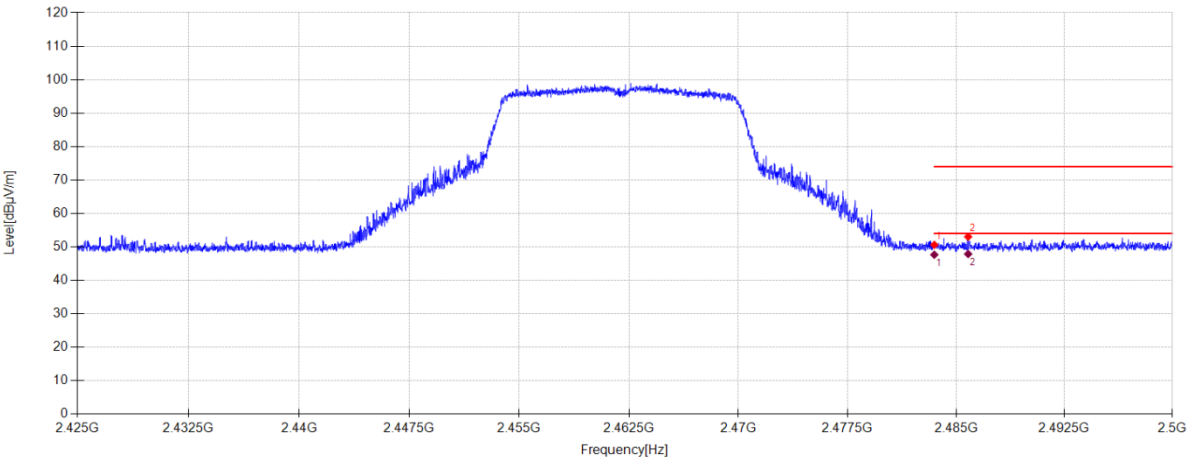

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.17	27.54	4.89	0.00	50.60	74.00	23.40	PK	Horizontal
2	2485.840	20.58	27.56	4.90	0.00	53.04	74.00	20.96	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.22	27.54	4.89	47.65	54.00	6.35	AV	Horizontal	
2	2485.840	15.41	27.56	4.90	47.87	54.00	6.13	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT2 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\46

Memo:

Sample Numbler:S25081330-003 Power Setting:15

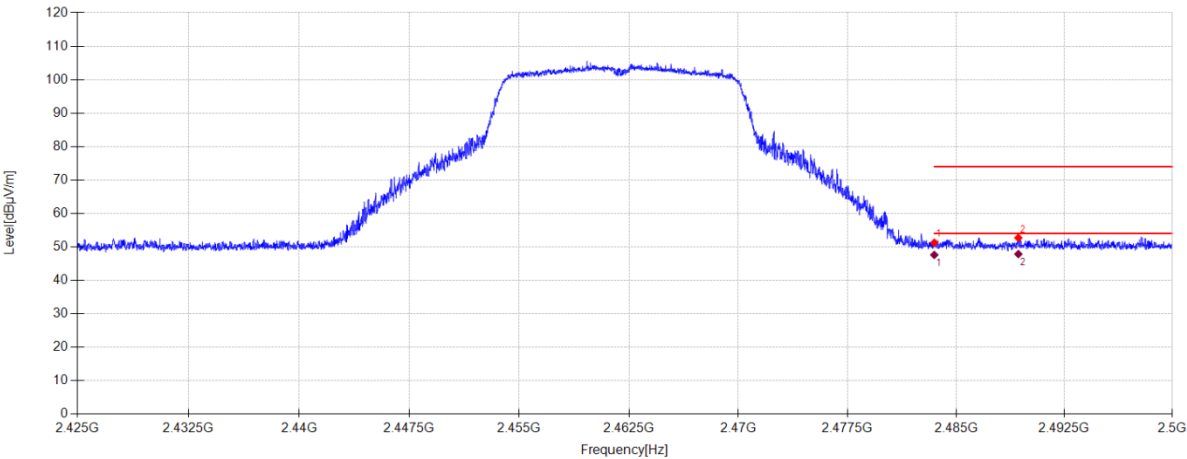

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.85	27.54	4.89	0.00	51.28	74.00	22.72	PK	Vertical
2	2489.313	20.21	27.59	4.90	0.00	52.70	74.00	21.30	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.17	27.54	4.89	47.60	54.00	6.40	AV	Vertical	
2	2489.313	15.36	27.59	4.90	47.85	54.00	6.15	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT1 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\47

Memo:

Sample Numbler:S25081330-003 Power Setting:15

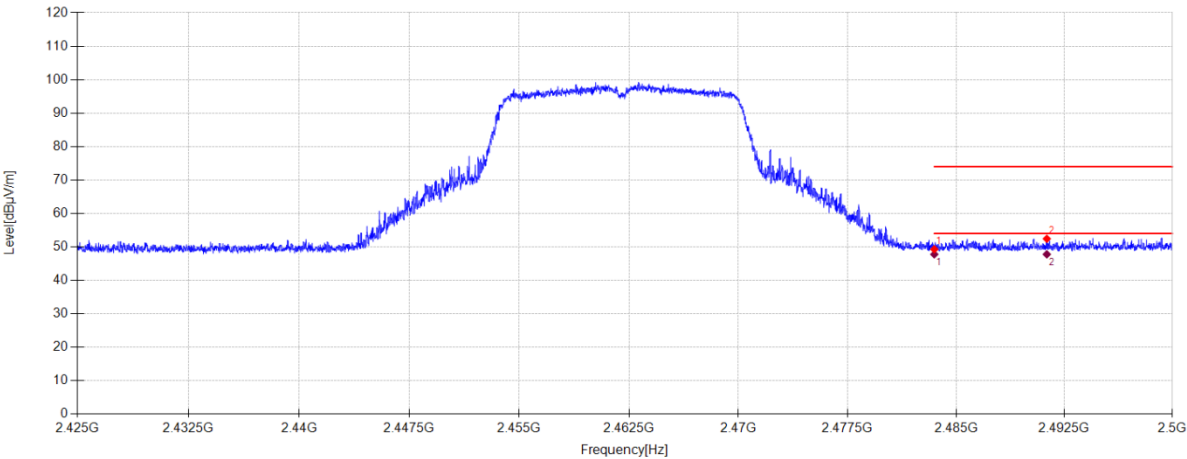

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.86	27.54	4.89	0.00	49.29	74.00	24.71	PK	Horizontal
2	2491.285	19.91	27.61	4.90	0.00	52.42	74.00	21.58	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]		Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.34	27.54	4.89		47.77	54.00	6.23	AV	Horizontal
2	2491.285	15.27	27.61	4.90		47.78	54.00	6.22	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11G ANT1 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\48

Memo:

Sample Numbler:S25081330-003 Power Setting:15

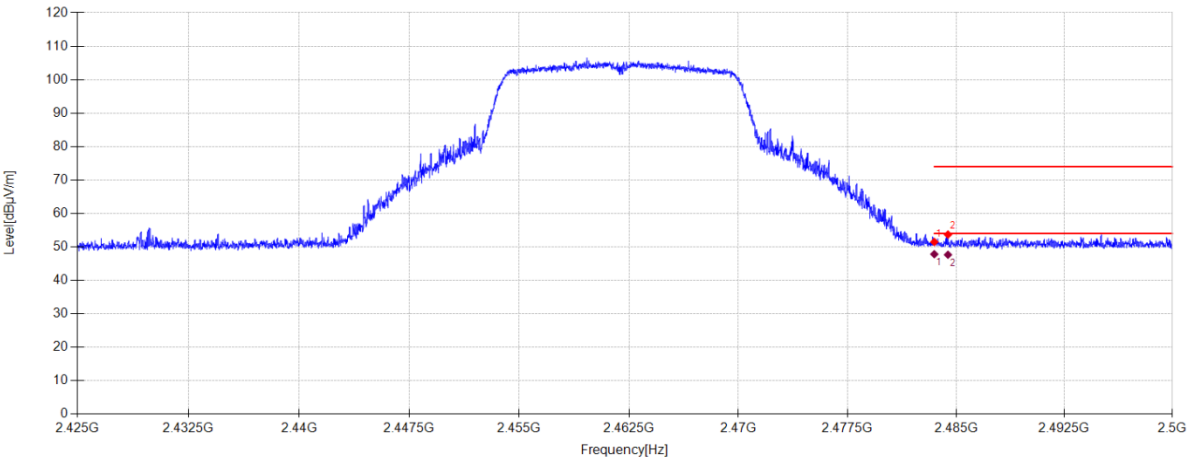

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.05	27.54	4.89	0.00	51.48	74.00	22.52	PK	Vertical
2	2484.445	21.25	27.54	4.90	0.00	53.69	74.00	20.31	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.39	27.54	4.89	47.82	54.00	6.18	AV	Vertical	
2	2484.445	15.21	27.54	4.90	47.65	54.00	6.35	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\31

Memo:

Sample Numbler:S25081330-003 Power Setting:15

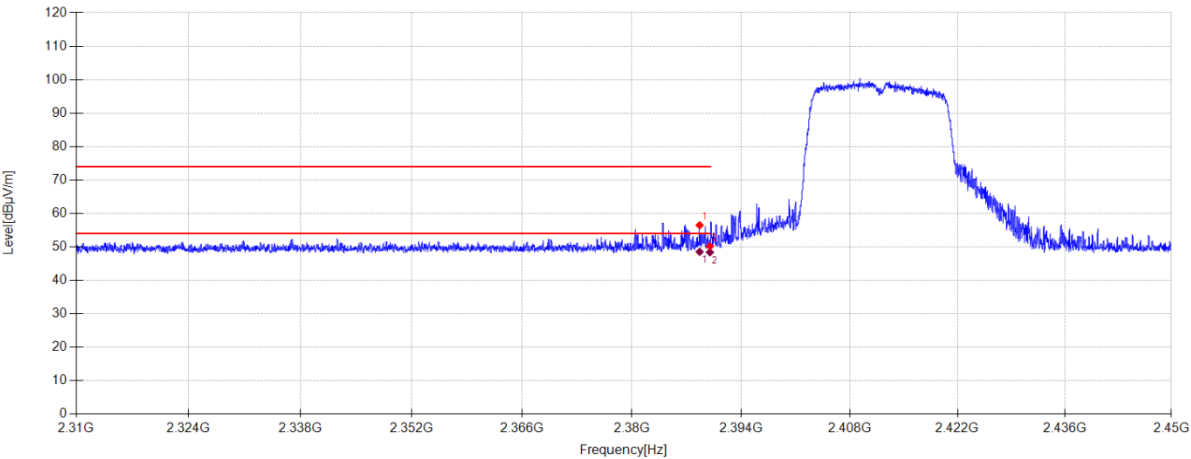

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.680	24.18	27.47	4.83	0.00	56.48	74.00	17.52	PK	Horizontal
2	2390.000	17.89	27.46	4.84	0.00	50.19	74.00	23.81	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]		Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.680	16.22	27.47	4.83		48.52	54.00	5.48	AV	Horizontal
2	2390.000	16.09	27.46	4.84		48.39	54.00	5.61	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\32

Memo:

Sample Numbler:S25081330-003 Power Setting:15

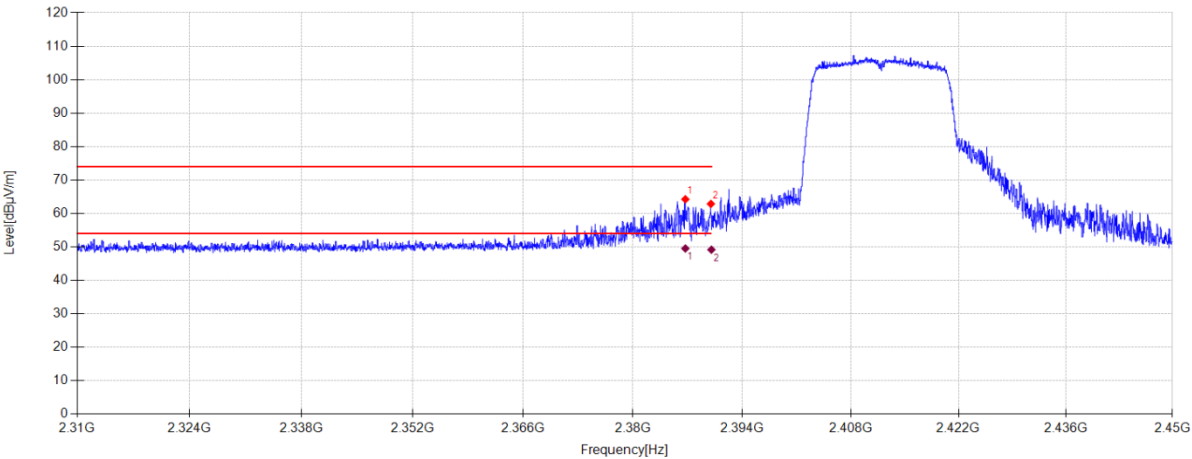

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.720	31.93	27.48	4.83	0.00	64.24	74.00	9.76	PK	Vertical
2	2390.000	30.56	27.46	4.84	0.00	62.86	74.00	11.14	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2386.720	17.21	27.48	4.83	49.52	54.00	4.48	AV	Vertical	
2	2390.063	16.86	27.46	4.84	49.16	54.0	4.84	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\33

Memo:

Sample Numbler:S25081330-003 Power Setting:15

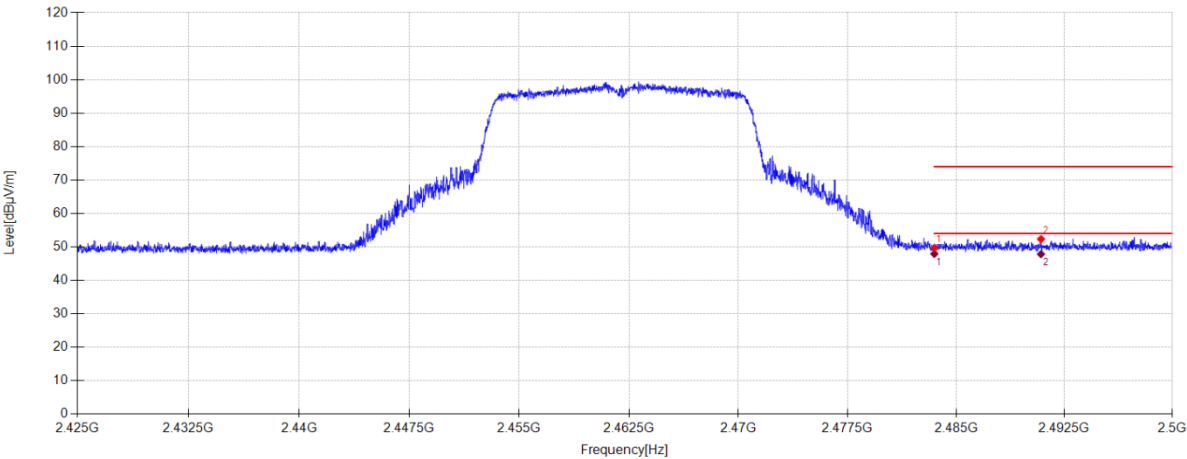

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.18	27.54	4.89	0.00	49.61	74.00	24.39	PK	Horizontal
2	2490.880	19.83	27.61	4.90	0.00	52.34	74.00	21.66	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.49	27.54	4.89	47.92	54.00	6.08	AV	Horizontal	
2	2490.880	15.33	27.61	4.90	47.84	54.00	6.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\34

Memo:

Sample Numbler:S25081330-003 Power Setting:15

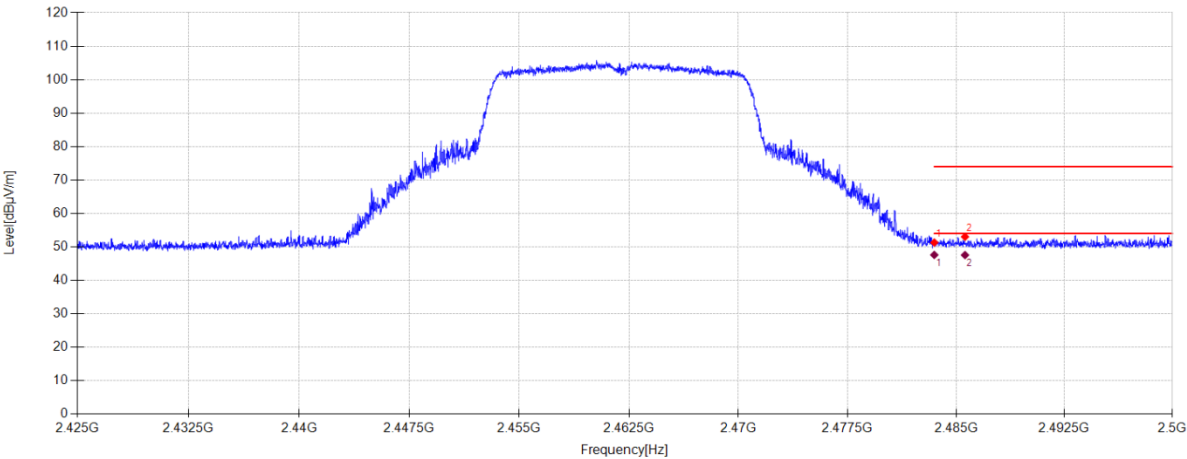

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.88	27.54	4.89	0.00	51.31	74.00	22.69	PK	Vertical
2	2485.623	20.55	27.56	4.90	0.00	53.01	74.00	20.99	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.17	27.54	4.89	47.60	54.00	6.40	AV	Vertical	
2	2485.623	15.09	27.56	4.90	47.55	54.00	6.45	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\39

Memo:

Sample Numbler:S25081330-003 Power Setting:14

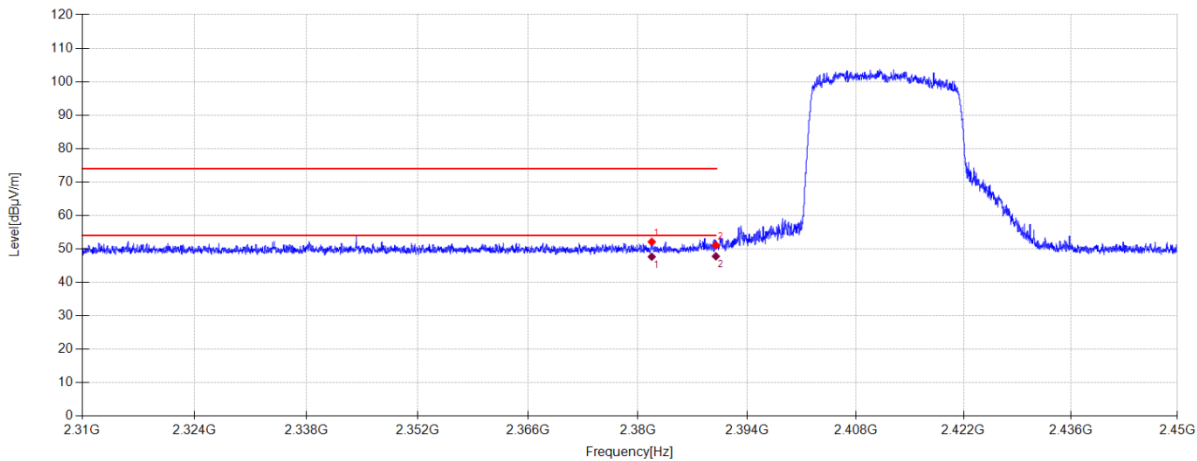

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.778	19.77	27.51	4.83	0.00	52.11	74.00	21.89	PK	Horizontal
2	2390.000	18.77	27.46	4.84	0.00	51.07	74.00	22.93	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2381.778	15.31	27.51	4.83	47.65	54.00	6.35	AV	Horizontal	
2	2390.000	15.47	27.46	4.84	47.77	54.00	6.23	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\40

Memo:

Sample Numbler:S25081330-003 Power Setting:14

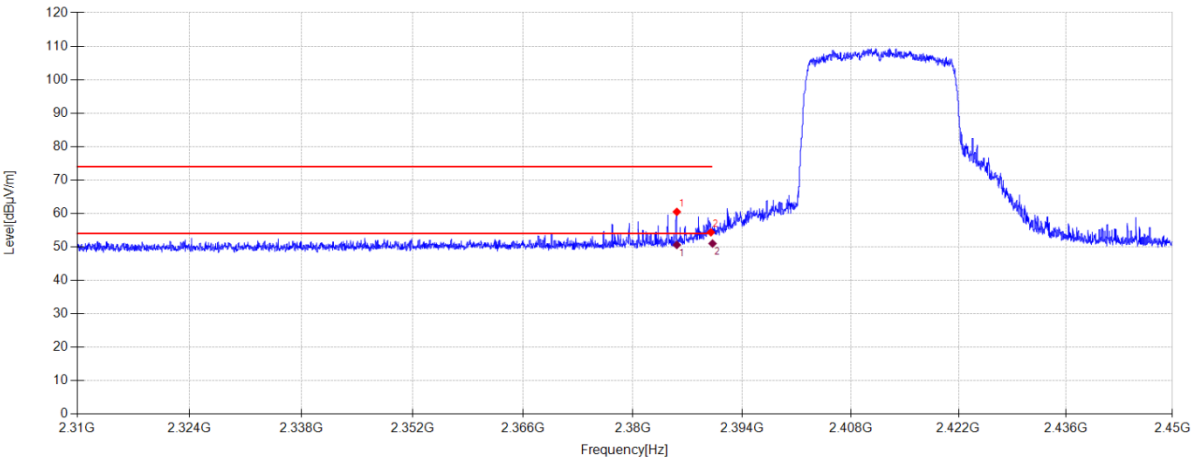

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.628	28.15	27.49	4.83	0.00	60.47	74.00	13.53	PK	Vertical
2	2390.000	22.06	27.46	4.84	0.00	54.36	74.00	19.64	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]		Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.628	18.26	27.49	4.83		50.58	54.00	3.42	AV	Vertical
2	2390.211	18.70	27.46	4.84		51.00	54.0	3.00	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\35

Memo:

Sample Numbler:S25081330-003 Power Setting:14

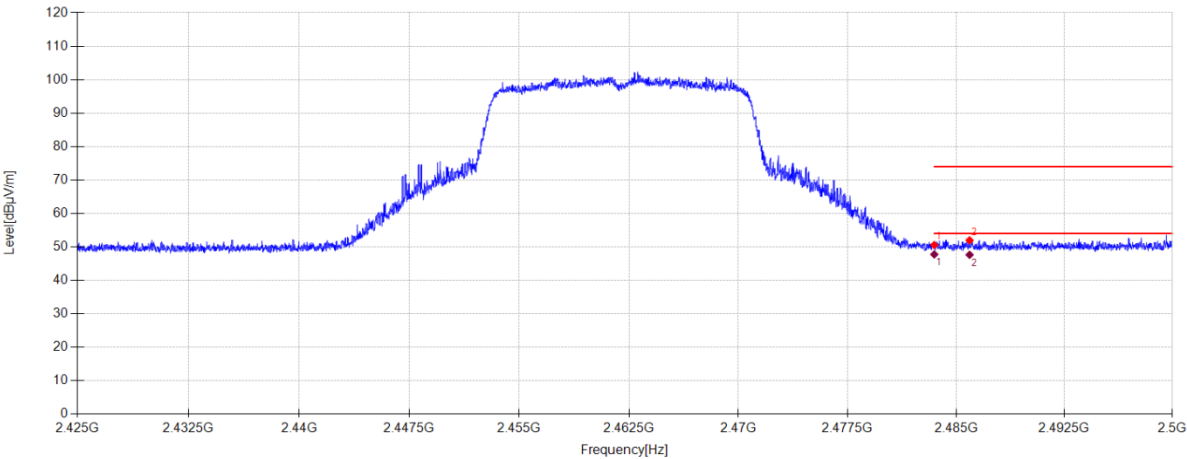

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.13	27.54	4.89	0.00	50.56	74.00	23.44	PK	Horizontal
2	2485.938	19.52	27.56	4.90	0.00	51.98	74.00	22.02	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.32	27.54	4.89	47.75	54.00	6.25	AV	Horizontal	
2	2485.938	15.17	27.56	4.90	47.63	54.00	6.37	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\36

Memo:

Sample Numbler:S25081330-003 Power Setting:14

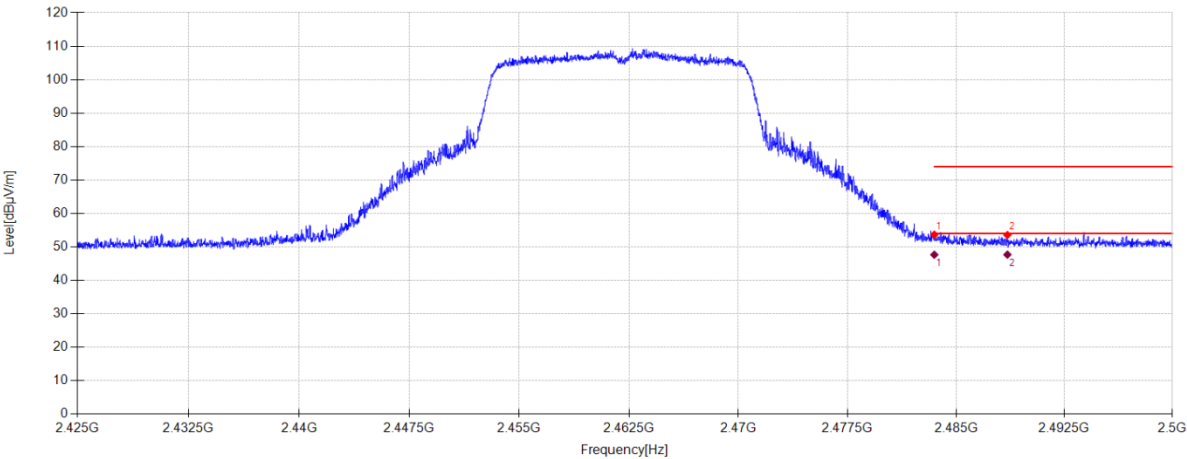

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.23	27.54	4.89	0.00	53.66	74.00	20.34	PK	Vertical
2	2488.555	21.07	27.59	4.90	0.00	53.56	74.00	20.44	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]		Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.22	27.54	4.89		47.65	54.00	6.35	AV	Vertical
2	2488.555	15.19	27.59	4.90		47.68	54.00	6.32	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\61

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

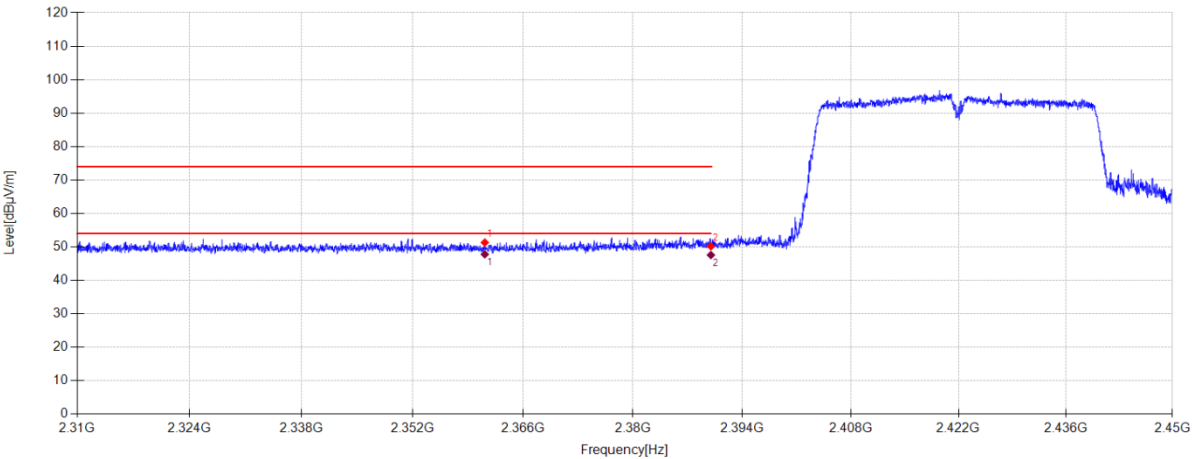

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2361.142	18.86	27.63	4.82	0.00	51.31	74.00	22.69	PK	Horizontal
2	2390.000	17.88	27.46	4.84	0.00	50.18	74.00	23.82	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2361.142	15.33	27.63	4.82	47.78	54.00	6.22	AV	Horizontal	
2	2390.000	15.27	27.46	4.84	47.57	54.00	6.43	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\62

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

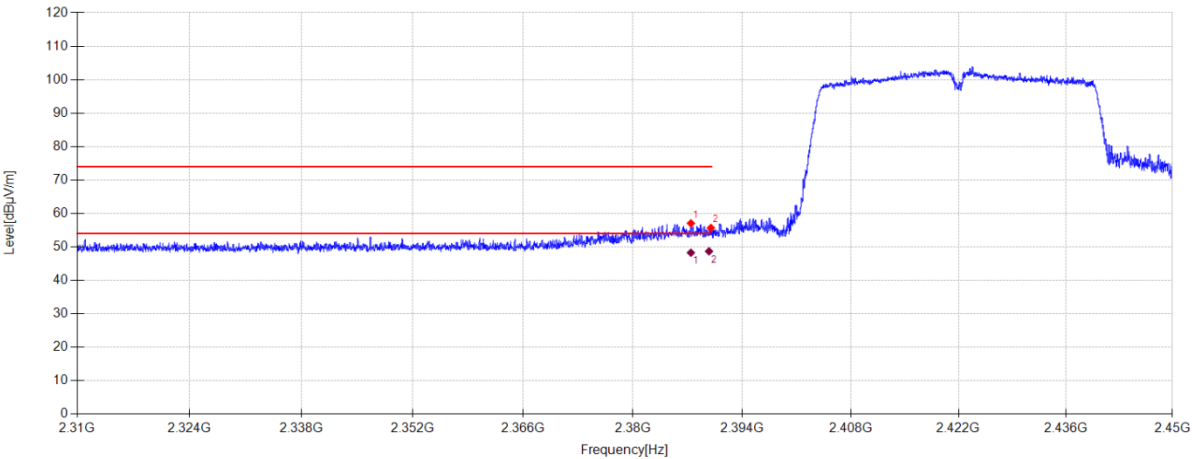

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.434	24.75	27.48	4.83	0.00	57.06	74.00	16.94	PK	Vertical
2	2390.000	23.37	27.46	4.84	0.00	55.67	74.00	18.33	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2387.434	15.95	27.48	4.83	48.26	54.00	5.74	AV	Vertical	
2	2389.754	16.38	27.46	4.84	48.68	54.00	5.32	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\63

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

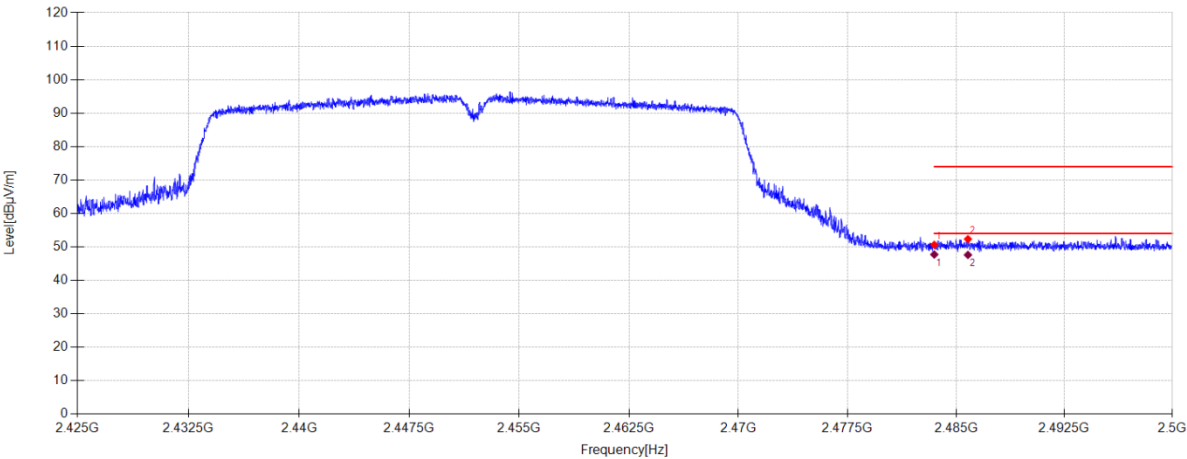

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.19	27.54	4.89	0.00	50.62	74.00	23.38	PK	Horizontal
2	2485.825	19.87	27.56	4.90	0.00	52.33	74.00	21.67	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.29	27.54	4.89	47.72	54.00	6.28	AV	Horizontal	
2	2485.825	15.14	27.56	4.90	47.60	54.00	6.40	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX N40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\64

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

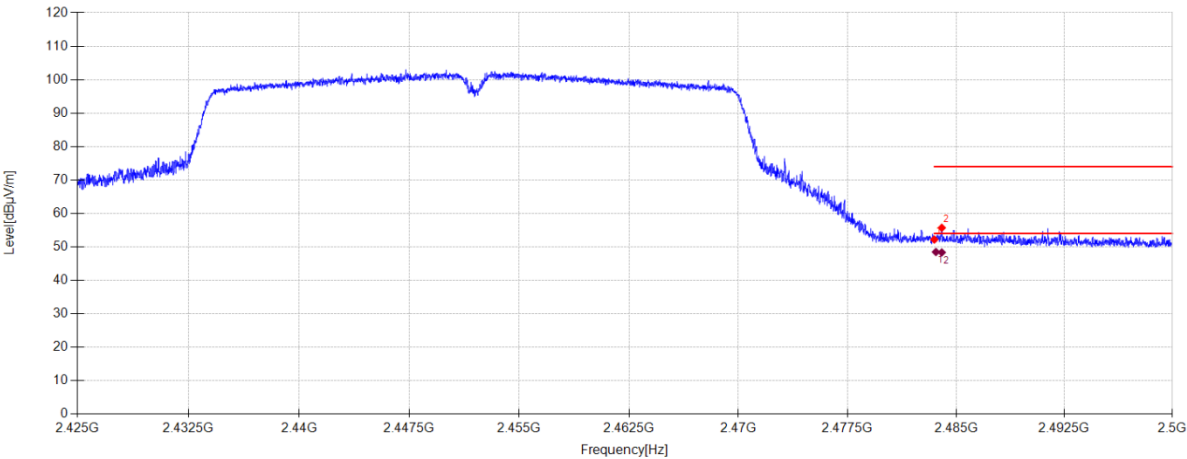

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.77	27.54	4.89	0.00	52.20	74.00	21.80	PK	Vertical
2	2484.018	23.28	27.54	4.89	0.00	55.71	74.00	18.29	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.612	16.05	27.54	4.89	48.48	54.00	5.52	AV	Vertical	
2	2484.018	15.91	27.54	4.89	48.34	54.00	5.66	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\67

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

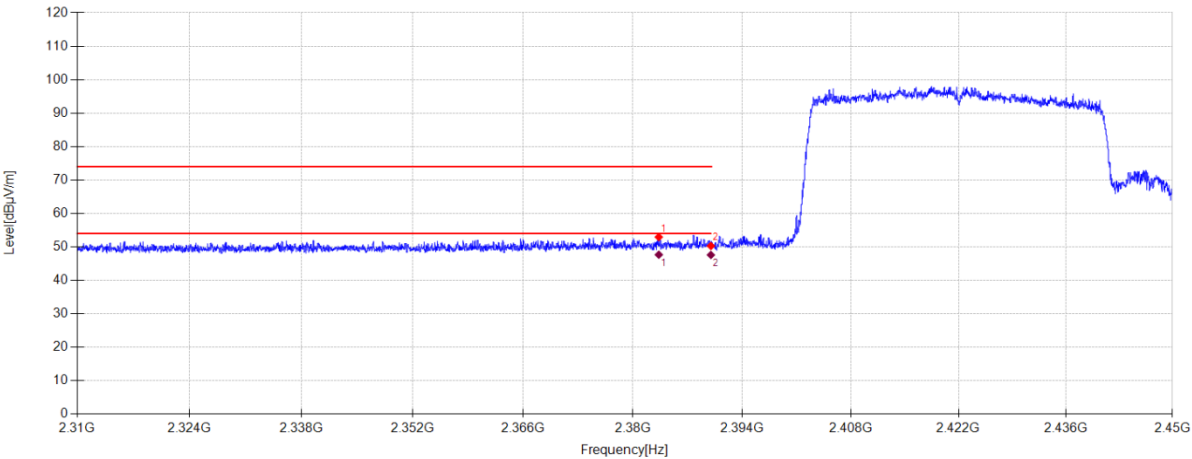

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.318	20.61	27.50	4.83	0.00	52.94	74.00	21.06	PK	Horizontal
2	2390.000	17.98	27.46	4.84	0.00	50.28	74.00	23.72	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2383.318	15.33	27.50	4.83	47.66	54.00	6.34	AV	Horizontal	
2	2390.000	15.29	27.46	4.84	47.59	54.00	6.41	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\68

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

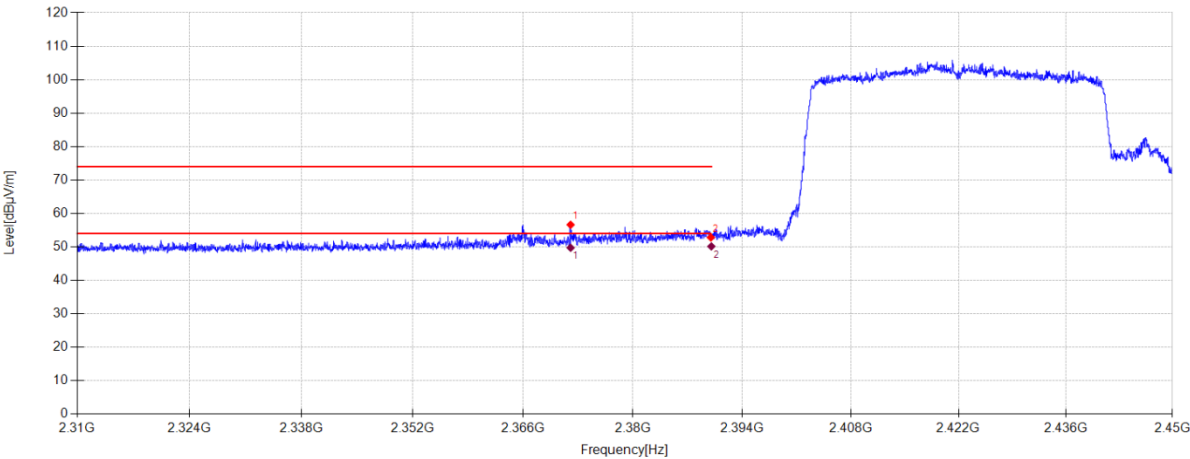

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.048	24.23	27.57	4.82	0.00	56.62	74.00	17.38	PK	Vertical
2	2390.000	20.52	27.46	4.84	0.00	52.82	74.00	21.18	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2372.048	17.35	27.57	4.82	49.74	54.00	4.26	AV	Vertical	
2	2390.058	17.85	27.46	4.84	50.15	54.0	3.85	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\65

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

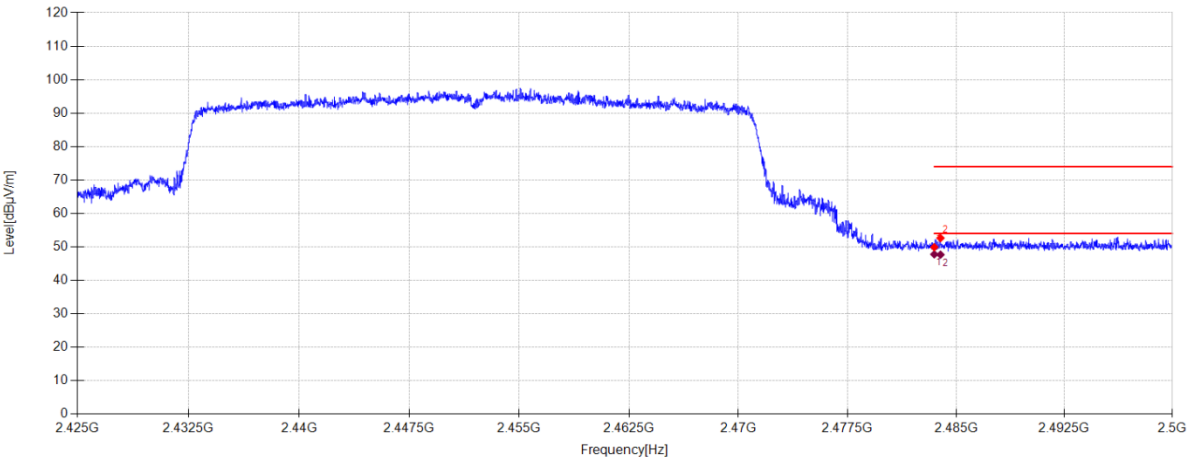

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.48	27.54	4.89	0.00	49.91	74.00	24.09	PK	Horizontal
2	2483.928	20.20	27.54	4.89	0.00	52.63	74.00	21.37	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.35	27.54	4.89	47.78	54.00	6.22	AV	Horizontal	
2	2483.928	15.24	27.54	4.89	47.67	54.00	6.33	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-15

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX AX40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\66

Memo:

Sample Numbler:S25081330-003 Power Setting:11.5

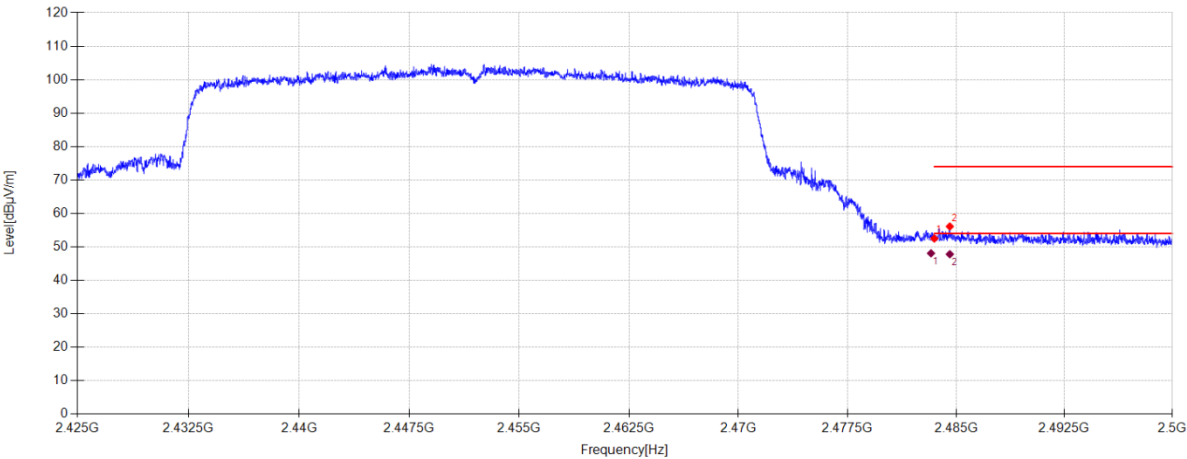

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.08	27.54	4.89	0.00	52.51	74.00	21.49	PK	Vertical
2	2484.573	23.66	27.55	4.90	0.00	56.11	74.00	17.89	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.274	15.66	27.54	4.89	48.09	54.00	5.91	AV	Vertical	
2	2484.573	15.36	27.55	4.90	47.81	54.00	6.19	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\72

Memo:

Sample Numble:S25081330-003 Power Setting:13

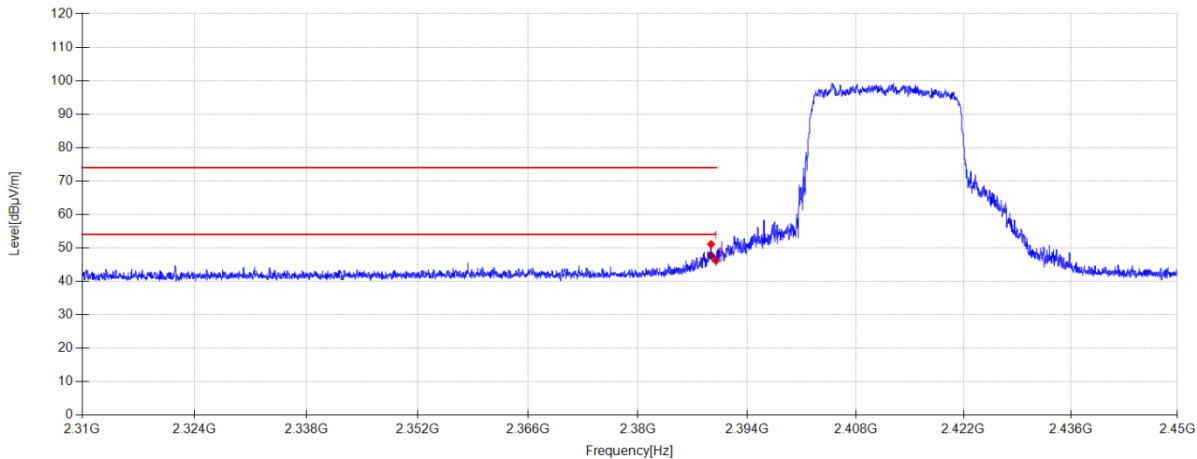

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.380	19.86	27.46	3.77	0.00	51.09	74.00	22.91	PK	Horizontal
2	2390.000	14.97	27.46	3.78	0.00	46.21	74.00	27.79	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2389.380	16.51	27.46	3.77	47.74	54.00	6.26	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE20 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\73

Memo:

Sample Numbler:S25081330-003 Power Setting:13

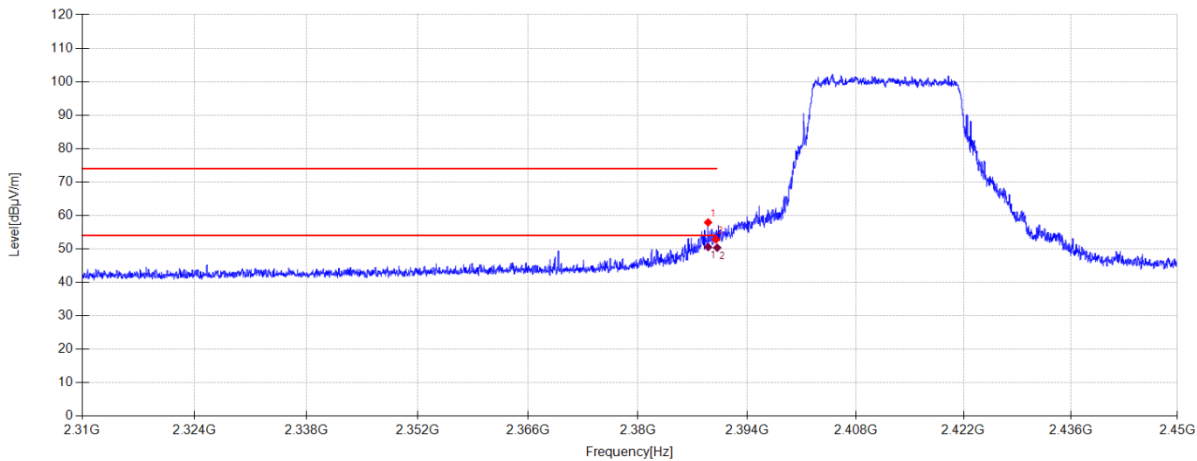

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.002	26.68	27.47	3.77	0.00	57.92	74.00	16.08	PK	Vertical
2	2390.000	21.58	27.46	3.78	0.00	52.82	74.00	21.18	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2389.002	19.30	27.47	3.77	50.54	54.00	3.46	AV	Vertical	
2	2390.168	19.12	27.46	3.78	50.36	54.00	3.64	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\74

Memo:

Sample Numbler:S25081330-003 Power Setting:13

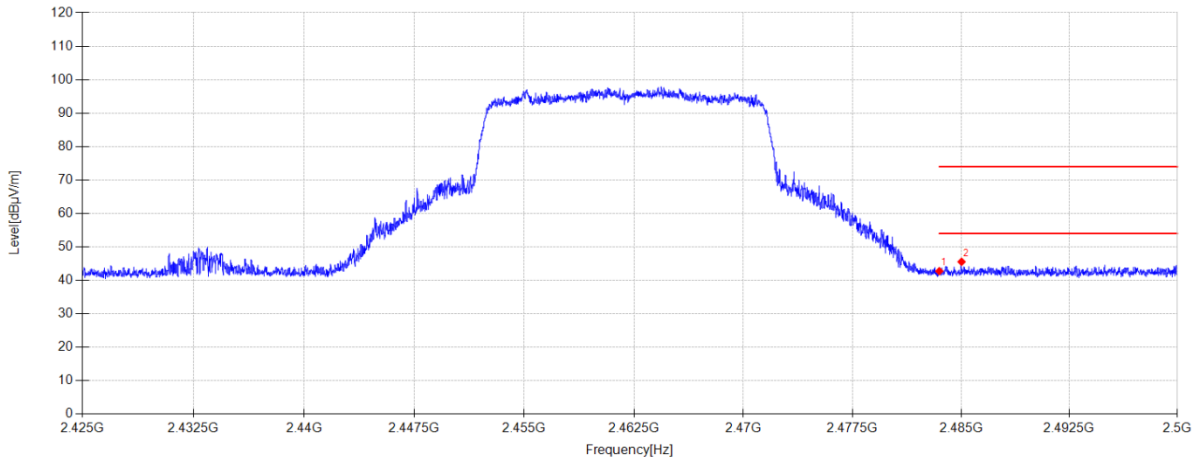

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.33	27.54	3.88	0.00	42.75	74.00	31.25	PK	Horizontal
2	2485.038	14.12	27.55	3.88	0.00	45.55	74.00	28.45	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE20 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\75

Memo:

Sample Numbler:S25081330-003 Power Setting:13

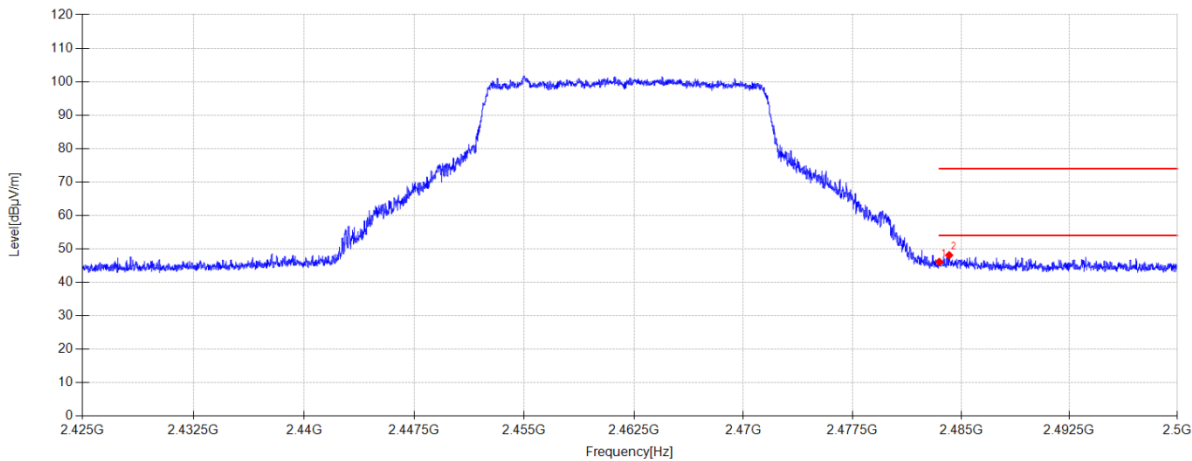

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	14.69	27.54	3.88	0.00	46.11	74.00	27.89	PK	Vertical
2	2484.183	16.69	27.54	3.88	0.00	48.11	74.00	25.89	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\76

Memo:

Sample Numbler:S25081330-003 Power Setting:13

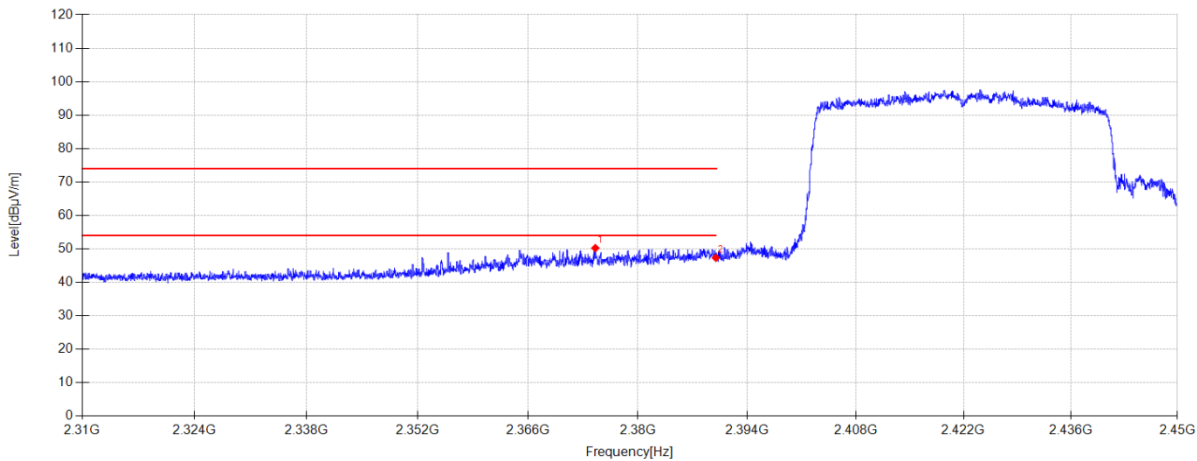

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2374.568	18.93	27.55	3.76	0.00	50.24	74.00	23.76	PK	Horizontal
2	2390.000	16.10	27.46	3.78	0.00	47.34	74.00	26.66	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE40 2422MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\77

Memo:

Sample Numbler:S25081330-003 Power Setting:13

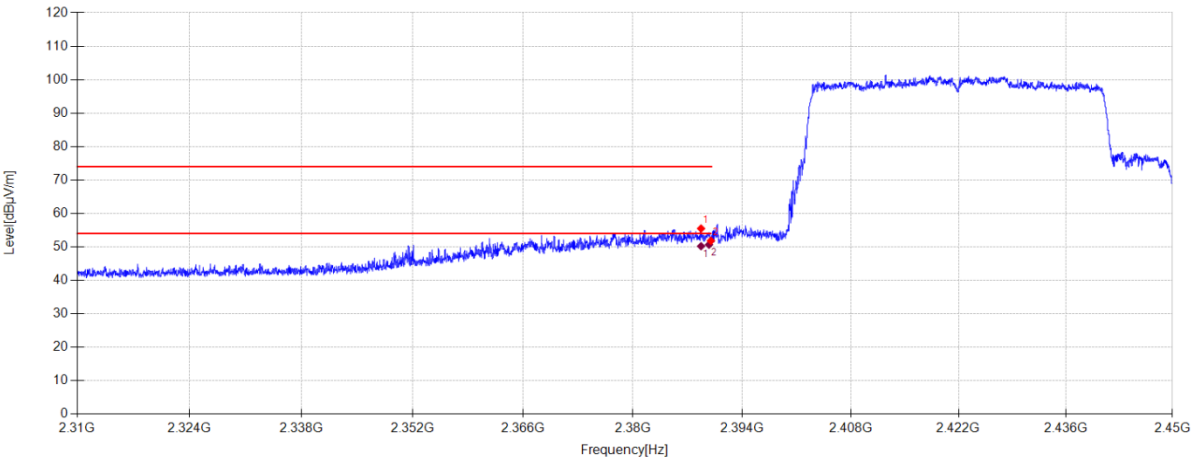

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.736	24.25	27.47	3.77	0.00	55.49	74.00	18.51	PK	Vertical
2	2390.000	20.59	27.46	3.78	0.00	51.83	74.00	22.17	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2388.736	18.97	27.47	3.77	50.21	54.00	3.79	AV	Vertical	
2	2389.754	19.42	27.46	3.78	50.66	54.00	3.34	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\78

Memo:

Sample Numbler:S25081330-003 Power Setting:13

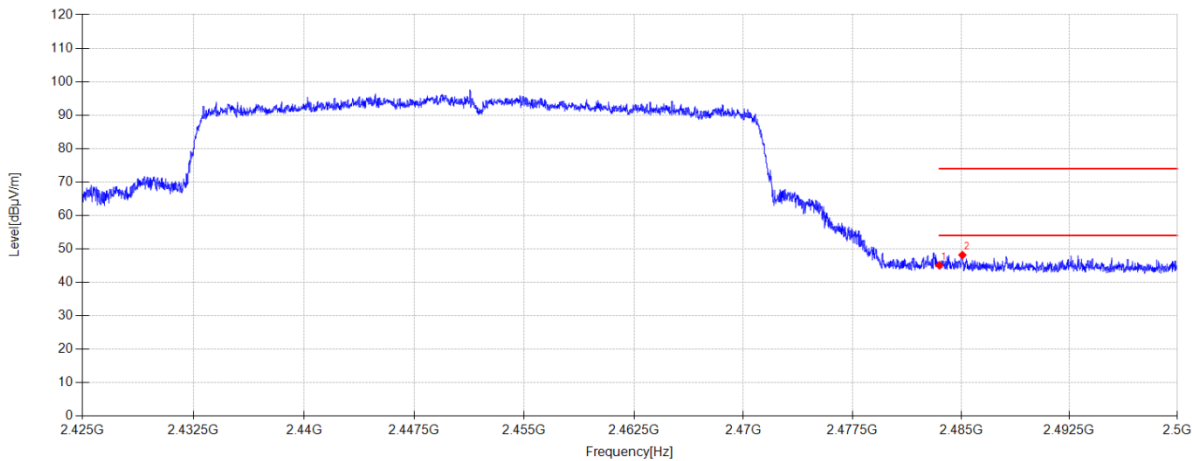

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	13.69	27.54	3.88	0.00	45.11	74.00	28.89	PK	Horizontal
2	2485.098	16.74	27.55	3.88	0.00	48.17	74.00	25.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-16

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX BE40 2452MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G\79

Memo:

Sample Numbler:S25081330-003 Power Setting:13

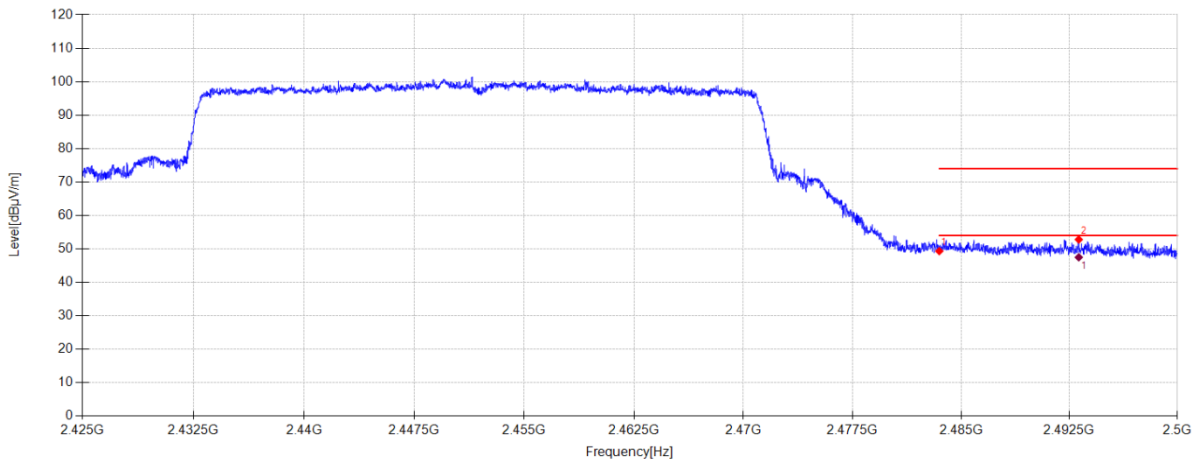

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.91	27.54	3.88	0.00	49.33	74.00	24.67	PK	Vertical
2	2493.153	21.28	27.63	3.89	0.00	52.80	74.00	21.20	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2493.153	15.96	27.63	3.89	47.48	54.00	6.52	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 2412MHz
52+26-tone MRU1 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\1

Memo:

Sample Numbler:S25081330-003 Power Setting:15

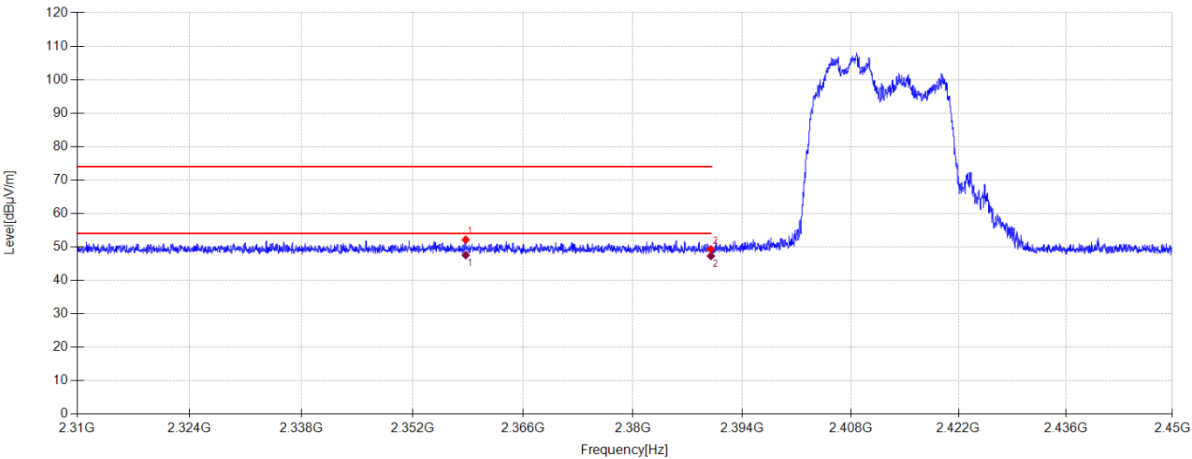

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2358.720	20.05	27.65	4.44	0.00	52.14	74.00	21.86	PK	Horizontal
2	2390.000	17.39	27.46	4.43	0.00	49.28	74.00	24.72	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2358.720	15.41	27.65	4.44	47.50	54.00	6.50	AV	Horizontal	
2	2390.000	15.37	27.46	4.43	47.26	54.00	6.74	AV	Horizontal	


- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2536
Test Mode: MIMO TX 11BE20 2412MHz 52+26-tone MRU1 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\2
Memo: Sample Numbler:S25081330-003 Power Setting:15

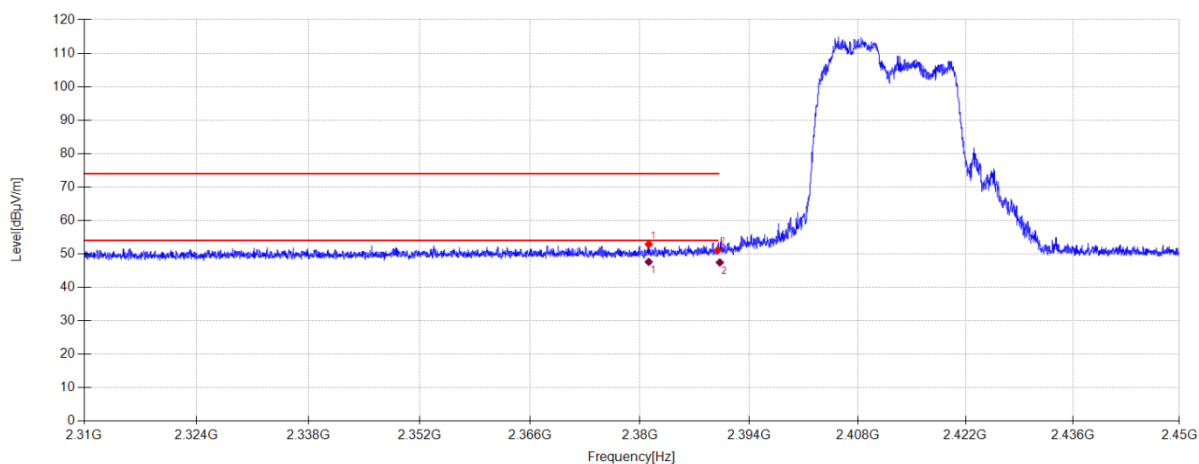**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.134	20.94	27.51	4.43	0.00	52.88	74.00	21.12	PK	Vertical
2	2390.000	19.26	27.46	4.43	0.00	51.15	74.00	22.85	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.134	15.67	27.51	4.43	47.61	54.00	6.39	AV	Vertical
2	2390.250	15.54	27.46	4.43	47.43	54.0	6.57	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 2462MHz
52+26-tone MRU3 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\3

Memo:

Sample Numbler:S25081330-003 Power Setting:15

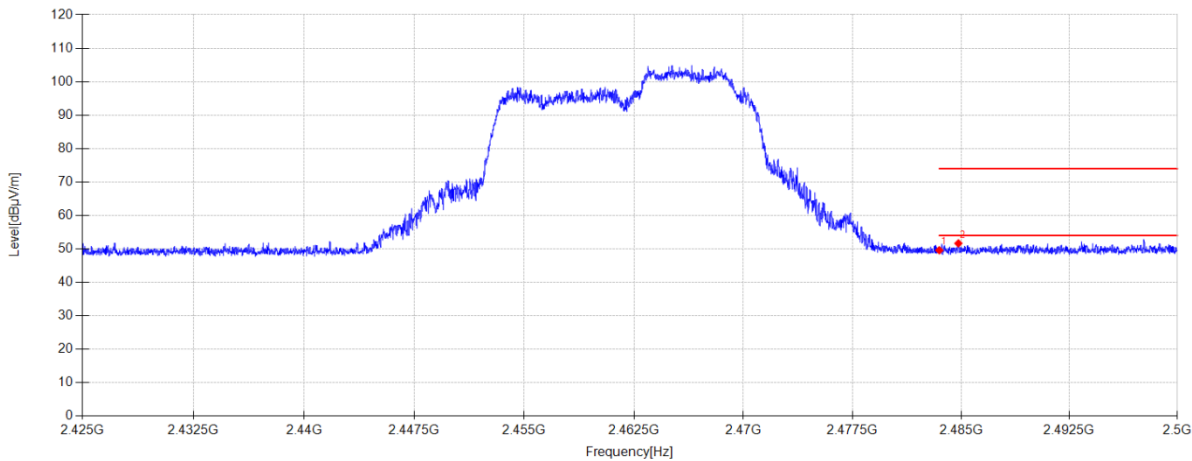

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.65	27.54	4.40	0.00	49.59	74.00	24.41	PK	Horizontal
2	2484.820	19.72	27.55	4.39	0.00	51.66	74.00	22.34	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 2462MHz
52+26-tone MRU3 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\4

Memo:

Sample Numbler:S25081330-003 Power Setting:15

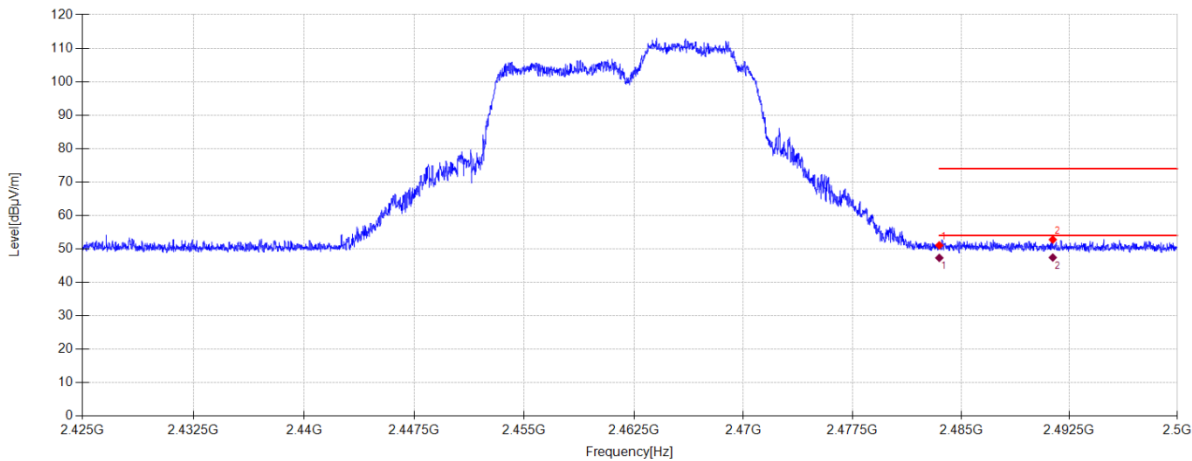

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.13	27.54	4.40	0.00	51.07	74.00	22.93	PK	Vertical
2	2491.353	20.77	27.61	4.39	0.00	52.77	74.00	21.23	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.37	27.54	4.40	47.31	54.00	6.69	AV	Vertical	
2	2491.353	15.42	27.61	4.39	47.42	54.00	6.58	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 2422MHz
106+26-tone MRU1 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\11

Memo:

Sample Numbler:S25081330-003 Power Setting:15

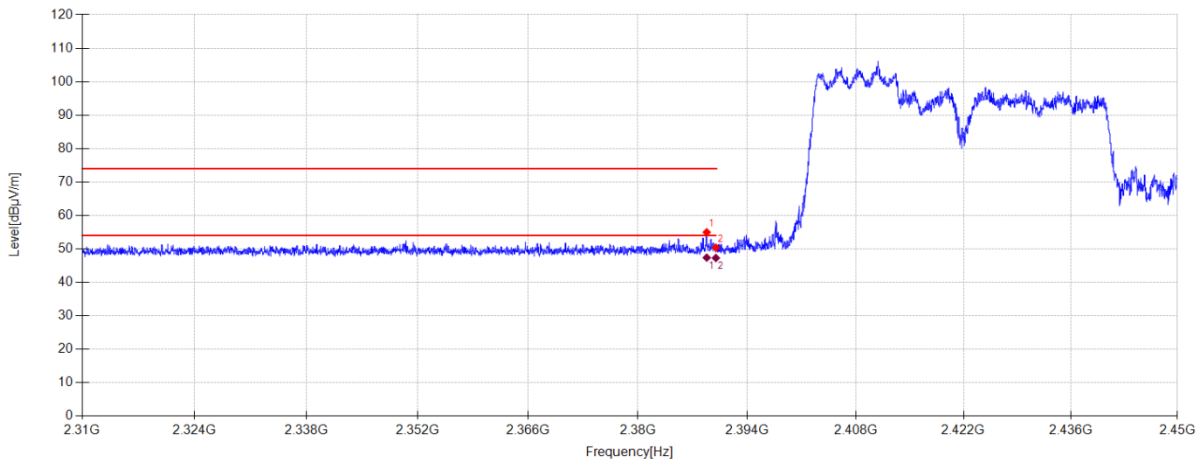

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.820	23.08	27.47	4.43	0.00	54.98	74.00	19.02	PK	Horizontal
2	2390.000	18.48	27.46	4.43	0.00	50.37	74.00	23.63	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2388.820	15.48	27.47	4.43	47.38	54.00	6.62	AV	Horizontal	
2	2390.000	15.39	27.46	4.43	47.28	54.00	6.72	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 2422MHz
106+26-tone MRU1 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\12

Memo:

Sample Numbler:S25081330-003 Power Setting:15

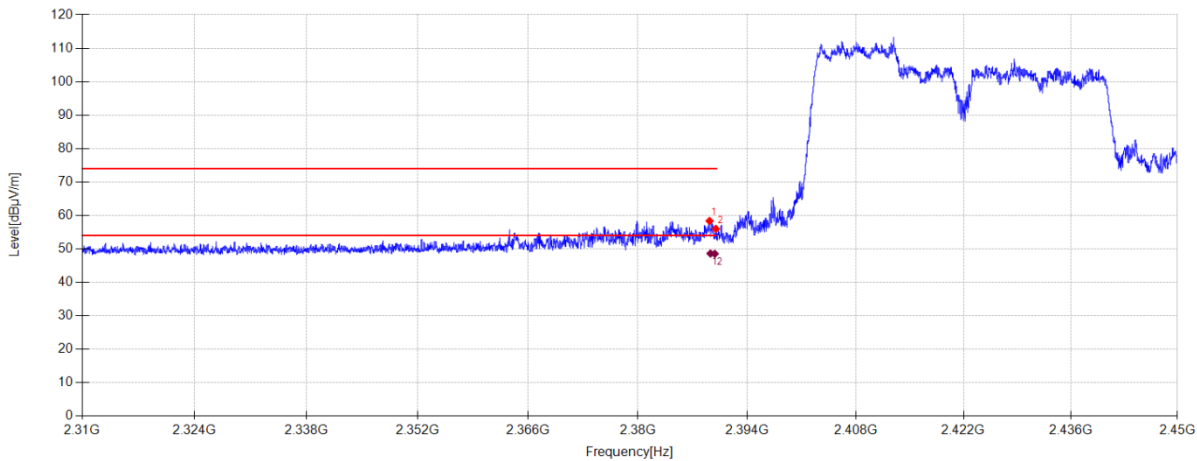

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.184	26.46	27.46	4.43	0.00	58.35	74.00	15.65	PK	Vertical
2	2390.000	24.10	27.46	4.43	0.00	55.99	74.00	18.01	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2389.301	16.73	27.46	4.43	48.62	54.00	5.38	AV	Vertical	
2	2389.856	16.63	27.46	4.43	48.52	54.00	5.48	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Nan Zhong
EUT: Wireless Access Point **Model Number:** L2536
Test Mode: MIMO TX 11BE40 2452MHz
106+26-tone MRU4 Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.8°C;Humi:54.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\9
Memo: Sample Numbler:S25081330-003 Power Setting:15

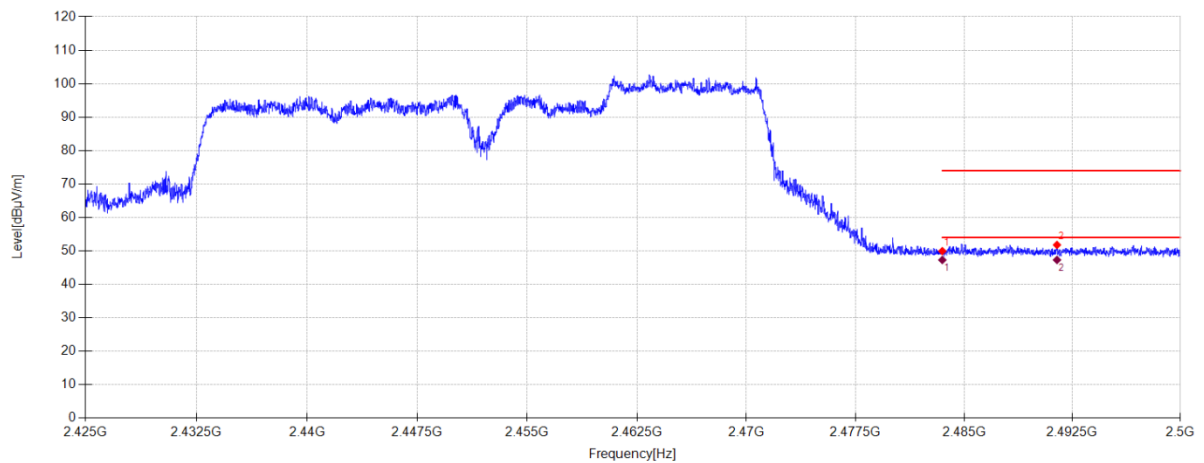

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.99	27.54	4.40	0.00	49.93	74.00	24.07	PK	Horizontal
2	2491.435	19.78	27.61	4.39	0.00	51.78	74.00	22.22	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.34	27.54	4.40	47.28	54.00	6.72	AV	Horizontal
2	2491.435	15.29	27.61	4.39	47.29	54.00	6.71	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 2452MHz
106+26-tone MRU4 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 2.4G MRU\10

Memo:

Sample Numbler:S25081330-003 Power Setting:15

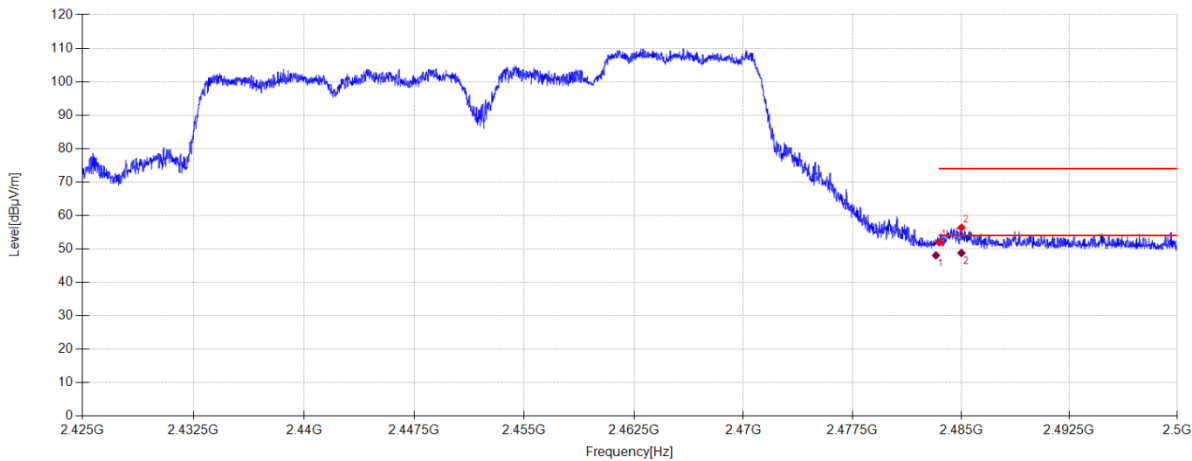

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.97	27.54	4.40	0.00	51.91	74.00	22.09	PK	Vertical
2	2485.030	24.41	27.55	4.39	0.00	56.35	74.00	17.65	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.270	16.11	27.54	4.40	48.05	53.99	5.94	AV	Vertical	
2	2485.030	16.83	27.55	4.39	48.77	54.00	5.23	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
EMI Test Software	Audix	e3	DDT-ZC01252	/

14.2. Block diagram of test setup

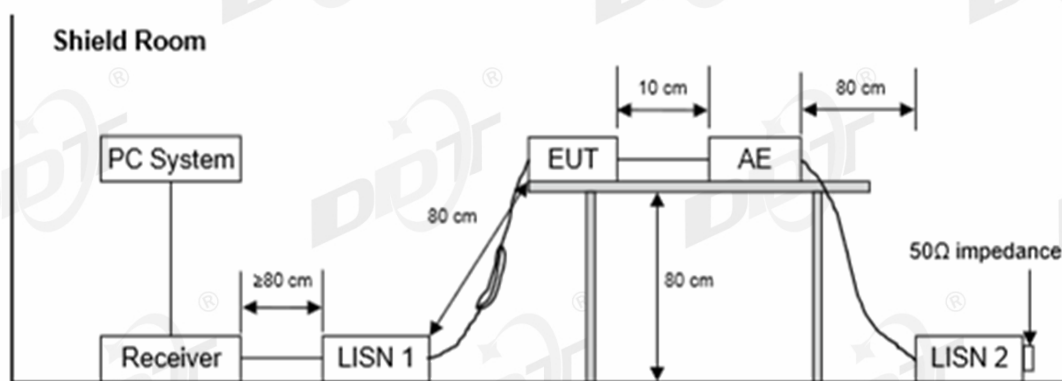

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25081330-1E\1120 CE.EM6
Test Date : 2025-11-20 Tested By : Alex Liu
EUT : Wireless Access Point Model Number : L2536
Power Supply : 120V/60Hz Test Mode : 2.4G Mode
Condition : TEMP:23.4°C, RH:61.2% LISN : 2025 1# 216/LINE
Memo : S25081330-001 (AC/DC ADAPTER)

Data: 2

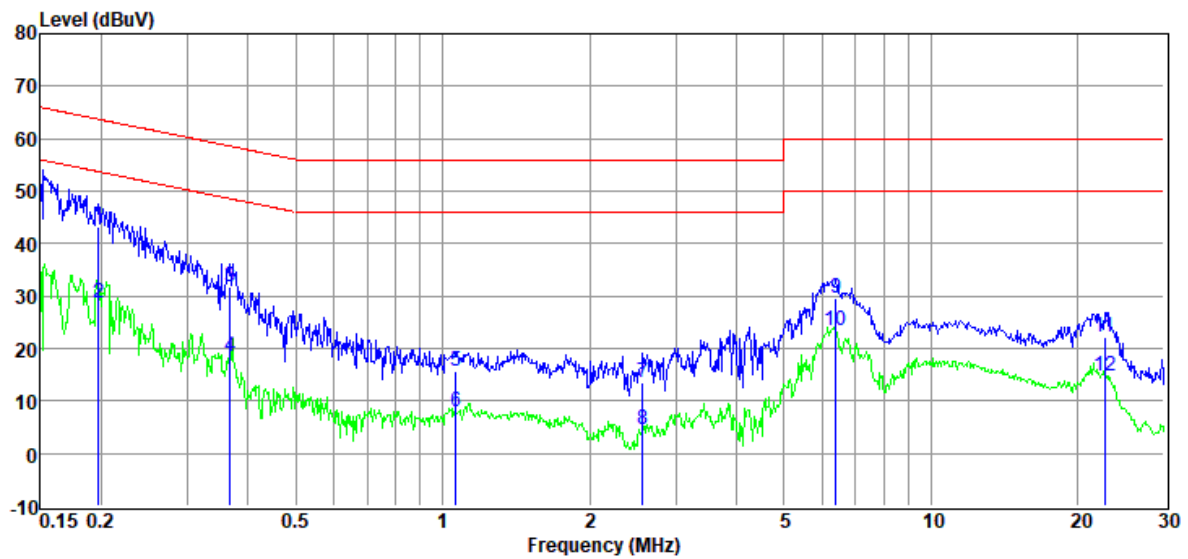

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	23.48	9.82	0.06	9.89	43.25	63.71	20.46	QP	LINE
2	0.20	8.86	9.82	0.06	9.89	28.63	53.71	25.08	Average	LINE
3	0.37	12.27	9.67	0.07	9.89	31.90	58.56	26.66	QP	LINE
4	0.37	-1.27	9.67	0.07	9.89	18.36	48.56	30.20	Average	LINE
5	1.07	-4.23	9.95	0.15	9.90	15.77	56.00	40.23	QP	LINE
6	1.07	-11.99	9.95	0.15	9.90	8.01	46.00	37.99	Average	LINE
7	2.57	-6.46	9.87	0.17	9.88	13.46	56.00	42.54	QP	LINE
8	2.57	-15.26	9.87	0.17	9.88	4.66	46.00	41.34	Average	LINE
9	6.39	9.72	9.93	0.21	9.85	29.71	60.00	30.29	QP	LINE
10	6.39	3.32	9.93	0.21	9.85	23.31	50.00	26.69	Average	LINE
11	22.66	1.25	10.41	0.42	9.96	22.04	60.00	37.96	QP	LINE
12	22.66	-5.93	10.41	0.42	9.96	14.86	50.00	35.14	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25081330-1E\1120 CE.EM6
Test Date : 2025-11-20 Tested By : Alex Liu
EUT : Wireless Access Point Model Number : L2536
Power Supply : 120V/60Hz Test Mode : 2.4G Mode
Condition : TEMP:23.4°C, RH:61.2% LISN : 2025 1# 216/NEUTRAL
Memo : S25081330-001 (AC/DC ADAPTER)

Data: 4

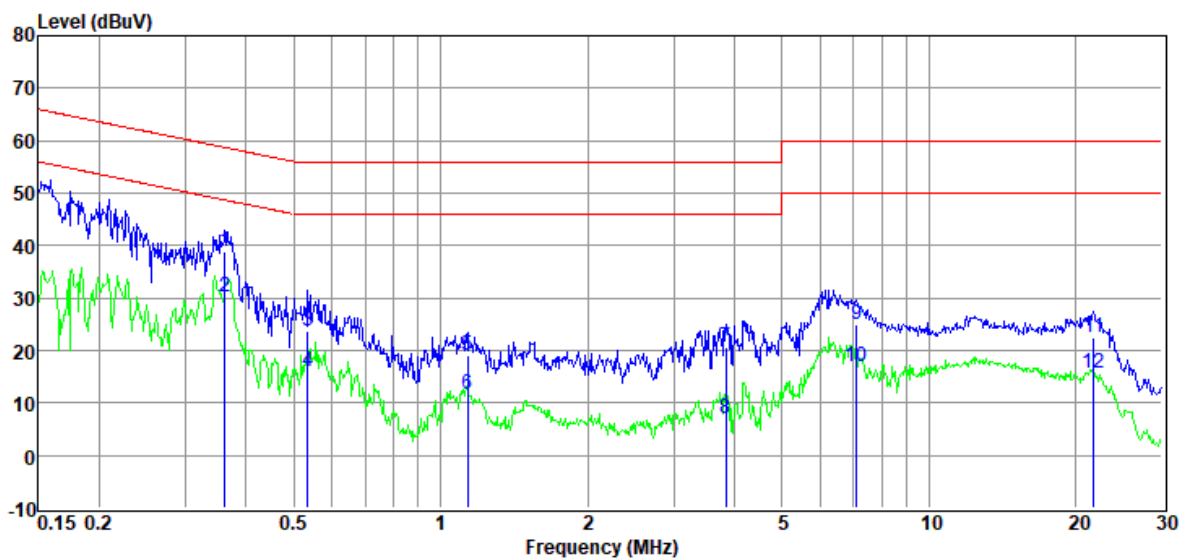

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.36	19.08	9.89	0.07	9.89	38.93	58.69	19.76	QP	NEUTRAL
2	0.36	10.21	9.89	0.07	9.89	30.06	48.69	18.63	Average	NEUTRAL
3	0.53	3.88	9.90	0.10	9.89	23.77	56.00	32.23	QP	NEUTRAL
4	0.53	-3.91	9.90	0.10	9.89	15.98	46.00	30.02	Average	NEUTRAL
5	1.14	-0.93	9.91	0.15	9.90	19.03	56.00	36.97	QP	NEUTRAL
6	1.14	-8.28	9.91	0.15	9.90	11.68	46.00	34.32	Average	NEUTRAL
7	3.84	0.76	9.86	0.18	9.87	20.67	56.00	35.33	QP	NEUTRAL
8	3.84	-13.05	9.86	0.18	9.87	6.86	46.00	39.14	Average	NEUTRAL
9	7.10	4.93	9.87	0.23	9.84	24.87	60.00	35.13	QP	NEUTRAL
10	7.10	-2.90	9.87	0.23	9.84	17.04	50.00	32.96	Average	NEUTRAL
11	21.72	1.59	10.57	0.41	9.96	22.53	60.00	37.47	QP	NEUTRAL
12	21.72	-5.36	10.57	0.41	9.96	15.58	50.00	34.42	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25081330-1E\1120 CE.EM6**
Test Date : 2025-11-20 **Tested By** : Alex Liu
EUT : Wireless Access Point **Model Number** : L2536
Power Supply : 120V/60Hz **Test Mode** : 2.4G Mode
Condition : TEMP:23.4°C, RH:61.2% **LISN** : 2025 1# 216/NEUTRAL
Memo : S25081330-001 (POE ADAPTER)

Data: 22

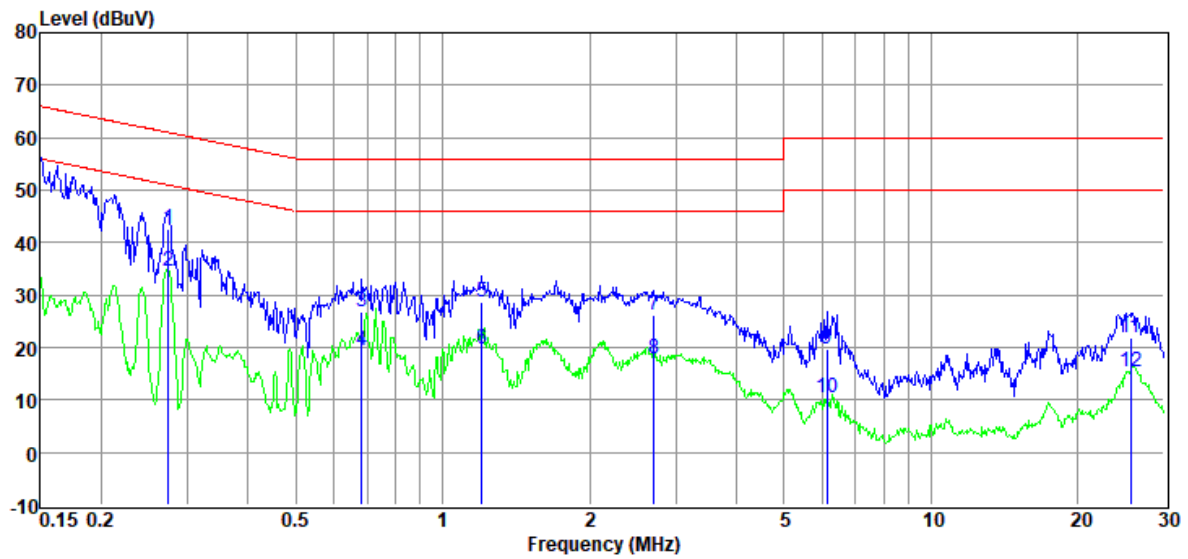

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.27	22.90	9.74	0.06	9.89	42.59	60.98	18.39	QP	NEUTRAL
2	0.27	14.86	9.74	0.06	9.89	34.55	50.98	16.43	Average	NEUTRAL
3	0.68	6.77	9.92	0.12	9.89	26.70	56.00	29.30	QP	NEUTRAL
4	0.68	-0.62	9.92	0.12	9.89	19.31	46.00	26.69	Average	NEUTRAL
5	1.20	8.64	9.89	0.15	9.90	28.58	56.00	27.42	QP	NEUTRAL
6	1.20	-0.23	9.89	0.15	9.90	19.71	46.00	26.29	Average	NEUTRAL
7	2.71	6.48	9.81	0.17	9.88	26.34	56.00	29.66	QP	NEUTRAL
8	2.71	-1.94	9.81	0.17	9.88	17.92	46.00	28.08	Average	NEUTRAL
9	6.12	-0.22	9.86	0.21	9.85	19.70	60.00	40.30	QP	NEUTRAL
10	6.12	-9.58	9.86	0.21	9.85	10.34	50.00	39.66	Average	NEUTRAL
11	25.59	0.67	10.71	0.42	9.97	21.77	60.00	38.23	QP	NEUTRAL
12	25.59	-5.66	10.71	0.42	9.97	15.44	50.00	34.56	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-11-20
EUT : Wireless Access Point
Power Supply : 120V/60Hz
Condition : TEMP:23.4°C, RH:61.2%
Memo : S25081330-001 (POE ADAPTER)

D:\2025 CE report data\Q25081330-1E\1120 CE.EM6
Tested By : Alex Liu
Model Number : L2536
Test Mode : 2.4G Mode
LISN : 2025 1# 216/LINE

Data: 24

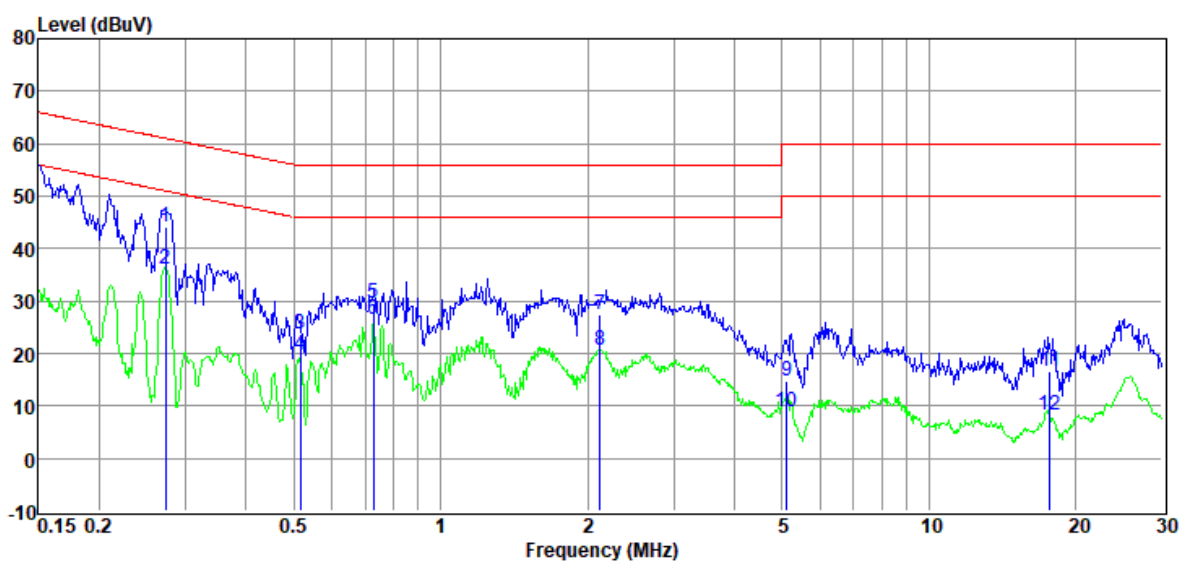

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.27	24.45	9.76	0.06	9.89	44.16	61.03	16.87	QP	LINE
2	0.27	16.38	9.76	0.06	9.89	36.09	51.03	14.94	Average	LINE
3	0.52	3.78	9.80	0.09	9.89	23.56	56.00	32.44	QP	LINE
4	0.52	-0.05	9.80	0.09	9.89	19.73	46.00	26.27	Average	LINE
5	0.73	9.60	9.88	0.12	9.90	29.50	56.00	26.50	QP	LINE
6	0.73	6.65	9.88	0.12	9.90	26.55	46.00	19.45	Average	LINE
7	2.12	7.69	9.81	0.17	9.89	27.56	56.00	28.44	QP	LINE
8	2.12	0.68	9.81	0.17	9.89	20.55	46.00	25.45	Average	LINE
9	5.11	-5.29	9.96	0.19	9.86	14.72	60.00	45.28	QP	LINE
10	5.11	-11.28	9.96	0.19	9.86	8.73	50.00	41.27	Average	LINE
11	17.66	-4.18	10.36	0.38	9.93	16.49	60.00	43.51	QP	LINE
12	17.66	-12.33	10.36	0.38	9.93	8.34	50.00	41.66	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q25081330-1E appendix I

-----End Report-----