

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 5500MHz
RU38+RU1 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU7

Memo:

Sample Numbler:S25081330-003 Power Setting:17

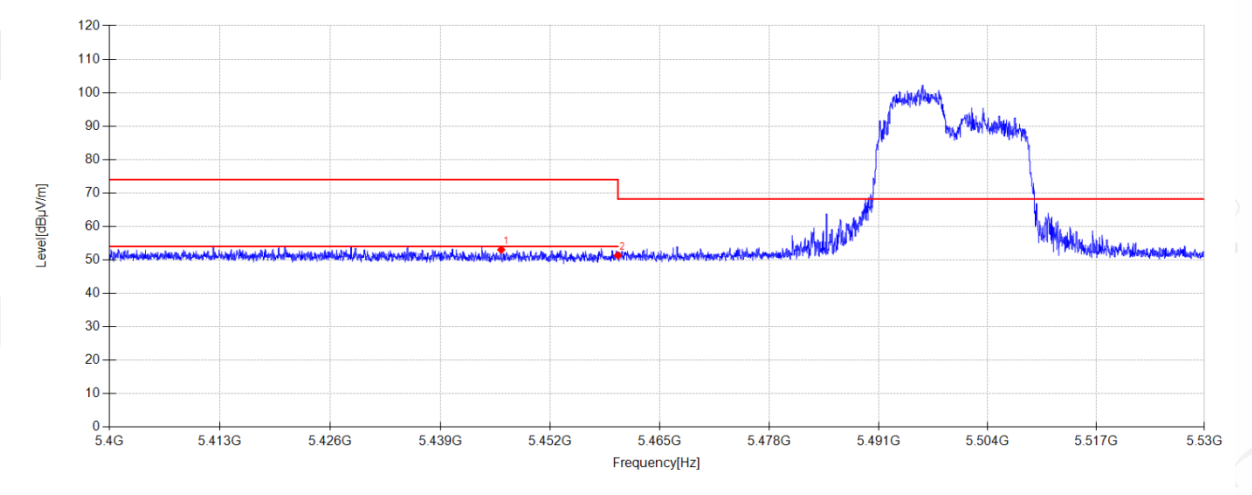

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.176	44.72	32.81	5.22	-29.71	53.04	74.00	20.96	PK	Horizontal
2	5460.000	42.93	32.90	5.23	-29.71	51.35	68.20	16.85	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 5500MHz
RU38+RU1 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\8

Memo:

Sample Numbel:S25081330-003 Power Setting:17

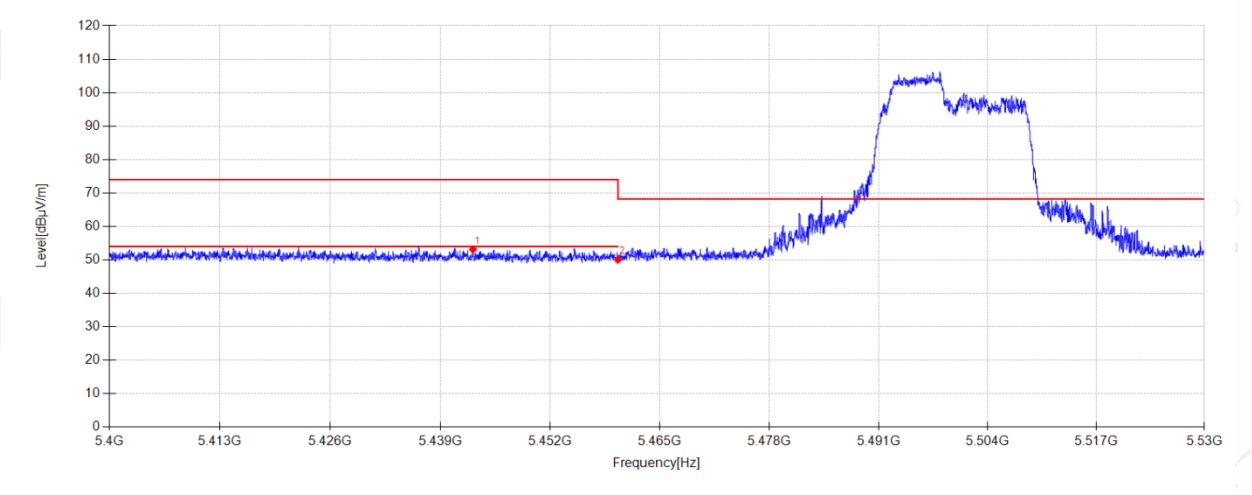

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.835	44.83	32.81	5.22	-29.71	53.15	74.00	20.85	PK	Vertical
2	5460.000	41.64	32.90	5.23	-29.71	50.06	68.20	18.14	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 5700MHz
RU39+RU7 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\9

Memo:

Sample Numbel:S25081330-003 Power Setting:17

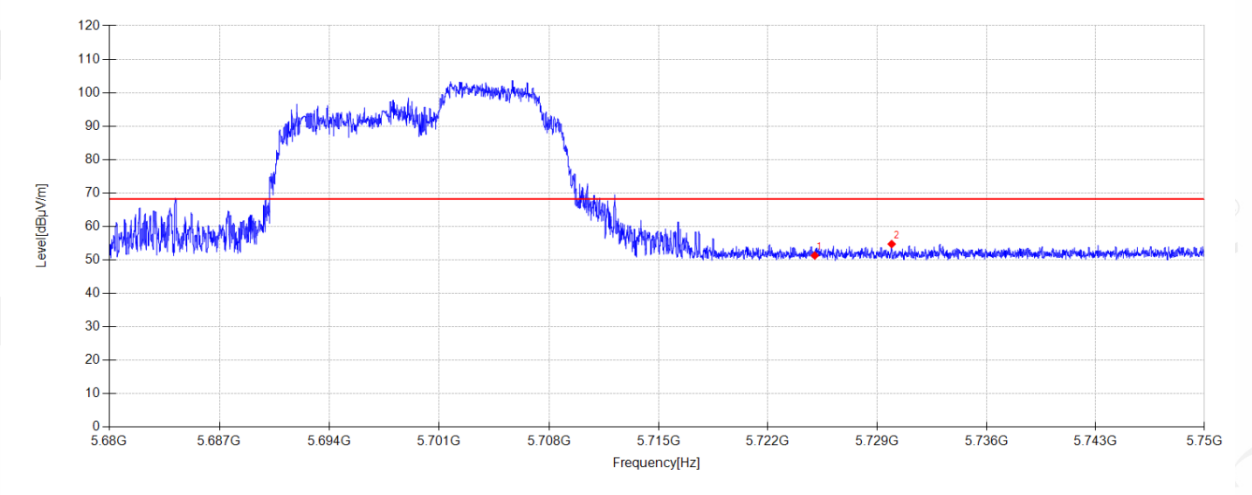

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.16	33.45	5.35	-29.65	51.31	68.20	16.89	PK	Horizontal
2	5729.924	45.52	33.52	5.35	-29.65	54.74	68.20	13.46	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE20 5700MHz
RU39+RU7 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU10

Memo:

Sample Numbler:S25081330-003 Power Setting:17

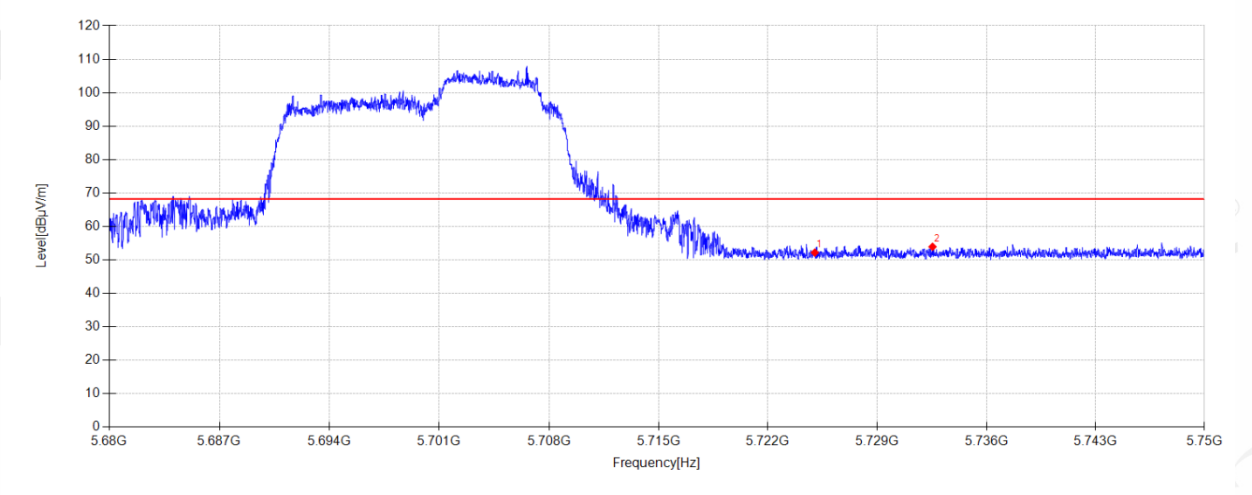

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.03	33.45	5.35	-29.65	52.18	68.20	16.02	PK	Vertical
2	5732.542	44.66	33.56	5.35	-29.65	53.92	68.20	14.28	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5190MHz
RU53+RU4 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\17

Memo:

Sample Numbel:S25081330-003 Power Setting:17

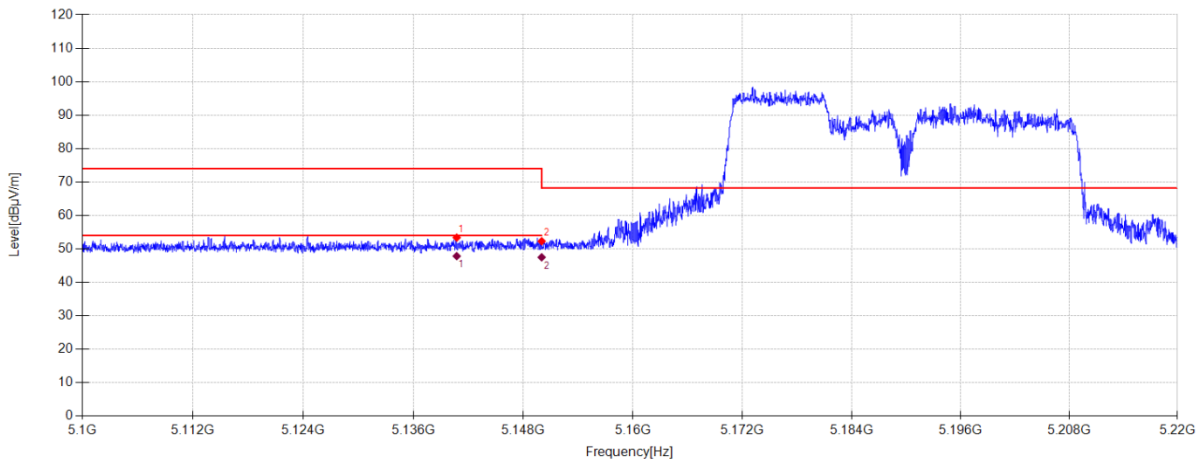

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.716	45.23	32.83	5.08	-29.77	53.37	74.00	20.63	PK	Horizontal
2	5150.000	44.07	32.90	5.09	-29.77	52.29	68.20	15.91	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5140.716	39.69	32.83	5.08	47.83	54.0	6.17	AV	Horizontal	
2	5150.000	39.26	32.90	5.09	47.48	54.0	6.52	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5190MHz
RU53+RU4 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU18

Memo:

Sample Numbel:S25081330-003 Power Setting:17

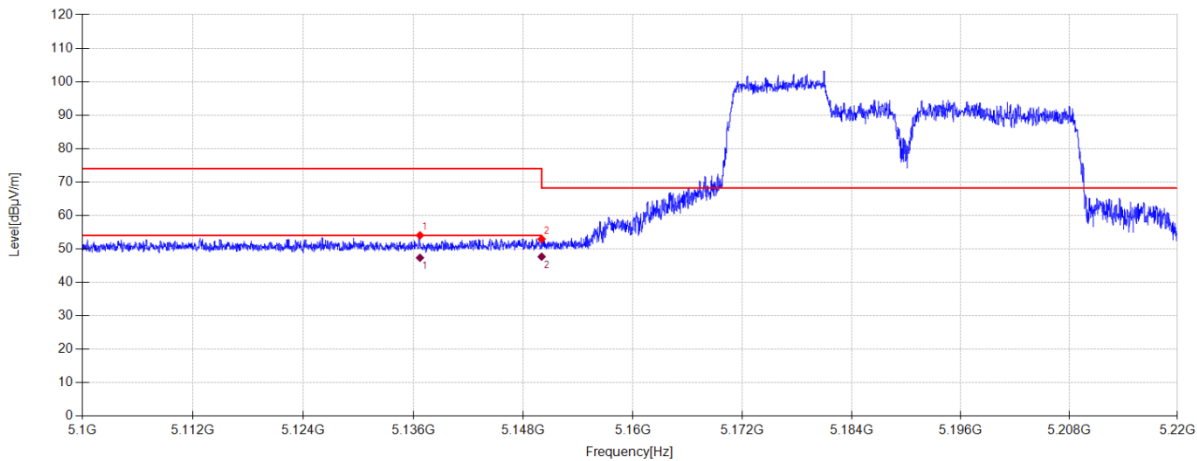

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.708	45.96	32.79	5.08	-29.77	54.06	74.00	19.94	PK	Vertical
2	5150.000	44.72	32.90	5.09	-29.77	52.94	68.20	15.26	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5136.708	39.24	32.79	5.08	47.34	54.0	6.66	AV	Vertical	
2	5150.000	39.45	32.90	5.09	47.67	54.0	6.33	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5310MHz
RU56+RU13 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU15

Memo:

Sample Numbler:S25081330-003 Power Setting:17

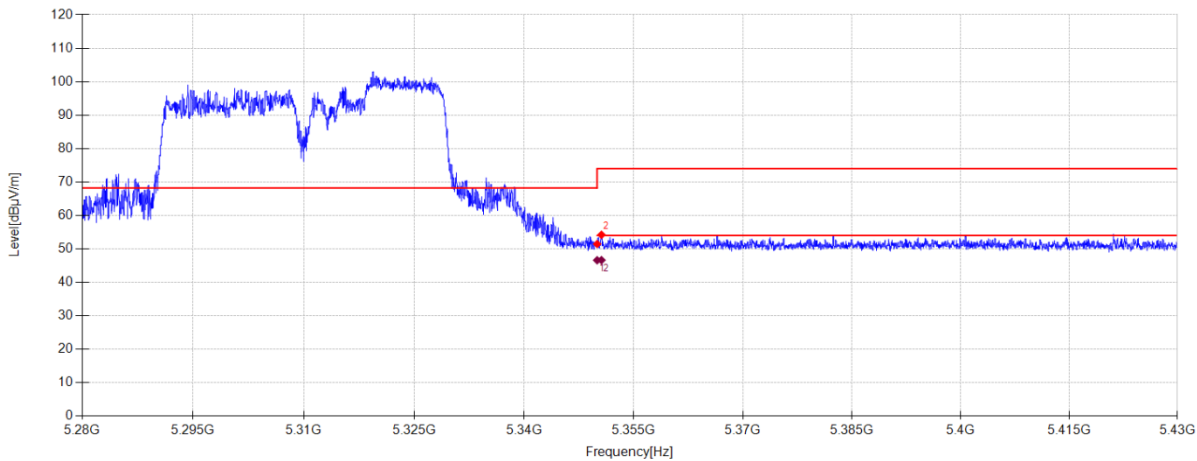

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.51	32.50	5.18	-29.73	51.46	68.20	16.74	PK	Horizontal
2	5350.590	46.27	32.50	5.18	-29.73	54.22	74.00	19.78	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.66	32.50	5.18	46.61	54.0	7.39	AV	Horizontal	
2	5350.590	38.69	32.50	5.18	46.64	54.0	7.36	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5310MHz
RU56+RU13 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU16

Memo:

Sample Numbel:S25081330-003 Power Setting:17

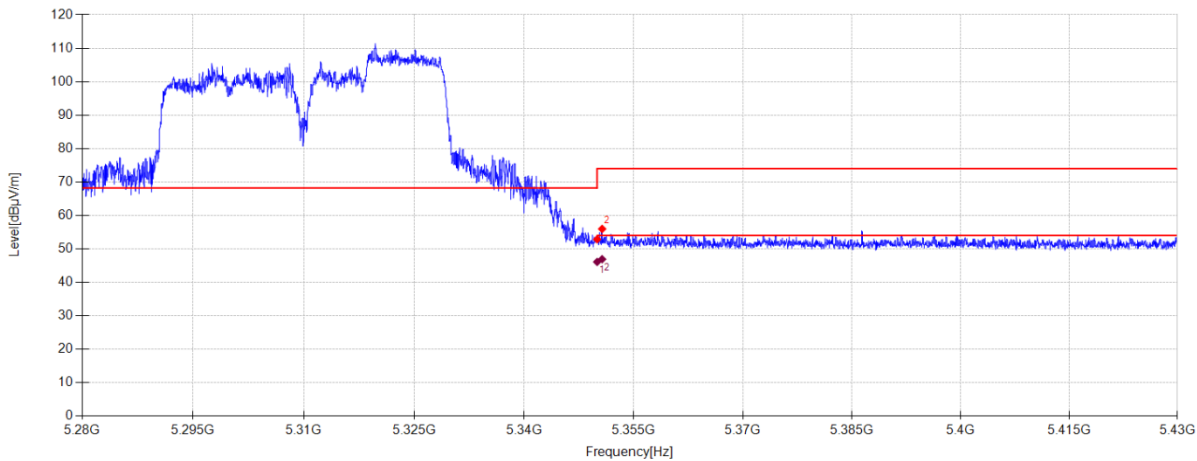

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.91	32.50	5.18	-29.73	52.86	68.20	15.34	PK	Vertical
2	5350.680	48.01	32.51	5.18	-29.73	55.97	74.00	18.03	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.16	32.50	5.18	46.11	54.0	7.89	AV	Vertical	
2	5350.680	38.96	32.51	5.18	46.92	54.0	7.08	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5510MHz
RU53+RU4 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\13

Memo:

Sample Numbel:S25081330-003 Power Setting:17

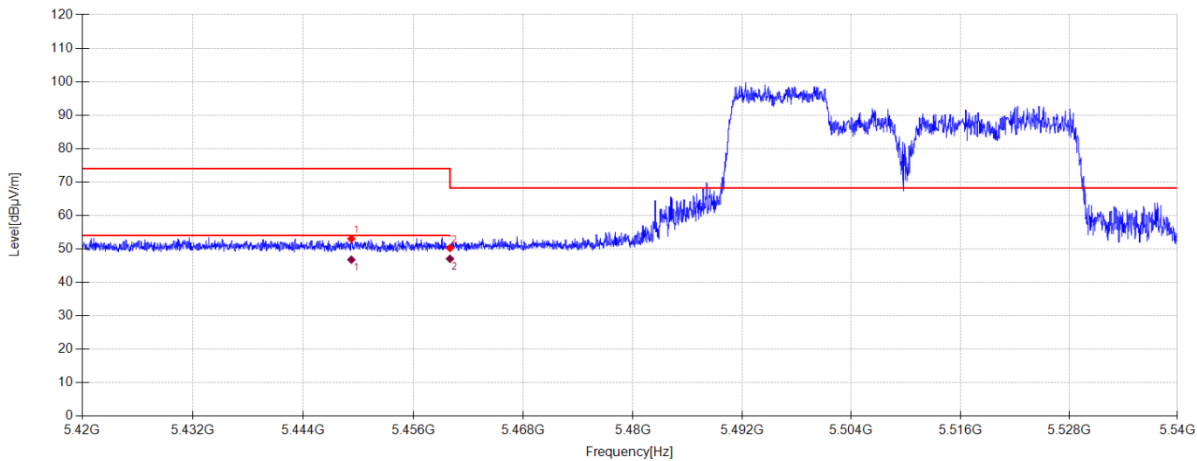

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5449.244	44.72	32.80	5.22	-29.71	53.03	74.00	20.97	PK	Horizontal
2	5460.000	41.84	32.90	5.23	-29.71	50.26	68.20	17.94	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5449.244	38.46	32.80	5.22	46.77	54.0	7.23	AV	Horizontal	
2	5460.000	38.62	32.90	5.23	47.04	54.0	6.96	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5510MHz
RU53+RU4 Mode

Power Supply:


AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.3%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\14

Memo:Sample Numbler:S25081330-003 Power Setting:17

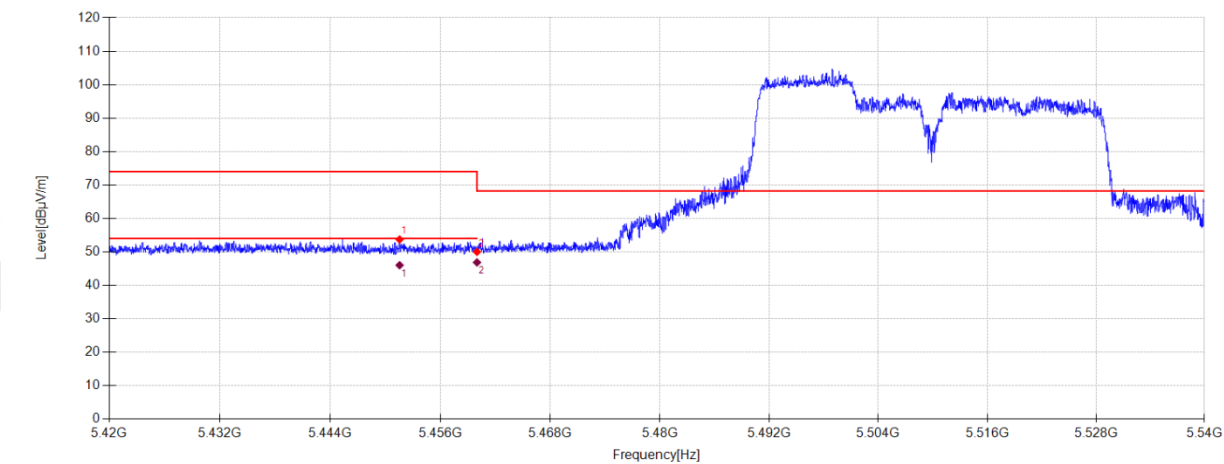

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.560	45.38	32.82	5.22	-29.71	53.71	74.00	20.29	PK	Vertical
2	5460.000	41.59	32.90	5.23	-29.71	50.01	68.20	18.19	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5451.560	37.69	32.82	5.22	46.02	54.0	7.98	AV	Vertical	
2	5460.000	38.43	32.90	5.23	46.85	54.0	7.15	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5670MHz
RU56+RU13 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU11

Memo:

Sample Numbel:S25081330-003 Power Setting:17

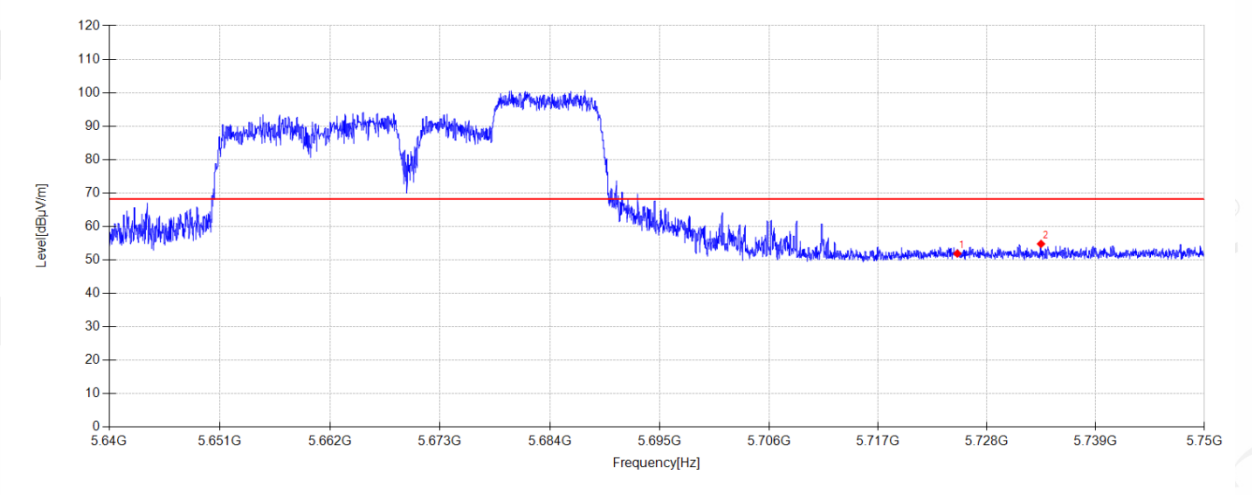

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.73	33.45	5.35	-29.65	51.88	68.20	16.32	PK	Horizontal
2	5733.456	45.51	33.57	5.35	-29.65	54.78	68.20	13.42	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE40 5670MHz
RU56+RU13 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU12

Memo:

Sample Numbel:S25081330-003 Power Setting:17

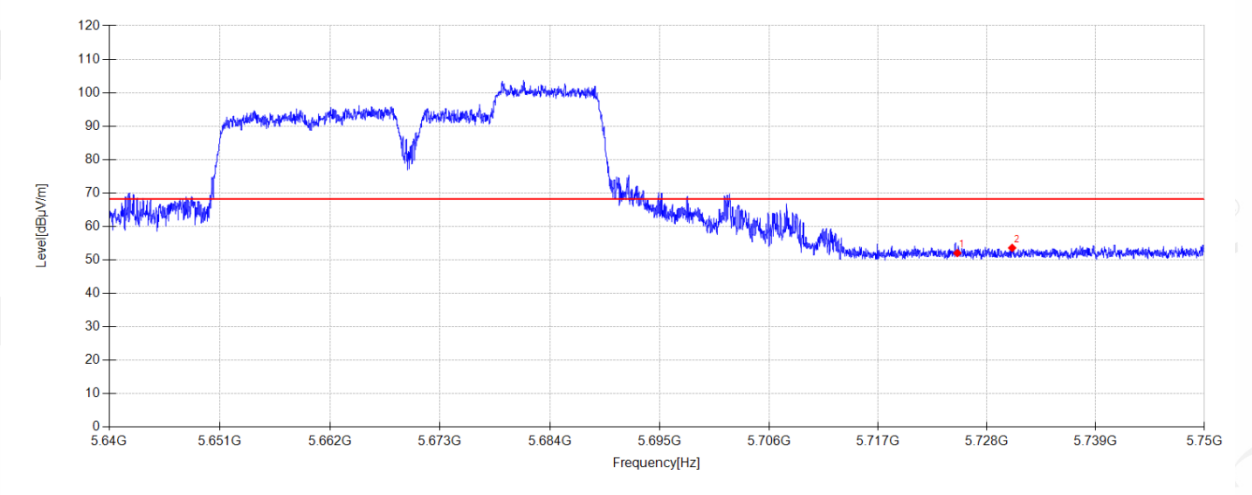

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.88	33.45	5.35	-29.65	52.03	68.20	16.17	PK	Vertical
2	5730.541	44.35	33.53	5.35	-29.65	53.58	68.20	14.62	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5210MHz
RU65+RU63 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\19

Memo:

Sample Numbel:S25081330-003 Power Setting:15

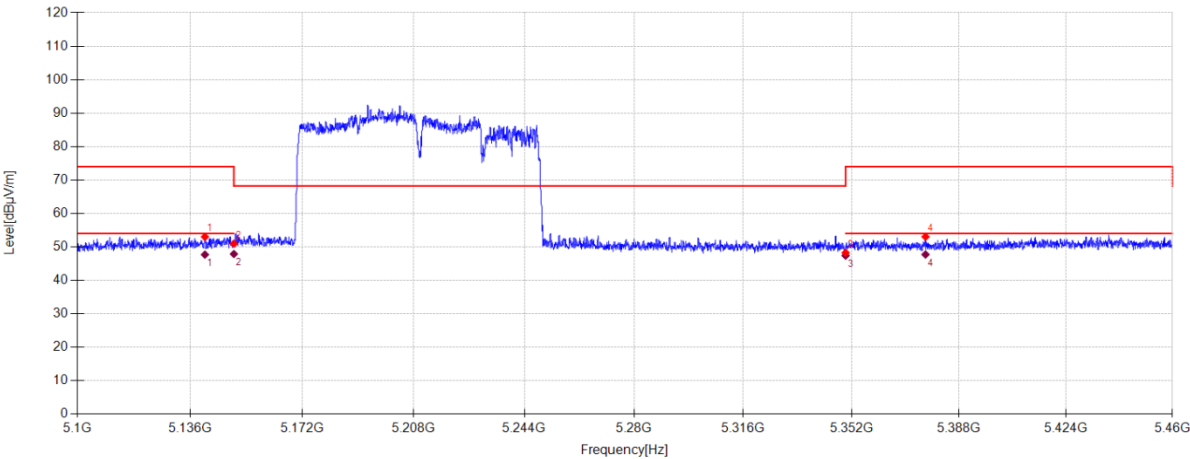

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.716	44.85	32.83	5.08	-29.77	52.99	74.00	21.01	PK	Horizontal
2	5150.000	42.74	32.90	5.09	-29.77	50.96	68.20	17.24	PK	Horizontal
3	5350.000	40.29	32.50	5.18	-29.73	48.24	68.20	19.96	PK	Horizontal
4	5376.696	44.84	32.71	5.19	-29.72	53.02	74.00	20.98	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5140.716	39.54	32.83	5.08	47.68	54.0	6.32	AV	Horizontal	
2	5150.000	39.66	32.90	5.09	47.88	54.0	6.12	AV	Horizontal	
3	5350.000	39.43	32.50	5.18	47.38	54.0	6.62	AV	Horizontal	
4	5376.696	39.54	32.71	5.19	47.72	54.0	6.28	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5210MHz
RU65+RU63 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\20

Memo:

Sample Numbler:S25081330-003 Power Setting:15

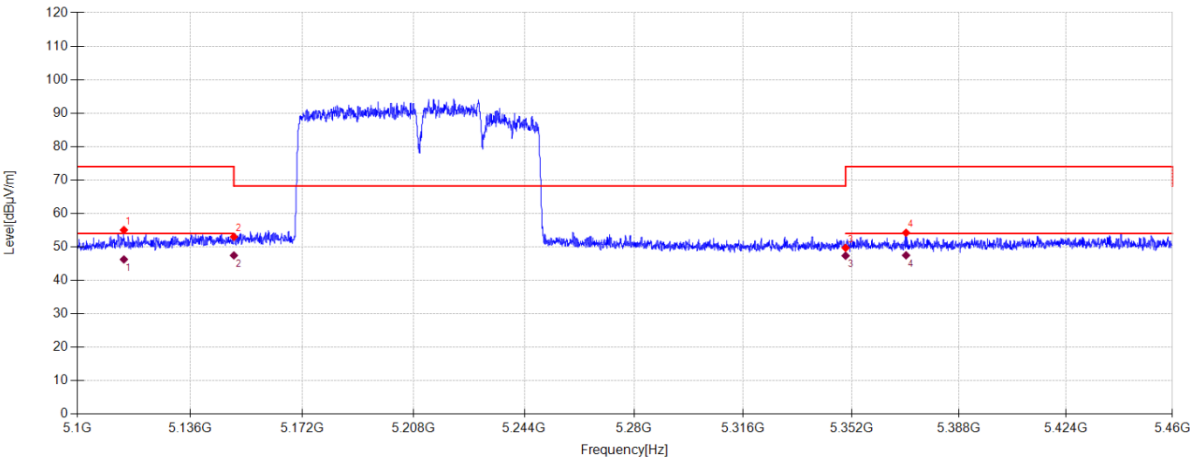

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5114.832	47.14	32.62	5.07	-29.78	55.05	74.00	18.95	PK	Vertical
2	5150.000	44.80	32.90	5.09	-29.77	53.02	68.20	15.18	PK	Vertical
3	5350.000	41.76	32.50	5.18	-29.73	49.71	68.20	18.49	PK	Vertical
4	5370.180	46.10	32.66	5.19	-29.73	54.22	74.00	19.78	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5114.832	38.34	32.62	5.07	46.25	54.0	7.75	AV	Vertical	
2	5150.000	39.22	32.90	5.09	47.44	54.0	6.56	AV	Vertical	
3	5350.000	39.41	32.50	5.18	47.36	54.0	6.64	AV	Vertical	
4	5370.180	39.36	32.66	5.19	47.48	54.0	6.52	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5290MHz
RU66+RU62 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\21

Memo:

Sample Numbler:S25081330-003 Power Setting:15

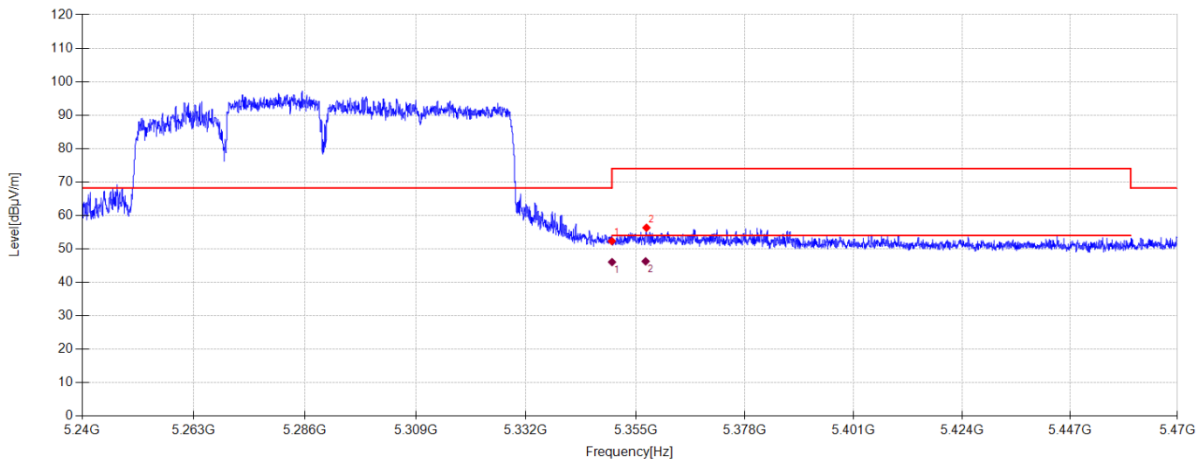

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.37	32.50	5.18	-29.73	52.32	68.20	15.88	PK	Horizontal
2	5357.254	48.31	32.56	5.18	-29.73	56.32	74.00	17.68	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.034	38.10	32.50	5.18	46.05	54.0	7.95	AV	Horizontal	
2	5357.090	38.26	32.56	5.18	46.27	54.0	7.73	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5290MHz
RU66+RU62 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\22

Memo:

Sample Numbler:S25081330-003 Power Setting:15

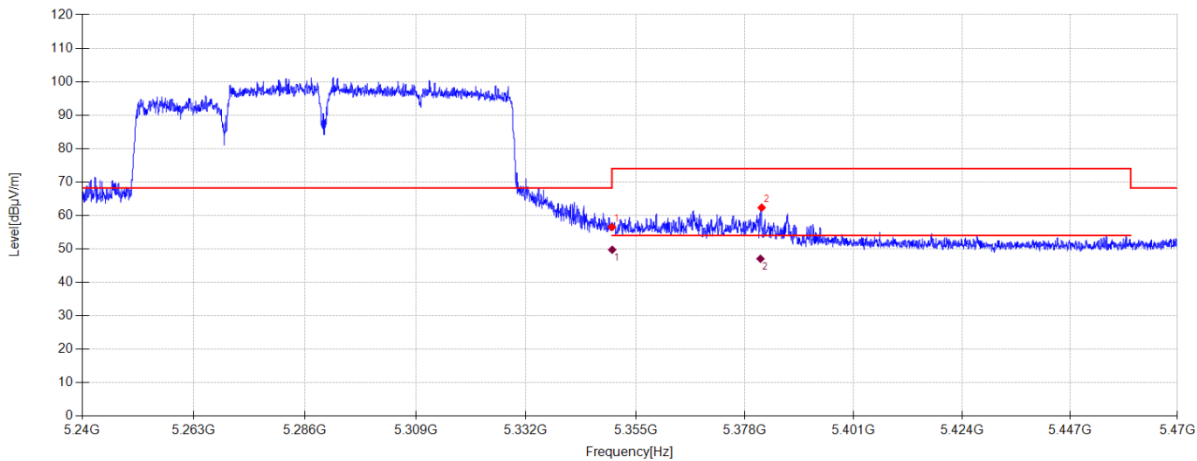

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.57	32.50	5.18	-29.73	56.52	68.20	11.68	PK	Vertical
2	5381.519	54.12	32.75	5.19	-29.72	62.34	74.00	11.66	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5350.065	41.79	32.50	5.18	49.74	54.0	4.26	AV	Vertical	
2	5381.279	38.82	32.75	5.19	47.04	54.0	6.96	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5530MHz
RU65+RU63 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\29

Memo:

Sample Numbler:S25081330-003 Power Setting:15

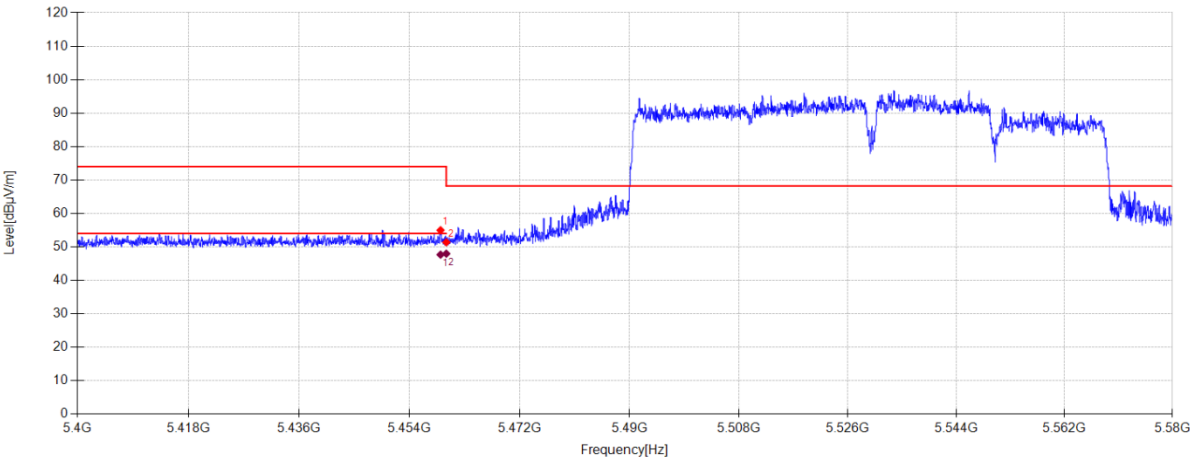

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.058	46.58	32.89	5.23	-29.71	54.99	74.00	19.01	PK	Horizontal
2	5460.000	42.97	32.90	5.23	-29.71	51.39	68.20	16.81	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5459.058	39.27	32.89	5.23	47.68	54.0	6.32	AV	Horizontal	
2	5460.000	39.55	32.90	5.23	47.97	54.0	6.03	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5530MHz
RU65+RU63 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\30

Memo:

Sample Numbler:S25081330-003 Power Setting:15

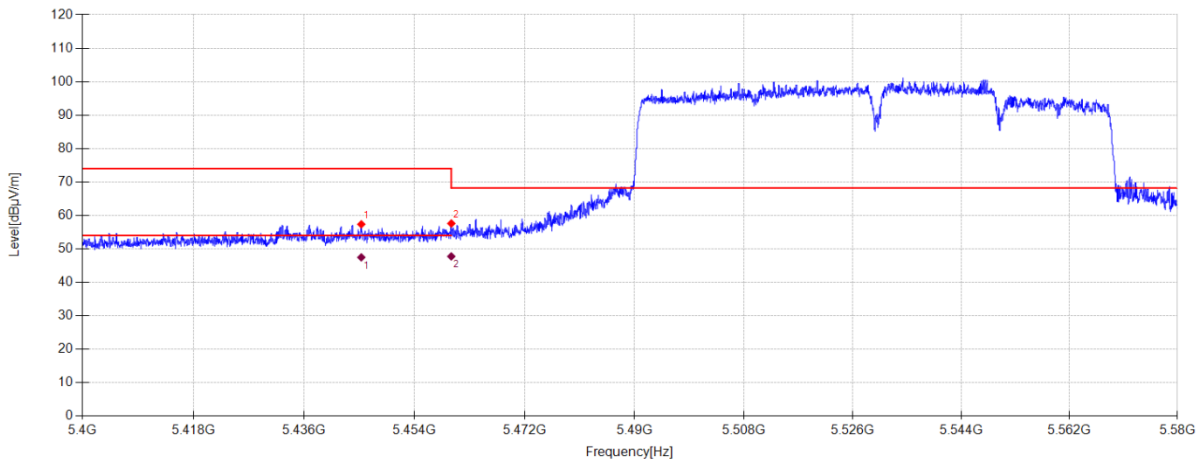

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.306	49.04	32.81	5.22	-29.71	57.36	74.00	16.64	PK	Vertical
2	5460.000	49.18	32.90	5.23	-29.71	57.60	68.20	10.60	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5445.306	39.15	32.81	5.22	47.47	54.0	6.53	AV	Vertical	
2	5460.000	39.33	32.90	5.23	47.75	54.0	6.25	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5610MHz
RU66+RU62 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\35

Memo:

Sample Numbel:S25081330-003 Power Setting:15

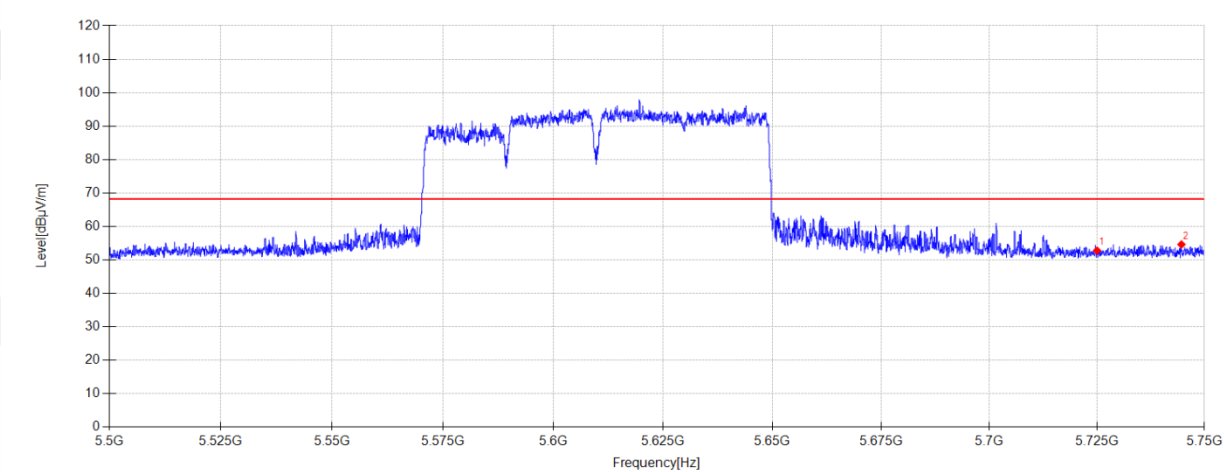

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.65	33.45	5.35	-29.66	52.79	68.20	15.41	PK	Horizontal
2	5744.650	45.18	33.73	5.36	-29.65	54.62	68.20	13.58	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-22

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

MIMO TX 11BE80 5610MHz
RU66+RU62 Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5G MRU\36

Memo:

Sample Numbel:S25081330-003 Power Setting:15

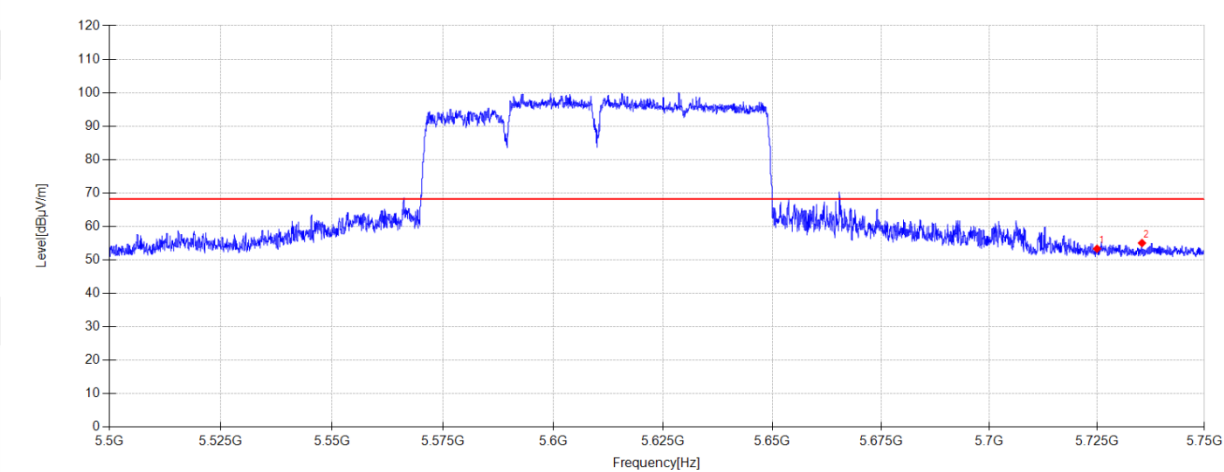

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.19	33.45	5.35	-29.66	53.33	68.20	14.87	PK	Vertical
2	5735.450	45.74	33.60	5.35	-29.65	55.04	68.20	13.16	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\15

Memo:

Sample Numbler:S25081330-003 Power Setting:20

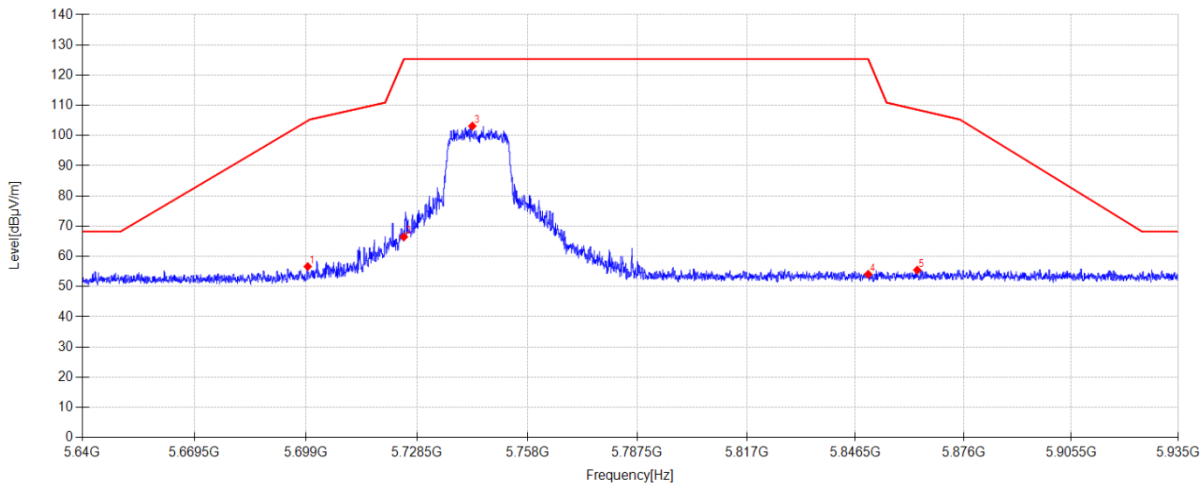

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.443	48.77	33.10	4.43	-29.66	56.64	104.89	48.25	PK	Horizontal
2	5725.000	58.21	33.45	4.44	-29.65	66.45	125.30	58.85	PK	Horizontal
3	5743.250	94.62	33.71	4.45	-29.65	103.13	125.30	22.17	PK	Horizontal
4	5850.000	45.30	33.90	4.51	-29.63	54.08	125.30	71.22	PK	Horizontal
5	5863.345	46.56	34.01	4.52	-29.63	55.46	108.56	53.10	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\16

Memo:

Sample Numbler:S25081330-003 Power Setting:20

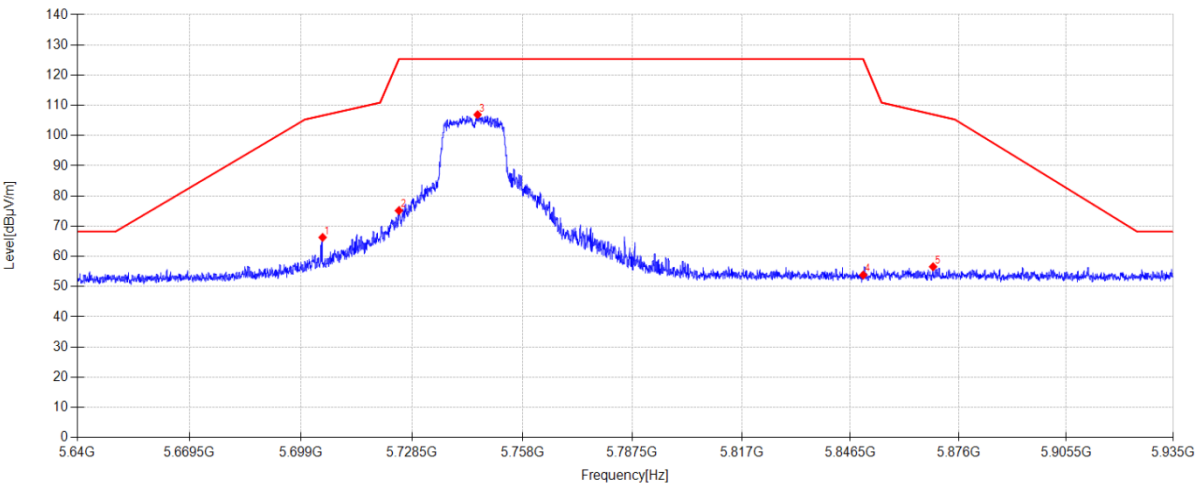

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.723	58.34	33.17	4.43	-29.66	66.28	106.62	40.34	PK	Vertical
2	5725.000	66.91	33.45	4.44	-29.65	75.15	125.30	50.15	PK	Vertical
3	5745.994	98.37	33.74	4.45	-29.65	106.91	125.30	18.39	PK	Vertical
4	5850.000	45.04	33.90	4.51	-29.63	53.82	125.30	71.48	PK	Vertical
5	5869.038	47.63	34.05	4.52	-29.63	56.57	106.97	50.40	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\13

Memo:

Sample Numbler:S25081330-003 Power Setting:20

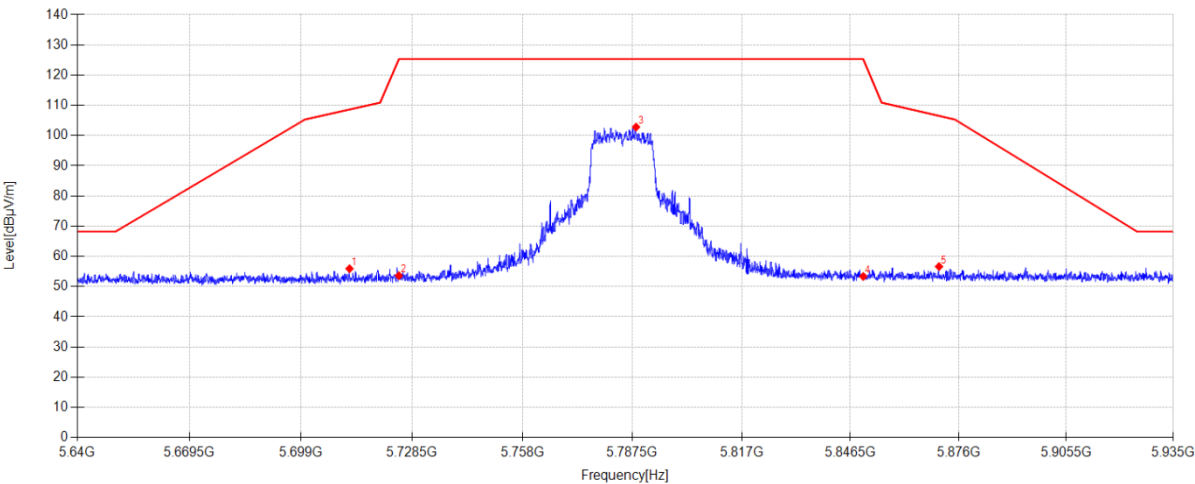

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.862	47.89	33.27	4.43	-29.66	55.93	108.62	52.69	PK	Horizontal
2	5725.000	45.37	33.45	4.44	-29.65	53.61	125.30	71.69	PK	Horizontal
3	5788.503	94.09	33.88	4.48	-29.64	102.81	125.30	22.49	PK	Horizontal
4	5850.000	44.58	33.90	4.51	-29.63	53.36	125.30	71.94	PK	Horizontal
5	5870.661	47.66	34.07	4.52	-29.63	56.62	106.52	49.90	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\14

Memo:

Sample Numbler:S25081330-003 Power Setting:20

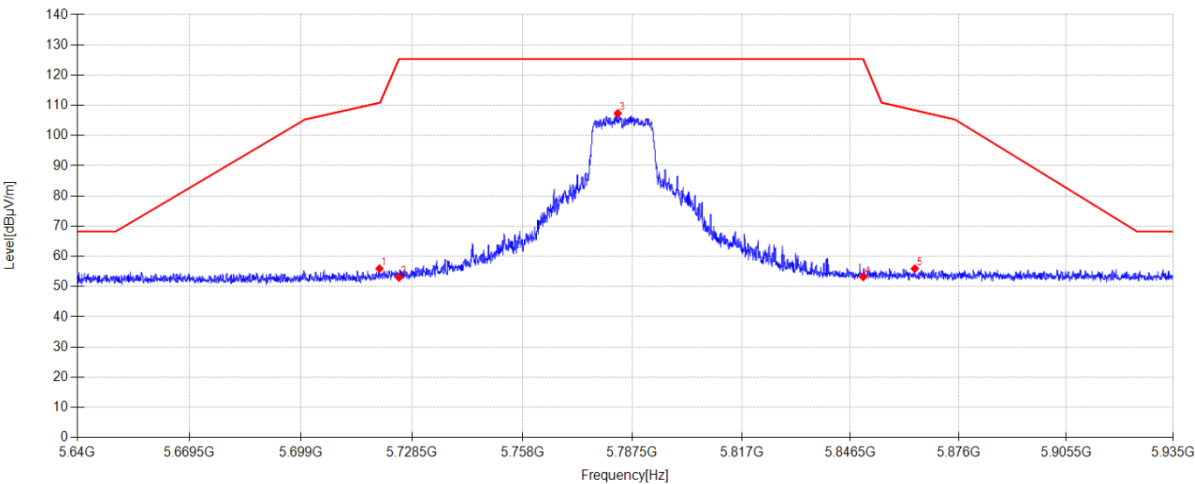

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.827	47.77	33.38	4.44	-29.66	55.93	110.85	54.92	PK	Vertical
2	5725.000	44.77	33.45	4.44	-29.65	53.01	125.30	72.29	PK	Vertical
3	5783.577	98.65	33.87	4.47	-29.64	107.35	125.30	17.95	PK	Vertical
4	5850.000	44.43	33.90	4.51	-29.63	53.21	125.30	72.09	PK	Vertical
5	5864.053	47.03	34.01	4.52	-29.63	55.93	108.37	52.44	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\7

Memo:

Sample Numbler:S25081330-003 Power Setting:20

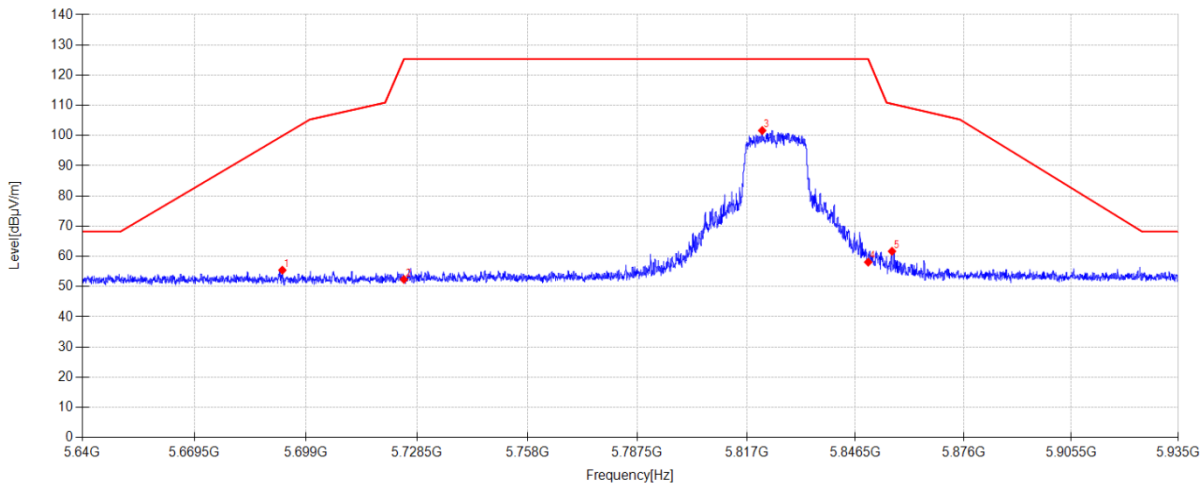

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.717	47.52	33.16	4.42	-29.66	55.44	99.90	44.46	PK	Horizontal
2	5725.000	44.13	33.45	4.44	-29.65	52.37	125.30	72.93	PK	Horizontal
3	5821.219	92.89	33.90	4.50	-29.64	101.65	125.30	23.65	PK	Horizontal
4	5850.000	49.31	33.90	4.51	-29.63	58.09	125.30	67.21	PK	Horizontal
5	5856.471	52.84	33.95	4.52	-29.63	61.68	110.49	48.81	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11A MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\8

Memo:

Sample Numbler:S25081330-003 Power Setting:20

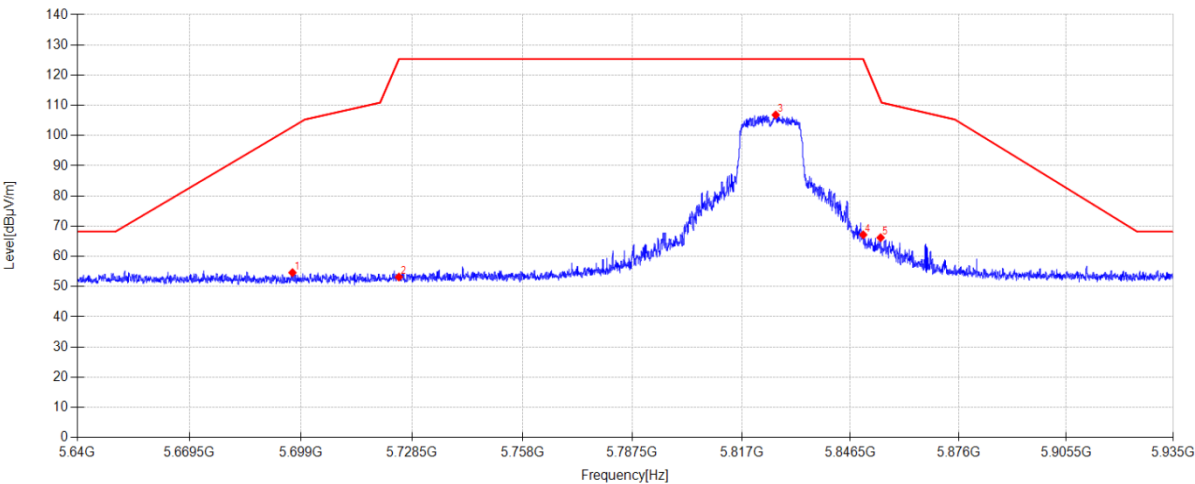

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.729	46.71	33.13	4.42	-29.66	54.60	102.87	48.27	PK	Vertical
2	5725.000	44.92	33.45	4.44	-29.65	53.16	125.30	72.14	PK	Vertical
3	5826.234	98.06	33.90	4.50	-29.63	106.83	125.30	18.47	PK	Vertical
4	5850.000	58.37	33.90	4.51	-29.63	67.15	125.30	58.15	PK	Vertical
5	5854.731	57.35	33.94	4.52	-29.63	66.18	111.68	45.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\1

Memo:

Sample Numbler:S25081330-003 Power Setting:20

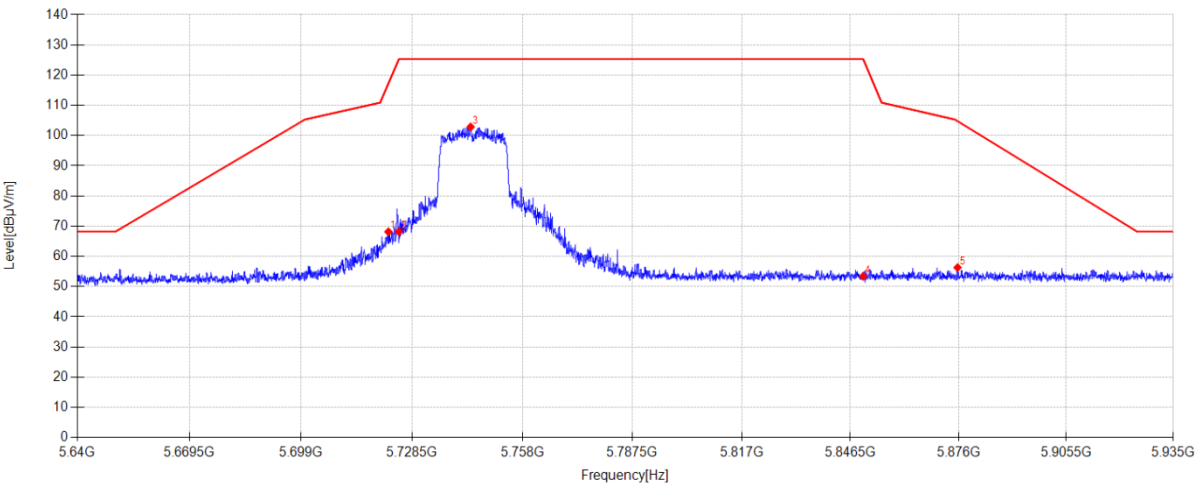

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.217	59.95	33.41	4.44	-29.66	68.14	117.28	49.14	PK	Horizontal
2	5725.000	59.92	33.45	4.44	-29.65	68.16	125.30	57.14	PK	Horizontal
3	5744.135	94.34	33.72	4.45	-29.65	102.86	125.30	22.44	PK	Horizontal
4	5850.000	44.62	33.90	4.51	-29.63	53.40	125.30	71.90	PK	Horizontal
5	5875.735	47.27	34.11	4.53	-29.62	56.29	104.76	48.47	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\2

Memo:

Sample Numbler:S25081330-003 Power Setting:20

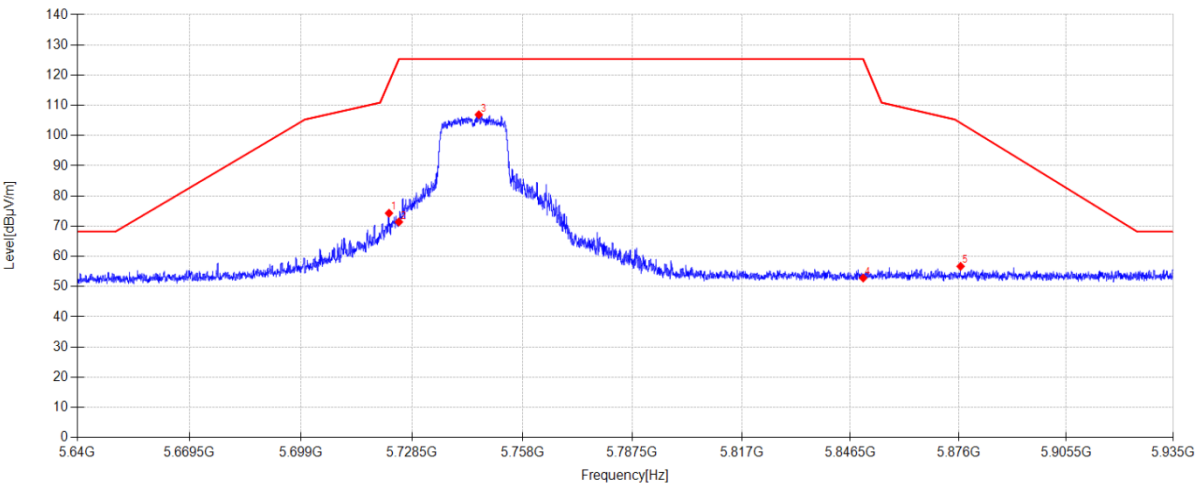

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.364	66.10	33.41	4.44	-29.66	74.29	117.71	43.42	PK	Vertical
2	5725.000	63.15	33.45	4.44	-29.65	71.39	125.30	53.91	PK	Vertical
3	5746.318	98.36	33.75	4.45	-29.65	106.91	125.30	18.39	PK	Vertical
4	5850.000	44.05	33.90	4.51	-29.63	52.83	125.30	72.47	PK	Vertical
5	5876.561	47.68	34.11	4.53	-29.62	56.70	104.14	47.44	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\3

Memo:

Sample Numbler:S25081330-003 Power Setting:20

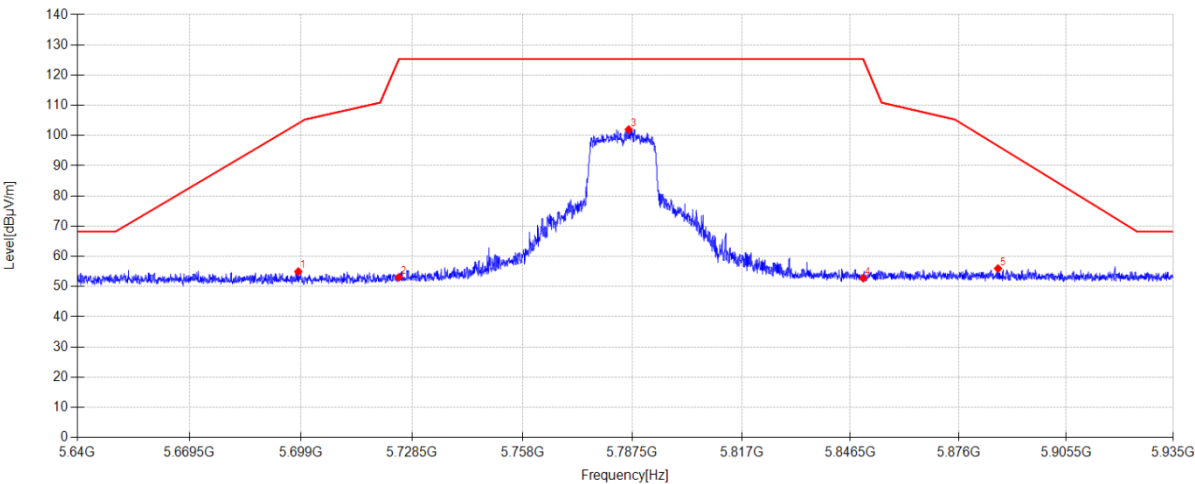

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5698.263	47.09	33.11	4.42	-29.66	54.96	104.01	49.05	PK	Horizontal
2	5725.000	44.81	33.45	4.44	-29.65	53.05	125.30	72.25	PK	Horizontal
3	5786.527	93.26	33.87	4.48	-29.64	101.97	125.30	23.33	PK	Horizontal
4	5850.000	44.01	33.90	4.51	-29.63	52.79	125.30	72.51	PK	Horizontal
5	5886.797	46.86	34.19	4.53	-29.62	55.96	96.55	40.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\4

Memo:

Sample Numbler:S25081330-003 Power Setting:20

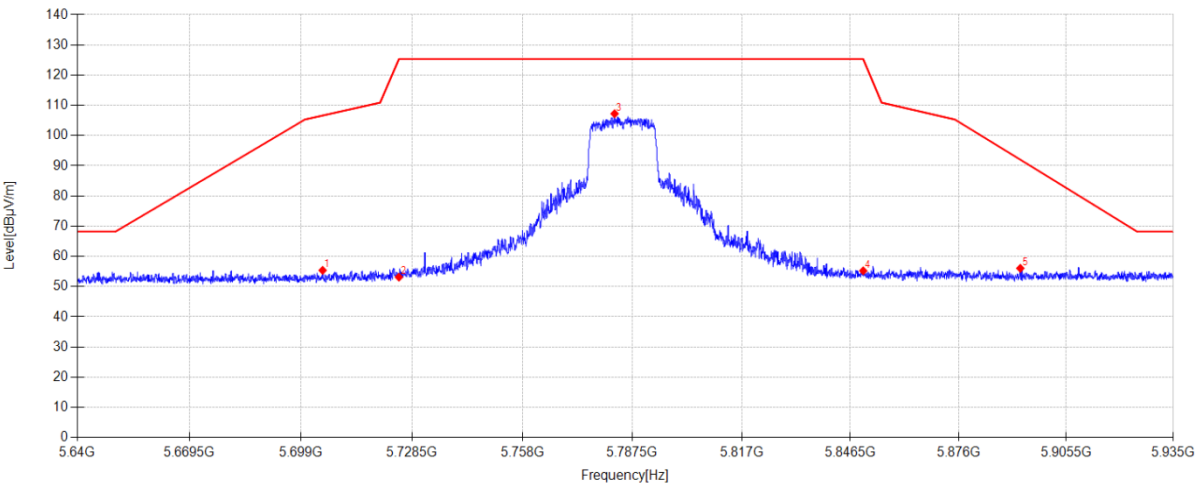

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.723	47.43	33.17	4.43	-29.66	55.37	106.62	51.25	PK	Vertical
2	5725.000	44.87	33.45	4.44	-29.65	53.11	125.30	72.19	PK	Vertical
3	5782.721	98.52	33.87	4.47	-29.64	107.22	125.30	18.08	PK	Vertical
4	5850.000	46.44	33.90	4.51	-29.63	55.22	125.30	70.08	PK	Vertical
5	5892.904	46.89	34.24	4.54	-29.62	56.05	92.02	35.97	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\5

Memo:

Sample Numbler:S25081330-003 Power Setting:20

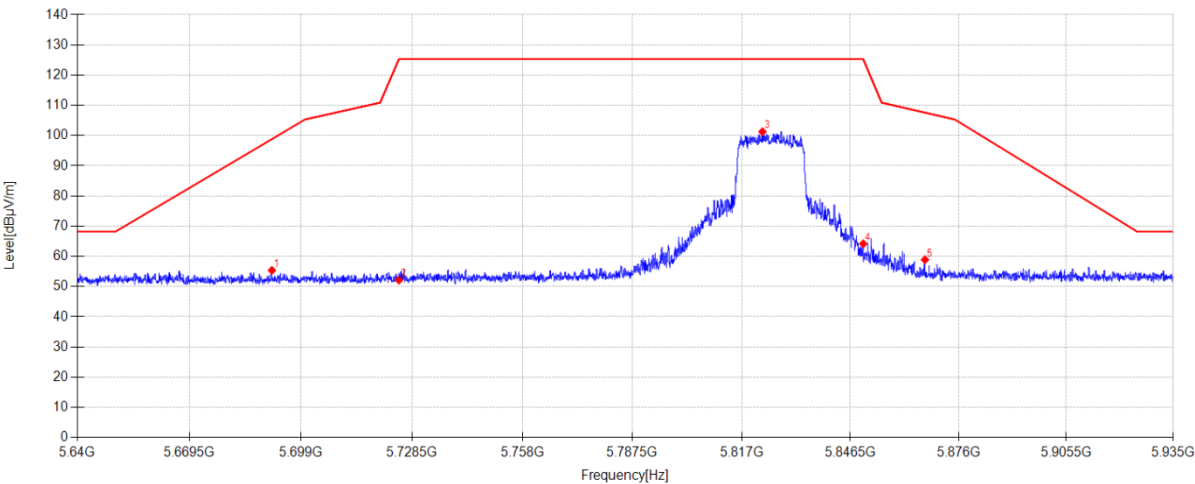

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.271	47.43	33.17	4.42	-29.66	55.36	98.82	43.46	PK	Horizontal
2	5725.000	43.88	33.45	4.44	-29.65	52.12	125.30	73.18	PK	Horizontal
3	5822.635	92.50	33.90	4.50	-29.64	101.26	125.30	24.04	PK	Horizontal
4	5850.000	55.38	33.90	4.51	-29.63	64.16	125.30	61.14	PK	Horizontal
5	5866.826	49.96	34.03	4.52	-29.63	58.88	107.59	48.71	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\6

Memo:

Sample Numbler:S25081330-003 Power Setting:20

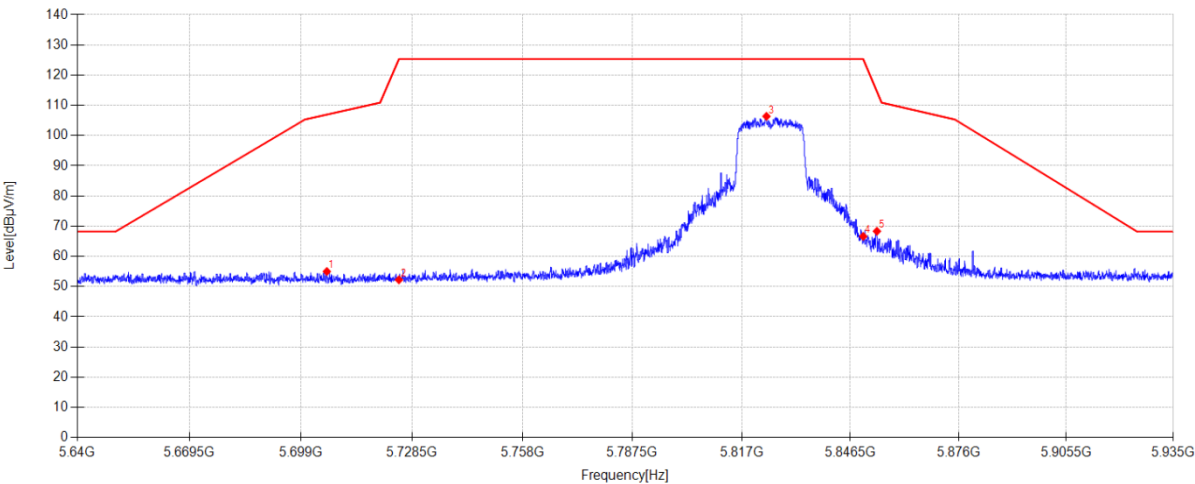

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5705.844	47.05	33.18	4.43	-29.66	55.00	106.94	51.94	PK	Vertical
2	5725.000	43.99	33.45	4.44	-29.65	52.23	125.30	73.07	PK	Vertical
3	5823.726	97.60	33.90	4.50	-29.64	106.36	125.30	18.94	PK	Vertical
4	5850.000	57.84	33.90	4.51	-29.63	66.62	125.30	58.68	PK	Vertical
5	5853.728	59.50	33.93	4.52	-29.63	68.32	114.56	46.24	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\19

Memo:

Sample Numbler:S25081330-003 Power Setting:20

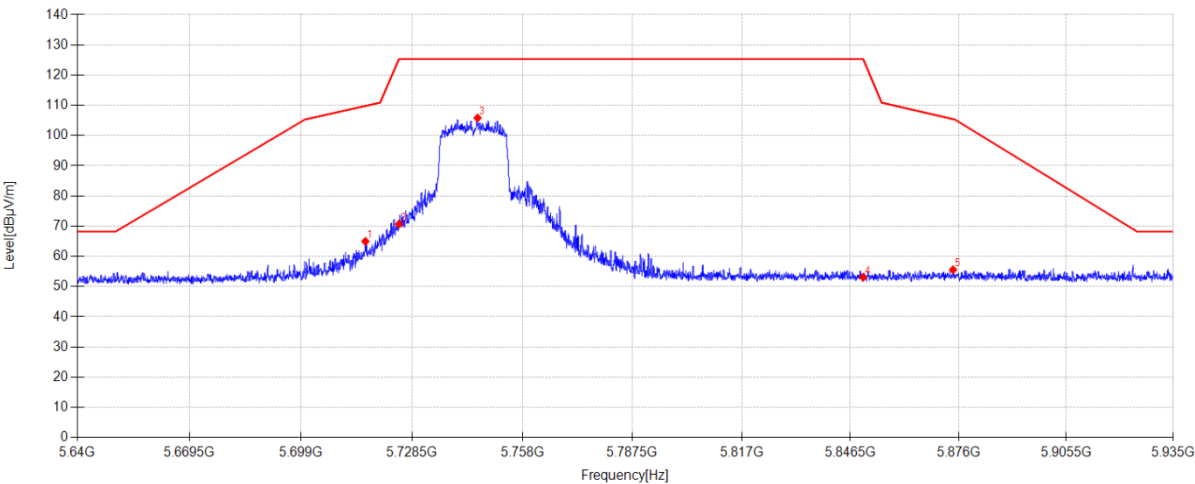

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.081	56.85	33.33	4.44	-29.66	64.96	109.80	44.84	PK	Horizontal
2	5725.000	62.45	33.45	4.44	-29.65	70.69	125.30	54.61	PK	Horizontal
3	5745.994	97.27	33.74	4.45	-29.65	105.81	125.30	19.49	PK	Horizontal
4	5850.000	44.32	33.90	4.51	-29.63	53.10	125.30	72.20	PK	Horizontal
5	5874.496	46.56	34.10	4.53	-29.63	55.56	105.44	49.88	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\20

Memo:

Sample Numble:S25081330-003 Power Setting:20

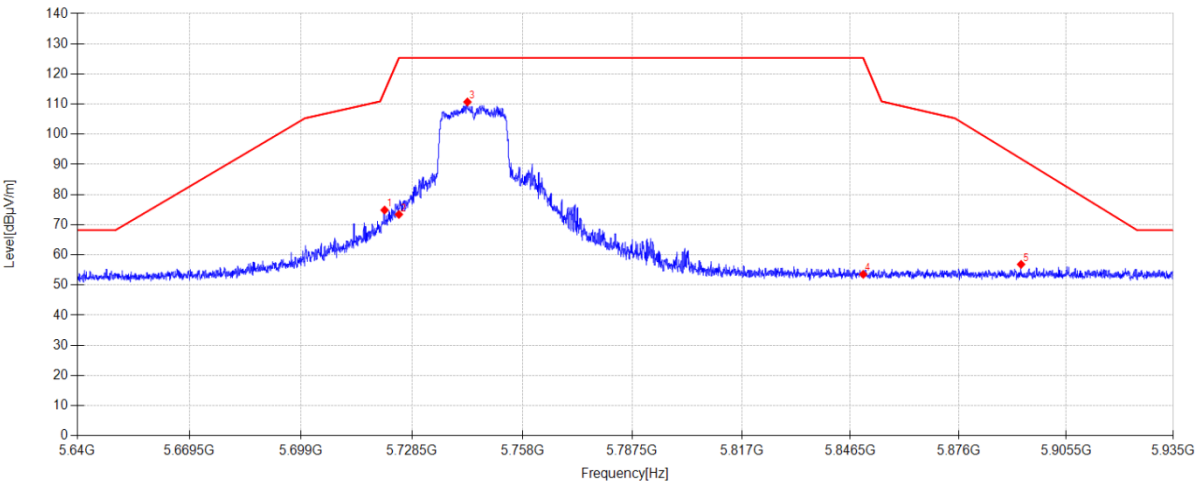

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.184	66.68	33.40	4.44	-29.66	74.86	114.31	39.45	PK	Vertical
2	5725.000	65.17	33.45	4.44	-29.65	73.41	125.30	51.89	PK	Vertical
3	5743.280	102.21	33.71	4.45	-29.65	110.72	125.30	14.58	PK	Vertical
4	5850.000	44.77	33.90	4.51	-29.63	53.55	125.30	71.75	PK	Vertical
5	5893.110	47.69	34.24	4.54	-29.62	56.85	91.86	35.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\21

Memo:

Sample Numbler:S25081330-003 Power Setting:20

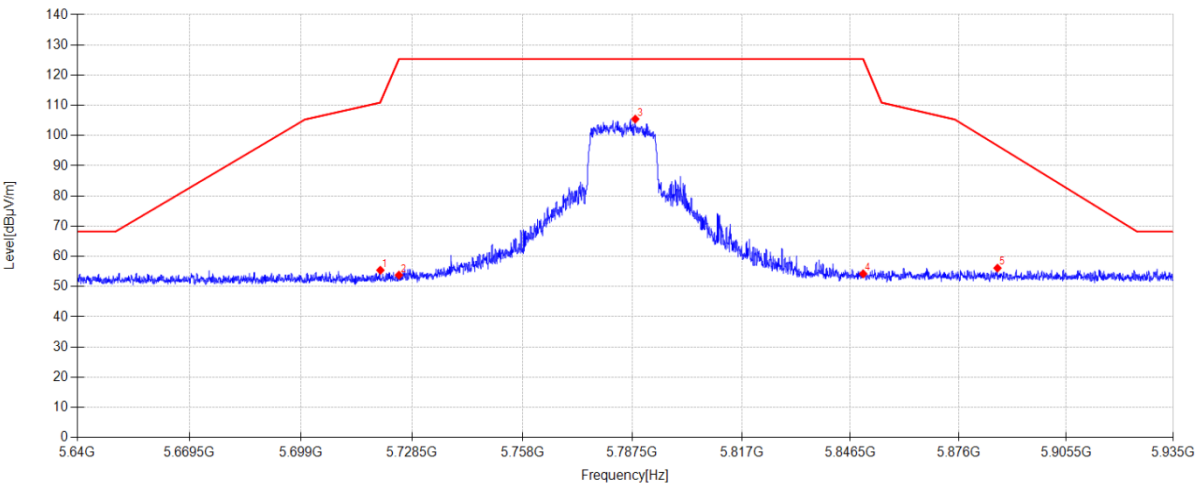

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.063	47.25	33.38	4.44	-29.66	55.41	111.08	55.67	PK	Horizontal
2	5725.000	45.55	33.45	4.44	-29.65	53.79	125.30	71.51	PK	Horizontal
3	5788.297	96.74	33.88	4.48	-29.64	105.46	125.30	19.84	PK	Horizontal
4	5850.000	45.44	33.90	4.51	-29.63	54.22	125.30	71.08	PK	Horizontal
5	5886.650	47.02	34.19	4.53	-29.62	56.12	96.66	40.54	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\22

Memo:

Sample Numbler:S25081330-003 Power Setting:20

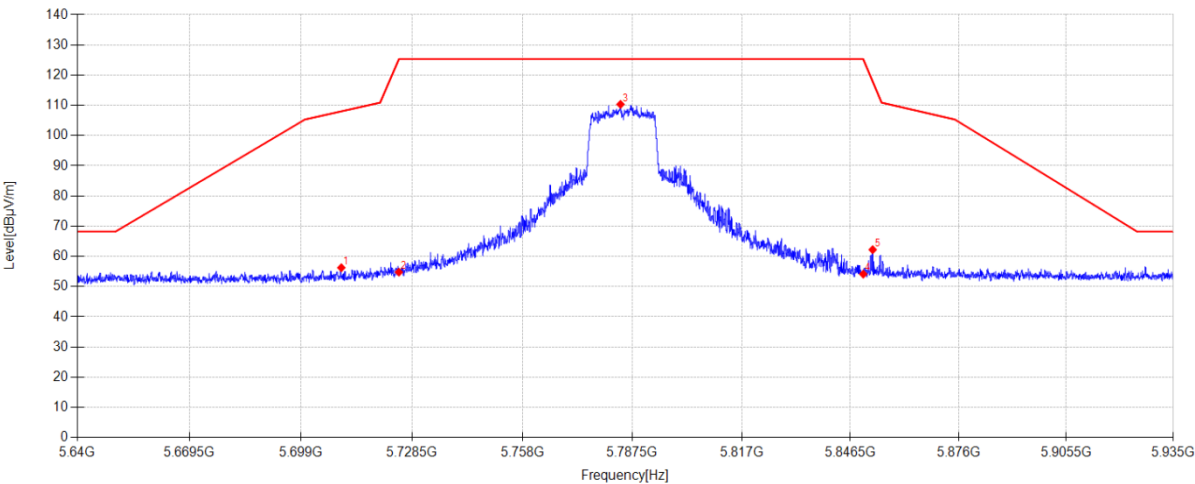

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.679	48.23	33.24	4.43	-29.66	56.24	108.01	51.77	PK	Vertical
2	5725.000	46.54	33.45	4.44	-29.65	54.78	125.30	70.52	PK	Vertical
3	5784.314	101.63	33.87	4.47	-29.64	110.33	125.30	14.97	PK	Vertical
4	5850.000	45.35	33.90	4.51	-29.63	54.13	125.30	71.17	PK	Vertical
5	5852.577	53.41	33.92	4.51	-29.63	62.21	117.88	55.67	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\23

Memo:

Sample Numbler:S25081330-003 Power Setting:20

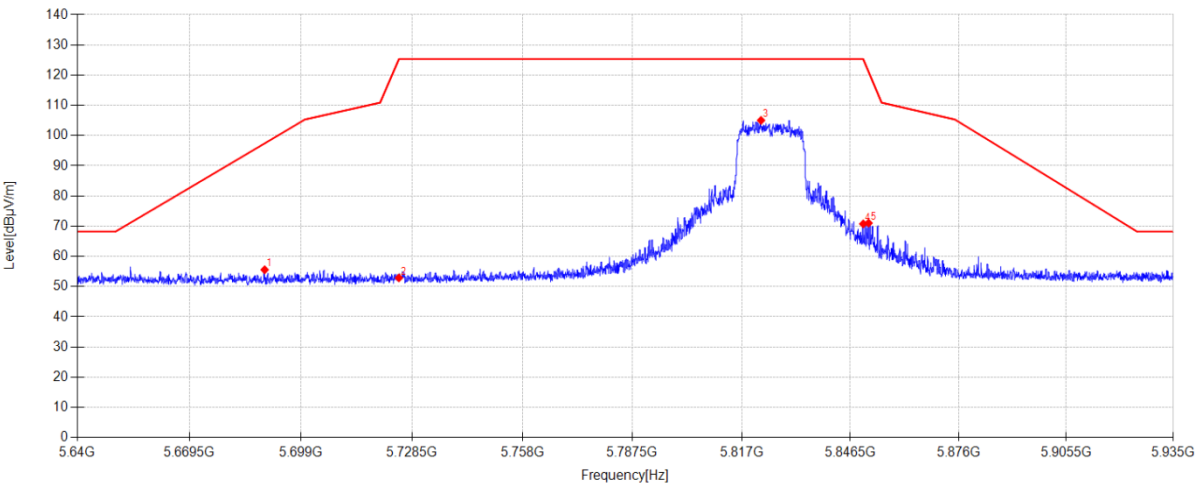

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5689.354	47.61	33.19	4.42	-29.66	55.56	97.40	41.84	PK	Horizontal
2	5725.000	44.64	33.45	4.44	-29.65	52.88	125.30	72.42	PK	Horizontal
3	5822.251	96.27	33.90	4.50	-29.64	105.03	125.30	20.27	PK	Horizontal
4	5850.000	61.97	33.90	4.51	-29.63	70.75	125.30	54.55	PK	Horizontal
5	5851.456	62.24	33.91	4.51	-29.63	71.03	121.11	50.08	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AC20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\24

Memo:

Sample Numbler:S25081330-003 Power Setting:20

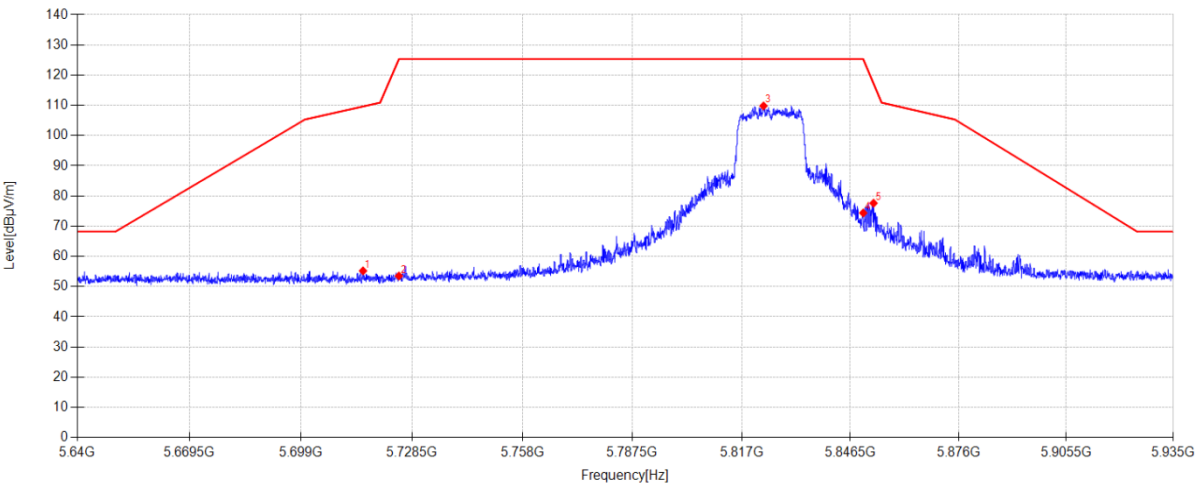

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.461	47.11	33.32	4.43	-29.66	55.20	109.63	54.43	PK	Vertical
2	5725.000	45.28	33.45	4.44	-29.65	53.52	125.30	71.78	PK	Vertical
3	5822.930	101.05	33.90	4.50	-29.64	109.81	125.30	15.49	PK	Vertical
4	5850.000	65.59	33.90	4.51	-29.63	74.37	125.30	50.93	PK	Vertical
5	5852.813	68.80	33.92	4.51	-29.63	77.60	117.20	39.60	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\29

Memo:

Sample Numbler:S25081330-003 Power Setting:20

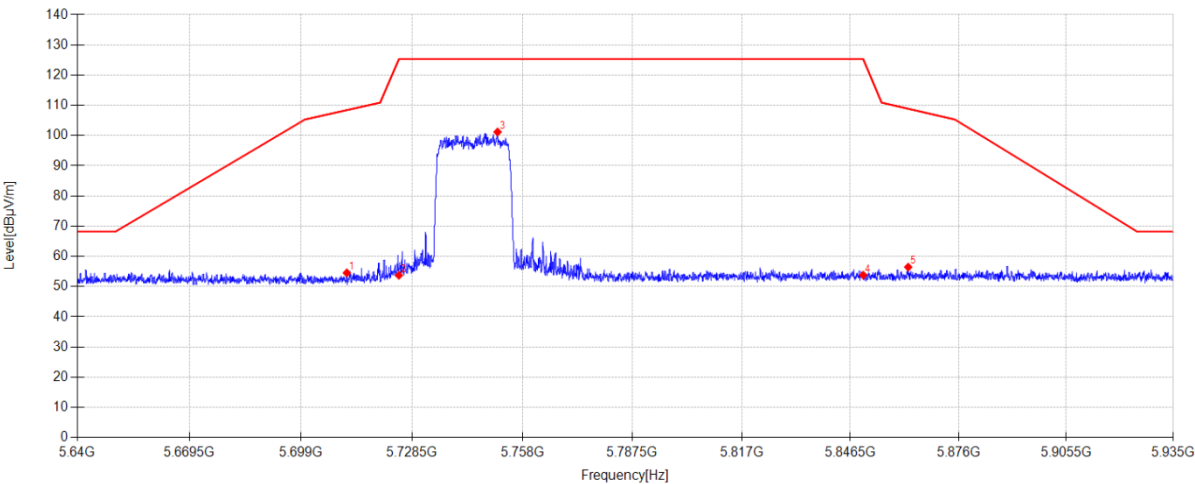

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.154	46.49	33.26	4.43	-29.66	54.52	108.42	53.90	PK	Horizontal
2	5725.000	45.49	33.45	4.44	-29.65	53.73	125.30	71.57	PK	Horizontal
3	5751.333	92.56	33.80	4.46	-29.65	101.17	125.30	24.13	PK	Horizontal
4	5850.000	45.00	33.90	4.51	-29.63	53.78	125.30	71.52	PK	Horizontal
5	5862.253	47.55	34.00	4.52	-29.63	56.44	108.87	52.43	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\30

Memo:

Sample Numbler:S25081330-003 Power Setting:20

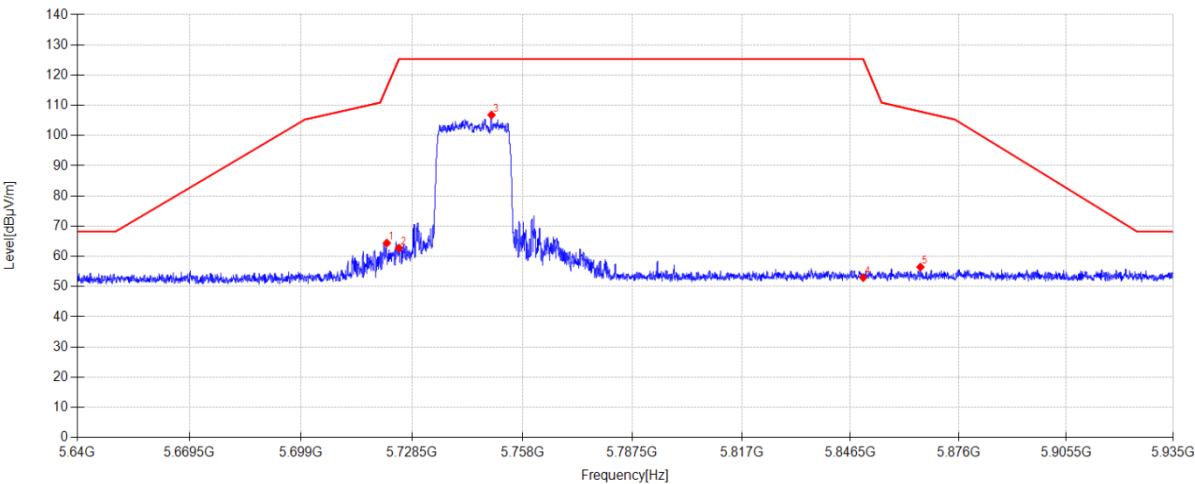

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.774	56.22	33.40	4.44	-29.66	64.40	116.01	51.61	PK	Vertical
2	5725.000	54.50	33.45	4.44	-29.65	62.74	125.30	62.56	PK	Vertical
3	5749.711	98.23	33.80	4.45	-29.65	106.83	125.30	18.47	PK	Vertical
4	5850.000	44.19	33.90	4.51	-29.63	52.97	125.30	72.33	PK	Vertical
5	5865.587	47.55	34.02	4.52	-29.63	56.46	107.94	51.48	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\27

Memo:

Sample Numbler:S25081330-003 Power Setting:20

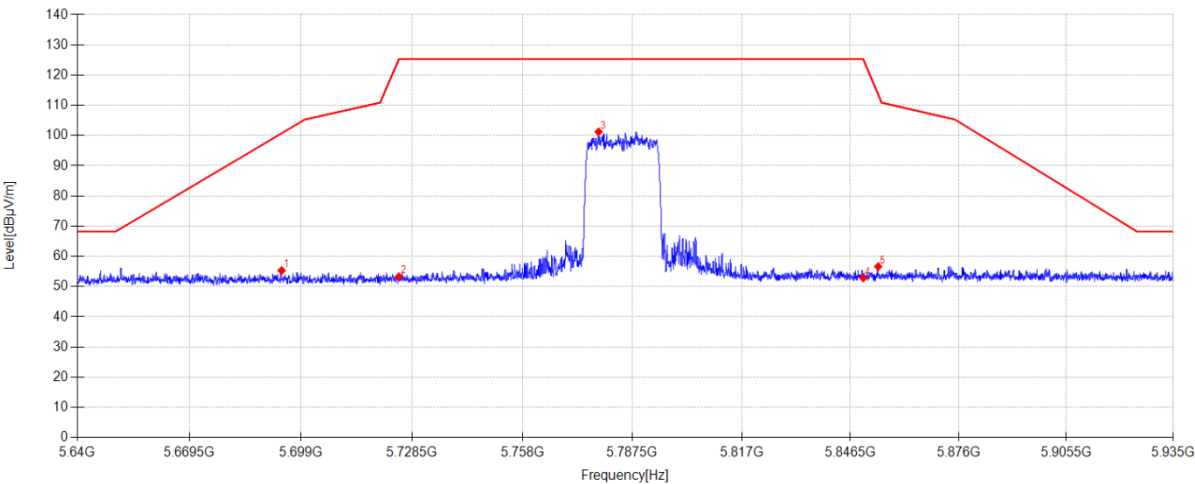

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5693.838	47.39	33.15	4.42	-29.66	55.30	100.73	45.43	PK	Horizontal
2	5725.000	45.02	33.45	4.44	-29.65	53.26	125.30	72.04	PK	Horizontal
3	5778.444	92.54	33.86	4.47	-29.64	101.23	125.30	24.07	PK	Horizontal
4	5850.000	44.08	33.90	4.51	-29.63	52.86	125.30	72.44	PK	Horizontal
5	5854.082	47.80	33.93	4.52	-29.63	56.62	113.55	56.93	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\28

Memo:

Sample Numbler:S25081330-003 Power Setting:20

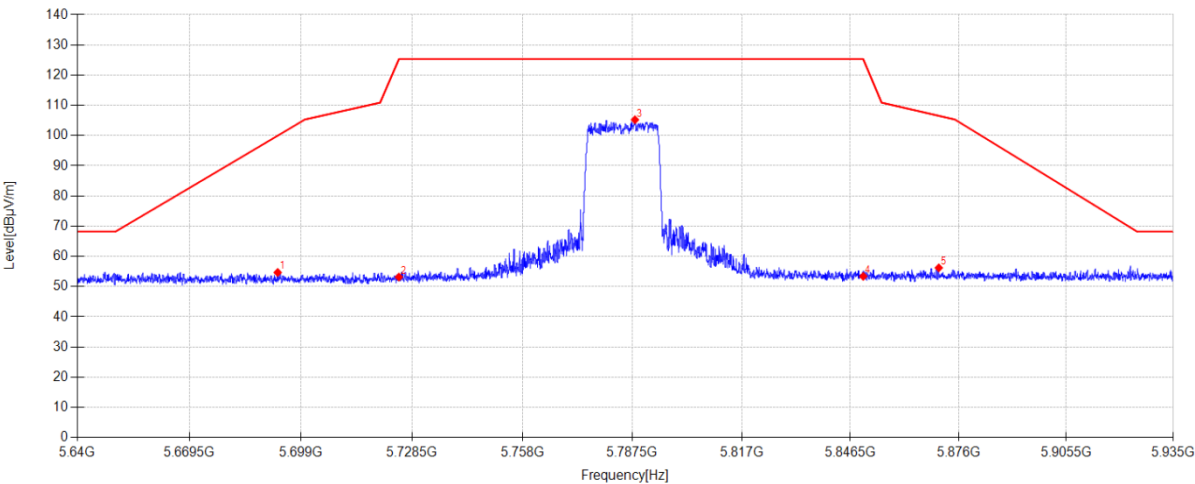

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.805	46.75	33.16	4.42	-29.66	54.67	99.96	45.29	PK	Vertical
2	5725.000	44.90	33.45	4.44	-29.65	53.14	125.30	72.16	PK	Vertical
3	5788.208	96.51	33.88	4.48	-29.64	105.23	125.30	20.07	PK	Vertical
4	5850.000	44.61	33.90	4.51	-29.63	53.39	125.30	71.91	PK	Vertical
5	5870.602	47.26	34.06	4.52	-29.63	56.21	106.53	50.32	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\25

Memo:

Sample Numbler:S25081330-003 Power Setting:20

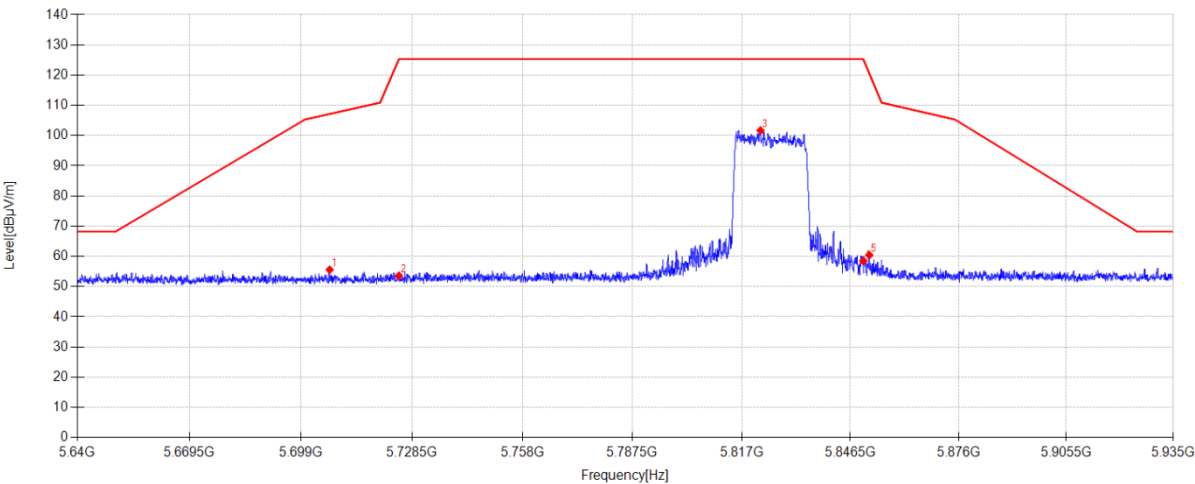

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5706.582	47.61	33.19	4.43	-29.66	55.57	107.14	51.57	PK	Horizontal
2	5725.000	45.32	33.45	4.44	-29.65	53.56	125.30	71.74	PK	Horizontal
3	5822.104	92.92	33.90	4.50	-29.64	101.68	125.30	23.62	PK	Horizontal
4	5850.000	49.71	33.90	4.51	-29.63	58.49	125.30	66.81	PK	Horizontal
5	5851.663	51.60	33.91	4.51	-29.63	60.39	120.51	60.12	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11AX20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\26

Memo:

Sample Numbler:S25081330-003 Power Setting:20

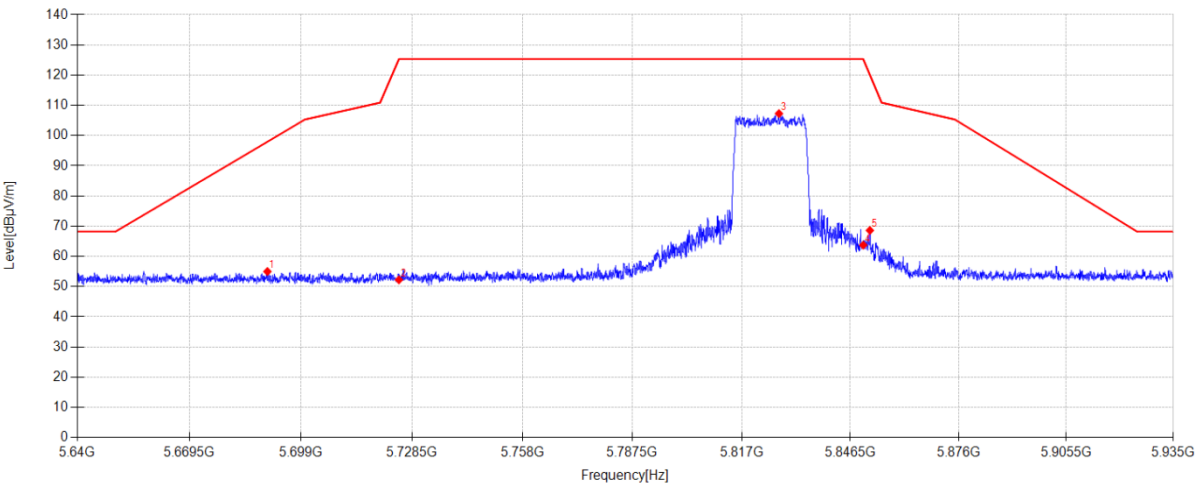

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5690.091	47.04	33.18	4.42	-29.66	54.98	97.95	42.97	PK	Vertical
2	5725.000	43.98	33.45	4.44	-29.65	52.22	125.30	73.08	PK	Vertical
3	5827.119	98.50	33.90	4.50	-29.63	107.27	125.30	18.03	PK	Vertical
4	5850.000	54.95	33.90	4.51	-29.63	63.73	125.30	61.57	PK	Vertical
5	5851.810	59.80	33.91	4.51	-29.63	68.59	120.09	51.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\45

Memo:

Sample Numbler:S25081330-003 Power Setting:20

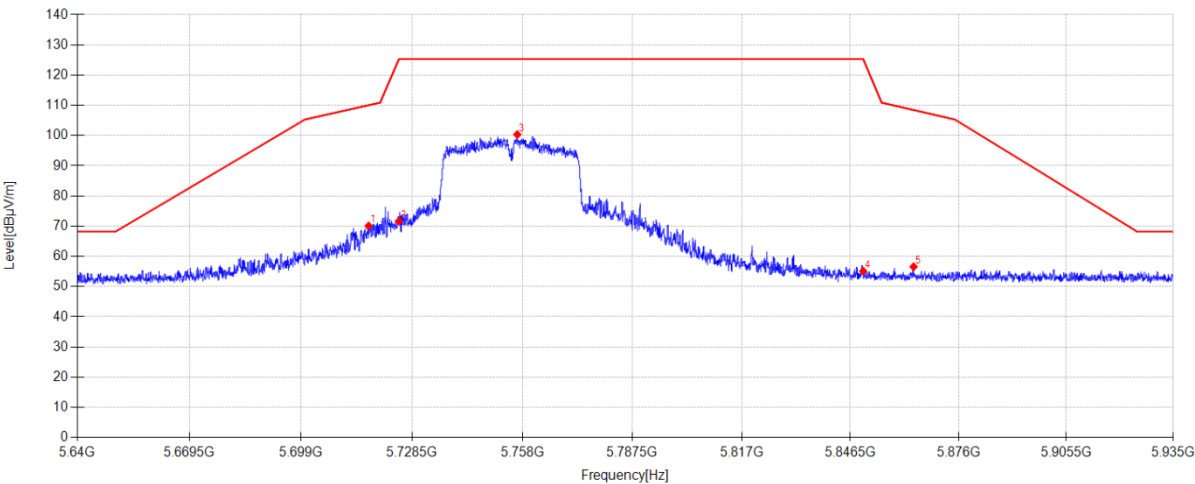

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.936	61.95	33.34	4.44	-29.66	70.07	110.04	39.97	PK	Horizontal
2	5725.000	63.37	33.45	4.44	-29.65	71.61	125.30	53.69	PK	Horizontal
3	5756.614	91.71	33.81	4.46	-29.65	100.33	125.30	24.97	PK	Horizontal
4	5850.000	46.33	33.90	4.51	-29.63	55.11	125.30	70.19	PK	Horizontal
5	5863.728	47.66	34.01	4.52	-29.63	56.56	108.46	51.90	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Nan Zhong

EUT:

Wireless Access Point

Model Number:

L2536

Test Mode:

TX 11N40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.3%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081330-2E\FCC ABOVE1G 5.8G\46

Memo:

Sample Numbler:S25081330-003 Power Setting:20

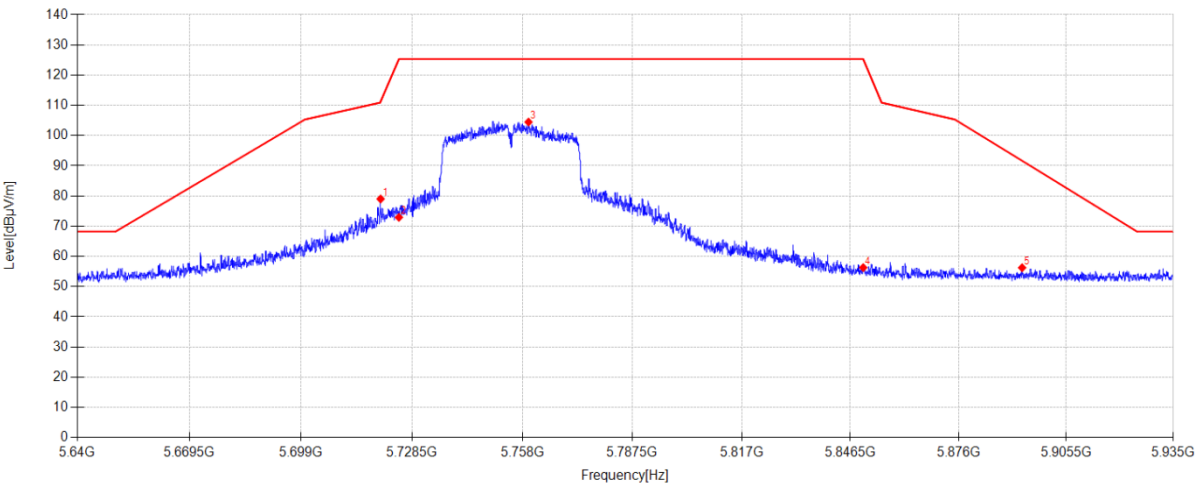

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.122	70.84	33.38	4.44	-29.66	79.00	111.25	32.25	PK	Vertical
2	5725.000	64.67	33.45	4.44	-29.65	72.91	125.30	52.39	PK	Vertical
3	5759.623	95.84	33.82	4.46	-29.65	104.47	125.30	20.83	PK	Vertical
4	5850.000	47.50	33.90	4.51	-29.63	56.28	125.30	69.02	PK	Vertical
5	5893.405	47.07	34.25	4.54	-29.62	56.24	91.64	35.40	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.