

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AX20 5320MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\79

Memo:Sample Numbler:S25081332-003 Power Setting:18.5

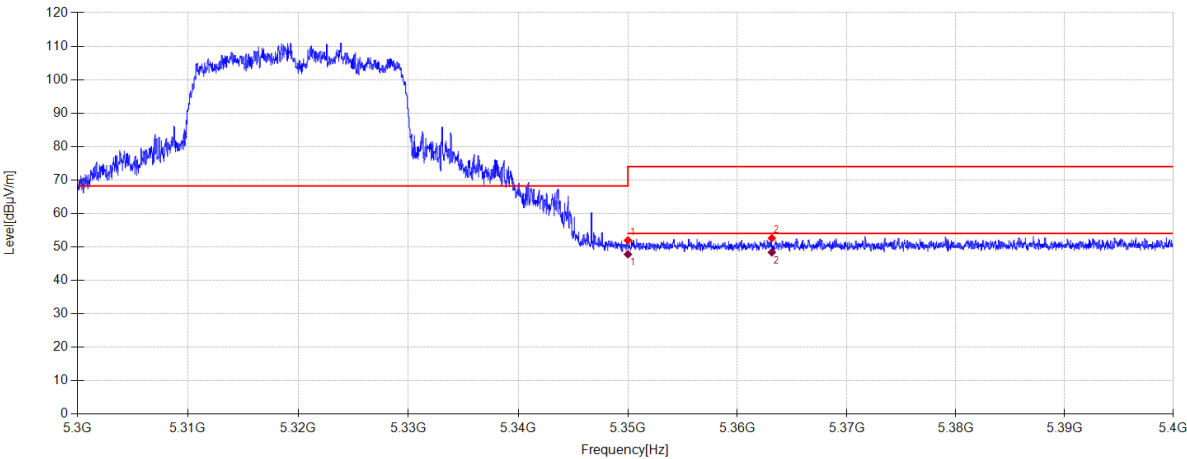

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.04	32.50	5.14	-29.73	51.95	68.20	16.25	PK	Horizontal
2	5363.150	44.57	32.61	5.14	-29.73	52.59	74.00	21.41	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.87	32.50	5.14	47.78	54.00	6.22	AV	Horizontal	
2	5363.150	40.35	32.61	5.14	48.37	54.00	5.63	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AX20 5320MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\80

Memo: Sample Numbler:S25081332-003 Power Setting:18.5

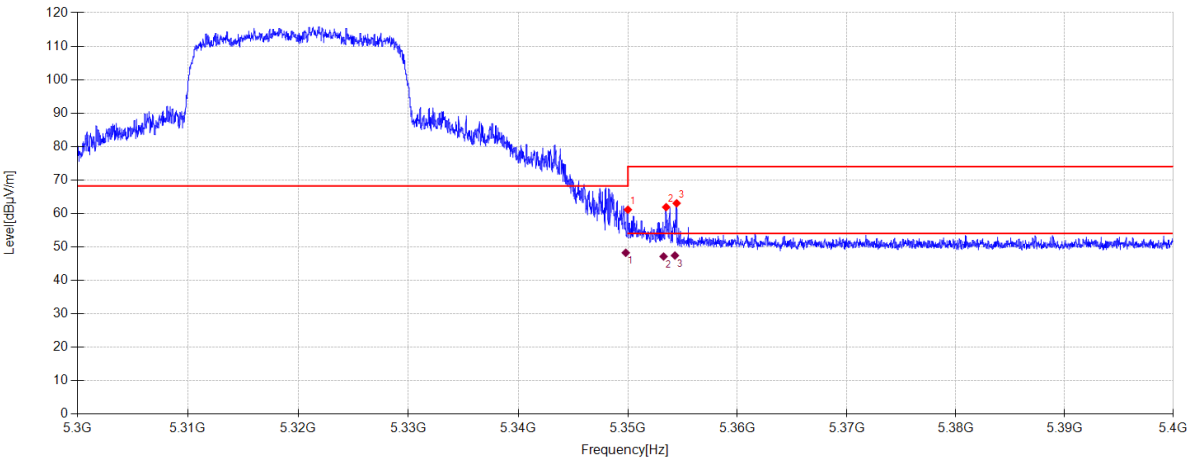

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	53.21	32.50	5.14	-29.73	61.12	68.20	7.08	PK	Vertical
2	5353.490	53.94	32.53	5.14	-29.73	61.88	74.00	12.12	PK	Vertical
3	5354.450	55.09	32.54	5.14	-29.73	63.04	74.00	10.96	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.805	40.33	32.50	5.14	48.24	54.00	5.76	AV	Vertical	
2	5353.258	39.19	32.53	5.14	47.13	54.00	6.87	AV	Vertical	
3	5354.291	39.46	32.54	5.14	47.41	54.00	6.59	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\81

Memo:

Sample Numbler:S25081332-003 Power Setting:18.5

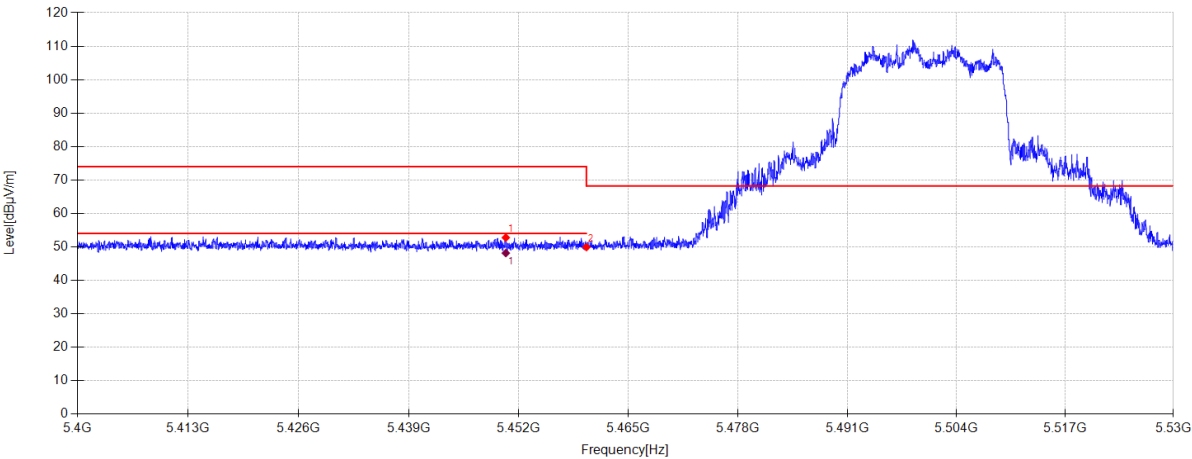

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.453	44.50	32.80	5.19	-29.71	52.78	74.00	21.22	PK	Horizontal
2	5460.000	41.54	32.90	5.19	-29.71	49.92	68.20	18.28	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5450.453	39.86	32.80	5.19	48.14	54.00	5.86	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AX20 5500MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\82

Memo: Sample Numbler:S25081332-003 Power Setting:18.5

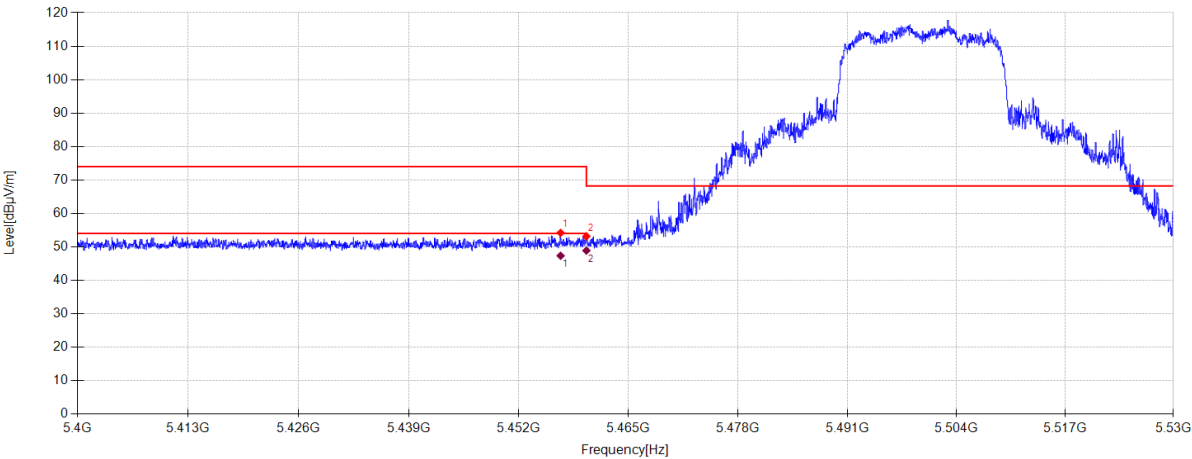

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.940	45.85	32.87	5.19	-29.71	54.20	74.00	19.80	PK	Vertical
2	5460.000	44.78	32.90	5.19	-29.71	53.16	68.20	15.04	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.940	39.00	32.87	5.19	47.35	54.00	6.65	AV	Vertical	
2	5460.000	40.52	32.90	5.19	48.90	54.00	5.10	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\83

Memo:

Sample Numbler:S25081332-003 Power Setting:18.5

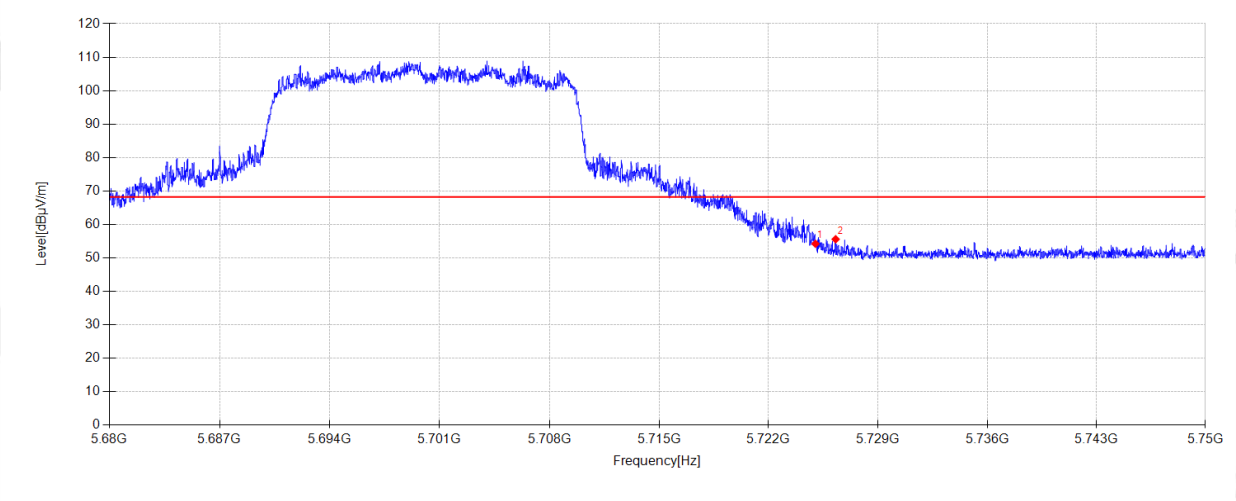

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.10	33.45	5.32	-29.65	54.22	68.20	13.98	PK	Horizontal
2	5726.291	46.43	33.47	5.32	-29.65	55.57	68.20	12.63	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5700MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\84
Memo: Sample Numbler:S25081332-003 Power Setting:18.5

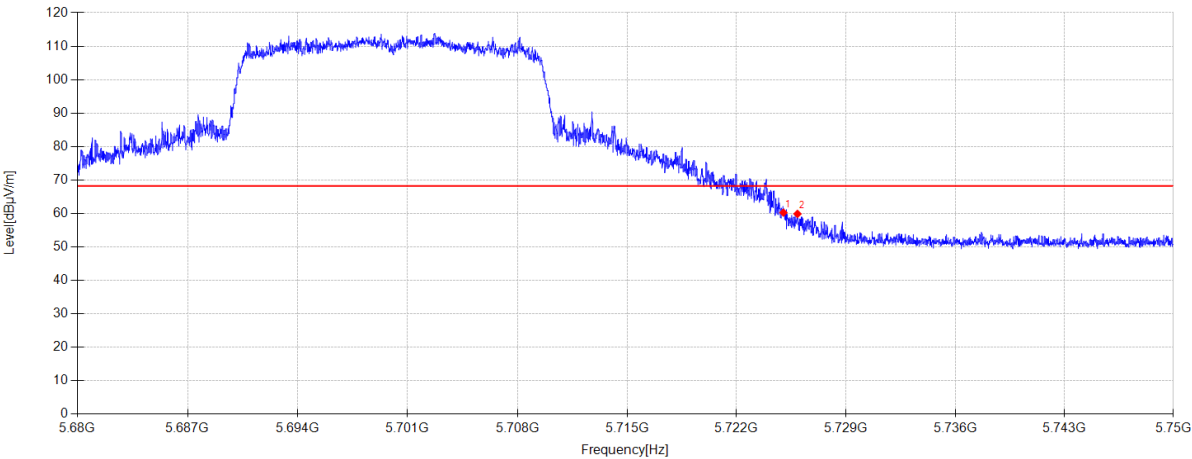


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.13	33.45	5.32	-29.65	60.25	68.20	7.95	PK	Vertical
2	5725.899	50.74	33.46	5.32	-29.65	59.87	68.20	8.33	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\91
Memo: Sample Numbler:S25081332-003 Power Setting:18

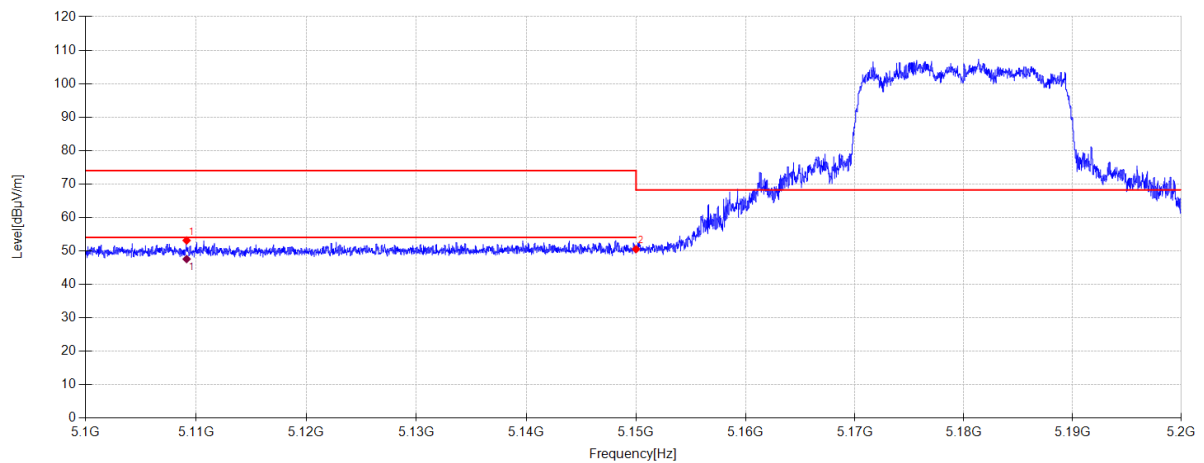

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5109.160	45.32	32.57	5.01	-29.78	53.12	74.00	20.88	PK	Horizontal
2	5150.000	42.35	32.90	5.04	-29.77	50.52	68.20	17.68	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5109.160	39.76	32.57	5.01	47.56	54.00	6.44	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE20 5180MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\92

Memo:Sample Numbler:S25081332-003 Power Setting:18

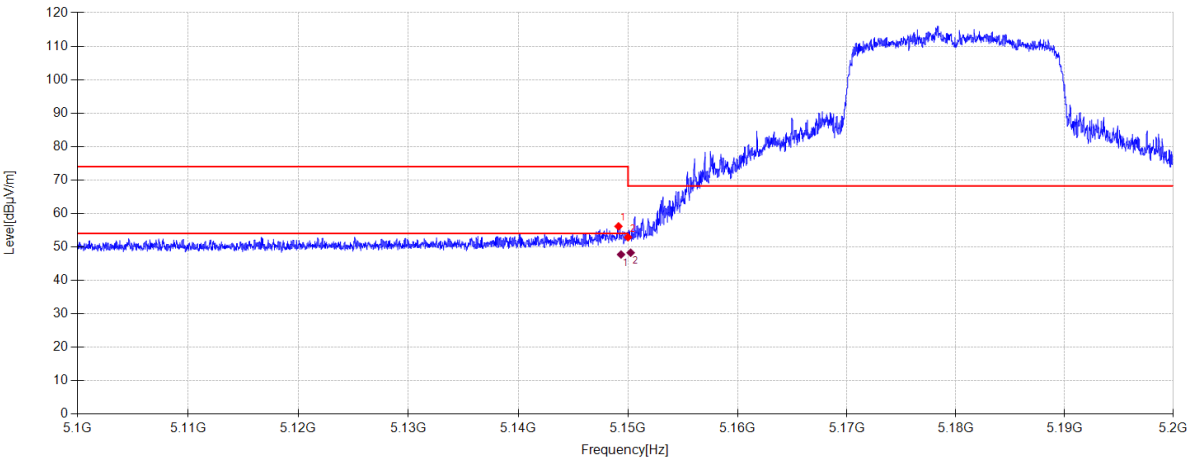

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.130	48.00	32.89	5.03	-29.77	56.15	74.00	17.85	PK	Vertical
2	5150.000	44.70	32.90	5.04	-29.77	52.87	68.20	15.33	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.360	39.57	32.89	5.03	47.72	54.00	6.28	AV	Vertical
2	5150.243	40.09	32.90	5.04	48.26	54.00	5.74	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE20 5320MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\89

Memo:Sample Numbre:S25081332-003 Power Setting:18

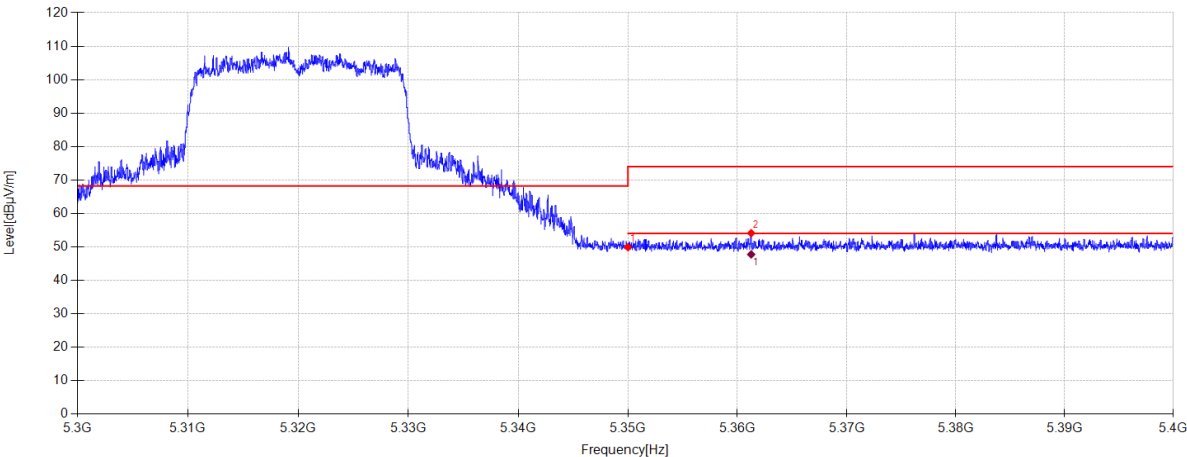

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.00	32.50	5.14	-29.73	49.91	68.20	18.29	PK	Horizontal
2	5361.260	46.11	32.59	5.14	-29.73	54.11	74.00	19.89	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5361.260	39.75	32.59	5.14	47.75	54.00	6.25	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE20 5320MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\90

Memo:Sample Numbler:S25081332-003 Power Setting:18

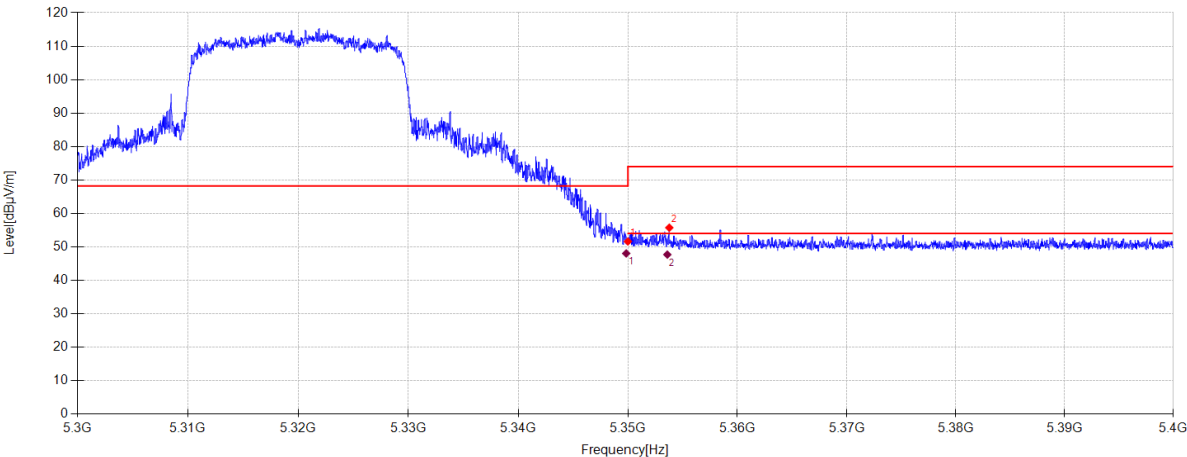

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.71	32.50	5.14	-29.73	51.62	68.20	16.58	PK	Vertical
2	5353.780	47.80	32.53	5.14	-29.73	55.74	74.00	18.26	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.844	40.14	32.50	5.14	48.05	54.00	5.95	AV	Vertical	
2	5353.598	39.76	32.53	5.14	47.70	54.00	6.30	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\87
Memo: Sample Numbler:S25081332-003 Power Setting:18

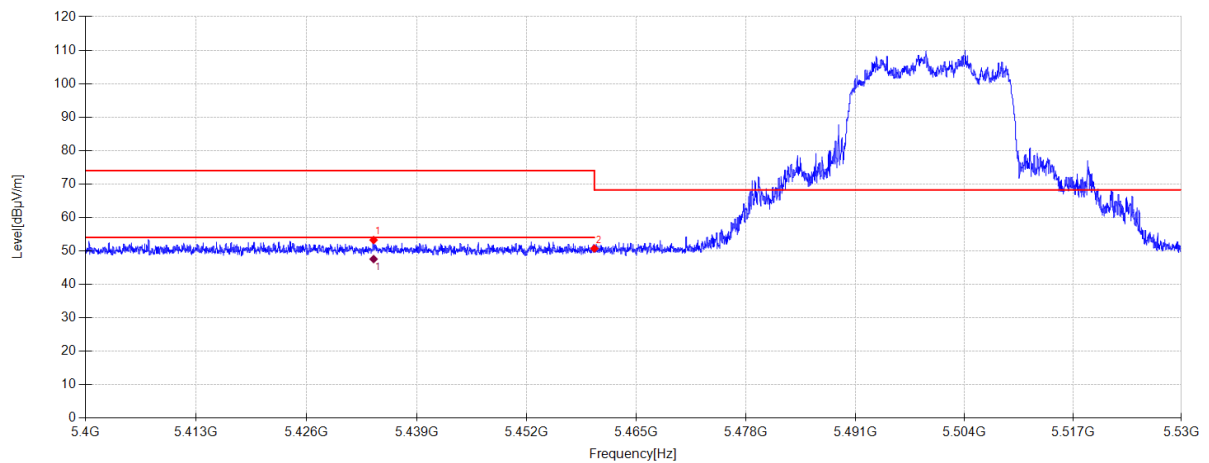

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5433.891	44.95	32.83	5.18	-29.71	53.25	74.00	20.75	PK	Horizontal
2	5460.000	42.33	32.90	5.19	-29.71	50.71	68.20	17.49	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5433.891	39.26	32.83	5.18	47.56	54.00	6.44	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\88
Memo: Sample Numbler:S25081332-003 Power Setting:18

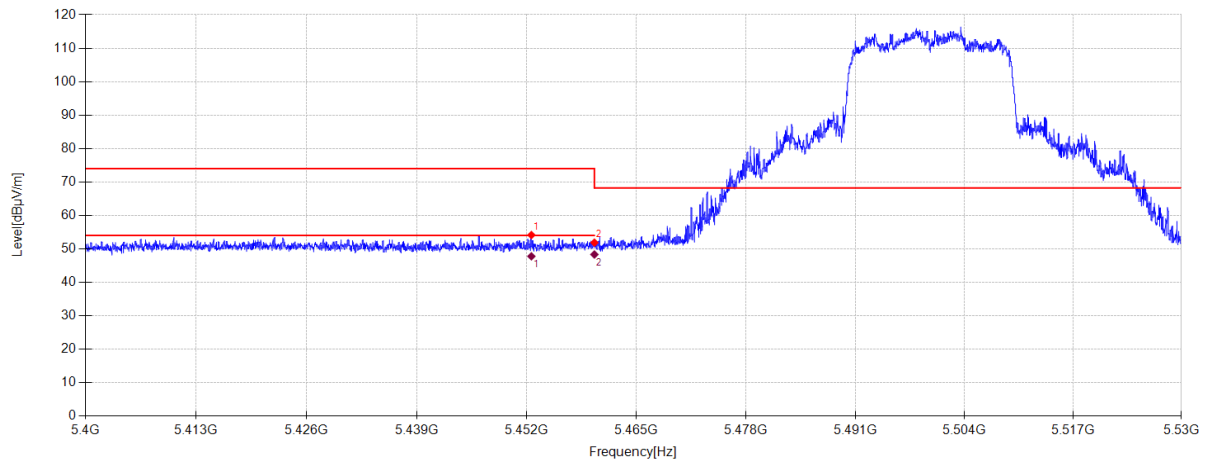

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.533	45.84	32.83	5.19	-29.71	54.15	74.00	19.85	PK	Vertical
2	5460.000	43.49	32.90	5.19	-29.71	51.87	68.20	16.33	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.533	39.47	32.83	5.19	47.78	54.00	6.22	AV	Vertical
2	5460.000	39.95	32.90	5.19	48.33	54.00	5.67	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\85

Memo:

Sample Numbler:S25081332-003 Power Setting:18

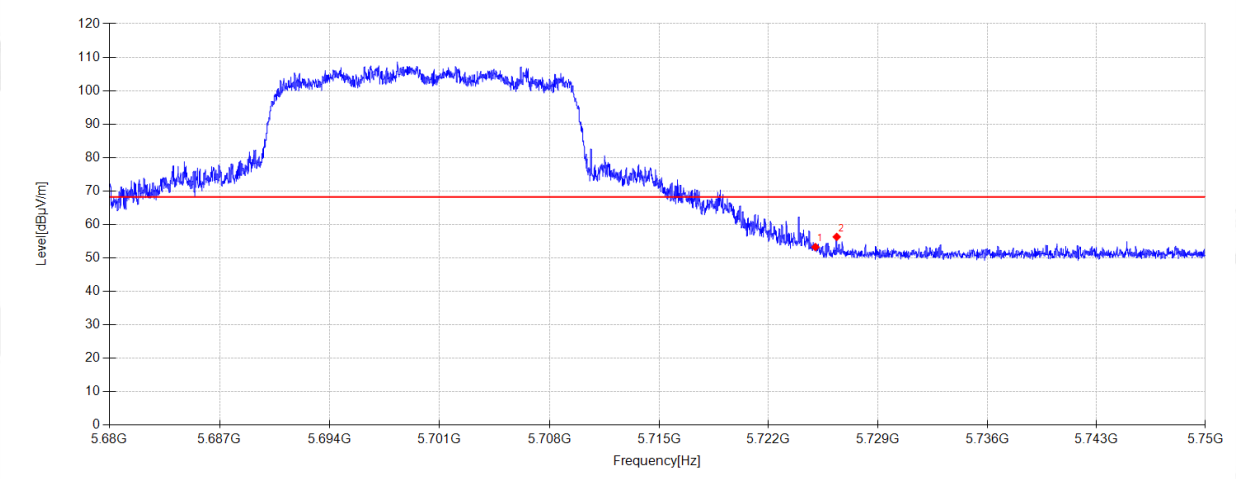

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.13	33.45	5.32	-29.65	53.25	68.20	14.95	PK	Horizontal
2	5726.361	47.13	33.47	5.32	-29.65	56.27	68.20	11.93	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\86

Memo:

Sample Numbler:S25081332-003 Power Setting:18

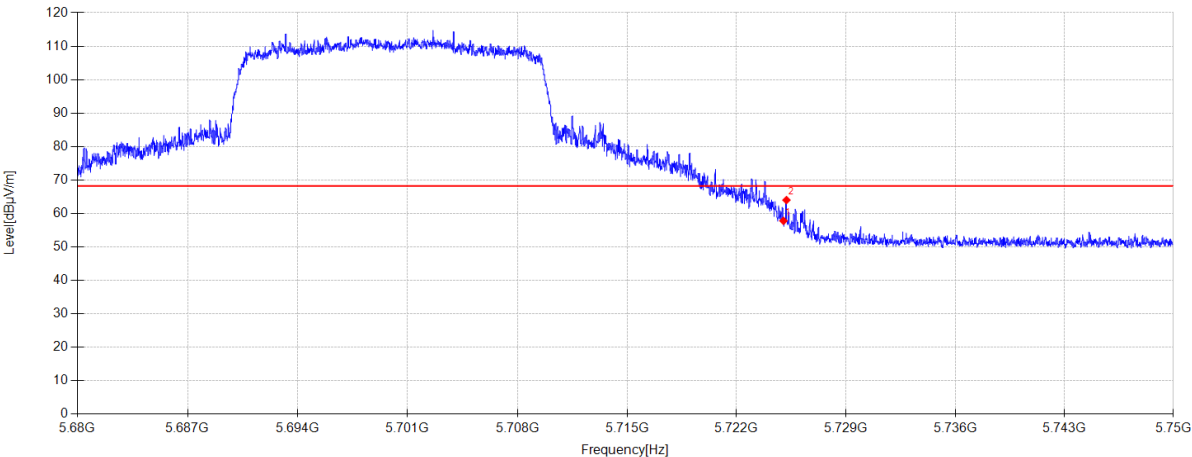


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	48.67	33.45	5.32	-29.65	57.79	68.20	10.41	PK	Vertical
2	5725.192	54.88	33.45	5.32	-29.65	64.00	68.20	4.20	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\117
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

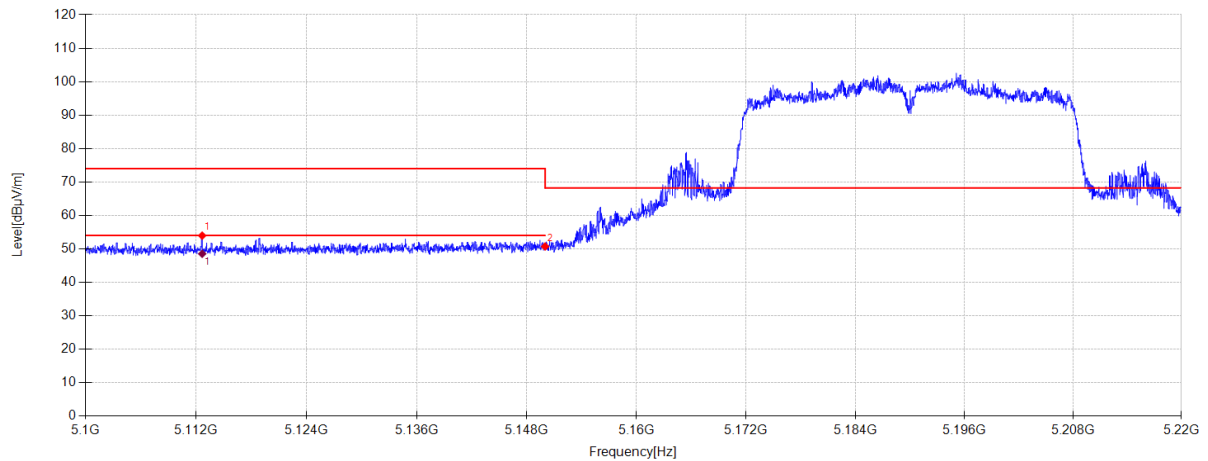

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5112.660	46.12	32.60	5.02	-29.78	53.96	74.00	20.04	PK	Horizontal
2	5150.000	42.55	32.90	5.04	-29.77	50.72	68.20	17.48	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5112.660	40.69	32.60	5.02	48.53	54.00	5.47	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\118
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

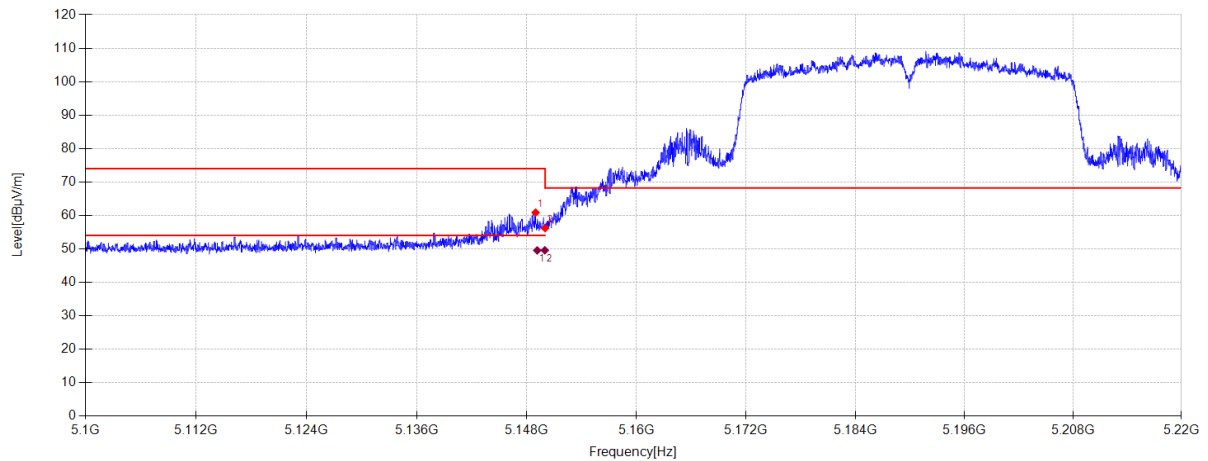

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.960	52.70	32.89	5.03	-29.77	60.85	74.00	13.15	PK	Vertical
2	5150.000	48.04	32.90	5.04	-29.77	56.21	68.20	11.99	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.135	41.40	32.89	5.03	49.55	54.00	4.45	AV	Vertical
2	5149.967	41.41	32.90	5.04	49.58	54.00	4.42	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\119
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

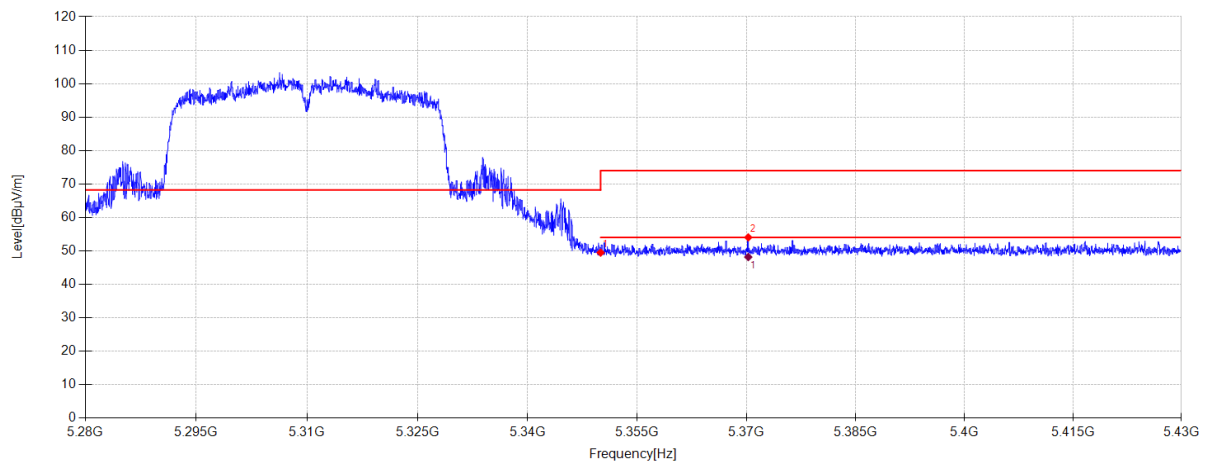

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.57	32.50	5.14	-29.73	49.48	68.20	18.72	PK	Horizontal
2	5370.225	45.96	32.66	5.15	-29.73	54.04	74.00	19.96	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5370.225	40.08	32.66	5.15	48.16	54.00	5.84	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11N40 5310MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\120
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

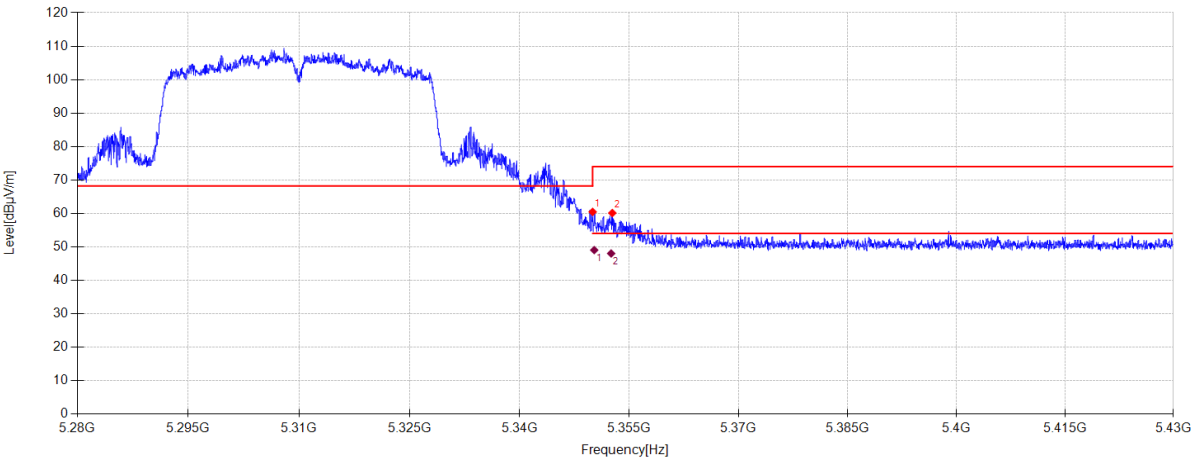


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	52.55	32.50	5.14	-29.73	60.46	68.20	7.74	PK	Vertical
2	5352.690	52.19	32.52	5.14	-29.73	60.12	74.00	13.88	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.220	41.13	32.50	5.14	49.04	54.00	4.96	AV	Vertical	
2	5352.533	40.10	32.52	5.14	48.03	NA	NA	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\121
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

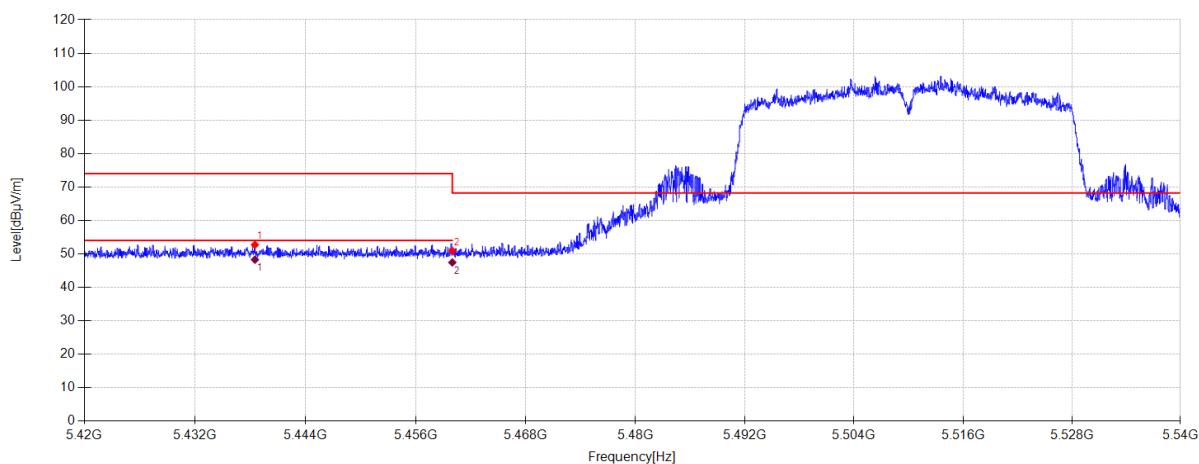

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.504	44.43	32.82	5.18	-29.71	52.72	74.00	21.28	PK	Horizontal
2	5460.000	42.51	32.90	5.19	-29.71	50.89	68.20	17.31	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.504	39.98	32.82	5.18	48.27	54.00	5.73	AV	Horizontal
2	5460.000	39.06	32.90	5.19	47.44	54.00	6.56	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\122
Memo: Sample Numbler:S25081332-003 Power Setting:15.5

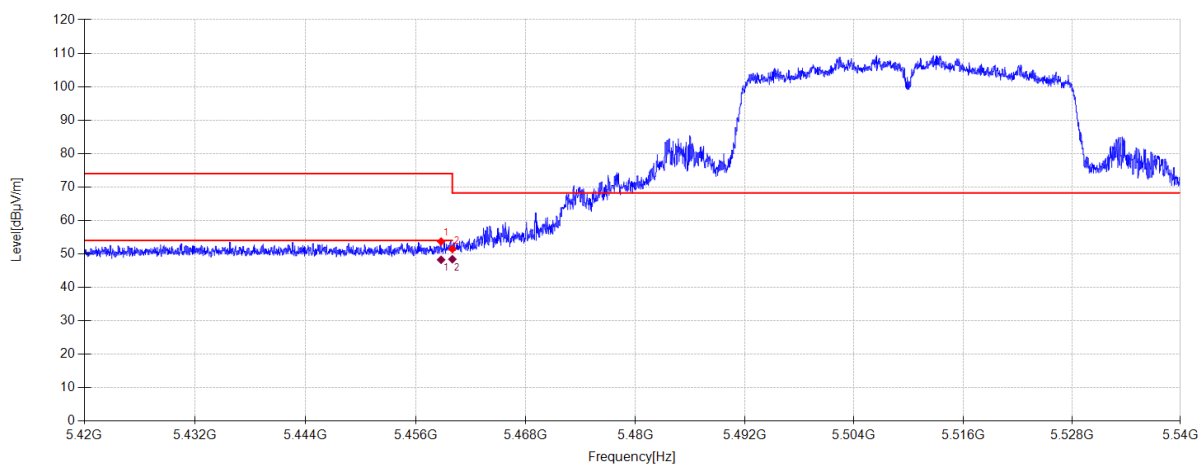

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.772	45.33	32.89	5.19	-29.71	53.70	74.00	20.30	PK	Vertical
2	5460.000	43.10	32.90	5.19	-29.71	51.48	68.20	16.72	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.772	39.87	32.89	5.19	48.24	54.00	5.76	AV	Vertical
2	5460.000	40.02	32.90	5.19	48.40	54.00	5.60	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\123

Memo:

Sample Numbler:S25081332-003 Power Setting:15.5

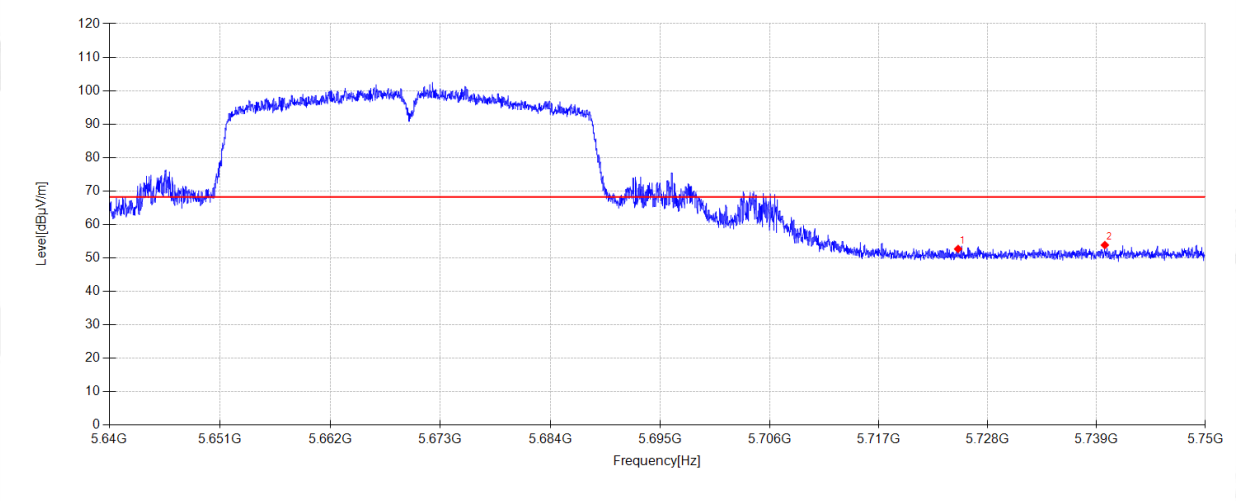

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.55	33.45	5.32	-29.65	52.67	68.20	15.53	PK	Horizontal
2	5739.825	44.49	33.66	5.33	-29.65	53.83	68.20	14.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\124

Memo:

Sample Numbler:S25081332-003 Power Setting:15.5

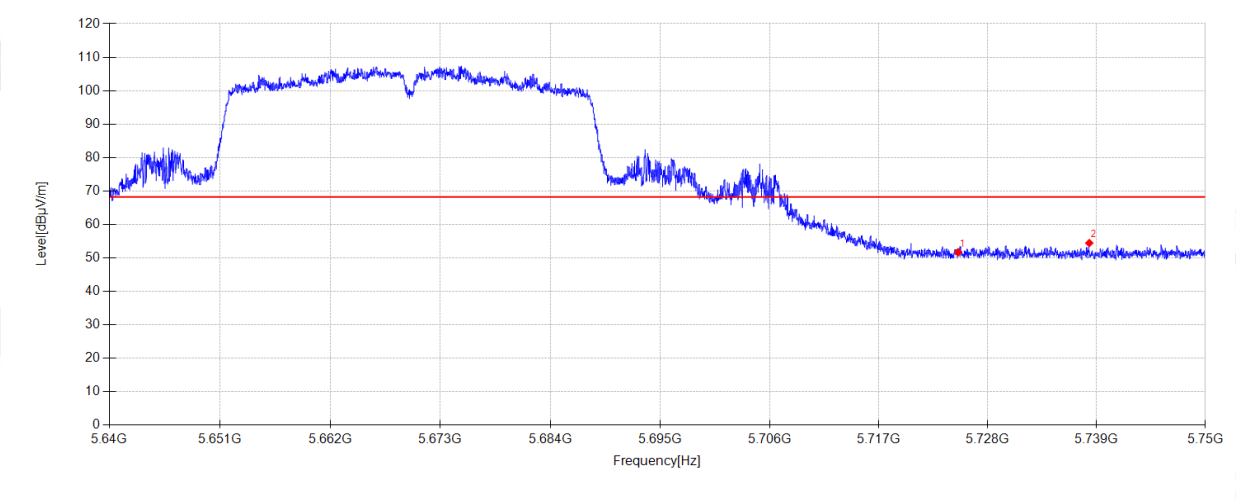

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.56	33.45	5.32	-29.65	51.68	68.20	16.52	PK	Vertical
2	5738.252	45.12	33.64	5.33	-29.65	54.44	68.20	13.76	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\109
Memo: Sample Numbler:S25081332-003 Power Setting:14

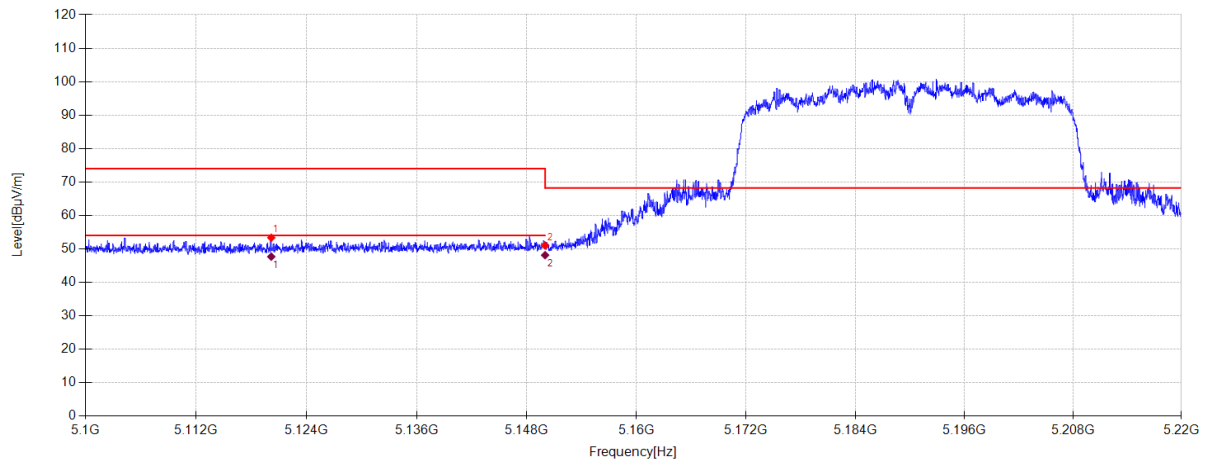

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5120.160	45.45	32.66	5.02	-29.78	53.35	74.00	20.65	PK	Horizontal
2	5150.000	42.83	32.90	5.04	-29.77	51.00	68.20	17.20	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5120.160	39.78	32.66	5.02	47.68	54.00	6.32	AV	Horizontal
2	5150.000	39.95	32.90	5.04	48.12	54.00	5.88	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\110
Memo: Sample Numbler:S25081332-003 Power Setting:14

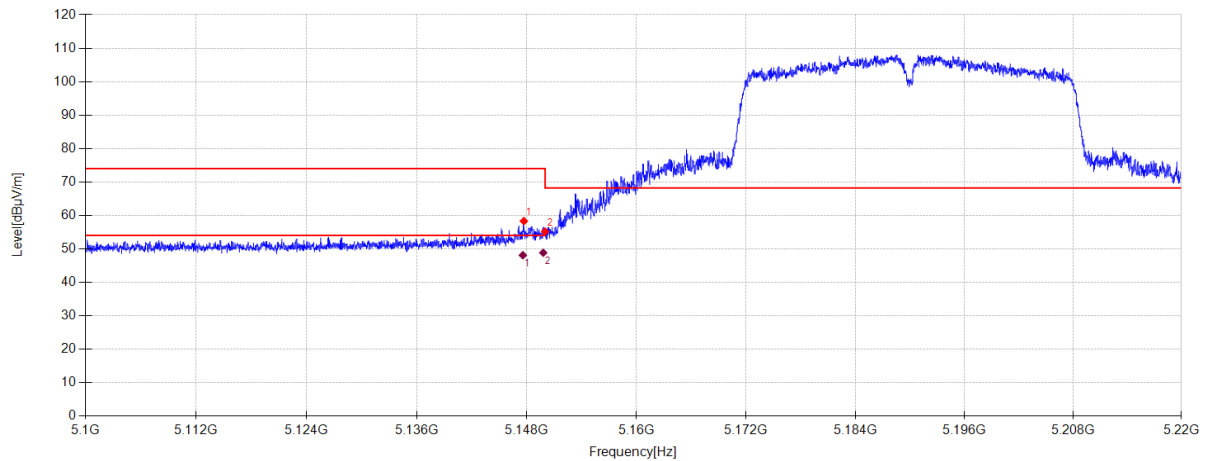**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.676	50.19	32.88	5.03	-29.77	58.33	74.00	15.67	PK	Vertical
2	5150.000	47.02	32.90	5.04	-29.77	55.19	68.20	13.01	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.566	39.96	32.88	5.03	48.10	54.00	5.90	AV	Vertical
2	5149.795	40.67	32.90	5.04	48.84	54.00	5.16	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AC40 5310MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\111

Memo: Sample Numbler:S25081332-003 Power Setting:14

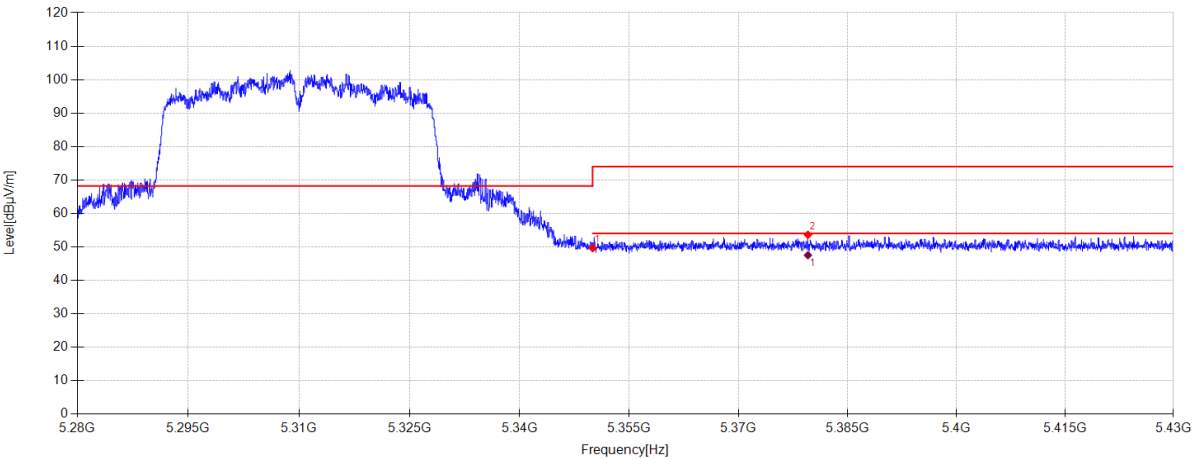


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.72	32.50	5.14	-29.73	49.63	68.20	18.57	PK	Horizontal
2	5379.525	45.45	32.74	5.15	-29.72	53.62	74.00	20.38	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5379.525	39.35	32.74	5.15	47.52	54.00	6.48	AV	Horizontal	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\112
Memo: Sample Numbler:S25081332-003 Power Setting:14

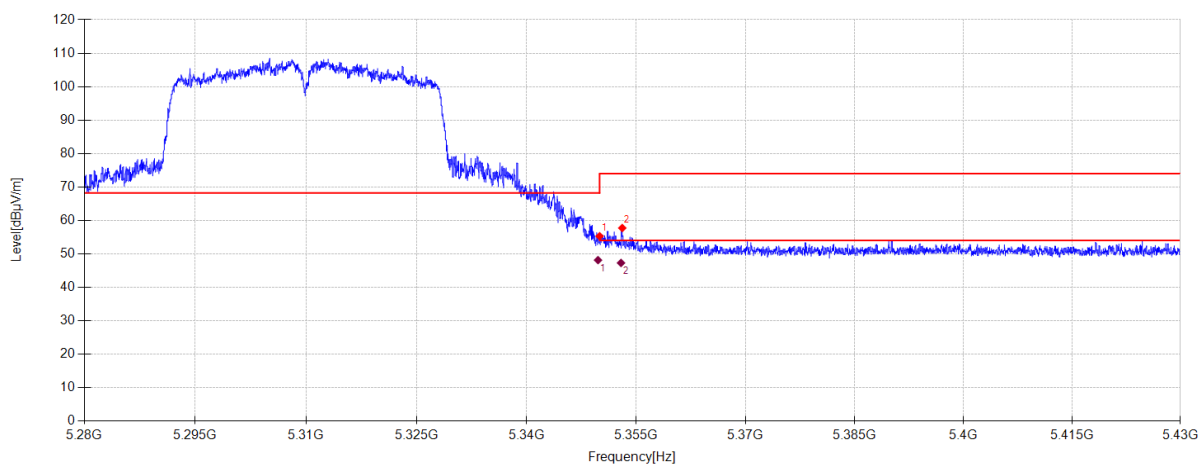

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.39	32.50	5.14	-29.73	55.30	68.20	12.90	PK	Vertical
2	5353.095	49.81	32.52	5.14	-29.73	57.74	74.00	16.26	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.779	40.23	32.50	5.14	48.14	54.00	5.86	AV	Vertical
2	5352.927	39.37	32.52	5.14	47.30	54.00	6.70	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\113
Memo: Sample Numbler:S25081332-003 Power Setting:14

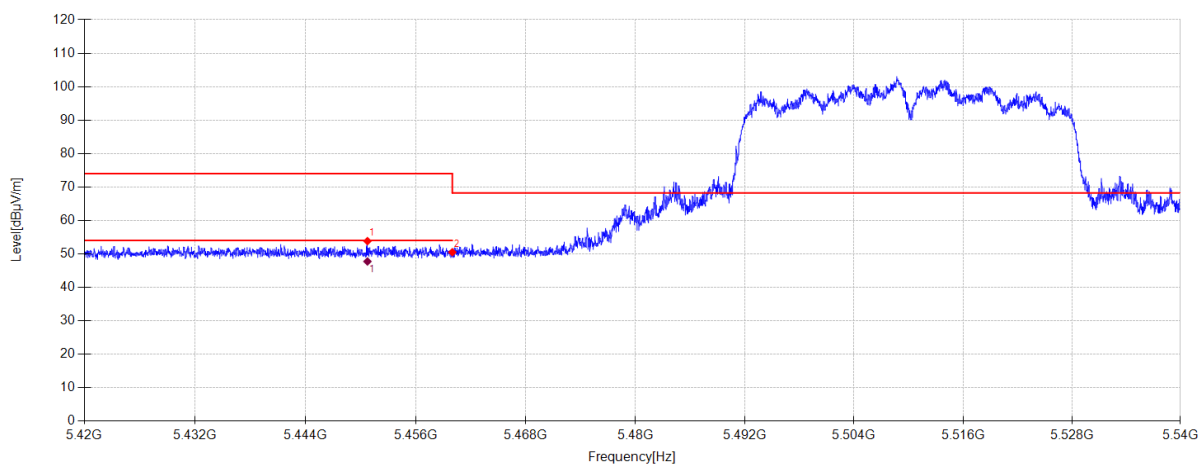

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.744	45.54	32.81	5.19	-29.71	53.83	74.00	20.17	PK	Horizontal
2	5460.000	42.13	32.90	5.19	-29.71	50.51	68.20	17.69	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.744	39.45	32.81	5.19	47.74	54.00	6.26	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\114
Memo: Sample Numbler:S25081332-003 Power Setting:14

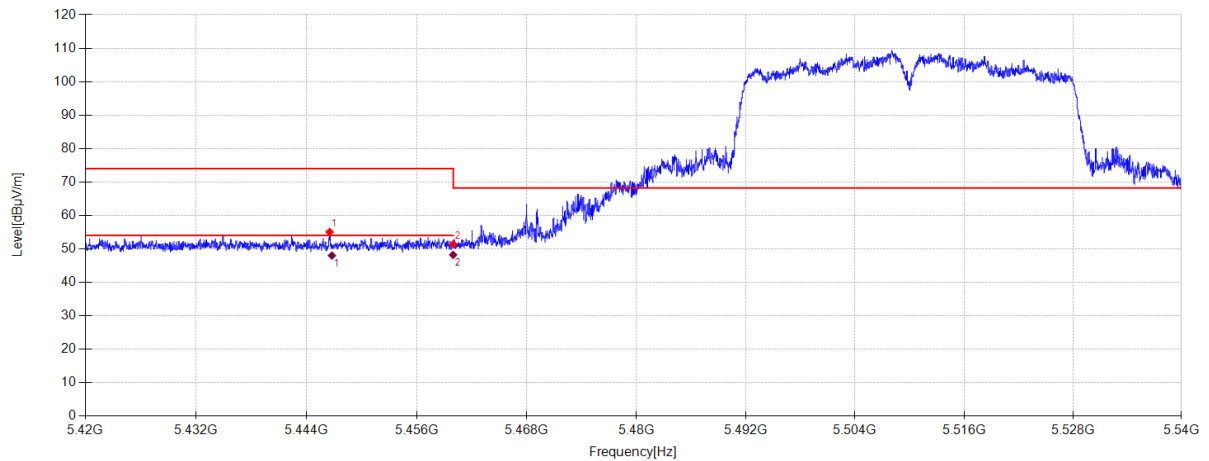

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.520	46.77	32.81	5.18	-29.71	55.05	74.00	18.95	PK	Vertical
2	5460.000	43.03	32.90	5.19	-29.71	51.41	68.20	16.79	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.769	39.73	32.81	5.18	48.01	54.00	5.99	AV	Vertical
2	5459.976	39.84	32.90	5.19	48.22	54.00	5.78	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AC40 5670MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\115

Memo: Sample Numbler:S25081332-003 Power Setting:14

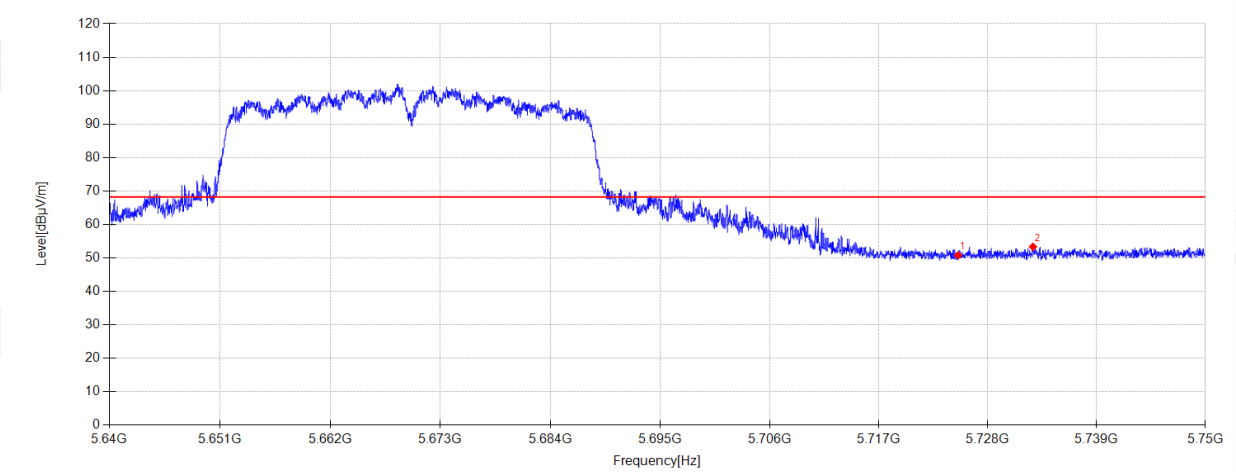

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.66	33.45	5.32	-29.65	50.78	68.20	17.42	PK	Horizontal
2	5732.565	44.08	33.56	5.33	-29.65	53.32	68.20	14.88	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\116

Memo:

Sample Numbler:S25081332-003 Power Setting:14

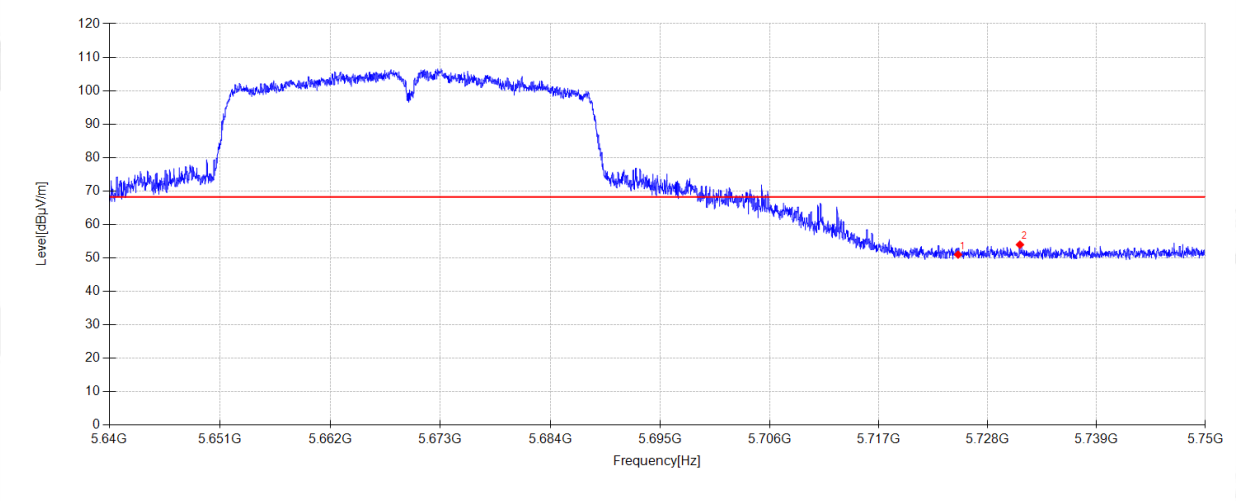

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.86	33.45	5.32	-29.65	50.98	68.20	17.22	PK	Vertical
2	5731.245	44.73	33.54	5.33	-29.65	53.95	68.20	14.25	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\101
Memo: Sample Numbler:S25081332-003 Power Setting:14

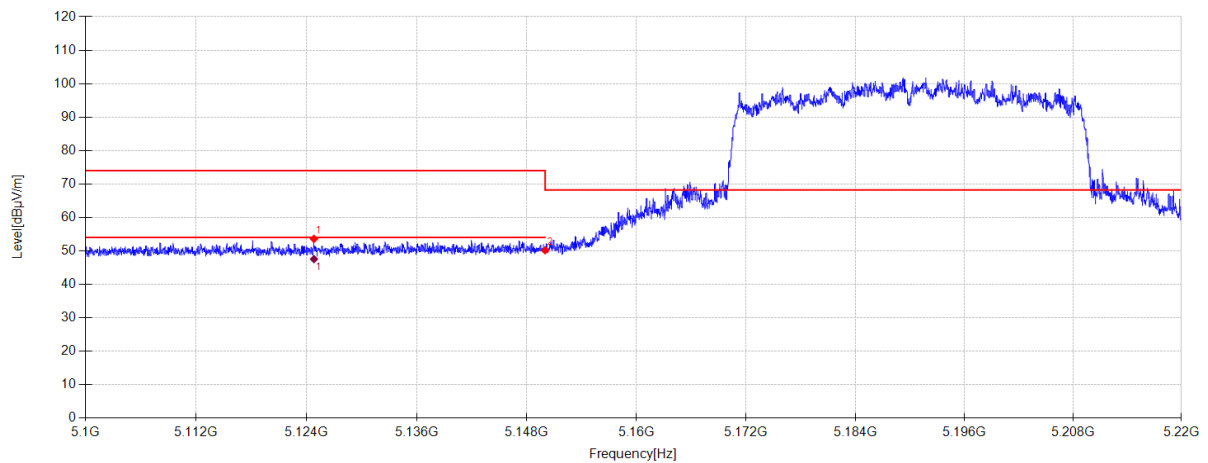

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5124.804	45.65	32.70	5.02	-29.78	53.59	74.00	20.41	PK	Horizontal
2	5150.000	42.02	32.90	5.04	-29.77	50.19	68.20	18.01	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5124.804	39.62	32.70	5.02	47.56	54.00	6.44	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\102
Memo: Sample Numbler:S25081332-003 Power Setting:14

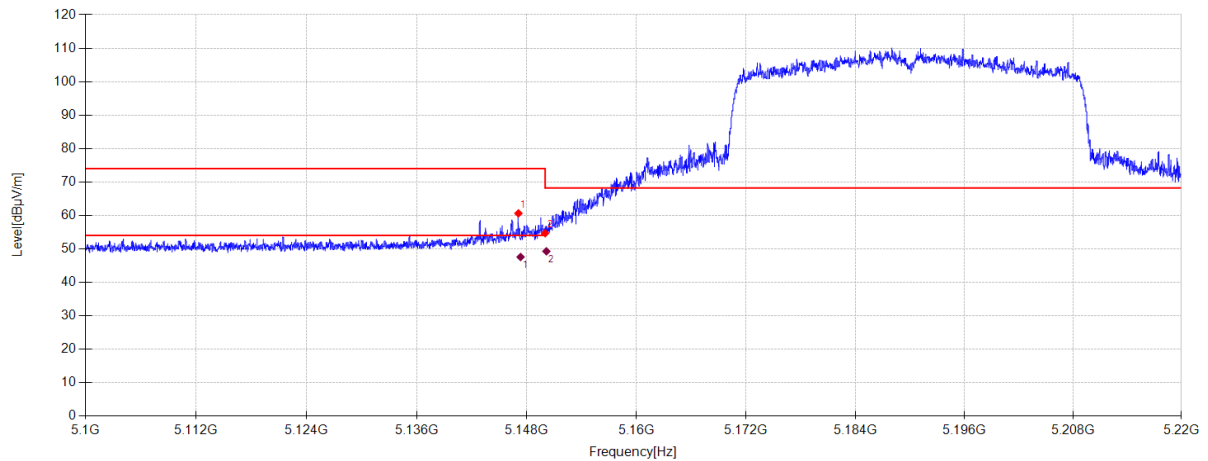

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.088	52.49	32.88	5.03	-29.77	60.63	74.00	13.37	PK	Vertical
2	5150.000	46.52	32.90	5.04	-29.77	54.69	68.20	13.51	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.321	39.44	32.88	5.03	47.58	54.00	6.42	AV	Vertical
2	5150.140	41.11	32.90	5.04	49.28	54.00	4.72	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AX40 5310MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\103

Memo:Sample Numbler:S25081332-003 Power Setting:14

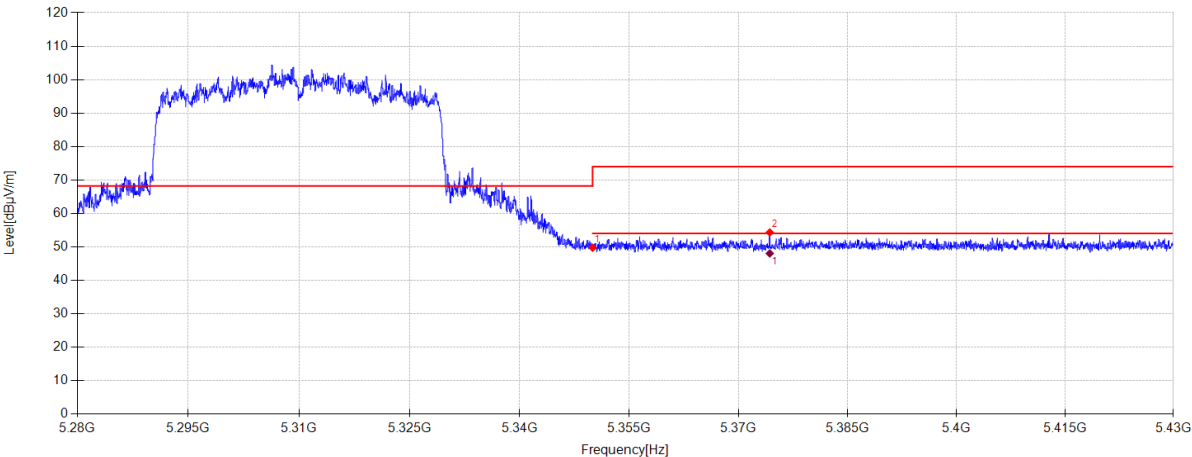


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.83	32.50	5.14	-29.73	49.74	68.20	18.46	PK	Horizontal
2	5374.275	46.21	32.69	5.15	-29.73	54.32	74.00	19.68	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5374.275	39.94	32.69	5.15	48.05	54.00	5.95	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\104
Memo: Sample Numbler:S25081332-003 Power Setting:14

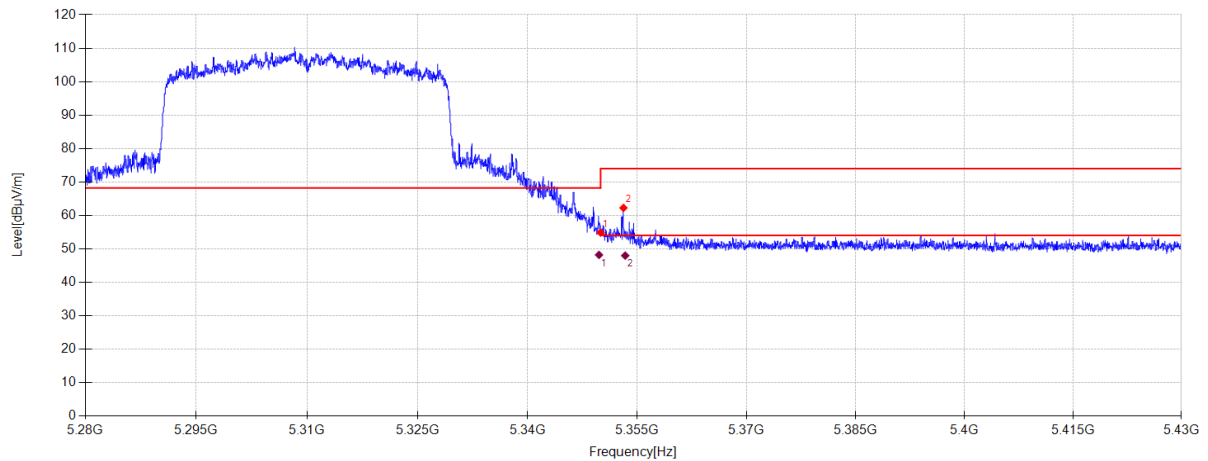

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.96	32.50	5.14	-29.73	54.87	68.20	13.33	PK	Vertical
2	5353.125	54.32	32.53	5.14	-29.73	62.26	74.00	11.74	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.780	40.29	32.50	5.14	48.20	54.00	5.80	AV	Vertical
2	5353.362	40.06	32.53	5.14	48.00	54.00	6.00	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\105

Memo:

Sample Numbler:S25081332-003 Power Setting:14

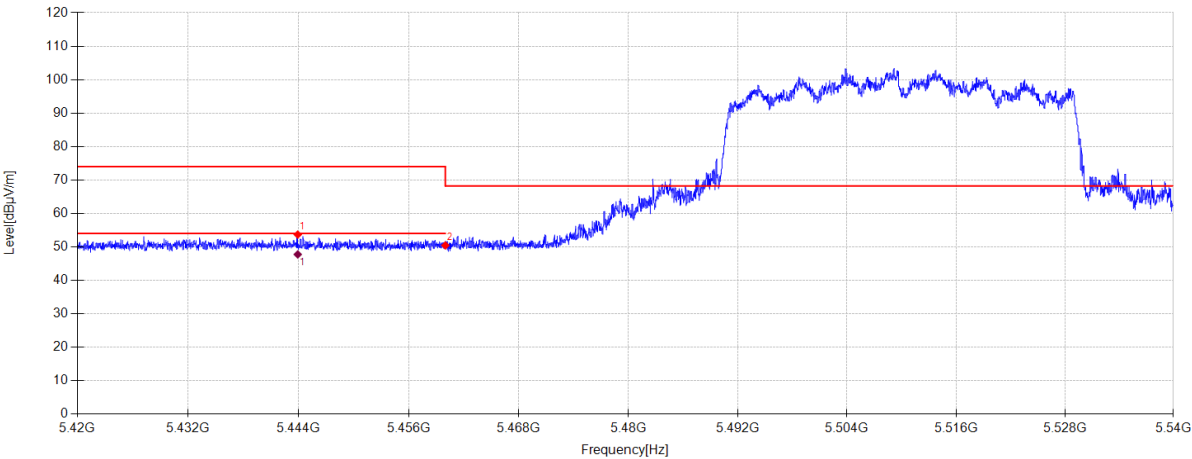

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5443.916	45.40	32.81	5.18	-29.71	53.68	74.00	20.32	PK	Horizontal
2	5460.000	42.07	32.90	5.19	-29.71	50.45	68.20	17.75	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5443.916	39.47	32.81	5.18	47.75	54.00	6.25	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\106
Memo: Sample Numbler:S25081332-003 Power Setting:14

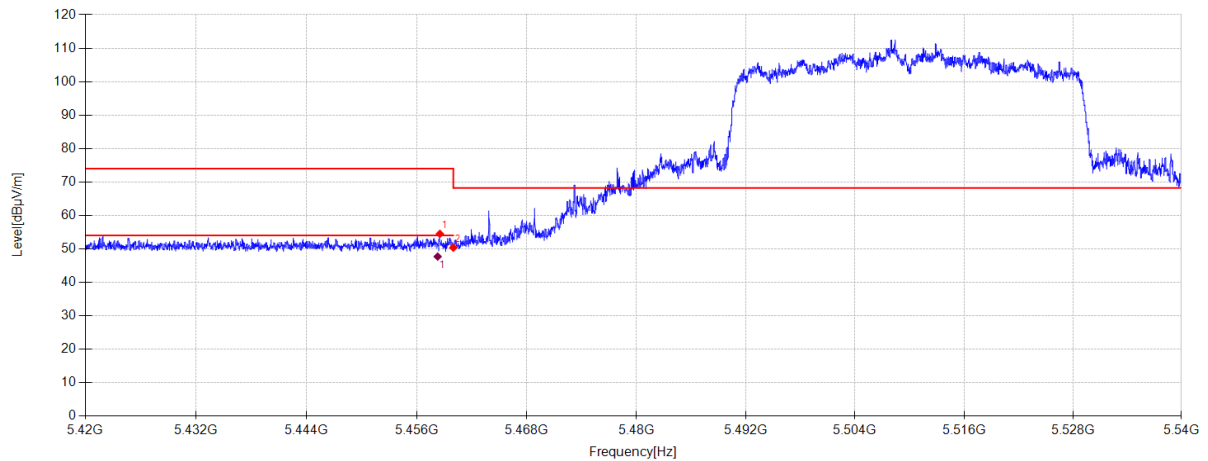

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.532	46.13	32.89	5.19	-29.71	54.50	74.00	19.50	PK	Vertical
2	5460.000	41.99	32.90	5.19	-29.71	50.37	68.20	17.83	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.289	39.33	32.89	5.19	47.70	54.00	6.30	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\107

Memo:

Sample Numbler:S25081332-003 Power Setting:14

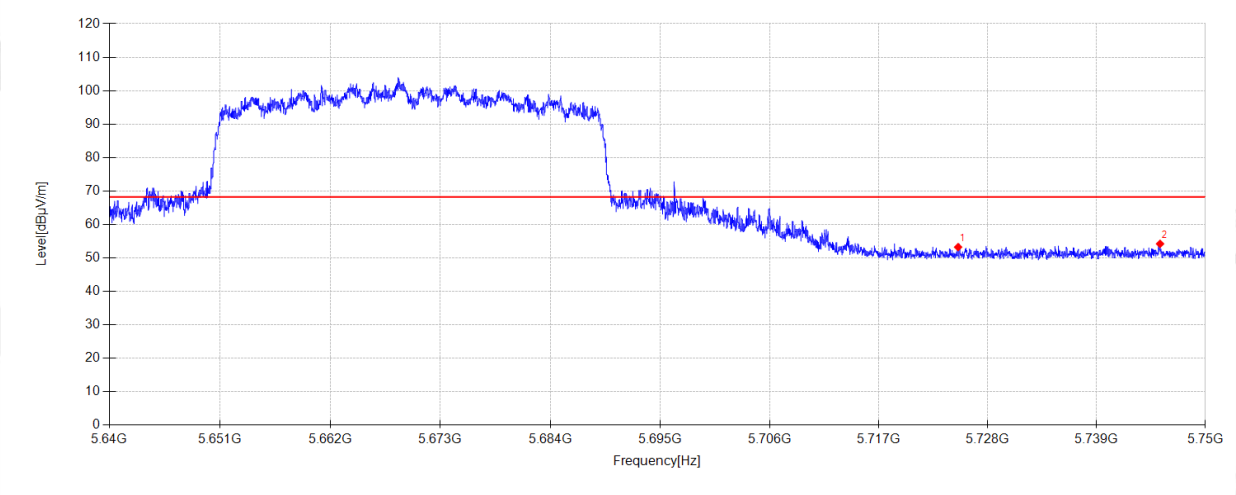

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.10	33.45	5.32	-29.65	53.22	68.20	14.98	PK	Horizontal
2	5745.413	44.78	33.74	5.33	-29.65	54.20	68.20	14.00	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\108

Memo:

Sample Numbler:S25081332-003 Power Setting:14

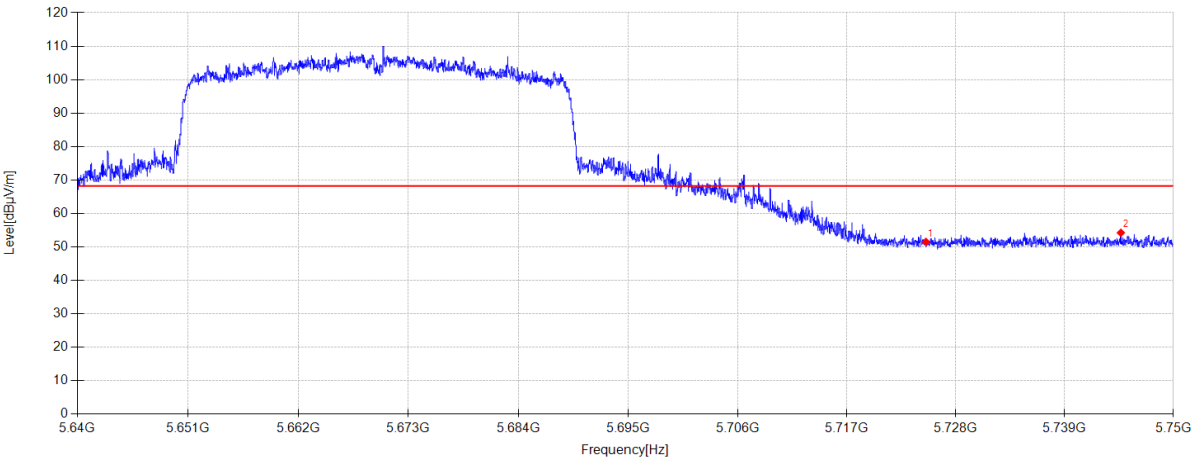

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.35	33.45	5.32	-29.65	51.47	68.20	16.73	PK	Vertical
2	5744.687	44.82	33.73	5.33	-29.65	54.23	68.20	13.97	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE40 5190MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\93

Memo:Sample Numbler:S25081332-003 Power Setting:14

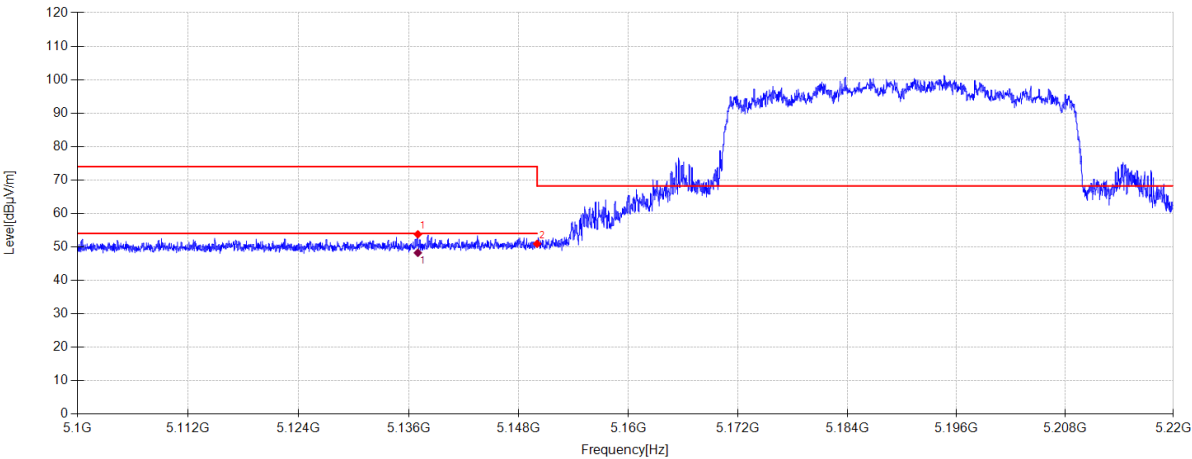

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.984	45.71	32.80	5.03	-29.77	53.77	74.00	20.23	PK	Horizontal
2	5150.000	42.76	32.90	5.04	-29.77	50.93	68.20	17.27	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5136.984	40.16	32.80	5.03	48.22	54.00	5.78	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\94
Memo: Sample Numbler:S25081332-003 Power Setting:14

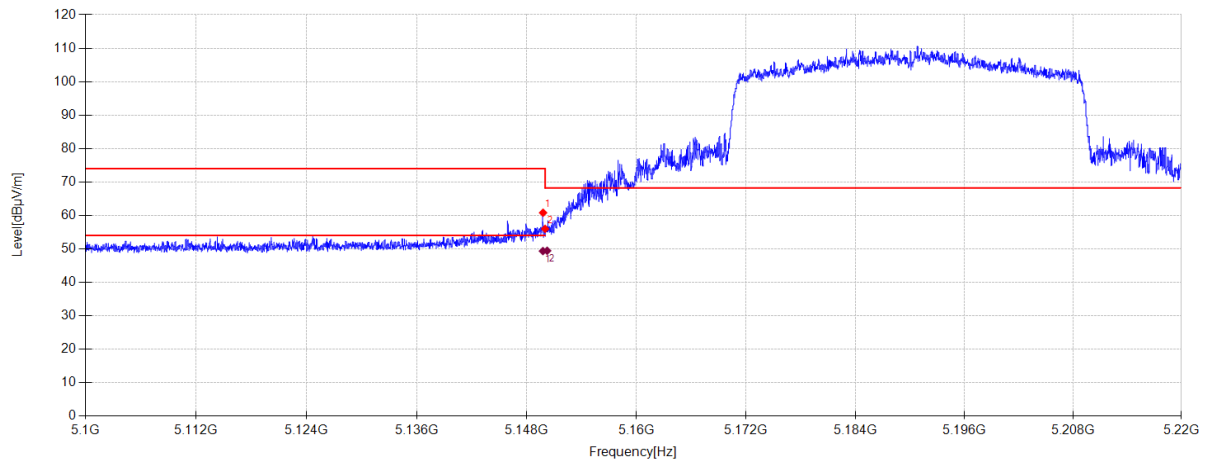

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.776	52.65	32.90	5.03	-29.77	60.81	74.00	13.19	PK	Vertical
2	5150.000	47.82	32.90	5.04	-29.77	55.99	68.20	12.21	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.758	41.19	32.90	5.03	49.35	54.00	4.65	AV	Vertical
2	5150.219	41.27	32.90	5.04	49.44	54.00	4.56	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE40 5310MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\95

Memo: Sample Numbler:S25081332-003 Power Setting:14

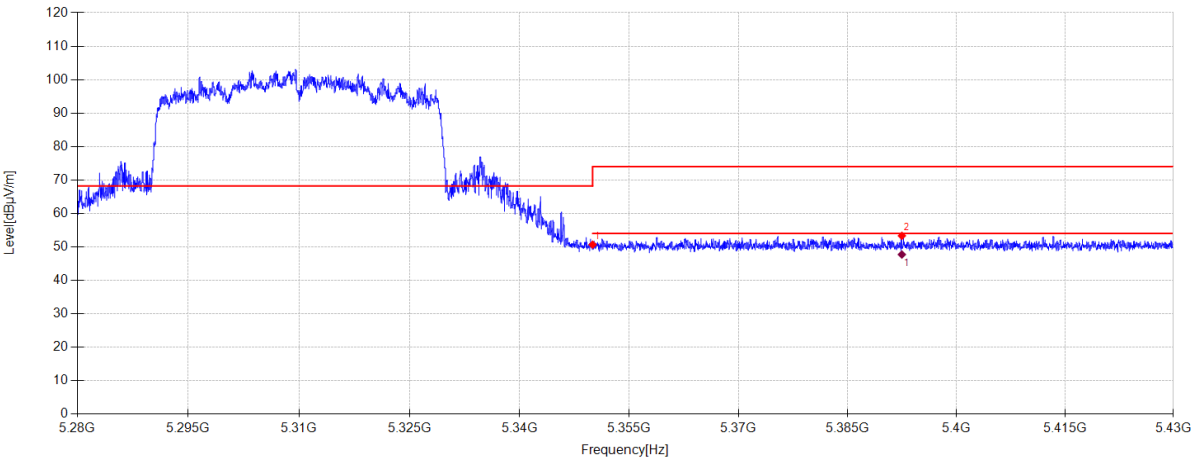


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.76	32.50	5.14	-29.73	50.67	68.20	17.53	PK	Horizontal
2	5392.455	45.03	32.84	5.16	-29.72	53.31	74.00	20.69	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5392.455	39.44	32.84	5.16	47.72	54.00	6.28	AV	Horizontal	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\96
Memo: Sample Numbler:S25081332-003 Power Setting:14

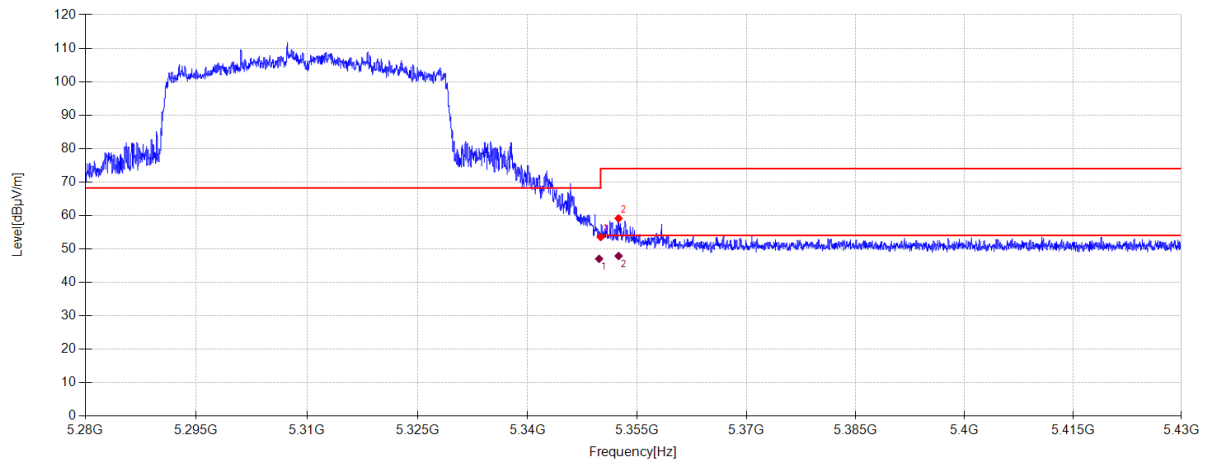

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.63	32.50	5.14	-29.73	53.54	68.20	14.66	PK	Vertical
2	5352.450	51.19	32.52	5.14	-29.73	59.12	74.00	14.88	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.795	39.12	32.50	5.14	47.03	54.00	6.97	AV	Vertical
2	5352.461	39.95	32.52	5.14	47.88	54.00	6.12	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE40 5510MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\97

Memo:Sample Numbler:S25081332-003 Power Setting:14

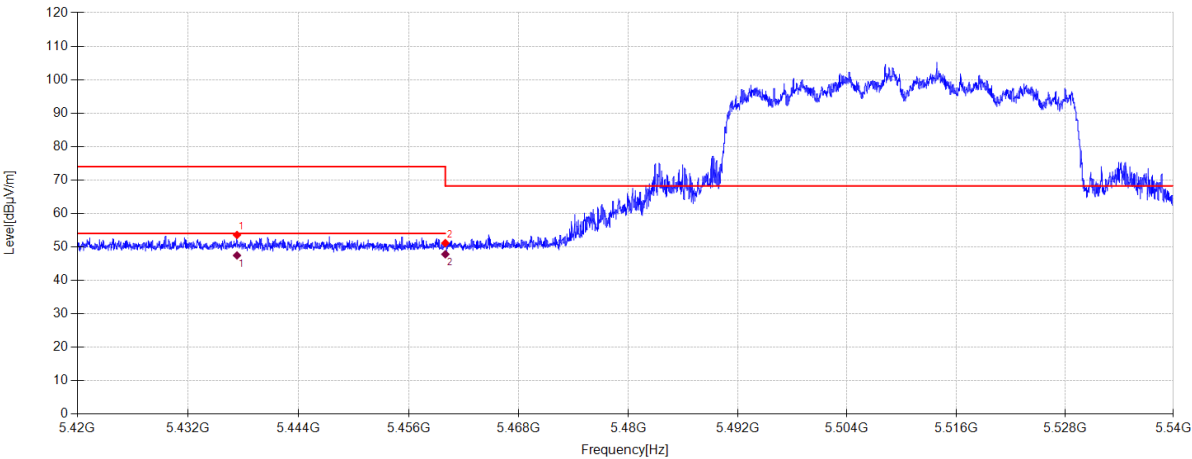

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5437.316	45.27	32.83	5.18	-29.71	53.57	74.00	20.43	PK	Horizontal
2	5460.000	42.75	32.90	5.19	-29.71	51.13	68.20	17.07	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5437.316	39.14	32.83	5.18	47.44	54.00	6.56	AV	Horizontal	
2	5460.000	39.42	32.90	5.19	47.80	54.00	6.20	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\98
Memo: Sample Numbler:S25081332-003 Power Setting:14

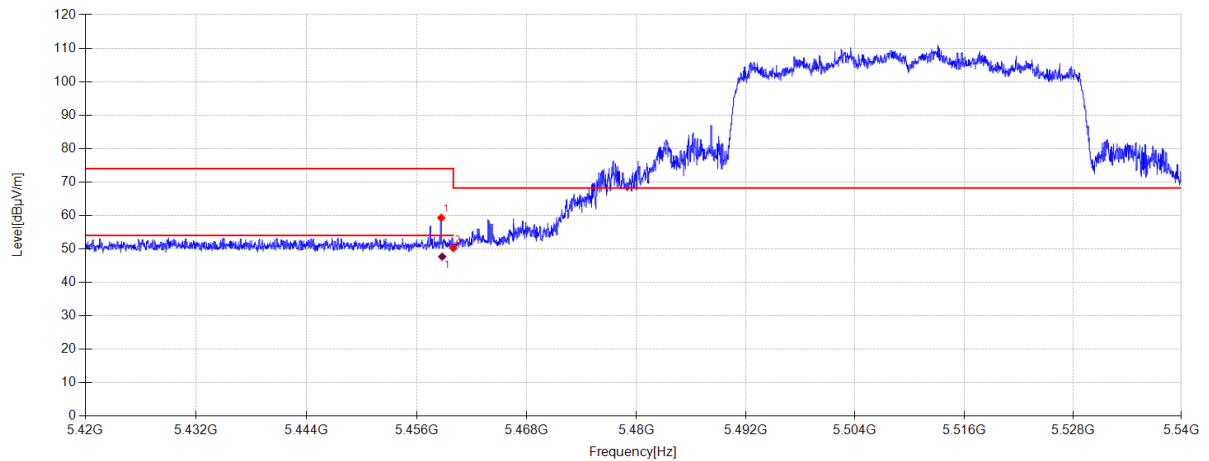

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.688	50.93	32.89	5.19	-29.71	59.30	74.00	14.70	PK	Vertical
2	5460.000	41.89	32.90	5.19	-29.71	50.27	68.20	17.93	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.779	39.30	32.89	5.19	47.67	54.00	6.33	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\99

Memo:

Sample Numbler:S25081332-003 Power Setting:14

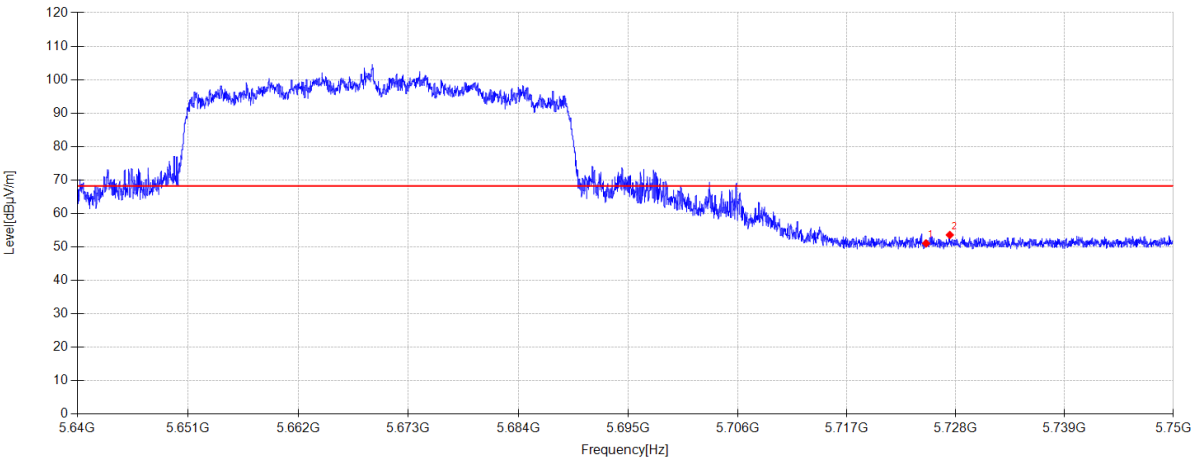

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.93	33.45	5.32	-29.65	51.05	68.20	17.15	PK	Horizontal
2	5727.395	44.42	33.48	5.32	-29.65	53.57	68.20	14.63	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11BE40 5670MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\100
Memo: Sample Numbler:S25081332-003 Power Setting:14

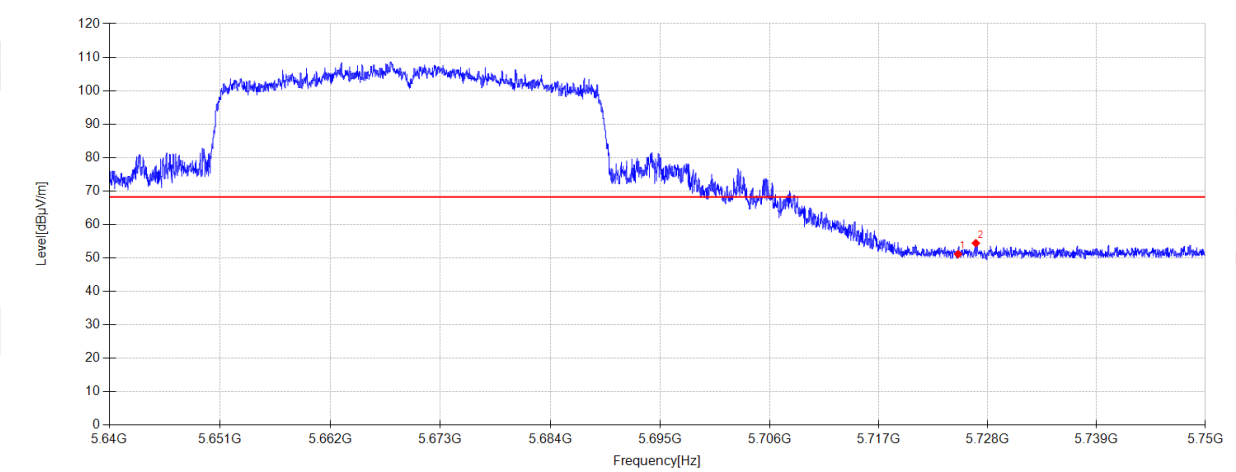

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.01	33.45	5.32	-29.65	51.13	68.20	17.07	PK	Vertical
2	5726.790	45.25	33.48	5.32	-29.65	54.40	68.20	13.80	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AC80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\125

Memo:

Sample Numbler:S25081332-003 Power Setting:13

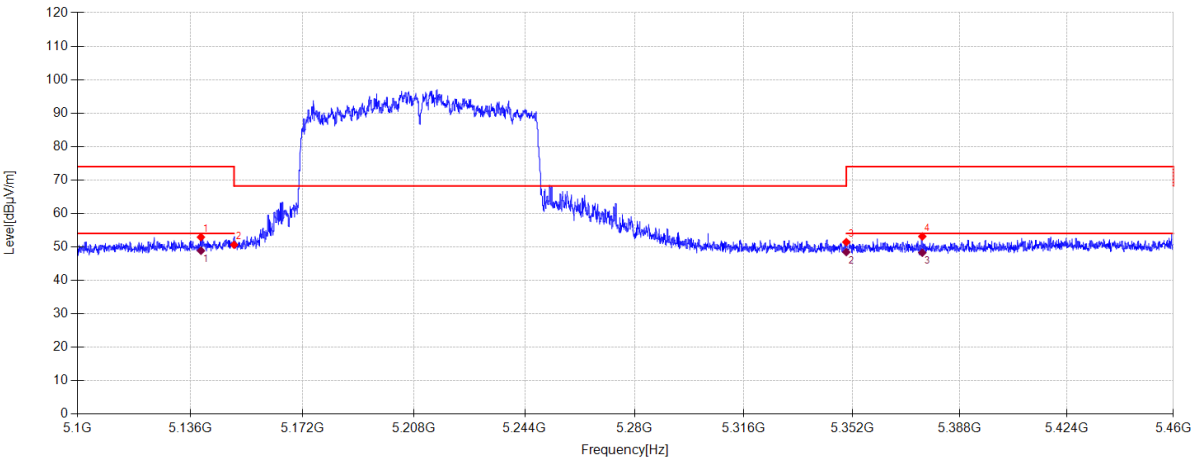

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.384	44.83	32.82	5.03	-29.77	52.91	74.00	21.09	PK	Horizontal
2	5150.000	42.45	32.90	5.04	-29.77	50.62	68.20	17.58	PK	Horizontal
3	5350.000	43.52	32.50	5.14	-29.73	51.43	68.20	16.77	PK	Horizontal
4	5375.364	44.99	32.70	5.15	-29.72	53.12	74.00	20.88	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.384	40.76	32.82	5.03	48.84	54.00	5.16	AV	Horizontal	
2	5350.000	40.52	32.50	5.14	48.43	54.00	5.57	AV	Horizontal	
3	5375.364	40.13	32.70	5.15	48.26	54.00	5.74	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC80 5210MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\126
Memo: Sample Numbler:S25081332-003 Power Setting:13

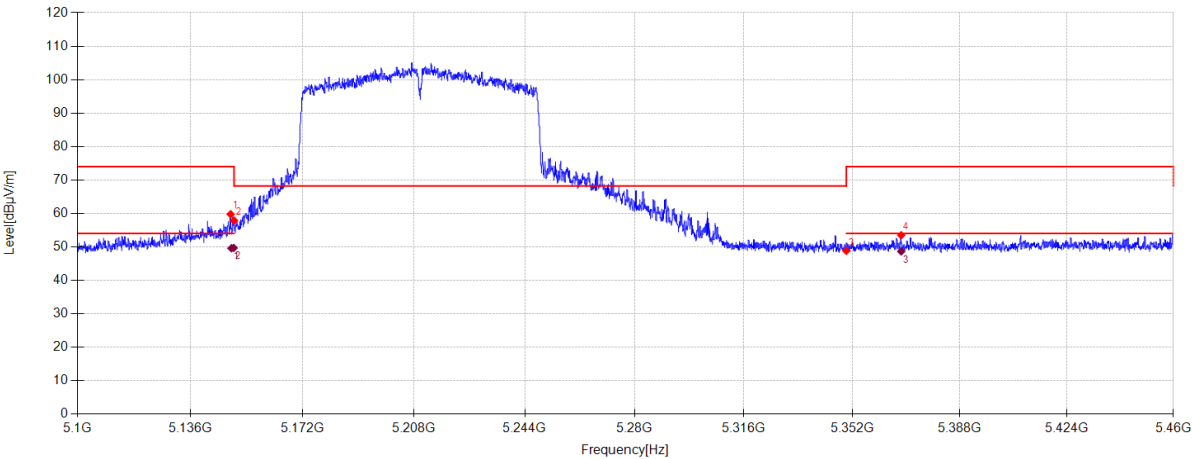


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.888	51.63	32.89	5.03	-29.77	59.78	74.00	14.22	PK	Vertical
2	5150.000	49.70	32.90	5.04	-29.77	57.87	68.20	10.33	PK	Vertical
3	5350.000	40.90	32.50	5.14	-29.73	48.81	68.20	19.39	PK	Vertical
4	5368.308	45.44	32.65	5.14	-29.73	53.50	74.00	20.50	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5149.134	41.45	32.89	5.03	49.60	54.00	4.40	AV	Vertical	
2	5149.866	41.53	32.90	5.04	49.70	54.00	4.30	AV	Vertical	
3	5368.308	40.58	32.65	5.14	48.64	54.00	5.36	AV	Vertical	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\127
Memo: Sample Numbler:S25081332-003 Power Setting:13

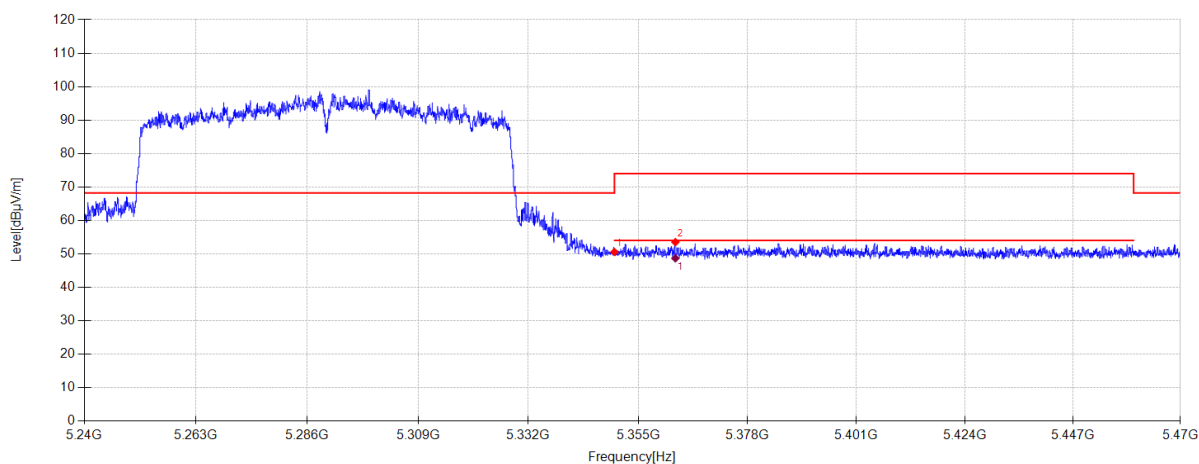

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.65	32.50	5.14	-29.73	50.56	68.20	17.64	PK	Horizontal
2	5362.797	45.51	32.60	5.14	-29.73	53.52	74.00	20.48	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5362.797	40.67	32.60	5.14	48.68	54.00	5.32	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AC80 5290MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\128

Memo:Sample Numbre:S25081332-003 Power Setting:13

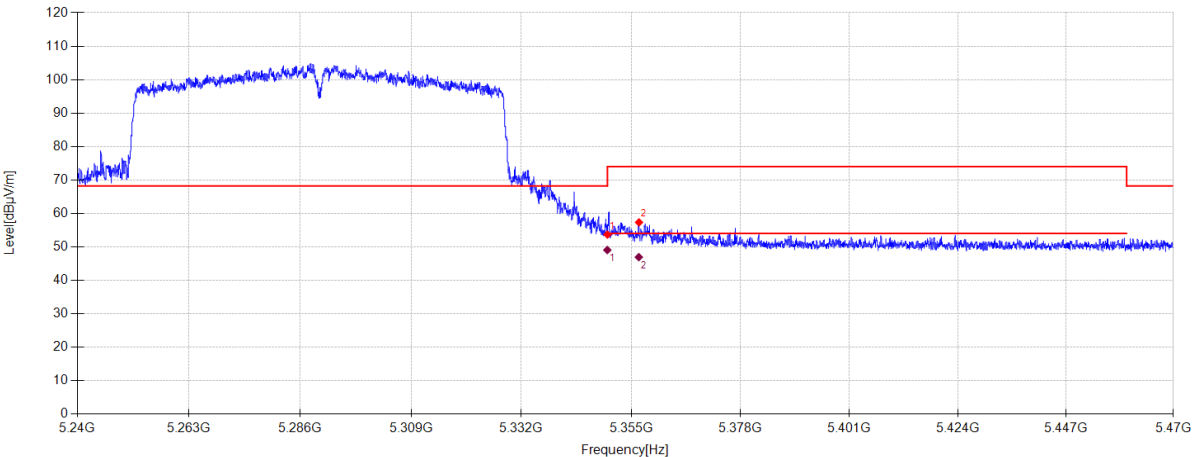

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.77	32.50	5.14	-29.73	53.68	68.20	14.52	PK	Vertical
2	5356.633	49.38	32.55	5.14	-29.73	57.34	74.00	16.66	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.980	41.15	32.50	5.14	49.06	54.00	4.94	AV	Vertical	
2	5356.600	38.98	32.55	5.14	46.94	54.00	7.06	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\129
Memo: Sample Numbler:S25081332-003 Power Setting:13

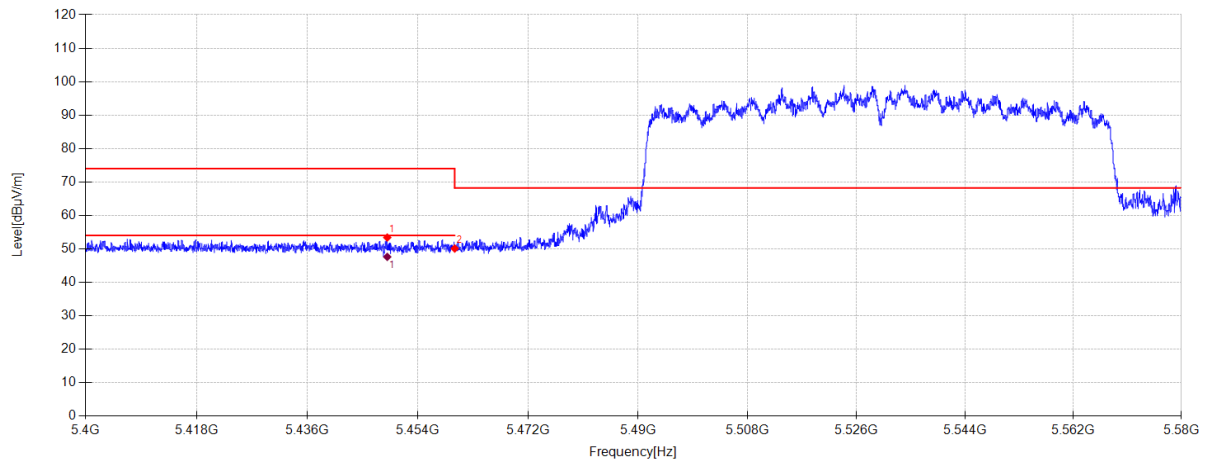

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.996	45.13	32.80	5.18	-29.71	53.40	74.00	20.60	PK	Horizontal
2	5460.000	41.73	32.90	5.19	-29.71	50.11	68.20	18.09	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.996	39.34	32.80	5.18	47.61	54.00	6.39	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\130
Memo: Sample Numbler:S25081332-003 Power Setting:13

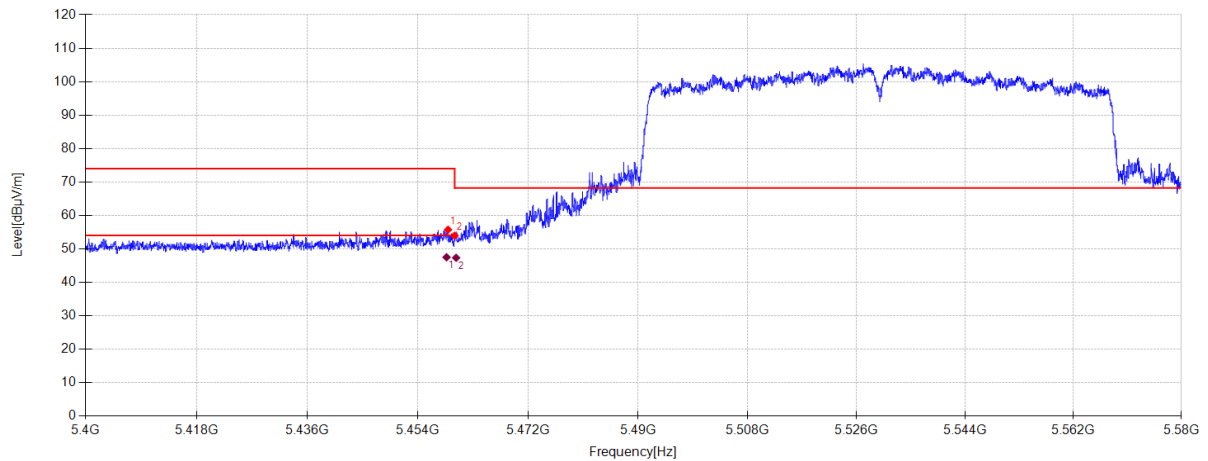

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.914	47.36	32.89	5.19	-29.71	55.73	74.00	18.27	PK	Vertical
2	5460.000	45.58	32.90	5.19	-29.71	53.96	68.20	14.24	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.673	39.13	32.89	5.19	47.50	54.00	6.50	AV	Vertical
2	5460.236	38.95	32.90	5.19	47.33	54.00	6.67	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\131

Memo:

Sample Numbler:S25081332-003 Power Setting:13

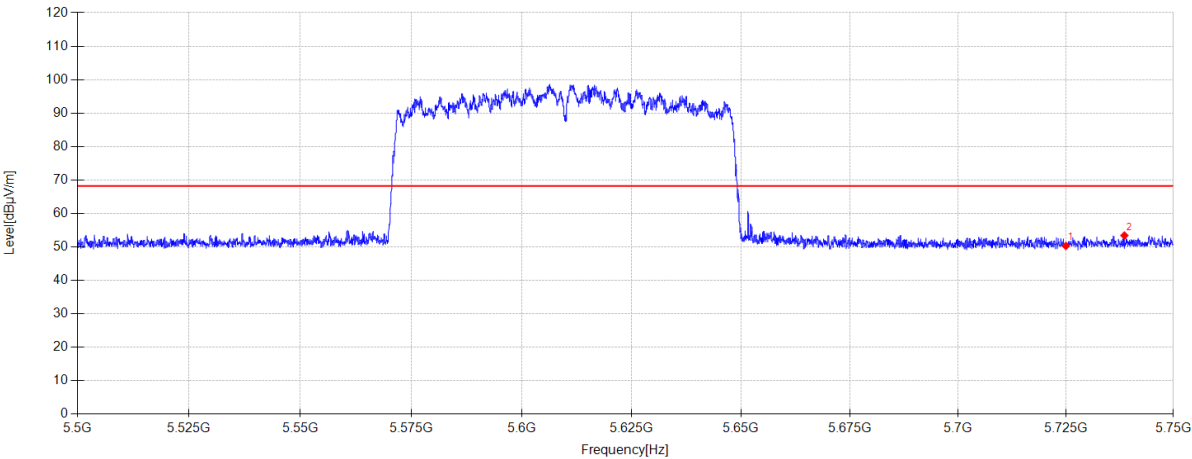

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.18	33.45	5.32	-29.66	50.29	68.20	17.91	PK	Horizontal
2	5738.600	44.09	33.64	5.33	-29.65	53.41	68.20	14.79	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\132

Memo:

Sample Numbler:S25081332-003 Power Setting:13

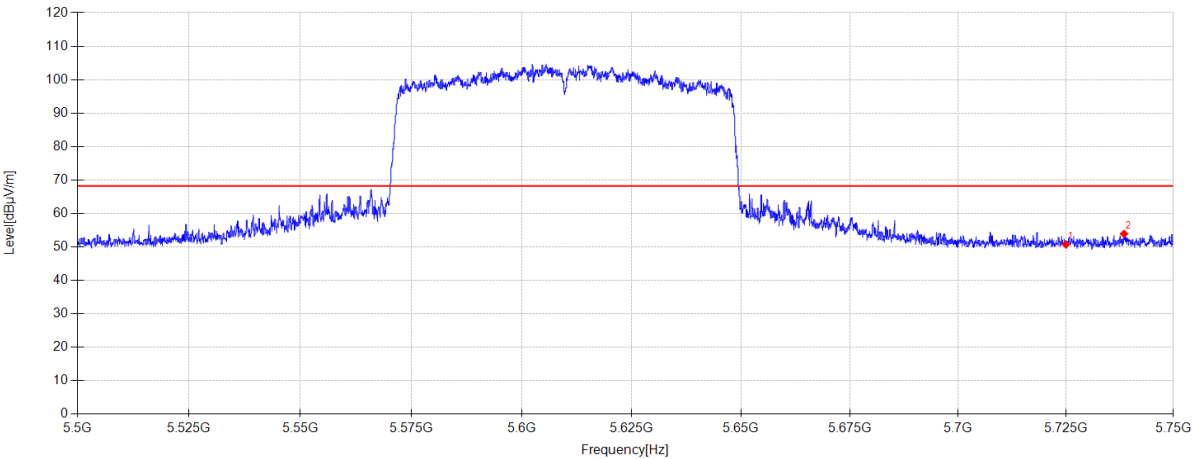

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.64	33.45	5.32	-29.66	50.75	68.20	17.45	PK	Vertical
2	5738.525	44.58	33.64	5.33	-29.65	53.90	68.20	14.30	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13Tested By:Lin Guoyuan


EUT:Wireless Access PointModel Number:L2537

Test Mode:MIMO TX 11AX80 5210MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\133

Memo:Sample Numbre:S25081332-003 Power Setting:13

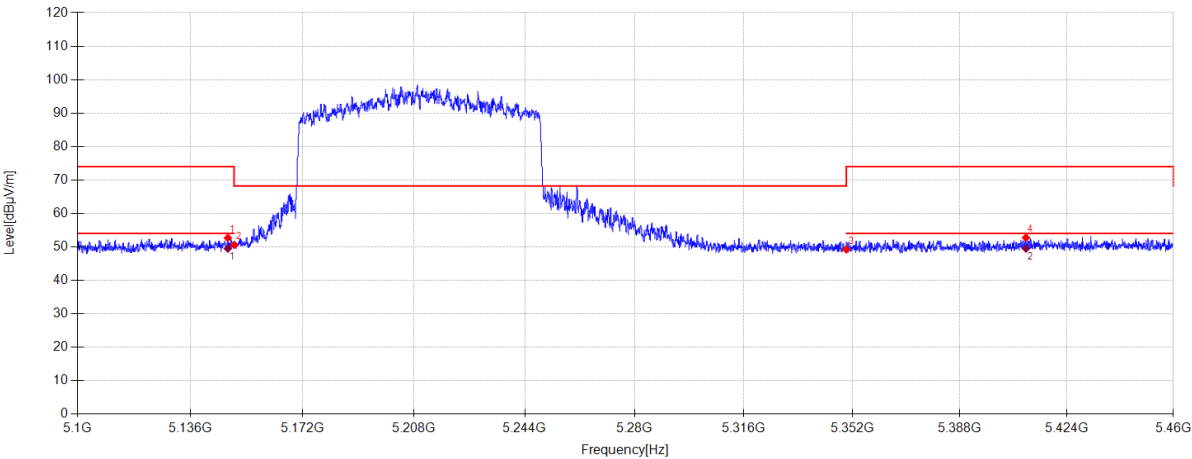

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.988	44.55	32.88	5.03	-29.77	52.69	74.00	21.31	PK	Horizontal
2	5150.000	42.42	32.90	5.04	-29.77	50.59	68.20	17.61	PK	Horizontal
3	5350.000	41.34	32.50	5.14	-29.73	49.25	68.20	18.95	PK	Horizontal
4	5410.140	44.43	32.88	5.17	-29.72	52.76	74.00	21.24	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.988	41.36	32.88	5.03	49.50	54.00	4.50	AV	Horizontal	
2	5410.140	41.18	32.88	5.17	49.51	54.00	4.49	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AX80 5210MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\134

Memo: Sample Numbler:S25081332-003 Power Setting:13

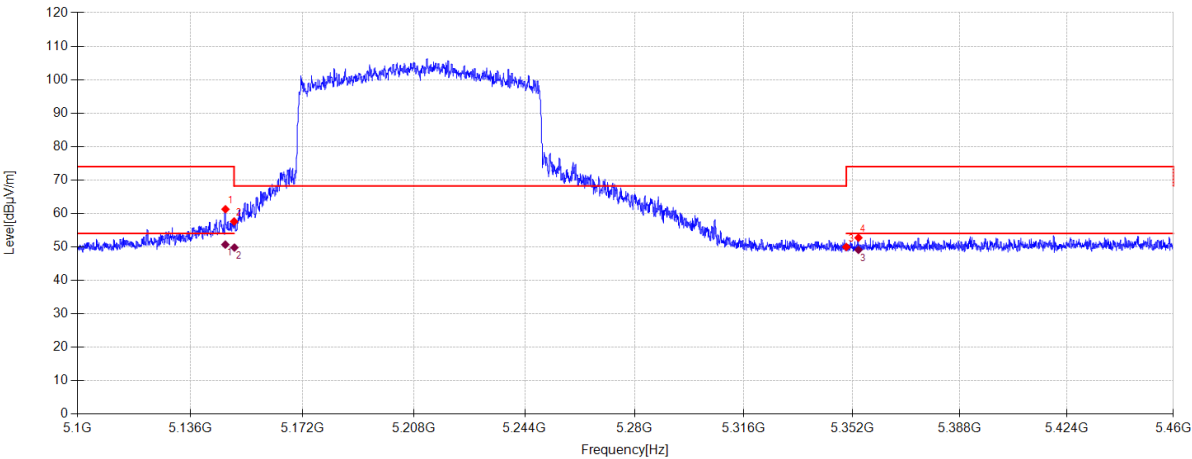

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.232	53.12	32.88	5.03	-29.77	61.26	74.00	12.74	PK	Vertical
2	5150.000	49.43	32.90	5.04	-29.77	57.60	68.20	10.60	PK	Vertical
3	5350.000	42.07	32.50	5.14	-29.73	49.98	68.20	18.22	PK	Vertical
4	5354.052	44.79	32.53	5.14	-29.73	52.73	74.00	21.27	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.191	42.55	32.88	5.03	50.69	54.00	3.31	AV	Vertical	
2	5150.101	41.63	32.90	5.04	49.80	54.00	4.20	AV	Vertical	
3	5354.052	41.16	32.53	5.14	49.10	54.00	4.90	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\135
Memo: Sample Numbler:S25081332-003 Power Setting:13

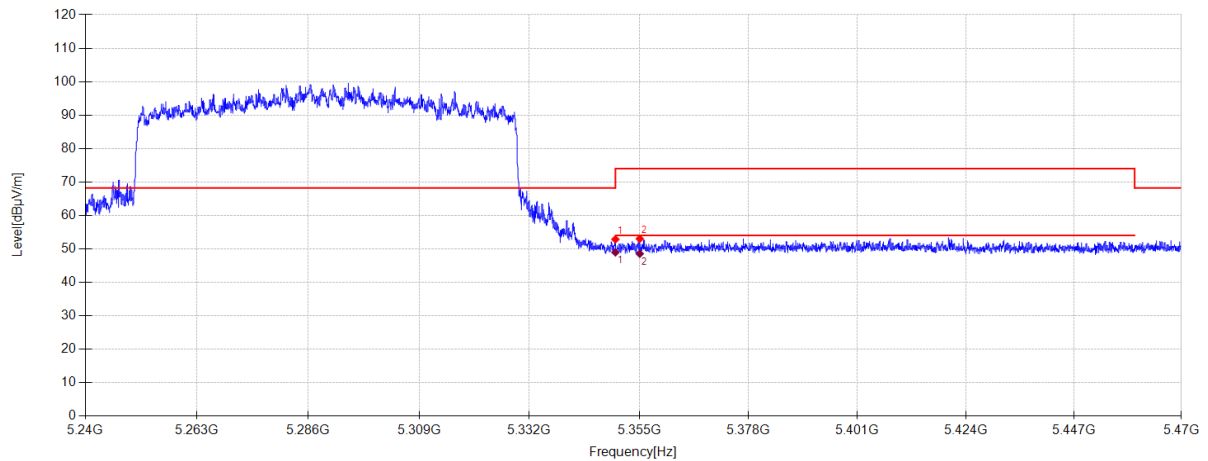

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.95	32.50	5.14	-29.73	52.86	68.20	15.34	PK	Horizontal
2	5355.115	45.08	32.54	5.14	-29.73	53.03	74.00	20.97	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.05	32.50	5.14	48.96	54.00	5.04	AV	Horizontal
2	5355.115	40.58	32.54	5.14	48.53	54.00	5.47	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\136
Memo: Sample Numbler:S25081332-003 Power Setting:13

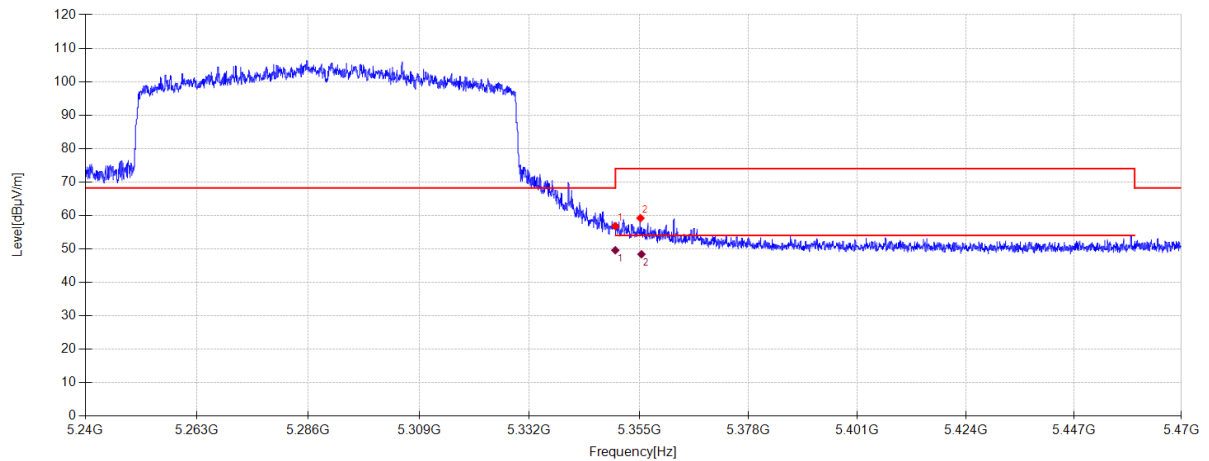

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.87	32.50	5.14	-29.73	56.78	68.20	11.42	PK	Vertical
2	5355.253	51.24	32.54	5.14	-29.73	59.19	74.00	14.81	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.985	41.68	32.50	5.14	49.59	54.00	4.41	AV	Vertical
2	5355.471	40.45	32.54	5.14	48.40	54.00	5.60	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AX80 5530MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\137

Memo:Sample Numbler:S25081332-003 Power Setting:13

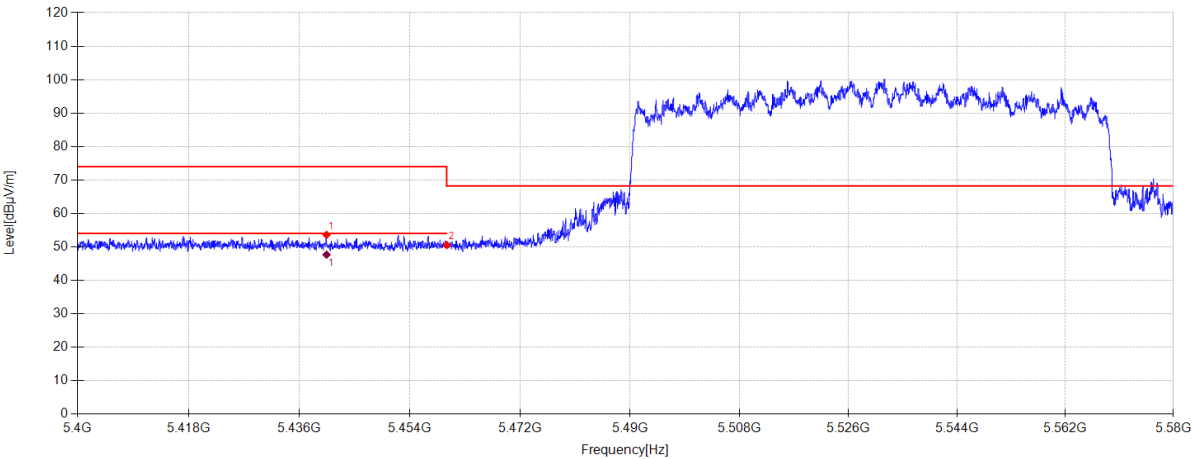

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.410	45.31	32.82	5.18	-29.71	53.60	74.00	20.40	PK	Horizontal
2	5460.000	42.16	32.90	5.19	-29.71	50.54	68.20	17.66	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5440.410	39.39	32.82	5.18	47.68	54.00	6.32	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX80 5530MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\138
Memo: Sample Numbler:S25081332-003 Power Setting:13

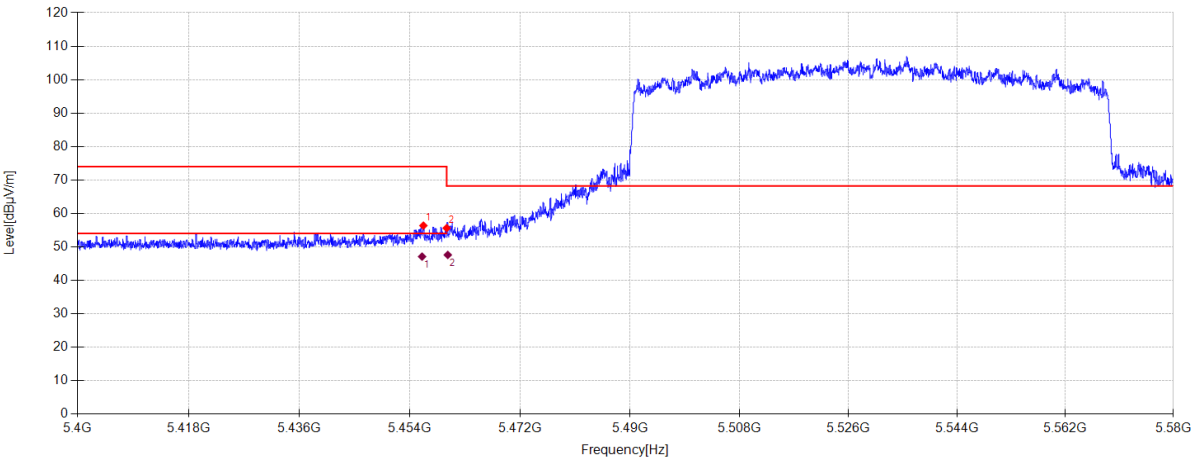


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.196	48.02	32.86	5.19	-29.71	56.36	74.00	17.64	PK	Vertical
2	5460.000	47.25	32.90	5.19	-29.71	55.63	68.20	12.57	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.983	38.76	32.86	5.19	47.10	54.00	6.90	AV	Vertical	
2	5460.177	39.22	32.90	5.19	47.60	54.00	6.40	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX80 5610MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\139
Memo: Sample Numbler:S25081332-003 Power Setting:13

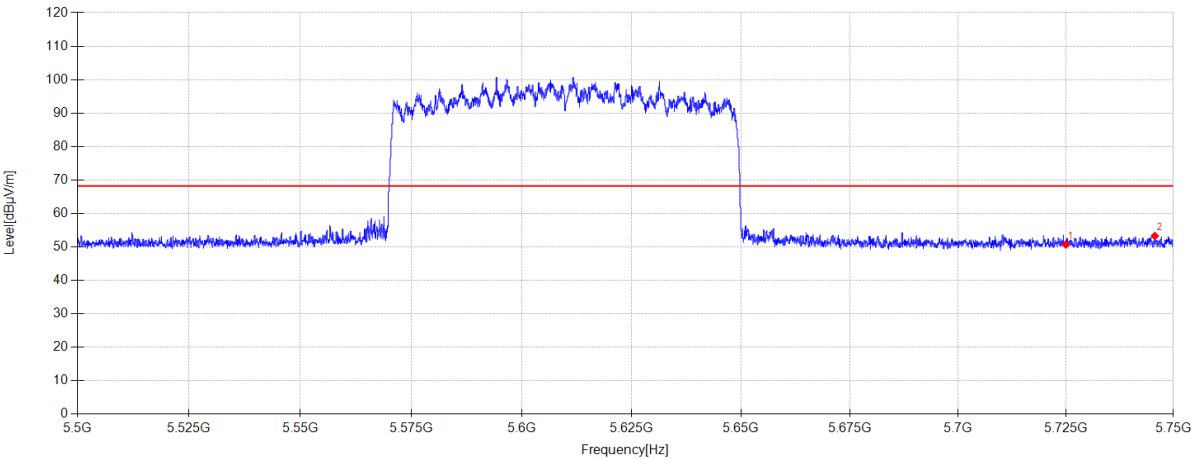

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.62	33.45	5.32	-29.66	50.73	68.20	17.47	PK	Horizontal
2	5745.700	43.84	33.74	5.33	-29.65	53.26	68.20	14.94	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\140

Memo:

Sample Numbler:S25081332-003 Power Setting:13

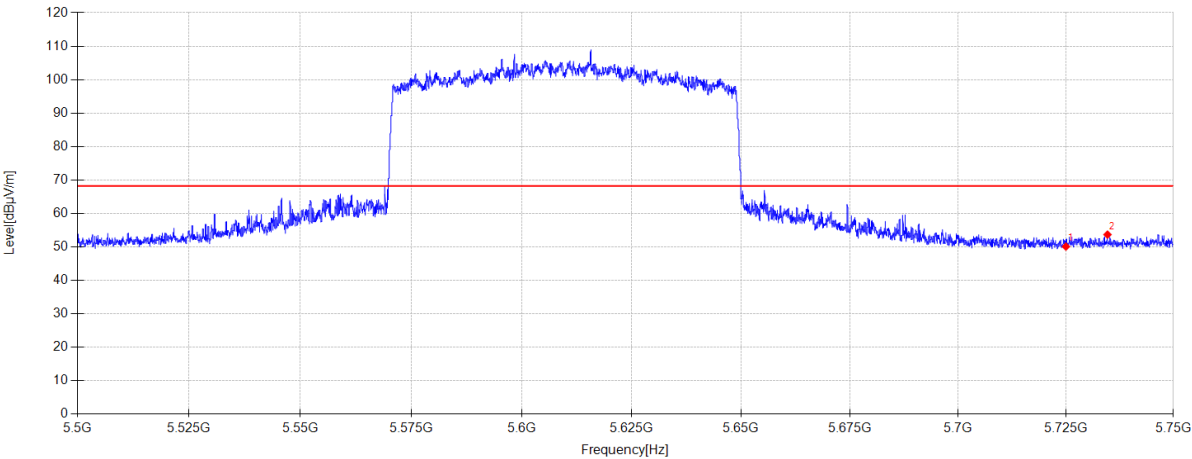

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.99	33.45	5.32	-29.66	50.10	68.20	18.10	PK	Vertical
2	5734.675	44.40	33.59	5.33	-29.65	53.67	68.20	14.53	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\141
Memo: Sample Numbler:S25081332-003 Power Setting:13

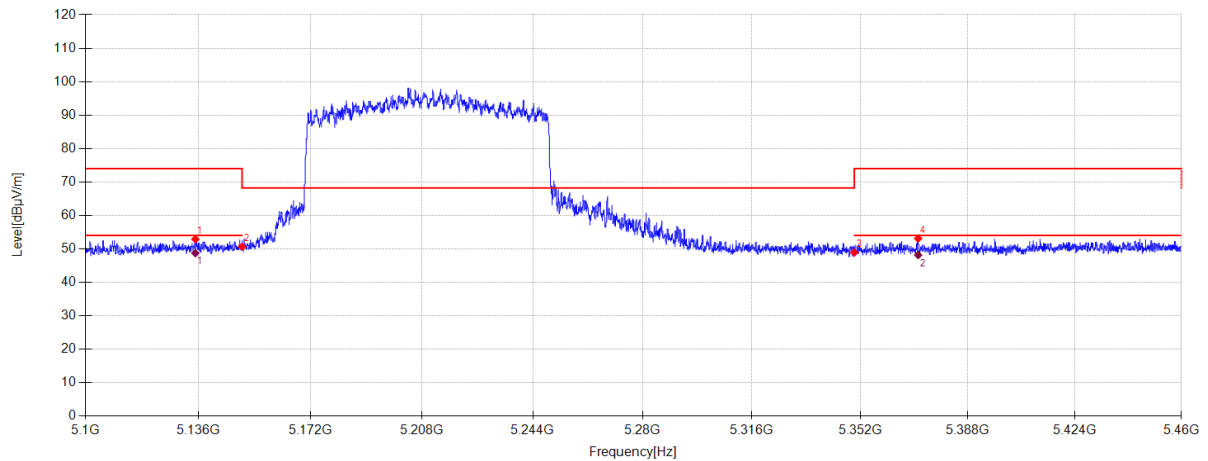

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5135.028	44.85	32.78	5.03	-29.77	52.89	74.00	21.11	PK	Horizontal
2	5150.000	42.48	32.90	5.04	-29.77	50.65	68.20	17.55	PK	Horizontal
3	5350.000	41.00	32.50	5.14	-29.73	48.91	68.20	19.29	PK	Horizontal
4	5371.296	45.01	32.67	5.15	-29.73	53.10	74.00	20.90	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5135.028	40.68	32.78	5.03	48.72	54.00	5.28	AV	Horizontal
2	5371.296	40.05	32.67	5.15	48.14	54.00	5.86	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\142
Memo: Sample Numbler:S25081332-003 Power Setting:13

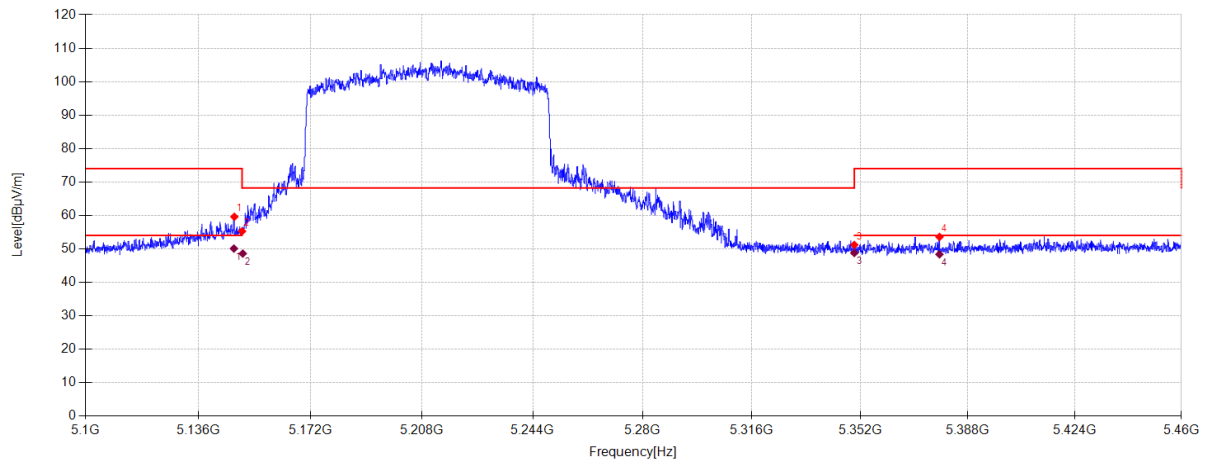

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.520	51.47	32.88	5.03	-29.77	59.61	74.00	14.39	PK	Vertical
2	5150.000	47.10	32.90	5.04	-29.77	55.27	68.20	12.93	PK	Vertical
3	5350.000	43.30	32.50	5.14	-29.73	51.21	68.20	16.99	PK	Vertical
4	5378.424	45.42	32.73	5.15	-29.72	53.58	74.00	20.42	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.366	41.95	32.88	5.03	50.09	54.00	3.91	AV	Vertical
2	5150.224	40.43	32.90	5.04	48.60	54.00	5.40	AV	Vertical
3	5350.000	40.87	32.50	5.14	48.78	54.00	5.22	AV	Vertical
4	5378.424	40.21	32.73	5.15	48.37	54.00	5.63	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\143

Memo:

Sample Numbler:S25081332-003 Power Setting:13

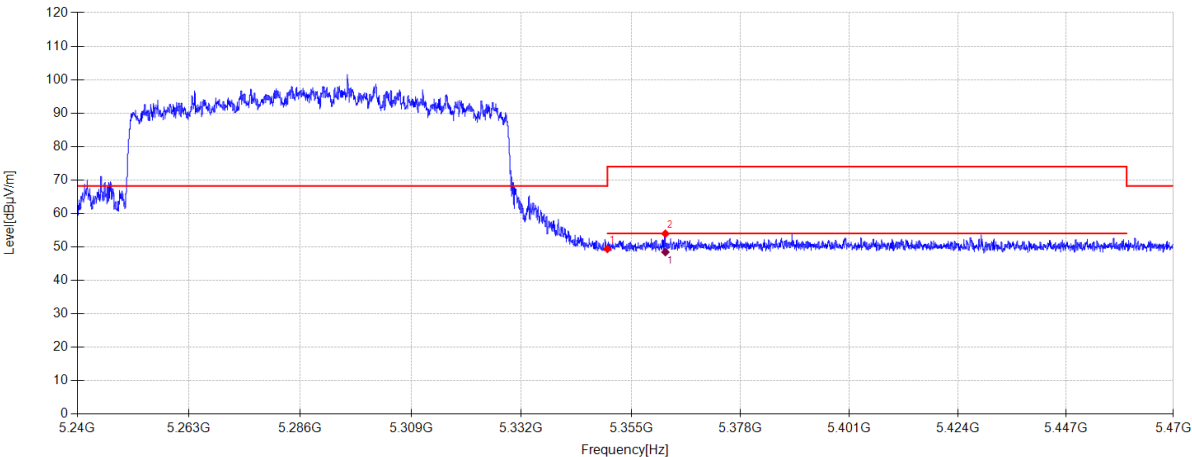

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.46	32.50	5.14	-29.73	49.37	68.20	18.83	PK	Horizontal
2	5362.176	45.93	32.60	5.14	-29.73	53.94	74.00	20.06	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5362.176	40.43	32.60	5.14	48.44	54.00	5.56	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\144
Memo: Sample Numbler:S25081332-003 Power Setting:13

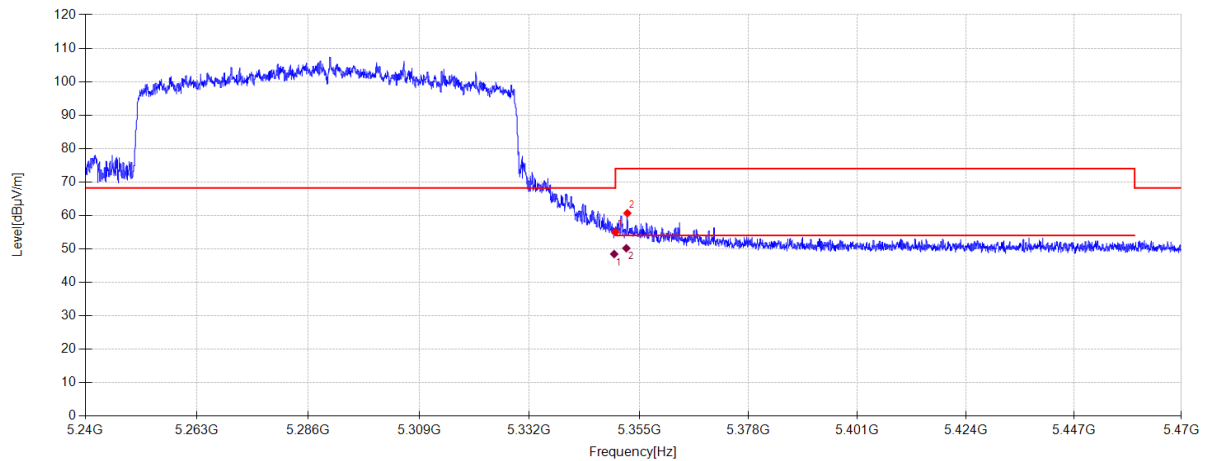

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.12	32.50	5.14	-29.73	55.03	68.20	13.17	PK	Vertical
2	5352.516	52.75	32.52	5.14	-29.73	60.68	74.00	13.32	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.750	40.54	32.50	5.14	48.45	54.00	5.55	AV	Vertical
2	5352.291	42.26	32.52	5.14	50.19	54.00	3.81	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\145
Memo: Sample Numbler:S25081332-003 Power Setting:13

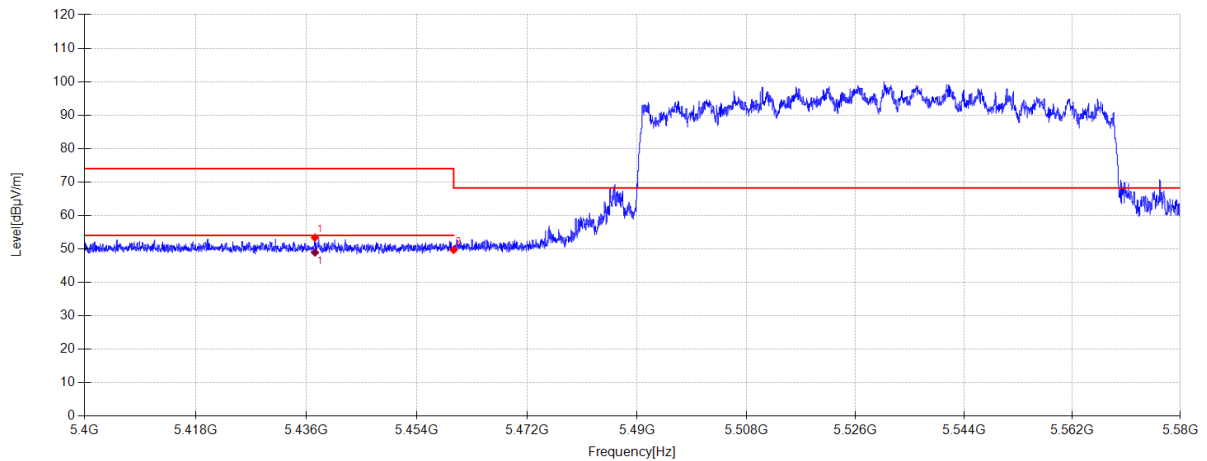

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5437.386	45.07	32.83	5.18	-29.71	53.37	74.00	20.63	PK	Horizontal
2	5460.000	41.32	32.90	5.19	-29.71	49.70	68.20	18.50	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5437.386	40.62	32.83	5.18	48.92	54.00	5.08	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\146
Memo: Sample Numbler:S25081332-003 Power Setting:13

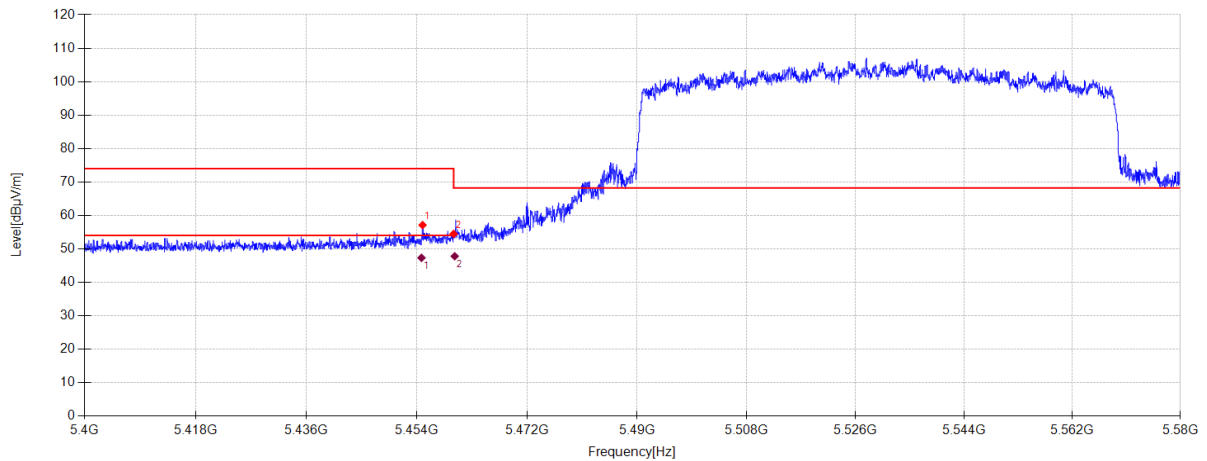

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.918	48.79	32.85	5.19	-29.71	57.12	74.00	16.88	PK	Vertical
2	5460.000	46.10	32.90	5.19	-29.71	54.48	68.20	13.72	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.744	38.99	32.85	5.19	47.32	54.00	6.68	AV	Vertical
2	5460.166	39.42	32.90	5.19	47.80	54.00	6.20	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\147

Memo:

Sample Numbler:S25081332-003 Power Setting:13

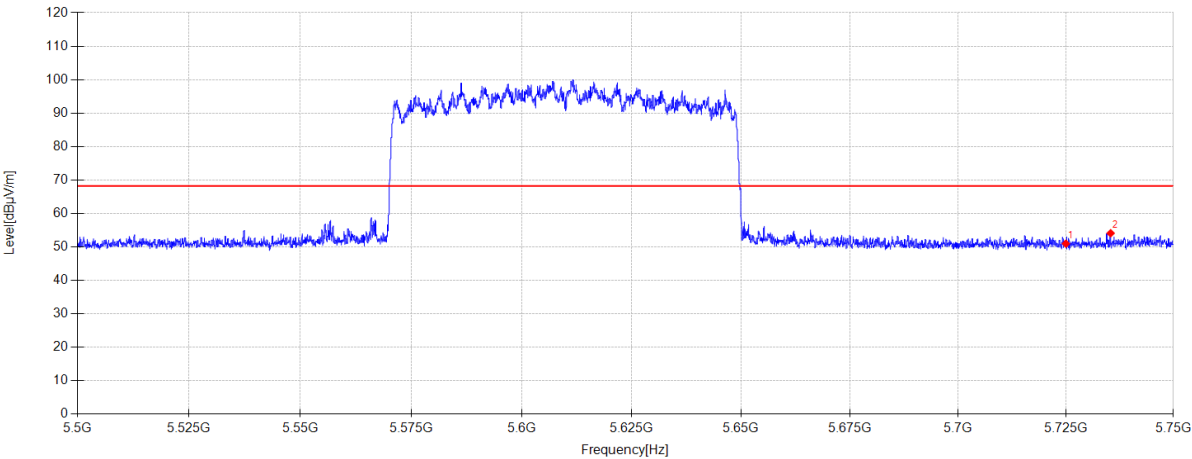

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.86	33.45	5.32	-29.66	50.97	68.20	17.23	PK	Horizontal
2	5735.400	44.80	33.60	5.33	-29.65	54.08	68.20	14.12	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\148

Memo:

Sample Numbler:S25081332-003 Power Setting:13

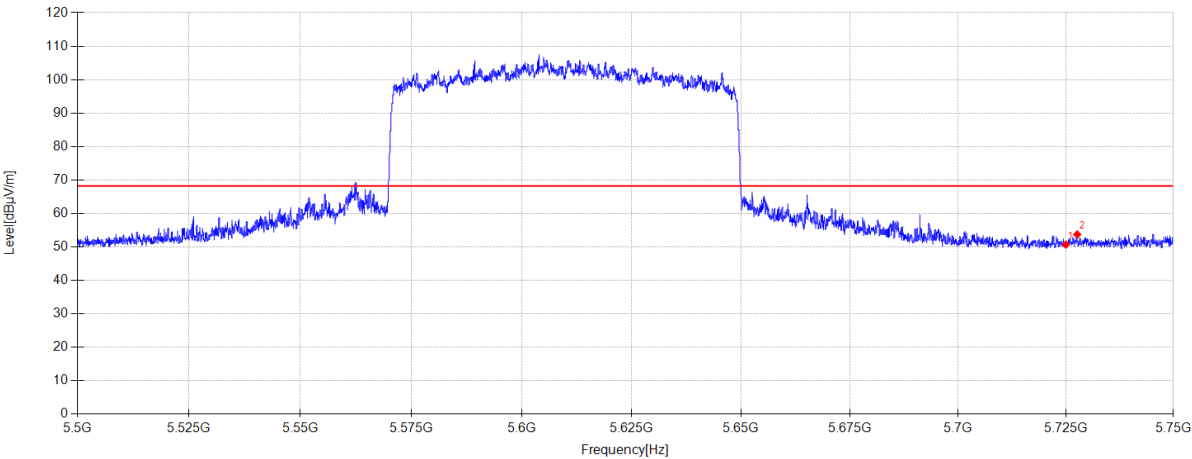

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.58	33.45	5.32	-29.66	50.69	68.20	17.51	PK	Vertical
2	5727.625	44.55	33.49	5.32	-29.65	53.71	68.20	14.49	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AC160 5250MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\157

Memo:

Sample Numbler:S25081332-003 Power Setting:13

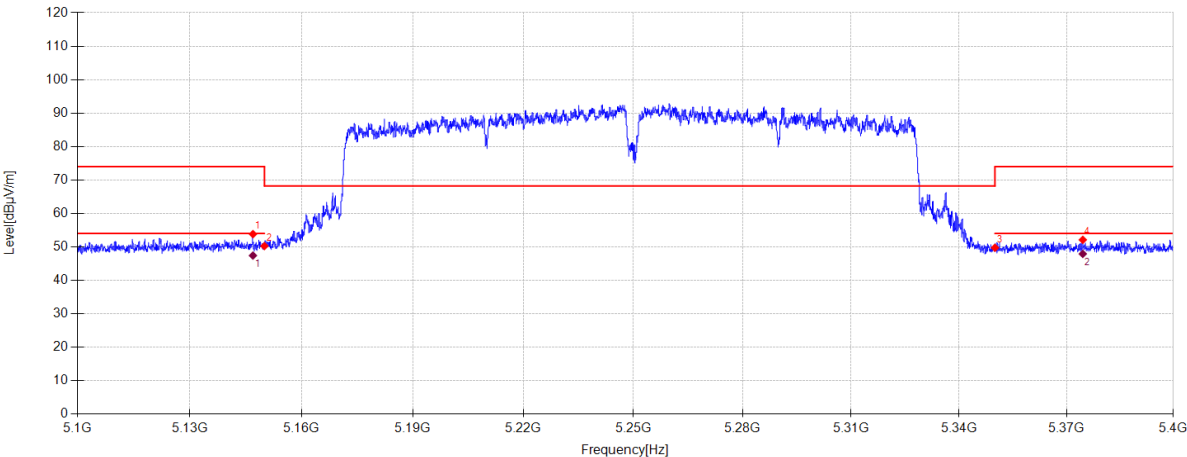

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.920	45.68	32.88	5.03	-29.77	53.82	74.00	20.18	PK	Horizontal
2	5150.000	42.08	32.90	5.04	-29.77	50.25	68.20	17.95	PK	Horizontal
3	5350.000	41.83	32.50	5.14	-29.73	49.74	68.20	18.46	PK	Horizontal
4	5374.560	43.99	32.70	5.15	-29.73	52.11	74.00	21.89	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.920	39.27	32.88	5.03	47.41	54.00	6.59	AV	Horizontal	
2	5374.560	39.79	32.70	5.15	47.91	54.00	6.09	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC160 5250MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\158
Memo: Sample Numbler:S25081332-003 Power Setting:13

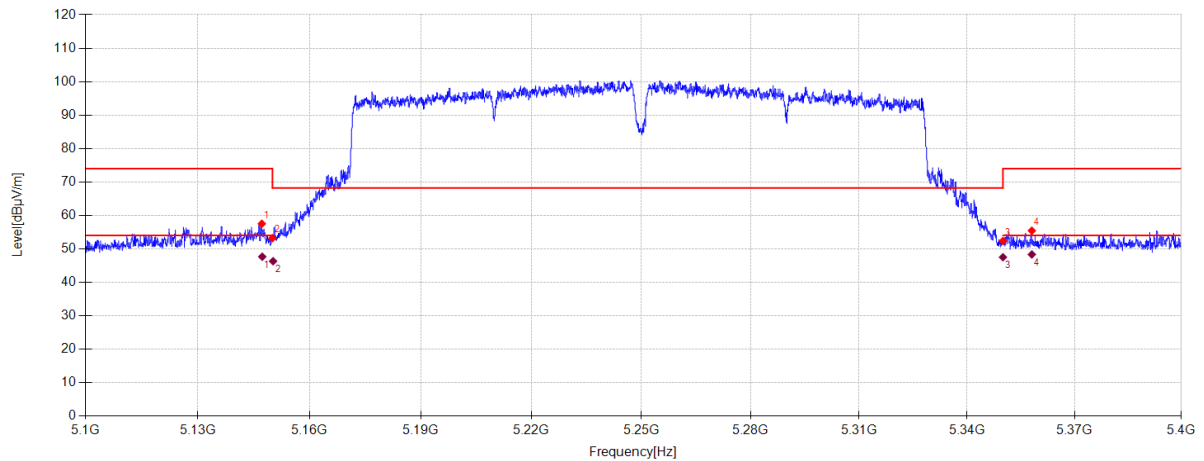**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.160	49.38	32.88	5.03	-29.77	57.52	74.00	16.48	PK	Vertical
2	5150.000	45.06	32.90	5.04	-29.77	53.23	68.20	14.97	PK	Vertical
3	5350.000	44.46	32.50	5.14	-29.73	52.37	68.20	15.83	PK	Vertical
4	5358.060	47.48	32.56	5.14	-29.73	55.45	74.00	18.55	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.277	39.52	32.88	5.03	47.66	54.00	6.34	AV	Vertical
2	5150.184	38.15	32.90	5.04	46.32	54.00	7.68	AV	Vertical
3	5350.000	39.59	32.50	5.14	47.50	54.00	6.50	AV	Vertical
4	5358.060	40.37	32.56	5.14	48.34	54.00	5.66	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AC160 5570MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\159
Memo: Sample Numbler:S25081332-003 Power Setting:13

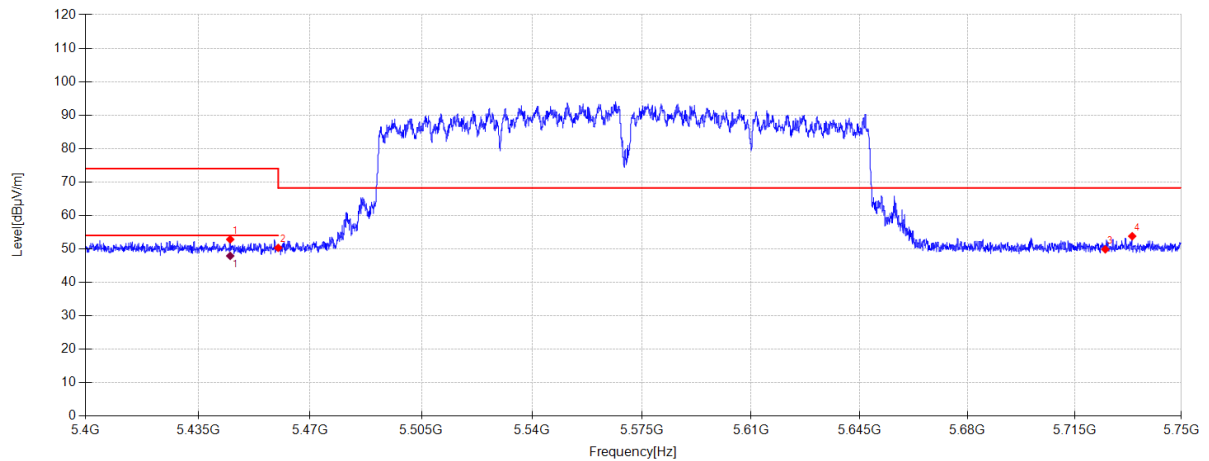

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.010	44.55	32.81	5.18	-29.71	52.83	74.00	21.17	PK	Horizontal
2	5460.000	41.94	32.90	5.19	-29.71	50.32	68.20	17.88	PK	Horizontal
3	5725.000	40.75	33.45	5.32	-29.65	49.87	68.20	18.33	PK	Horizontal
4	5733.830	44.54	33.57	5.33	-29.65	53.79	68.20	14.41	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.010	39.63	32.81	5.18	47.91	54.00	6.09	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AC160 5570MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\160

Memo: Sample Numbler:S25081332-003 Power Setting:13

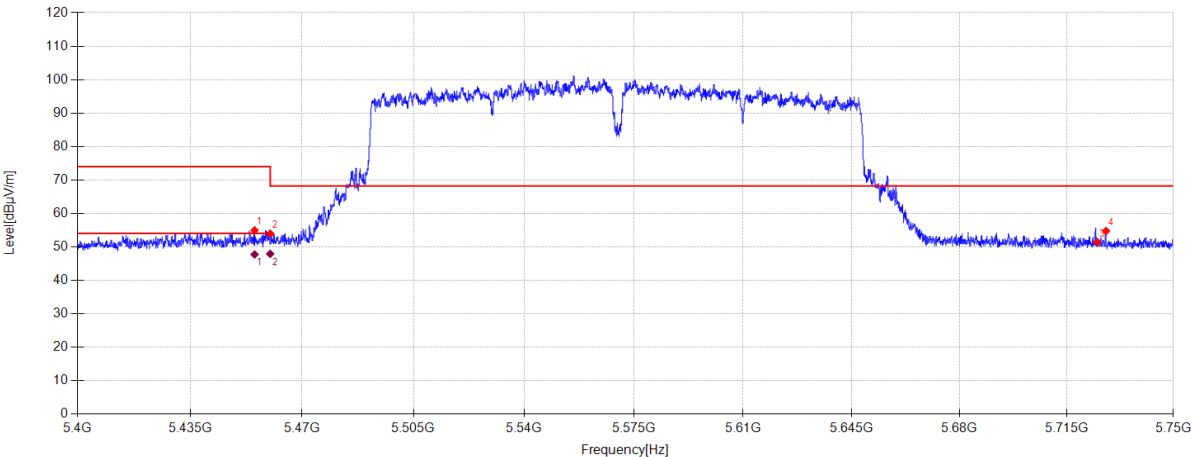

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.125	46.63	32.85	5.19	-29.71	54.96	74.00	19.04	PK	Vertical
2	5460.000	45.56	32.90	5.19	-29.71	53.94	68.20	14.26	PK	Vertical
3	5725.000	42.30	33.45	5.32	-29.65	51.42	68.20	16.78	PK	Vertical
4	5727.880	45.60	33.49	5.32	-29.65	54.76	68.20	13.44	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.125	39.41	32.85	5.19	47.74	54.00	6.26	AV	Vertical	
2	5460.000	39.54	32.90	5.19	47.92	54.00	6.08	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX160 5250MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\155
Memo: Sample Numbler:S25081332-003 Power Setting:13

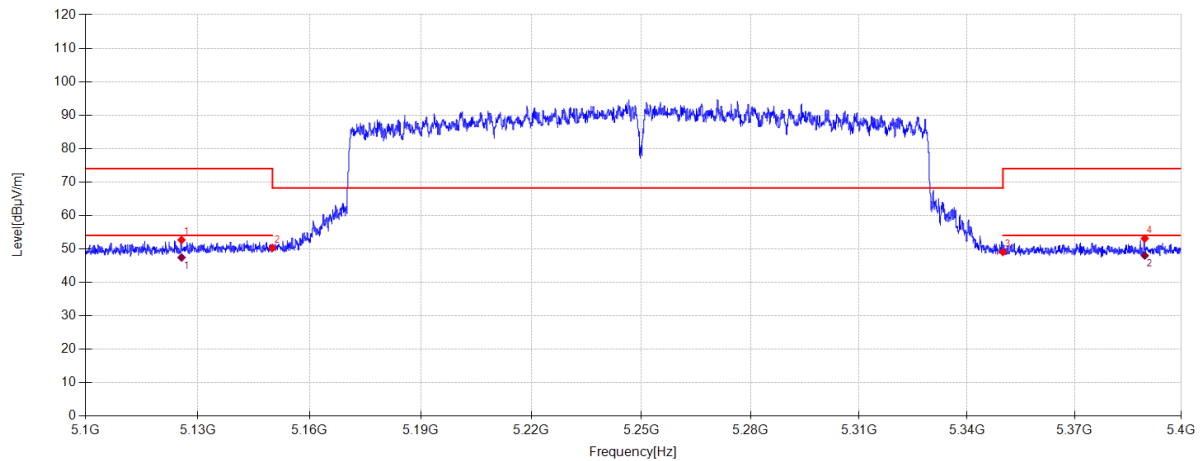

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.650	44.71	32.71	5.02	-29.77	52.67	74.00	21.33	PK	Horizontal
2	5150.000	42.10	32.90	5.04	-29.77	50.27	68.20	17.93	PK	Horizontal
3	5350.000	41.12	32.50	5.14	-29.73	49.03	68.20	19.17	PK	Horizontal
4	5389.710	44.85	32.82	5.15	-29.72	53.10	74.00	20.90	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.650	39.46	32.71	5.02	47.42	54.00	6.58	AV	Horizontal
2	5389.710	39.74	32.82	5.15	47.99	54.00	6.01	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX160 5250MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\156
Memo: Sample Numbler:S25081332-003 Power Setting:13

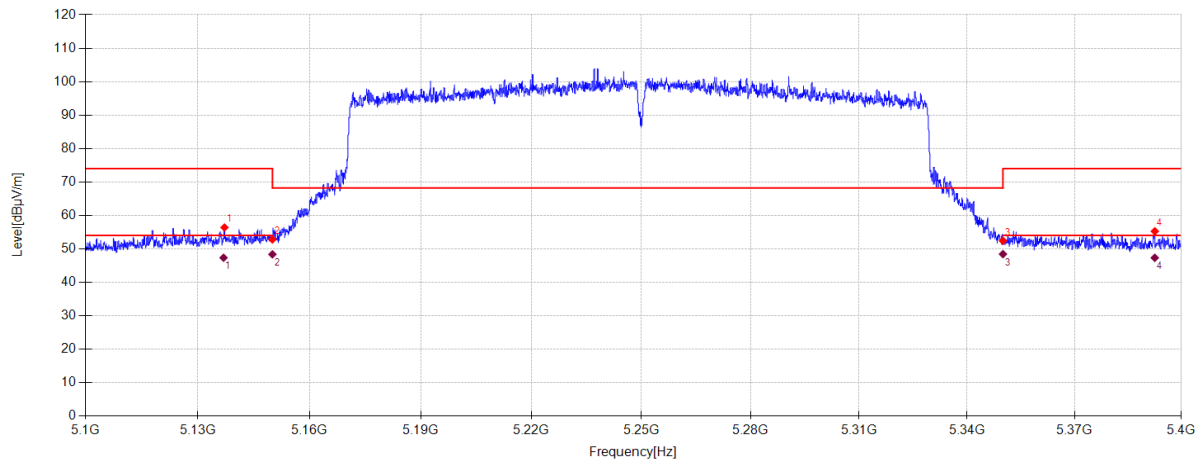**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5137.140	48.33	32.80	5.03	-29.77	56.39	74.00	17.61	PK	Vertical
2	5150.000	44.65	32.90	5.04	-29.77	52.82	68.20	15.38	PK	Vertical
3	5350.000	44.52	32.50	5.14	-29.73	52.43	68.20	15.77	PK	Vertical
4	5392.530	46.99	32.84	5.16	-29.72	55.27	74.00	18.73	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.894	39.29	32.80	5.03	47.35	54.00	6.65	AV	Vertical
2	5150.000	40.20	32.90	5.04	48.37	54.00	5.63	AV	Vertical
3	5350.000	40.53	32.50	5.14	48.44	54.00	5.56	AV	Vertical
4	5392.530	39.06	32.84	5.16	47.34	54.00	6.66	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX160 5570MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\153
Memo: Sample Numbler:S25081332-003 Power Setting:13

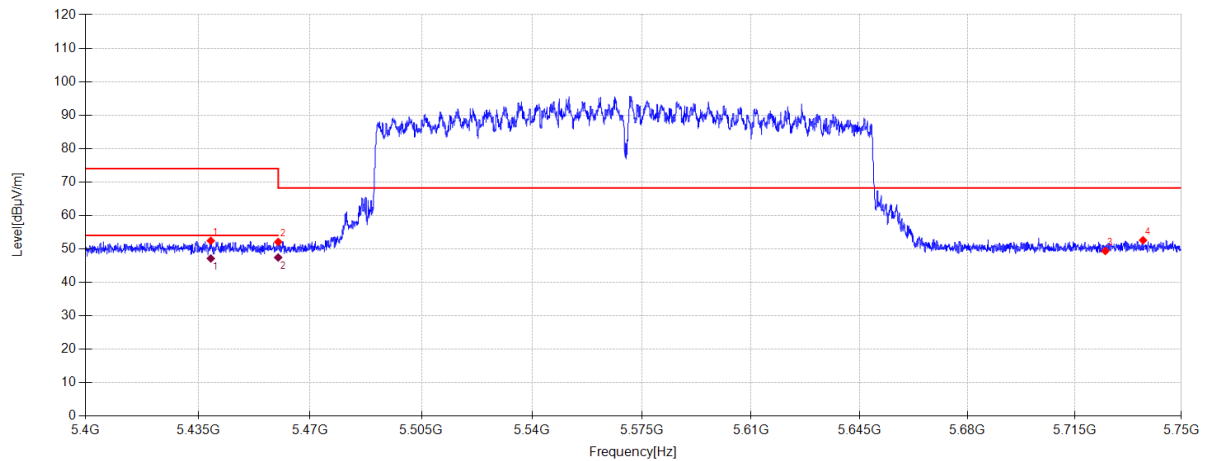

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.955	44.14	32.82	5.18	-29.71	52.43	74.00	21.57	PK	Horizontal
2	5460.000	43.70	32.90	5.19	-29.71	52.08	68.20	16.12	PK	Horizontal
3	5725.000	40.26	33.45	5.32	-29.65	49.38	68.20	18.82	PK	Horizontal
4	5737.400	43.28	33.62	5.33	-29.65	52.58	68.20	15.62	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.955	38.84	32.82	5.18	47.13	54.00	6.87	AV	Horizontal
2	5460.000	39.05	32.90	5.19	47.43	54.00	6.57	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX160 5570MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\154

Memo:

Sample Numbler:S25081332-003 Power Setting:13

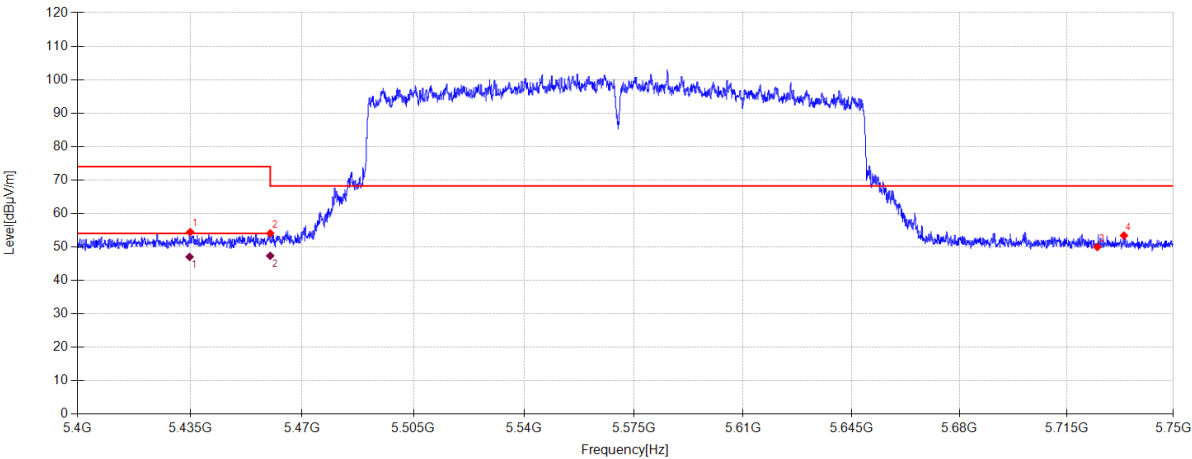

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5435.035	46.13	32.83	5.18	-29.71	54.43	74.00	19.57	PK	Vertical
2	5460.000	45.68	32.90	5.19	-29.71	54.06	68.20	14.14	PK	Vertical
3	5725.000	40.84	33.45	5.32	-29.65	49.96	68.20	18.24	PK	Vertical
4	5733.760	44.15	33.57	5.33	-29.65	53.40	68.20	14.80	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5434.837	38.71	32.83	5.18	47.01	54.00	6.99	AV	Vertical
2	5460.000	38.95	32.90	5.19	47.33	54.00	6.67	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE160 5250MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\149

Memo: Sample Numbler:S25081332-003 Power Setting:13

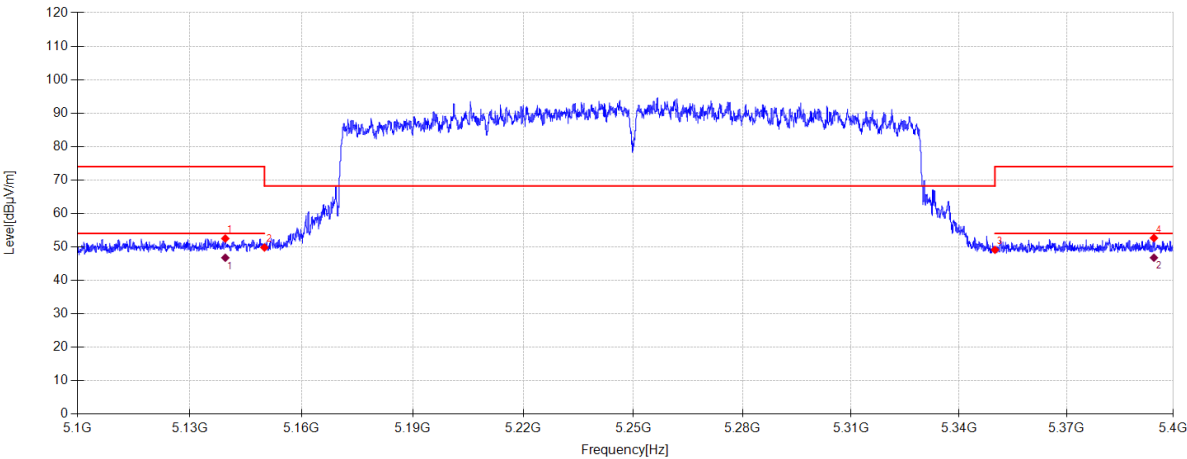

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.510	44.42	32.82	5.03	-29.77	52.50	74.00	21.50	PK	Horizontal
2	5150.000	41.64	32.90	5.04	-29.77	49.81	68.20	18.39	PK	Horizontal
3	5350.000	41.21	32.50	5.14	-29.73	49.12	68.20	19.08	PK	Horizontal
4	5394.540	44.35	32.86	5.16	-29.72	52.65	74.00	21.35	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.510	38.67	32.82	5.03	46.75	54.00	7.25	AV	Horizontal	
2	5394.540	38.46	32.86	5.16	46.76	54.00	7.24	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-13

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11BE160 5250MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\150

Memo:Sample Numbler:S25081332-003 Power Setting:13

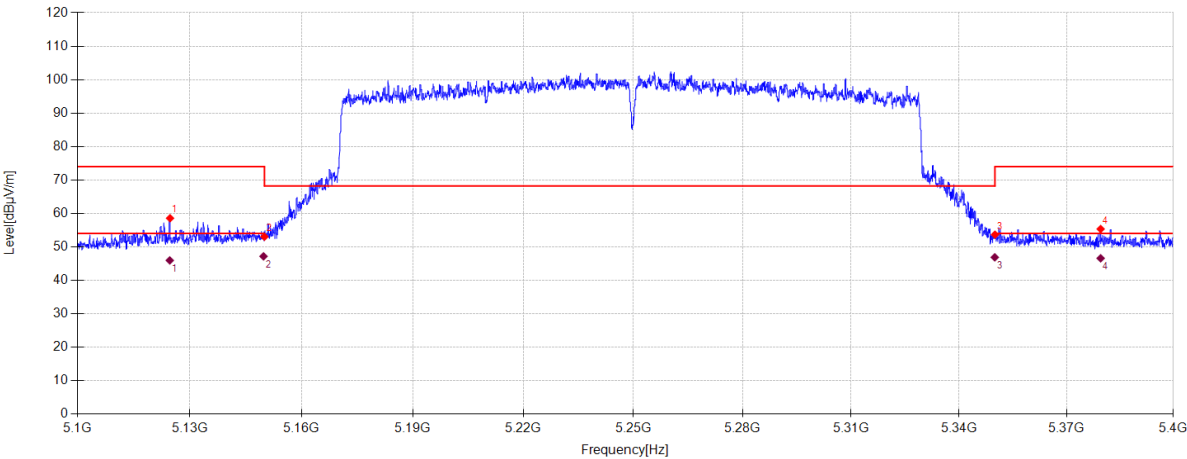

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5124.720	50.64	32.70	5.02	-29.78	58.58	74.00	15.42	PK	Vertical
2	5150.000	44.87	32.90	5.04	-29.77	53.04	68.20	15.16	PK	Vertical
3	5350.000	45.74	32.50	5.14	-29.73	53.65	68.20	14.55	PK	Vertical
4	5379.570	47.17	32.74	5.15	-29.72	55.34	74.00	18.66	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5124.641	38.02	32.70	5.02	45.96	54.00	8.04	AV	Vertical
2	5149.760	39.01	32.90	5.04	47.18	54.00	6.82	AV	Vertical
3	5349.945	38.97	32.50	5.14	46.88	54.00	7.12	AV	Vertical
4	5379.570	38.43	32.74	5.15	46.60	54.00	7.40	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-13 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE160 5570MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\151

Memo: Sample Numbler:S25081332-003 Power Setting:13

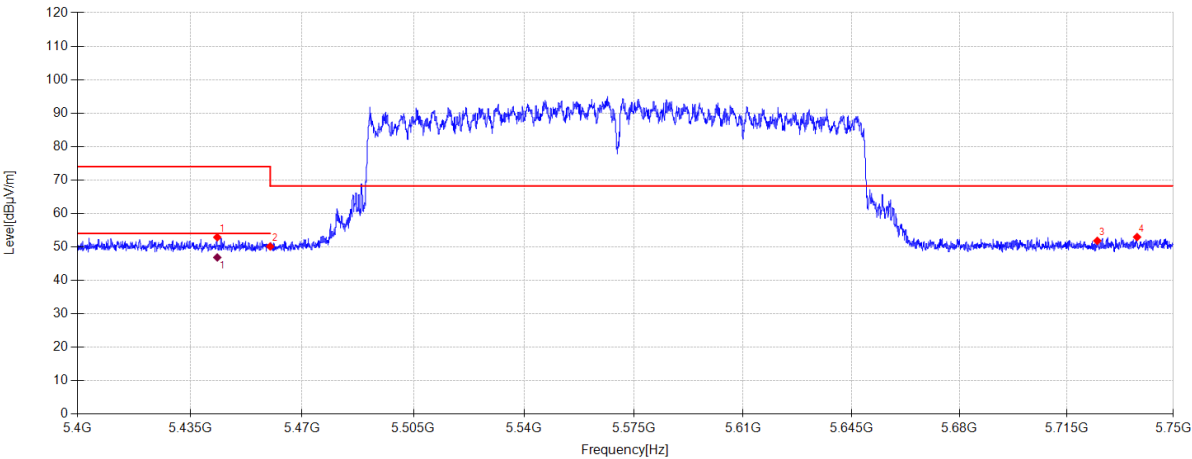

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5443.470	44.59	32.81	5.18	-29.71	52.87	74.00	21.13	PK	Horizontal
2	5460.000	41.74	32.90	5.19	-29.71	50.12	68.20	18.08	PK	Horizontal
3	5725.000	42.70	33.45	5.32	-29.65	51.82	68.20	16.38	PK	Horizontal
4	5738.065	43.63	33.63	5.33	-29.65	52.94	68.20	15.26	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5443.470	38.56	32.81	5.18	46.84	54.00	7.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-13

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE160 5570MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5G\152

Memo:

Sample Numbler:S25081332-003 Power Setting:13

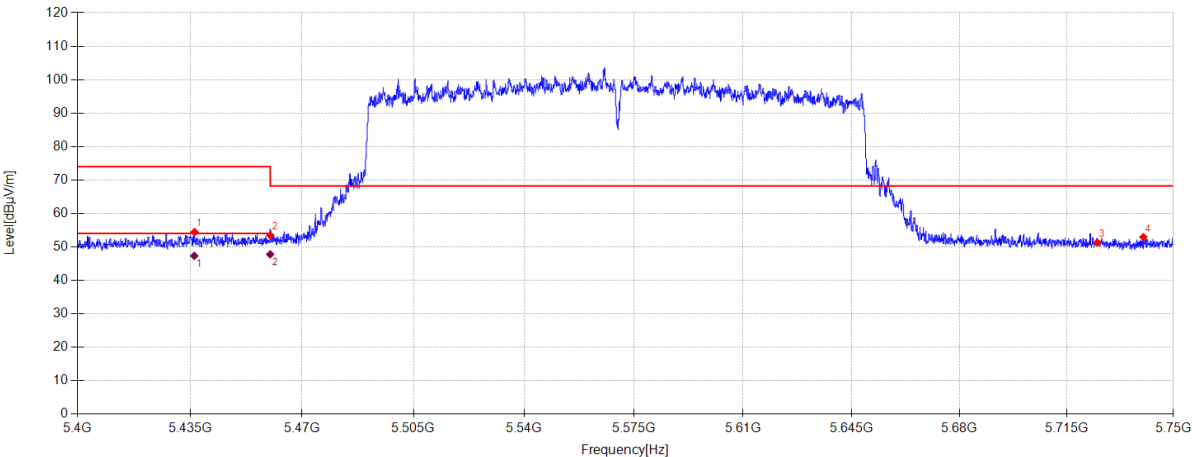

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.400	46.15	32.83	5.18	-29.71	54.45	74.00	19.55	PK	Vertical
2	5460.000	45.07	32.90	5.19	-29.71	53.45	68.20	14.75	PK	Vertical
3	5725.000	42.20	33.45	5.32	-29.65	51.32	68.20	16.88	PK	Vertical
4	5740.130	43.58	33.66	5.33	-29.65	52.92	68.20	15.28	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.307	39.02	32.83	5.18	47.32	54.00	6.68	AV	Vertical
2	5460.000	39.41	32.90	5.19	47.79	54.00	6.21	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE20 RU38+RU1 5180MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\3

Memo: Sample Numbler:S25081332-003 Power Setting:21

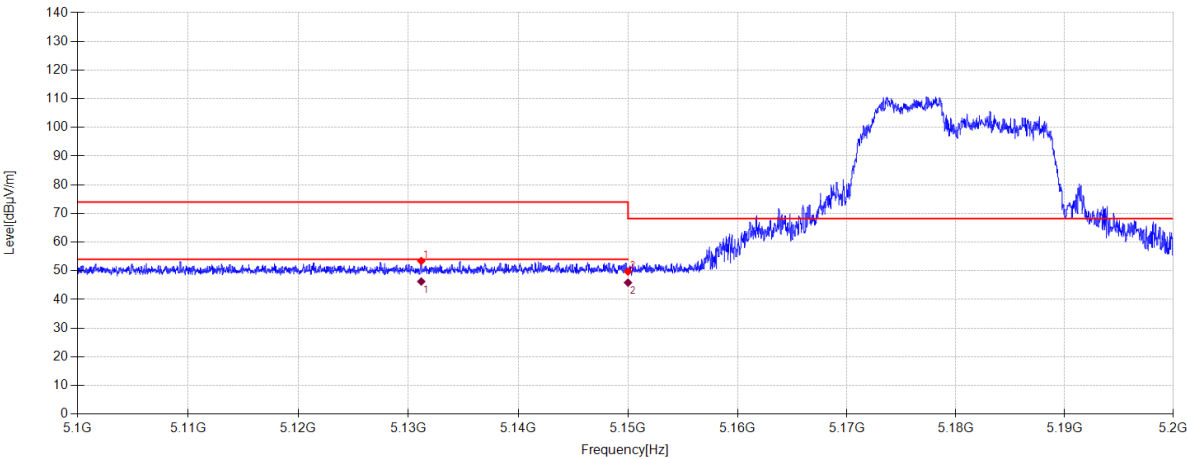

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5131.170	45.39	32.75	5.03	-29.77	53.40	74.00	20.60	PK	Horizontal
2	5150.000	41.55	32.90	5.04	-29.77	49.72	68.20	18.48	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5131.170	38.26	32.75	5.03	46.27	54.00	7.73	AV	Horizontal	
2	5150.000	37.69	32.90	5.04	45.86	54.00	8.14	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE20 RU38+RU1
5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\4

Memo:

Sample Numble:S25081332-003 Power Setting:21

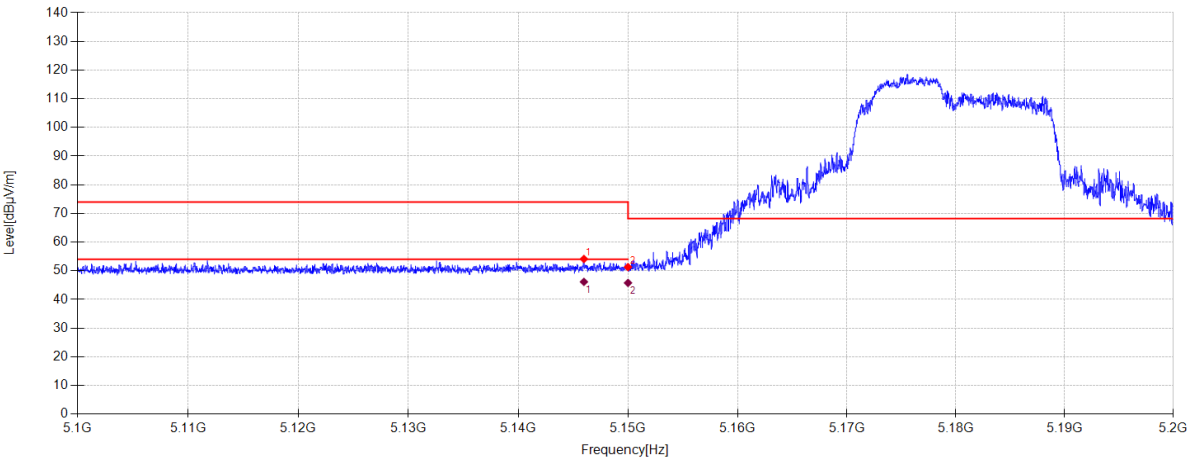

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.980	45.98	32.87	5.03	-29.77	54.11	74.00	19.89	PK	Vertical
2	5150.000	43.12	32.90	5.04	-29.77	51.29	68.20	16.91	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.980	38.01	32.87	5.03	46.14	54.00	7.86	AV	Vertical	
2	5150.000	37.60	32.90	5.04	45.77	54.00	8.23	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE20 RU39+RU7 5320MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\5

Memo: Sample Numbre:S25081332-003 Power Setting:21

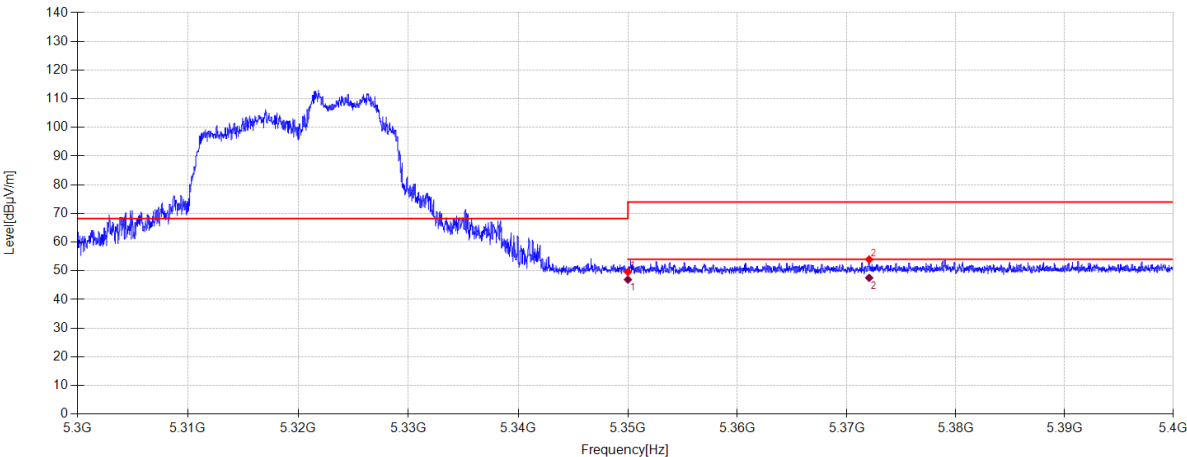

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.68	32.50	5.14	-29.73	49.59	68.20	18.61	PK	Horizontal
2	5372.060	45.86	32.68	5.15	-29.73	53.96	74.00	20.04	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.02	32.50	5.14	46.93	54.00	7.07	AV	Horizontal	
2	5372.060	39.43	32.68	5.15	47.53	54.00	6.47	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE20 RU39+RU7 5320MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\6

Memo: Sample Numbre:S25081332-003 Power Setting:21

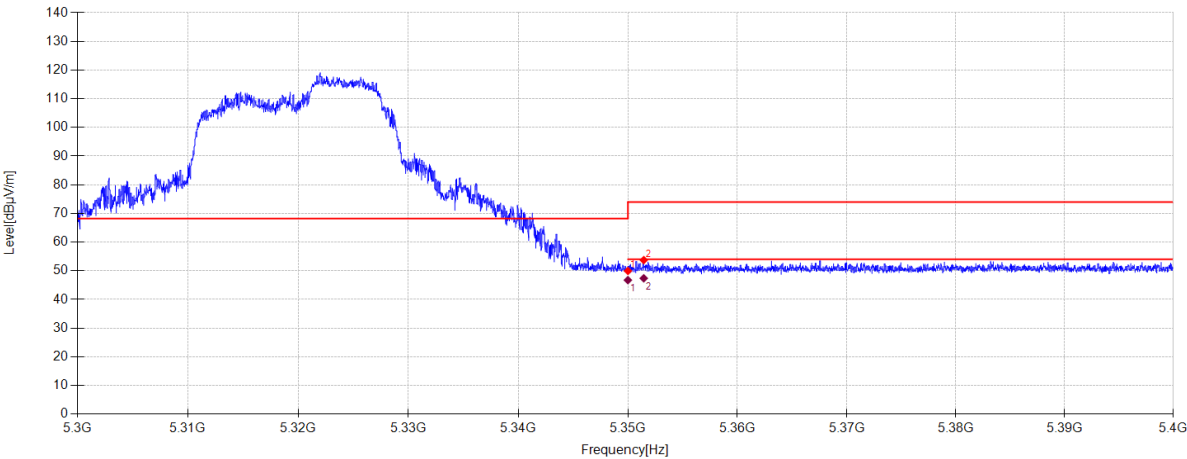

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.04	32.50	5.14	-29.73	49.95	68.20	18.25	PK	Vertical
2	5351.450	45.81	32.51	5.14	-29.73	53.73	74.00	20.27	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.83	32.50	5.14	46.74	54.00	7.26	AV	Vertical	
2	5351.450	39.46	32.51	5.14	47.38	54.00	6.62	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE20 RU38+RU1 **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\7
Memo: Sample Numbler:S25081332-003 Power Setting:21

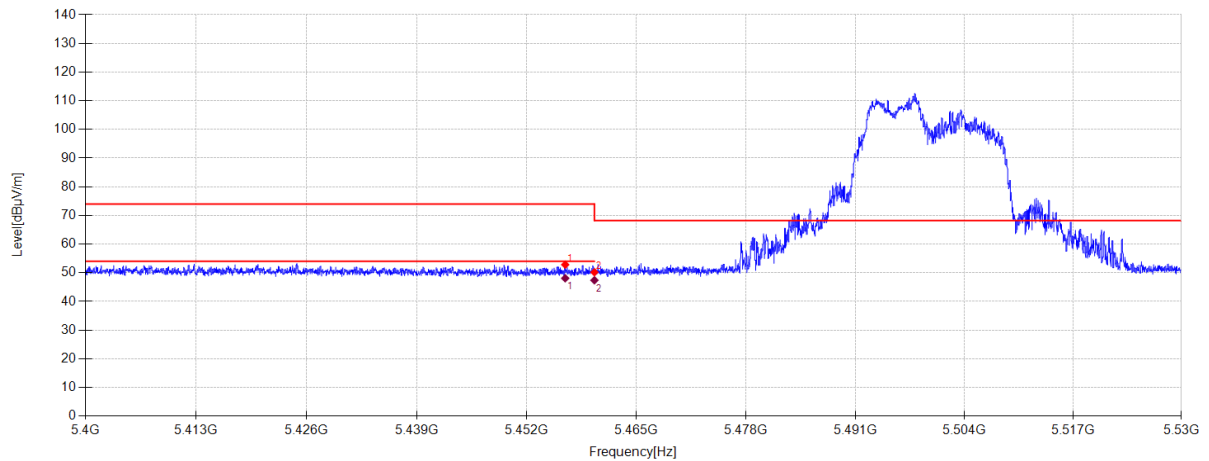

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.537	44.48	32.87	5.19	-29.71	52.83	74.00	21.17	PK	Horizontal
2	5460.000	41.81	32.90	5.19	-29.71	50.19	68.20	18.01	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.537	39.73	32.87	5.19	48.08	54.00	5.92	AV	Horizontal
2	5460.000	39.01	32.90	5.19	47.39	54.00	6.61	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE20 RU38+RU1 5500MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\8

Memo: Sample Numbler:S25081332-003 Power Setting:21

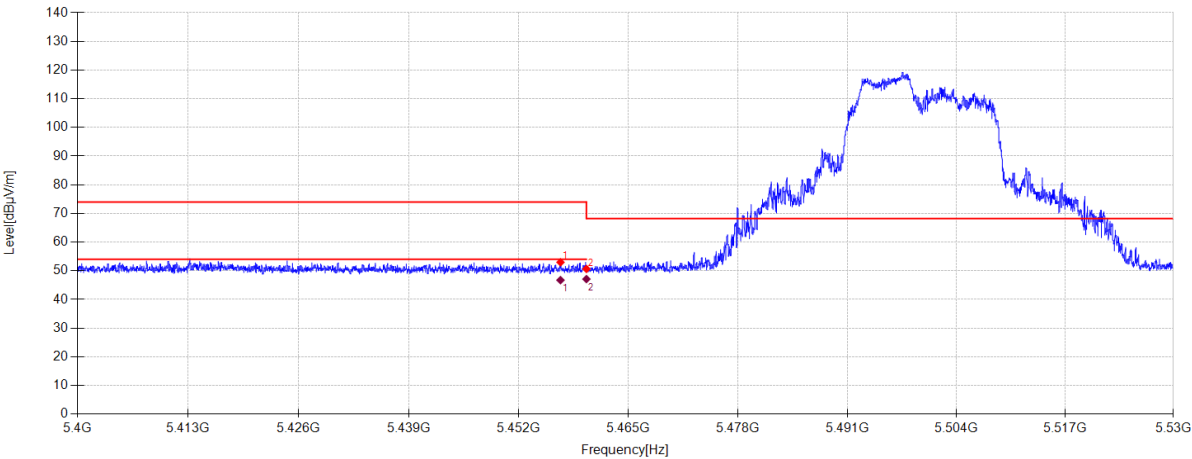

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.927	44.62	32.87	5.19	-29.71	52.97	74.00	21.03	PK	Vertical
2	5460.000	42.27	32.90	5.19	-29.71	50.65	68.20	17.55	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.927	38.39	32.87	5.19	46.74	54.00	7.26	AV	Vertical	
2	5460.000	38.73	32.90	5.19	47.11	54.00	6.89	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE20 RU39+RU7
5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\9

Memo:

Sample Numbler:S25081332-003 Power Setting:21

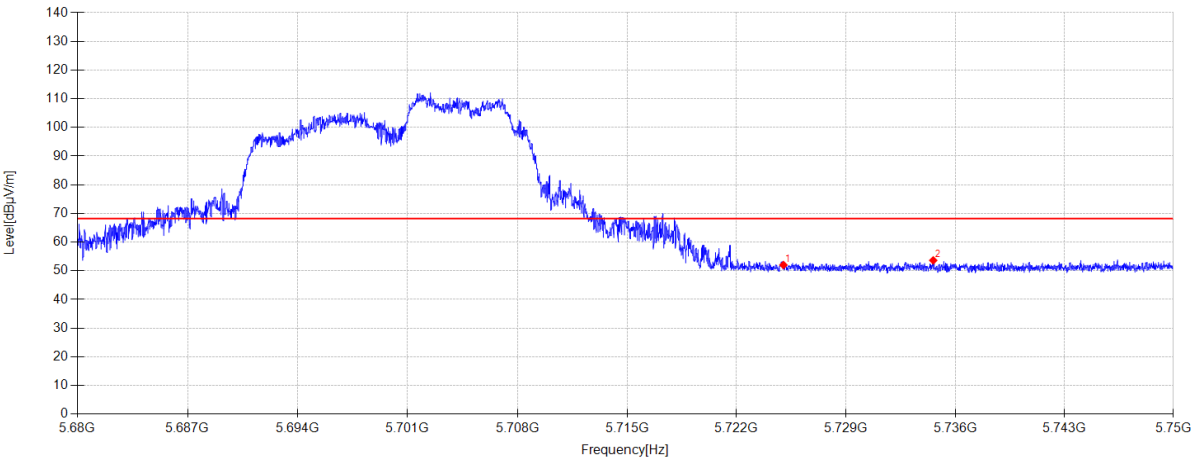

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.90	33.45	5.32	-29.65	52.02	68.20	16.18	PK	Horizontal
2	5734.593	44.37	33.58	5.33	-29.65	53.63	68.20	14.57	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE20 RU39+RU7
5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\10

Memo:

Sample Numbler:S25081332-003 Power Setting:21

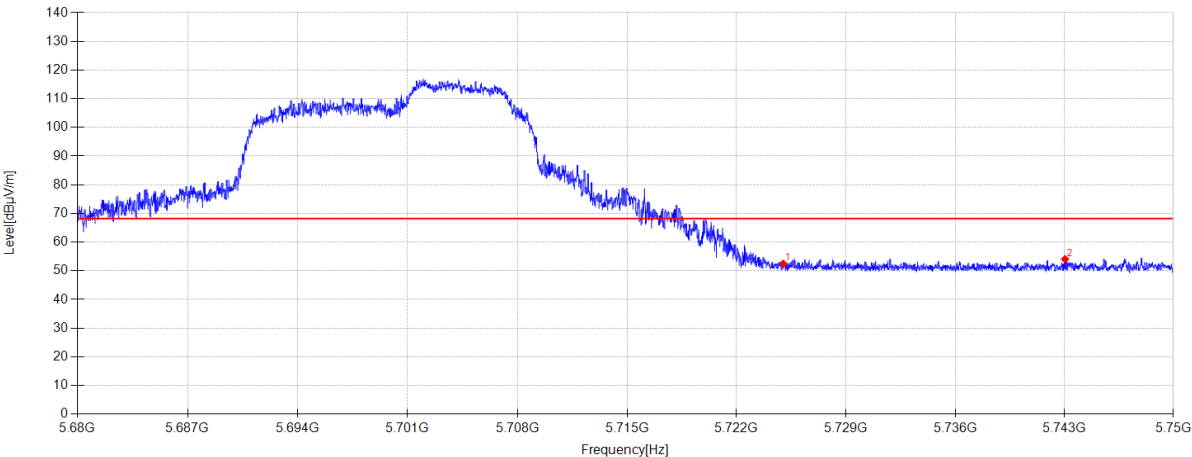

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.30	33.45	5.32	-29.65	52.42	68.20	15.78	PK	Vertical
2	5743.042	44.67	33.70	5.33	-29.65	54.05	68.20	14.15	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.