

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE40 RU53+RU4 5190MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\11

Memo: Sample Numbler:S25081332-003 Power Setting:21

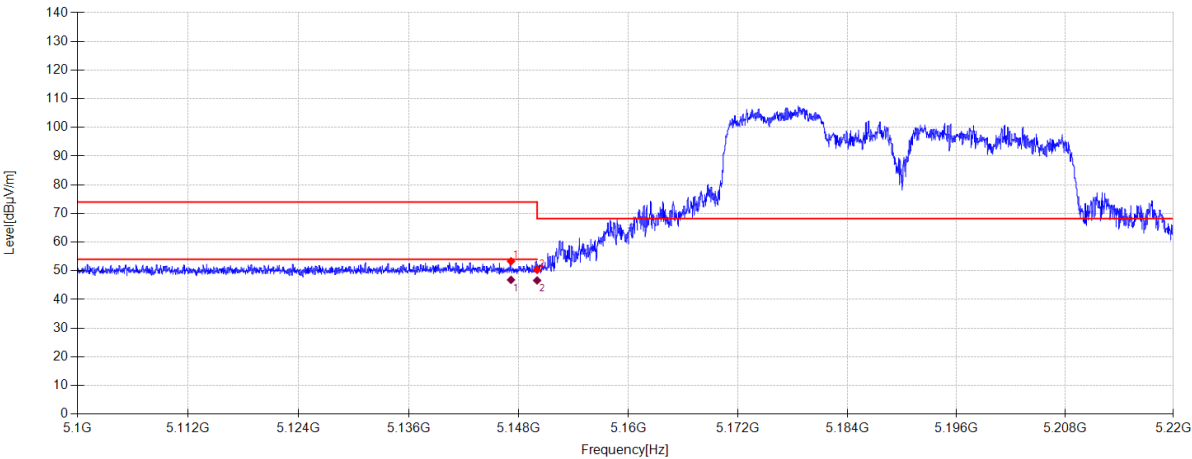

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.148	45.18	32.88	5.03	-29.77	53.32	74.00	20.68	PK	Horizontal
2	5150.000	42.14	32.90	5.04	-29.77	50.31	68.20	17.89	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.148	38.69	32.88	5.03	46.83	54.00	7.17	AV	Horizontal	
2	5150.000	38.46	32.90	5.04	46.63	54.00	7.37	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE40 RU53+RU4 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\12
Memo: Sample Numbler:S25081332-003 Power Setting:21

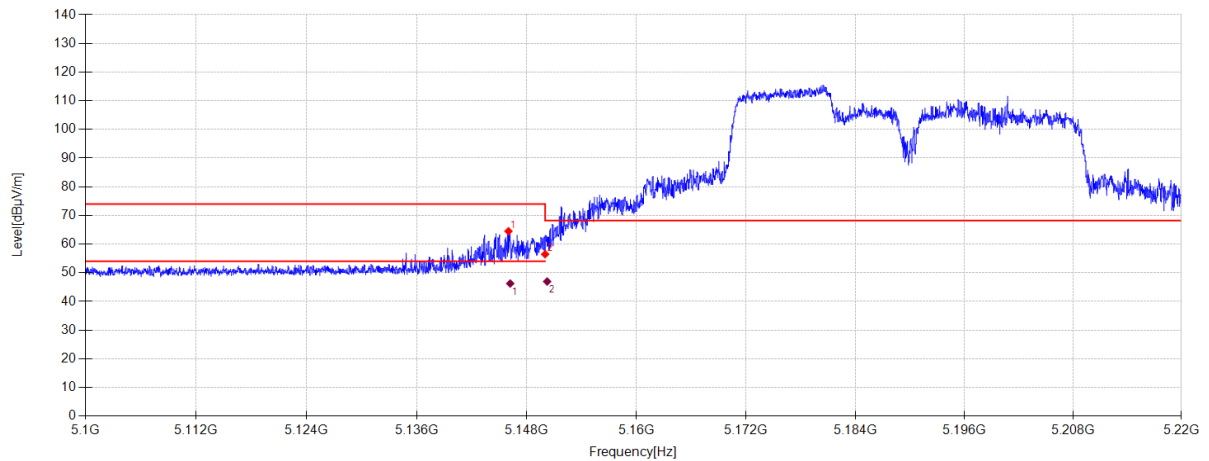

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.996	56.37	32.87	5.03	-29.77	64.50	74.00	9.50	PK	Vertical
2	5150.000	48.29	32.90	5.04	-29.77	56.46	68.20	11.74	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.191	38.13	32.87	5.03	46.26	54.00	7.74	AV	Vertical
2	5150.221	38.78	32.90	5.04	46.95	54.00	7.05	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE40 RU56+RU13 5310MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\15

Memo: Sample Numbre:S25081332-003 Power Setting:21

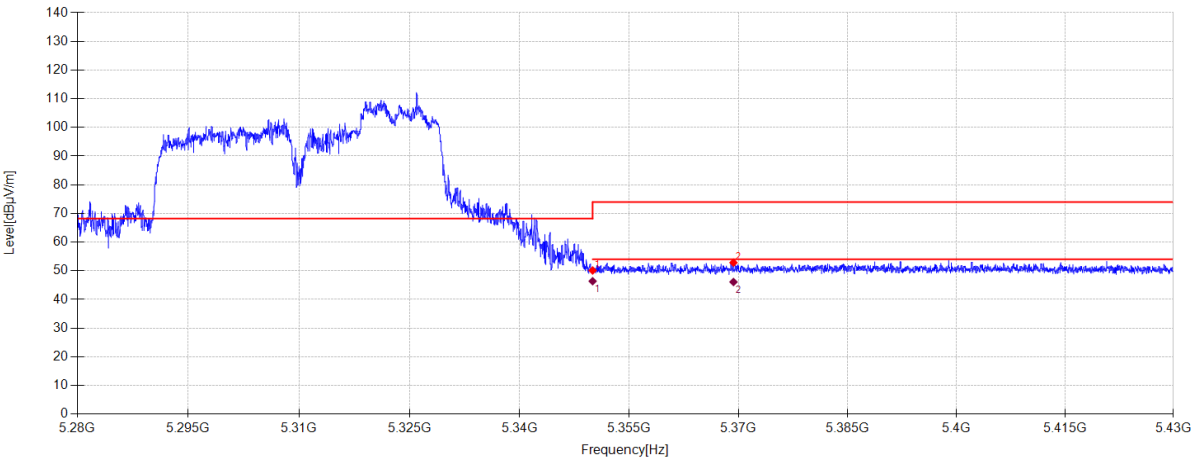


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.20	32.50	5.14	-29.73	50.11	68.20	18.09	PK	Horizontal
2	5369.295	44.78	32.65	5.14	-29.73	52.84	74.00	21.16	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.46	32.50	5.14	46.37	54.00	7.63	AV	Horizontal	
2	5369.295	38.03	32.65	5.14	46.09	54.00	7.91	AV	Horizontal	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE40 RU56+RU13
5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\16
Memo: Sample Numbler:S25081332-003 Power Setting:21

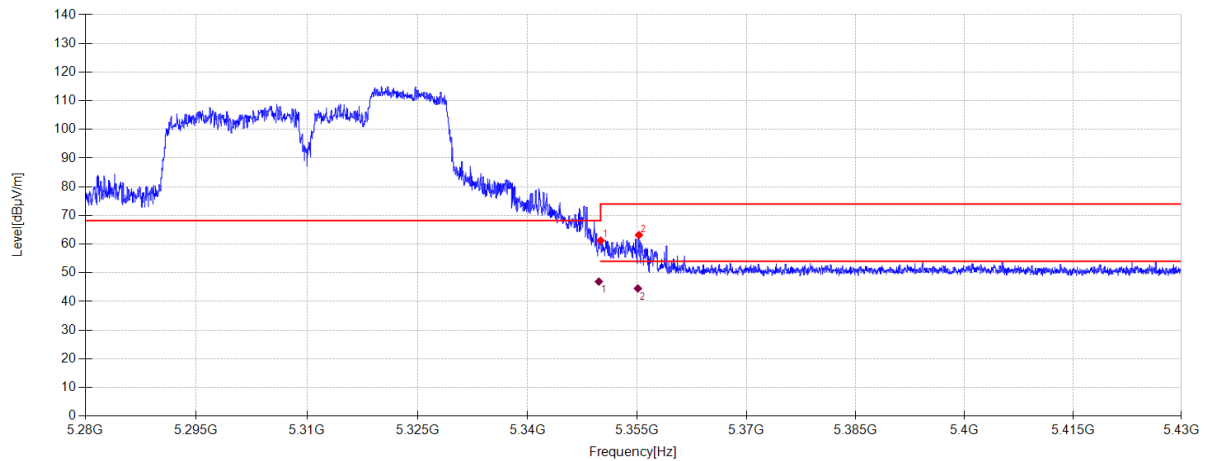

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	53.32	32.50	5.14	-29.73	61.23	68.20	6.97	PK	Vertical
2	5355.240	55.21	32.54	5.14	-29.73	63.16	74.00	10.84	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.756	39.02	32.50	5.14	46.93	54.00	7.07	AV	Vertical
2	5355.101	36.57	32.54	5.14	44.52	54.00	9.48	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE40 RU53+RU4
5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\17

Memo:

Sample Numbler:S25081332-003 Power Setting:21

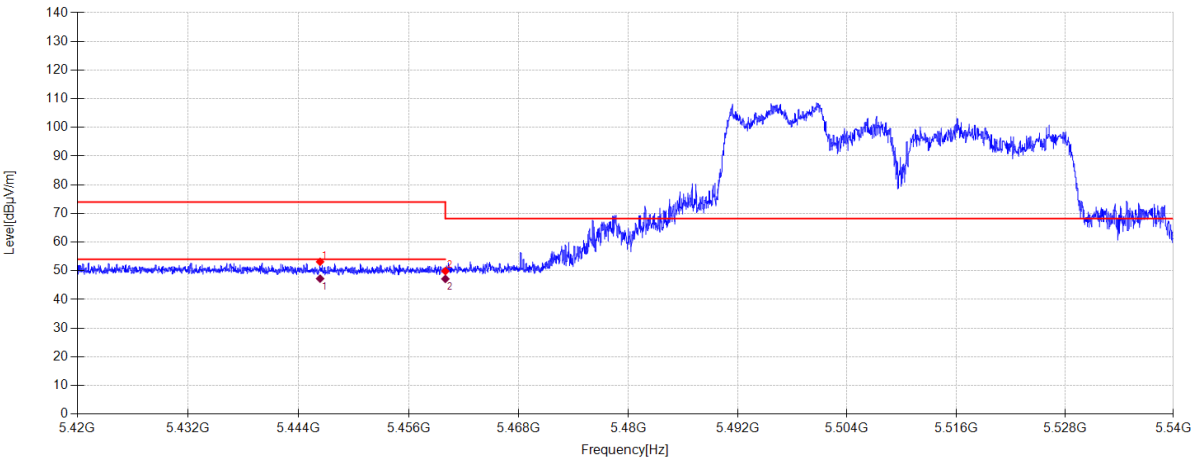

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.352	44.85	32.81	5.18	-29.71	53.13	74.00	20.87	PK	Horizontal
2	5460.000	41.51	32.90	5.19	-29.71	49.89	68.20	18.31	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5446.352	38.97	32.81	5.18	47.25	54.00	6.75	AV	Horizontal	
2	5460.000	38.79	32.90	5.19	47.17	54.00	6.83	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE40 RU53+RU4 5510MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\18

Memo: Sample Numbler:S25081332-003 Power Setting:21

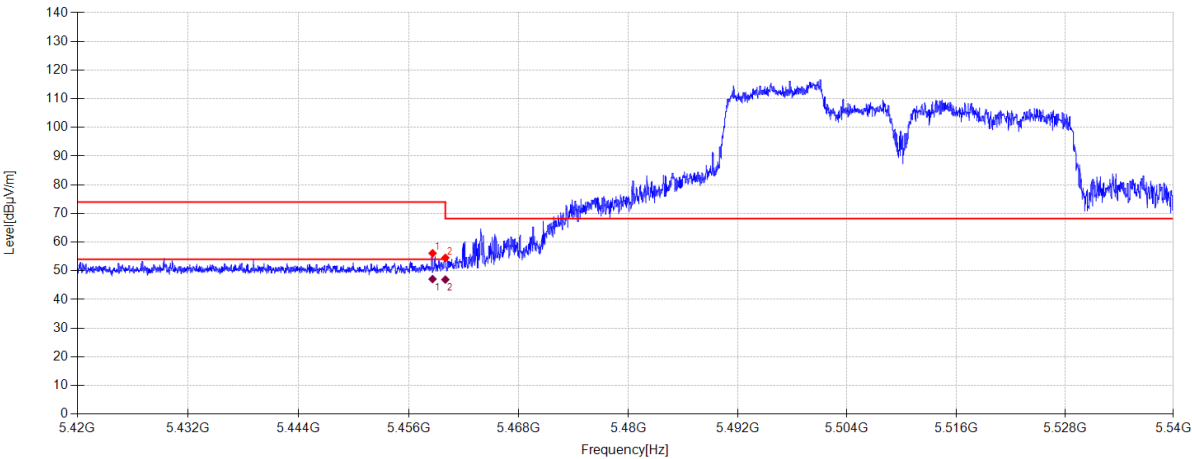

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.604	47.75	32.89	5.19	-29.71	56.12	74.00	17.88	PK	Vertical
2	5460.000	46.14	32.90	5.19	-29.71	54.52	68.20	13.68	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.604	38.73	32.89	5.19	47.10	54.00	6.90	AV	Vertical	
2	5460.000	38.55	32.90	5.19	46.93	54.00	7.07	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE40 RU56+RU13
5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\19

Memo:

Sample Numbler:S25081332-003 Power Setting:21

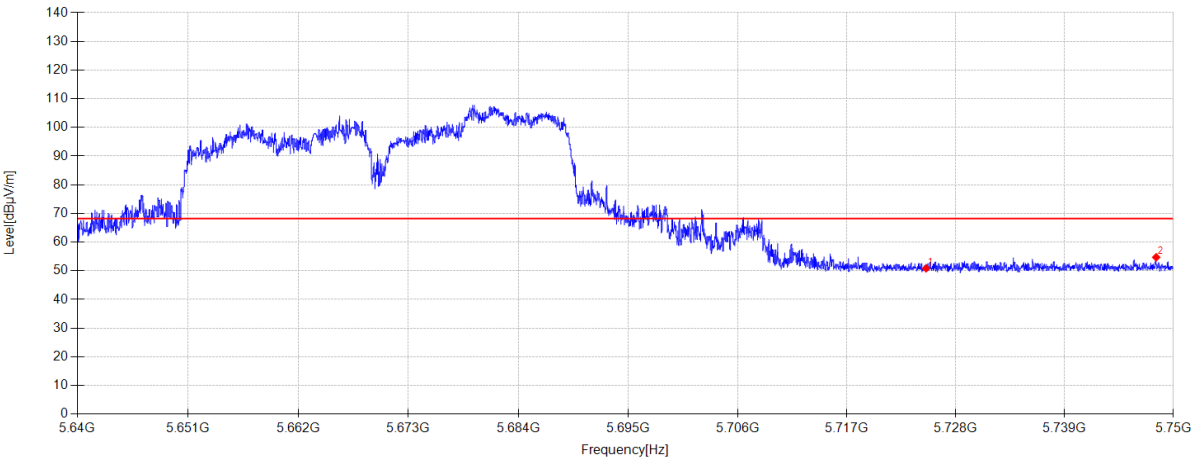

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.72	33.45	5.32	-29.65	50.84	68.20	17.36	PK	Horizontal
2	5748.262	45.25	33.78	5.33	-29.65	54.71	68.20	13.49	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE40 RU56+RU13
5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\20

Memo:

Sample Numbler:S25081332-003 Power Setting:21

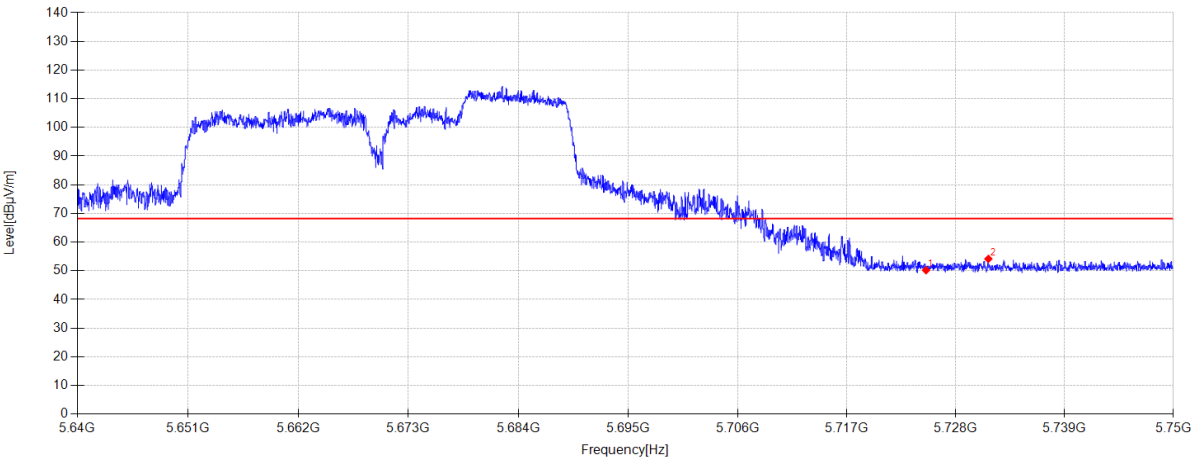

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.07	33.45	5.32	-29.65	50.19	68.20	18.01	PK	Vertical
2	5731.289	44.94	33.54	5.33	-29.65	54.16	68.20	14.04	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 RU66+RU62 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\38
Memo: Sample Numble:S25081332-003 Power Setting:13

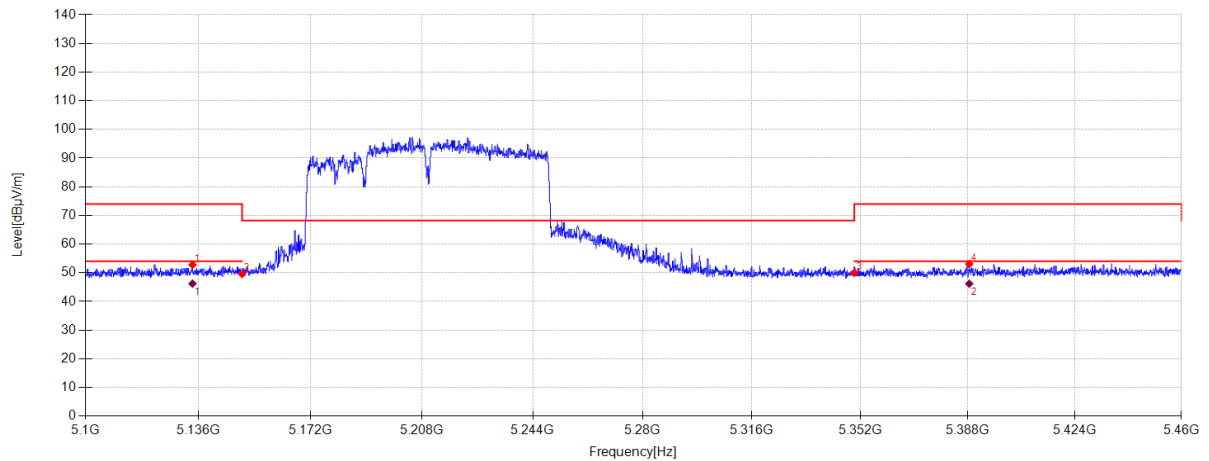

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.128	44.76	32.77	5.03	-29.77	52.79	74.00	21.21	PK	Horizontal
2	5150.000	41.40	32.90	5.04	-29.77	49.57	68.20	18.63	PK	Horizontal
3	5350.000	42.08	32.50	5.14	-29.73	49.99	68.20	18.21	PK	Horizontal
4	5388.396	44.84	32.81	5.15	-29.72	53.08	74.00	20.92	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.128	38.19	32.77	5.03	46.22	54.00	7.78	AV	Horizontal
2	5388.396	37.93	32.81	5.15	46.17	54.00	7.83	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE80 RU66+RU62 5210MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\39

Memo: Sample Numbler:S25081332-003 Power Setting:13

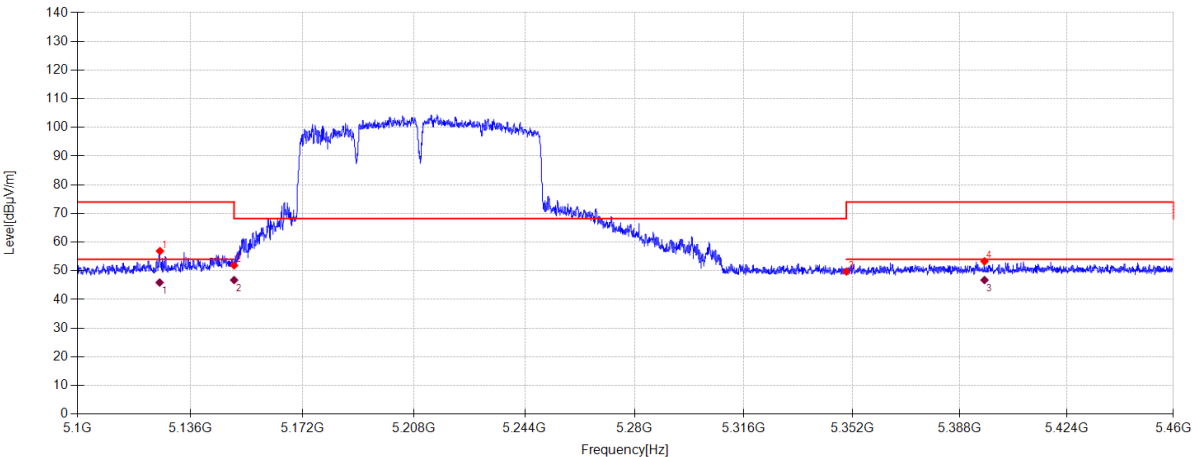

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.280	48.93	32.71	5.02	-29.77	56.89	74.00	17.11	PK	Vertical
2	5150.000	43.70	32.90	5.04	-29.77	51.87	68.20	16.33	PK	Vertical
3	5350.000	41.82	32.50	5.14	-29.73	49.73	68.20	18.47	PK	Vertical
4	5396.208	44.98	32.87	5.16	-29.72	53.29	74.00	20.71	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5126.189	37.95	32.71	5.02	45.91	54.00	8.09	AV	Vertical	
2	5150.000	38.59	32.90	5.04	46.76	54.00	7.24	AV	Vertical	
3	5396.208	38.46	32.87	5.16	46.77	54.00	7.23	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11BE80 RU66+RU62 5290MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\32

Memo: Sample Numbler:S25081332-003 Power Setting:13

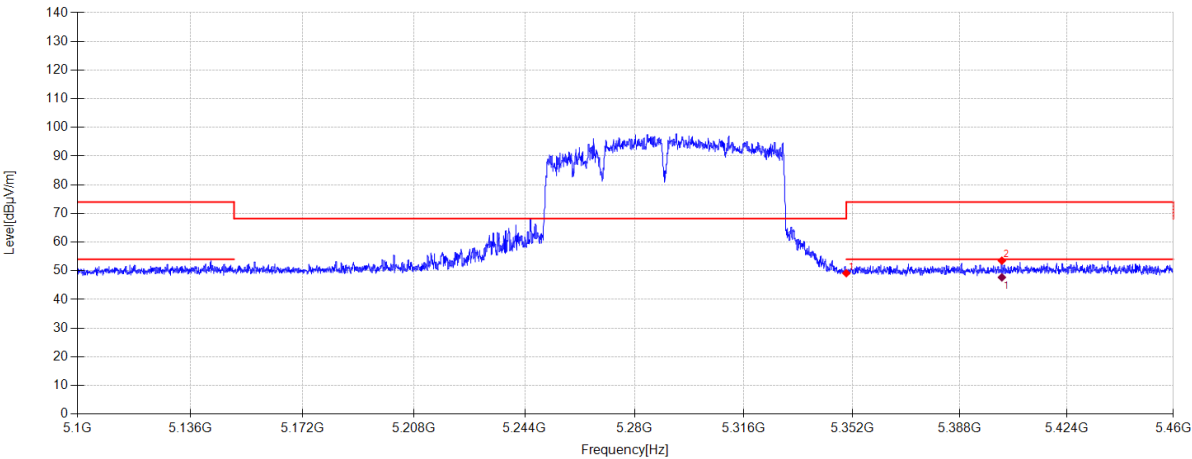

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.24	32.50	5.14	-29.73	49.15	68.20	19.05	PK	Horizontal
2	5402.040	45.19	32.90	5.16	-29.72	53.53	74.00	20.47	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5402.040	39.36	32.90	5.16	47.70	54.00	6.30	AV	Horizontal	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-19Tested By:Lin Guoyuan


EUT:Wireless Access PointModel Number:L2537

Test Mode:MIMO TX 11BE80 RU66+RU625290MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\33

Memo:Sample Numbre:S25081332-003 Power Setting:13

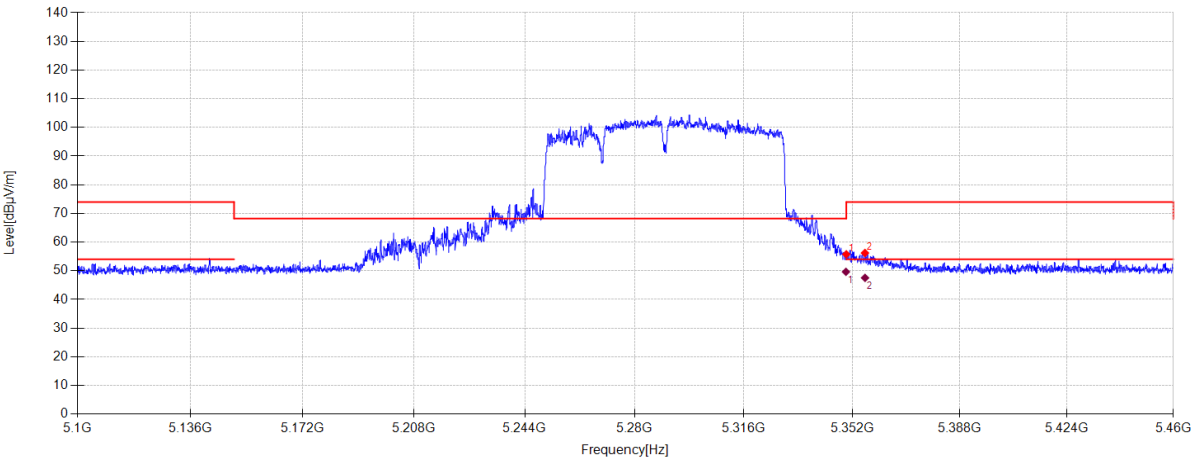

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.86	32.50	5.14	-29.73	55.77	68.20	12.43	PK	Vertical
2	5356.212	48.25	32.55	5.14	-29.73	56.21	74.00	17.79	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.878	41.73	32.50	5.14	49.64	54.00	4.36	AV	Vertical	
2	5356.239	39.57	32.55	5.14	47.53	54.00	6.47	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11BE80 RU65+RU63 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\34
Memo: Sample Numbler:S25081332-003 Power Setting:13

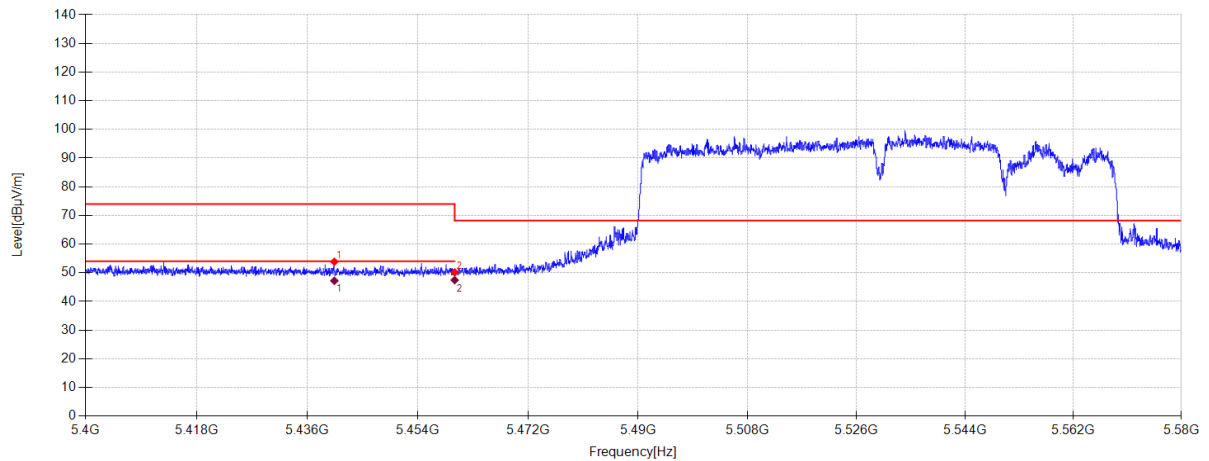

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.374	45.56	32.82	5.18	-29.71	53.85	74.00	20.15	PK	Horizontal
2	5460.000	41.77	32.90	5.19	-29.71	50.15	68.20	18.05	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.374	38.92	32.82	5.18	47.21	54.00	6.79	AV	Horizontal
2	5460.000	39.06	32.90	5.19	47.44	54.00	6.56	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE80 RU65+RU63
5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\35

Memo:

Sample Numbler:S25081332-003 Power Setting:13

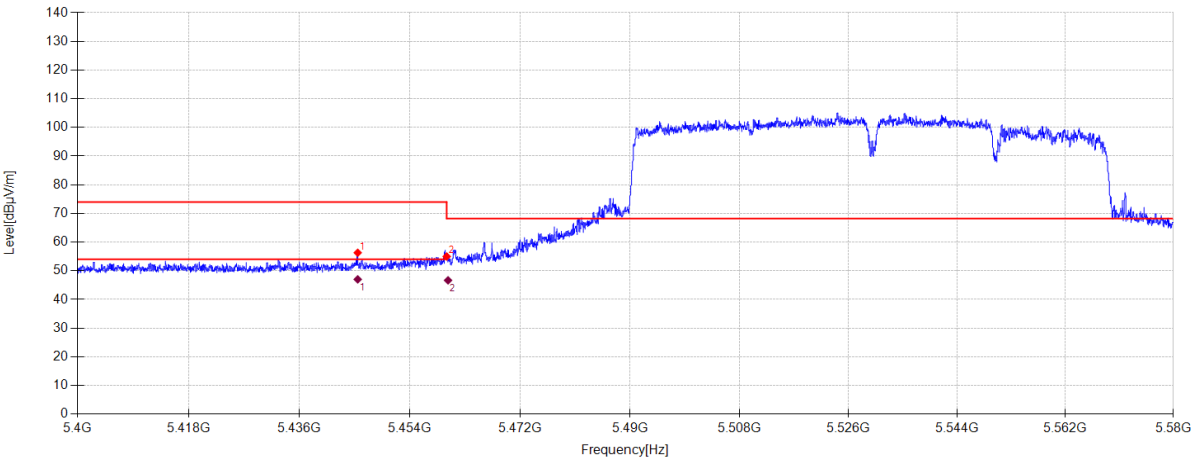

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.486	48.02	32.81	5.18	-29.71	56.30	74.00	17.70	PK	Vertical
2	5460.000	46.60	32.90	5.19	-29.71	54.98	68.20	13.22	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5445.486	38.73	32.81	5.18	47.01	54.00	6.99	AV	Vertical	
2	5460.218	38.29	32.90	5.19	46.67	54.00	7.33	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11BE80 RU66+RU62
5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\36

Memo:

Sample Numbler:S25081332-003 Power Setting:13

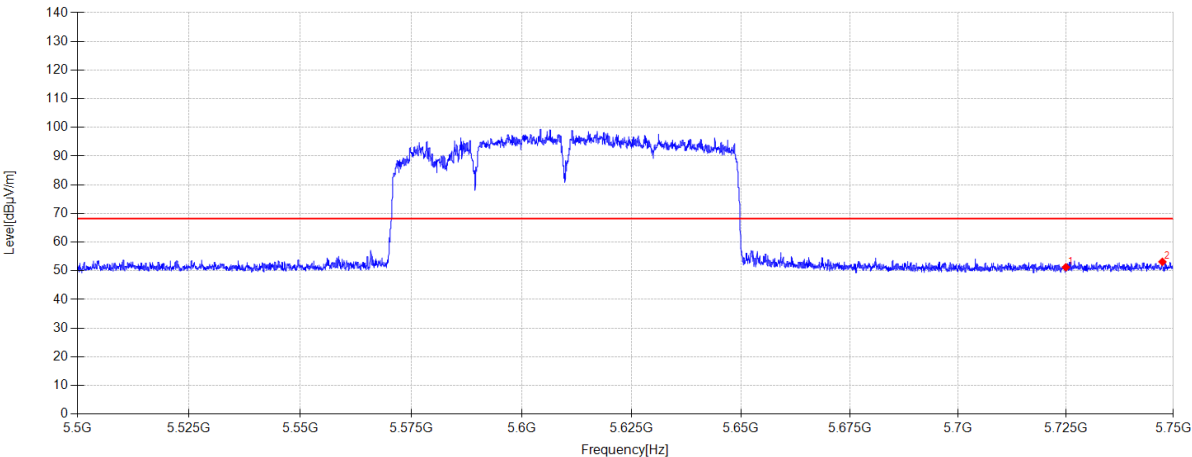

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.13	33.45	5.32	-29.66	51.24	68.20	16.96	PK	Horizontal
2	5747.450	43.68	33.76	5.33	-29.65	53.12	68.20	15.08	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11BE80 RU66+RU62 5610MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC Above 1G 5G MRU\37
Memo: Sample Numbler:S25081332-003 Power Setting:13

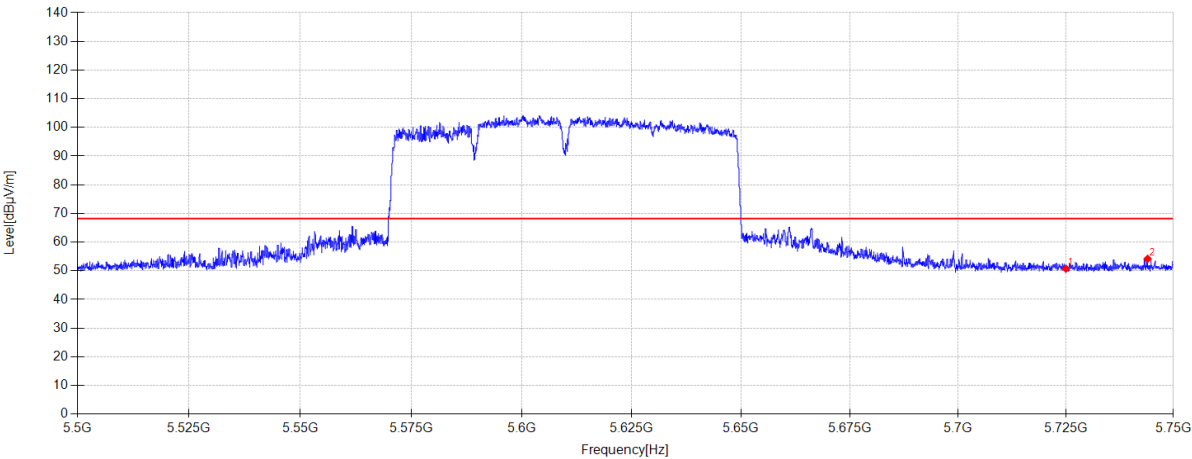

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.62	33.45	5.32	-29.66	50.73	68.20	17.47	PK	Vertical
2	5744.000	44.77	33.72	5.33	-29.65	54.17	68.20	14.03	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\11

Memo:

Sample Numbler:S25081332-003 Power Setting:21

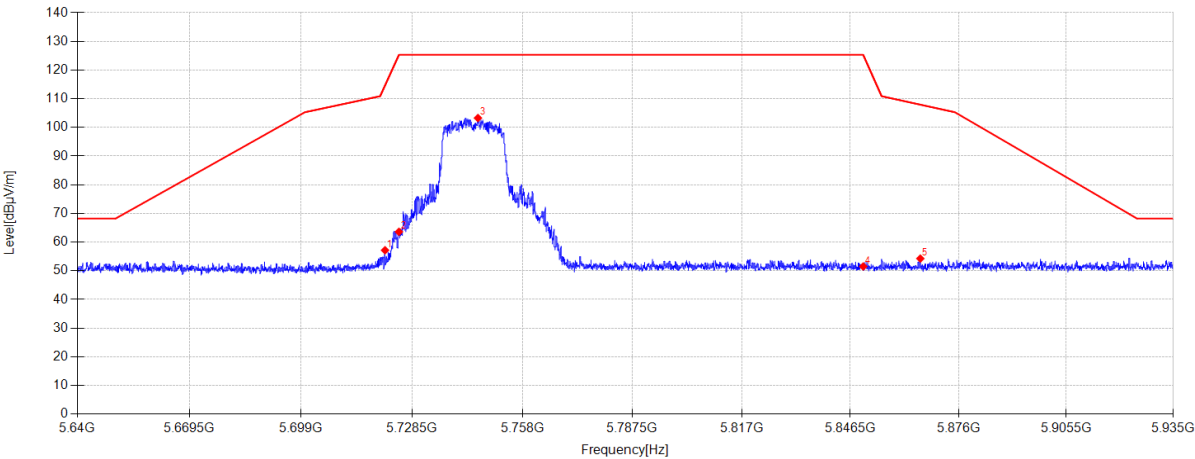

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.302	48.16	33.40	5.26	-29.66	57.16	114.65	57.49	PK	Horizontal
2	5725.000	54.54	33.45	5.26	-29.65	63.60	125.30	61.70	PK	Horizontal
3	5746.082	93.91	33.75	5.27	-29.65	103.28	125.30	22.02	PK	Horizontal
4	5850.000	41.92	33.90	5.31	-29.63	51.50	125.30	73.80	PK	Horizontal
5	5865.557	44.55	34.02	5.32	-29.63	54.26	107.94	53.68	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\12

Memo:

Sample Numbler:S25081332-003 Power Setting:21

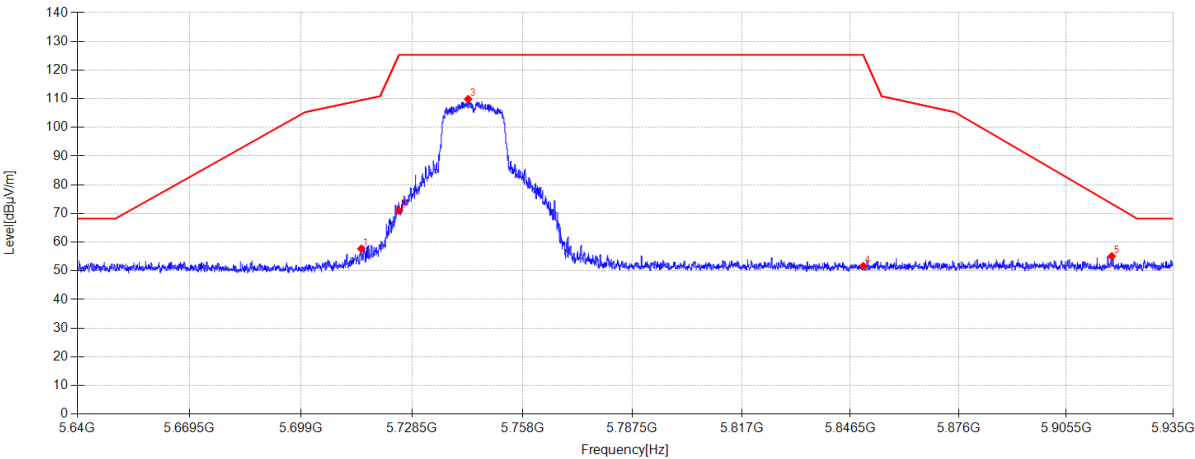

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.989	48.79	33.31	5.26	-29.66	57.70	109.50	51.80	PK	Vertical
2	5725.000	61.90	33.45	5.26	-29.65	70.96	125.30	54.34	PK	Vertical
3	5743.457	100.56	33.71	5.27	-29.65	109.89	125.30	15.41	PK	Vertical
4	5850.000	42.05	33.90	5.31	-29.63	51.63	125.30	73.67	PK	Vertical
5	5918.038	45.03	34.34	5.34	-29.62	55.09	73.37	18.28	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT1 TX 11A 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\9
Memo: Sample Numbler:S25081332-003 Power Setting:21

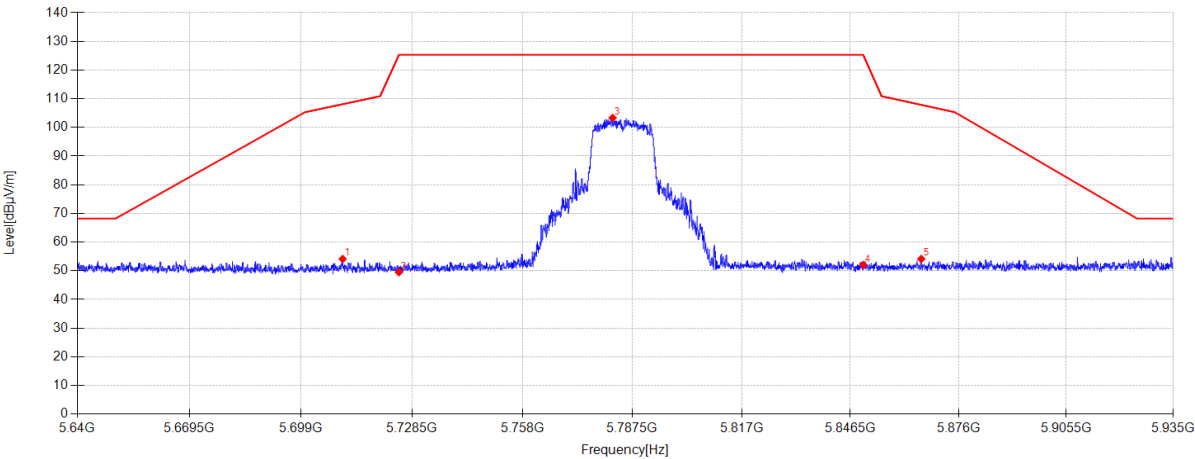


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5710.033	45.29	33.24	5.25	-29.66	54.12	108.11	53.99	PK	Horizontal
2	5725.000	40.45	33.45	5.26	-29.65	49.51	125.30	75.79	PK	Horizontal
3	5782.190	93.85	33.86	5.28	-29.64	103.35	125.30	21.95	PK	Horizontal
4	5850.000	42.48	33.90	5.31	-29.63	52.06	125.30	73.24	PK	Horizontal
5	5865.823	44.41	34.03	5.32	-29.63	54.13	107.87	53.74	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT1 TX 11A 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\10
Memo: Sample Numbler:S25081332-003 Power Setting:21

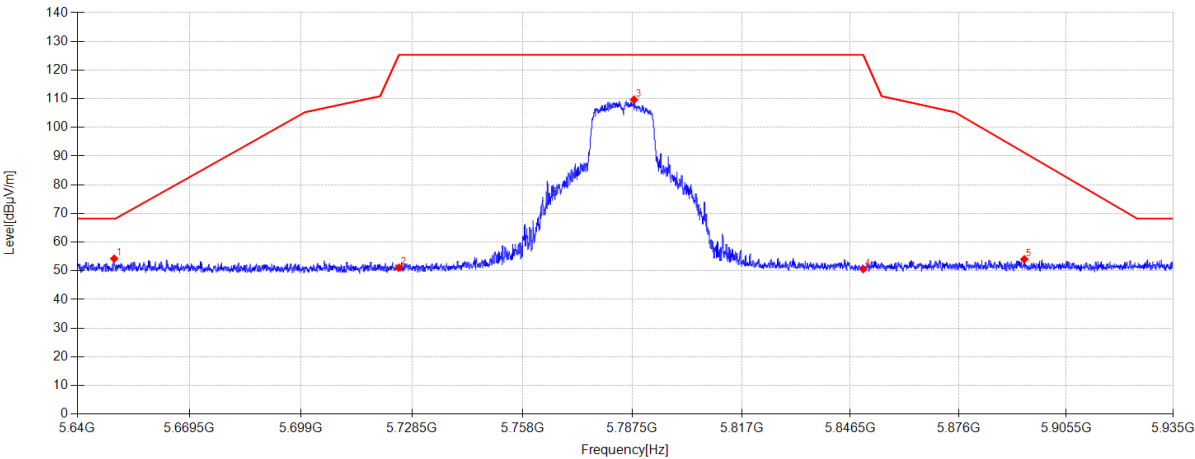

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5649.676	45.17	33.50	5.23	-29.67	54.23	68.20	13.97	PK	Vertical
2	5725.000	42.04	33.45	5.26	-29.65	51.10	125.30	74.20	PK	Vertical
3	5787.943	100.15	33.88	5.29	-29.64	109.68	125.30	15.62	PK	Vertical
4	5850.000	40.99	33.90	5.31	-29.63	50.57	125.30	74.73	PK	Vertical
5	5893.995	44.07	34.25	5.33	-29.62	54.03	91.21	37.18	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\7

Memo:

Sample Numbre:S25081332-003 Power Setting:21

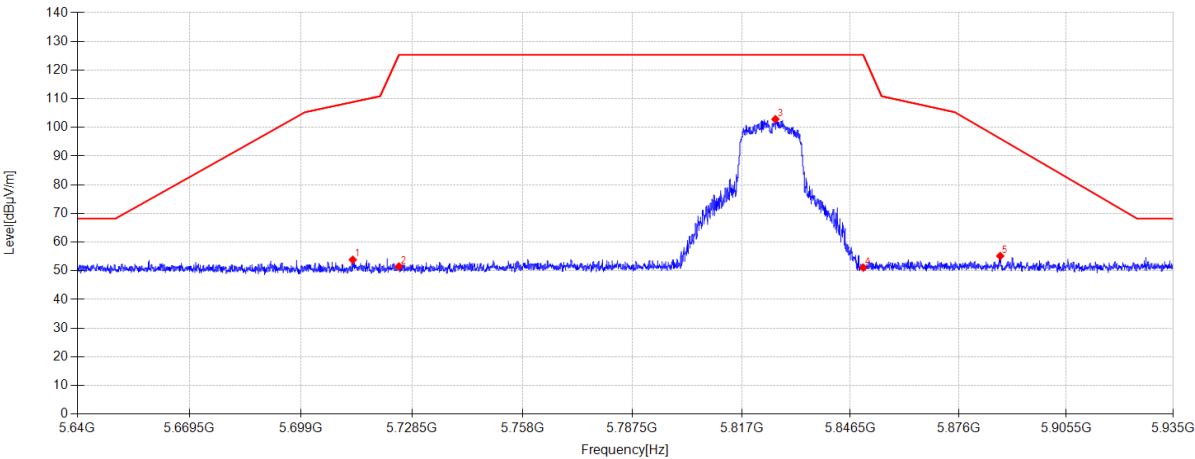

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.718	44.97	33.28	5.26	-29.66	53.85	108.86	55.01	PK	Horizontal
2	5725.000	42.44	33.45	5.26	-29.65	51.50	125.30	73.80	PK	Horizontal
3	5826.145	93.30	33.90	5.30	-29.63	102.87	125.30	22.43	PK	Horizontal
4	5850.000	41.52	33.90	5.31	-29.63	51.10	125.30	74.20	PK	Horizontal
5	5887.387	45.26	34.20	5.32	-29.62	55.16	96.11	40.95	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:ANT1 TX 11A 5825MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\8

Memo:Sample Numbler:S25081332-003 Power Setting:21

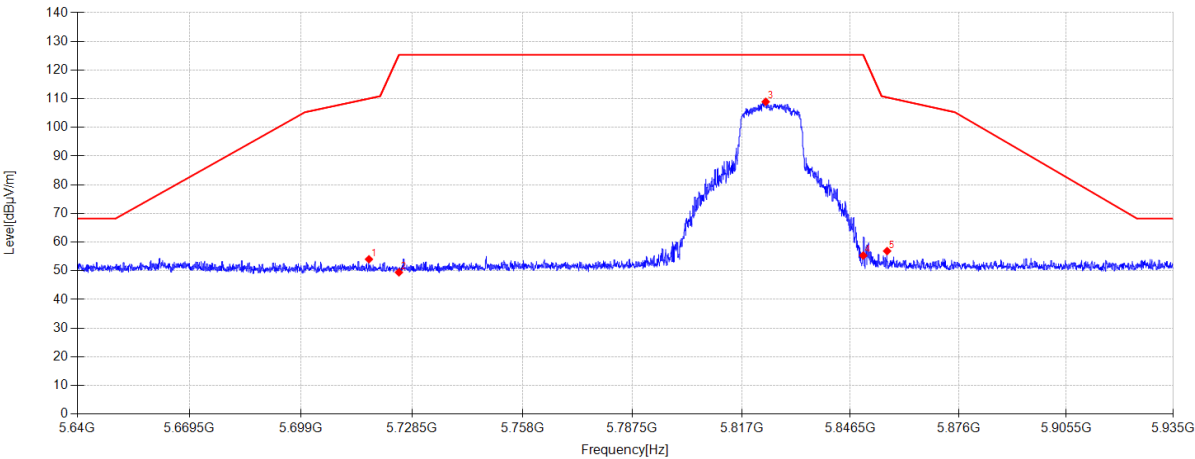

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.025	45.09	33.34	5.26	-29.66	54.03	110.07	56.04	PK	Vertical
2	5725.000	40.39	33.45	5.26	-29.65	49.45	125.30	75.85	PK	Vertical
3	5823.520	99.38	33.90	5.30	-29.64	108.94	125.30	16.36	PK	Vertical
4	5850.000	45.74	33.90	5.31	-29.63	55.32	125.30	69.98	PK	Vertical
5	5856.501	47.26	33.95	5.31	-29.63	56.89	110.48	53.59	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:ANT2 TX 11A 5745MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\13

Memo:Sample Numbre:S25081332-003 Power Setting:21

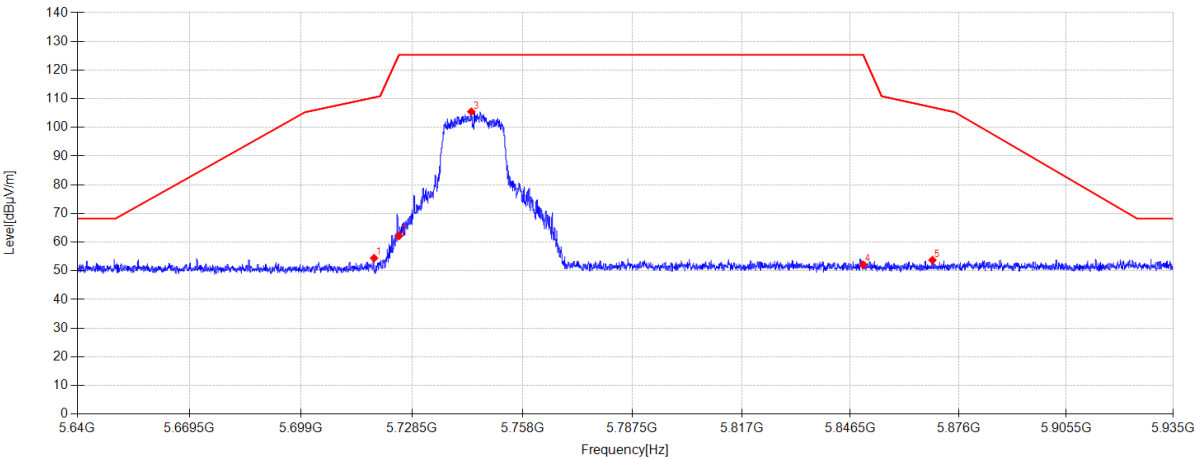

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.382	45.46	33.36	5.26	-29.66	54.42	110.45	56.03	PK	Horizontal
2	5725.000	53.05	33.45	5.26	-29.65	62.11	125.30	63.19	PK	Horizontal
3	5744.312	96.17	33.72	5.27	-29.65	105.51	125.30	19.79	PK	Horizontal
4	5850.000	42.57	33.90	5.31	-29.63	52.15	125.30	73.15	PK	Horizontal
5	5868.861	44.00	34.05	5.32	-29.63	53.74	107.02	53.28	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT2 TX 11A 5745MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\14
Memo: Sample Numbler:S25081332-003 Power Setting:21

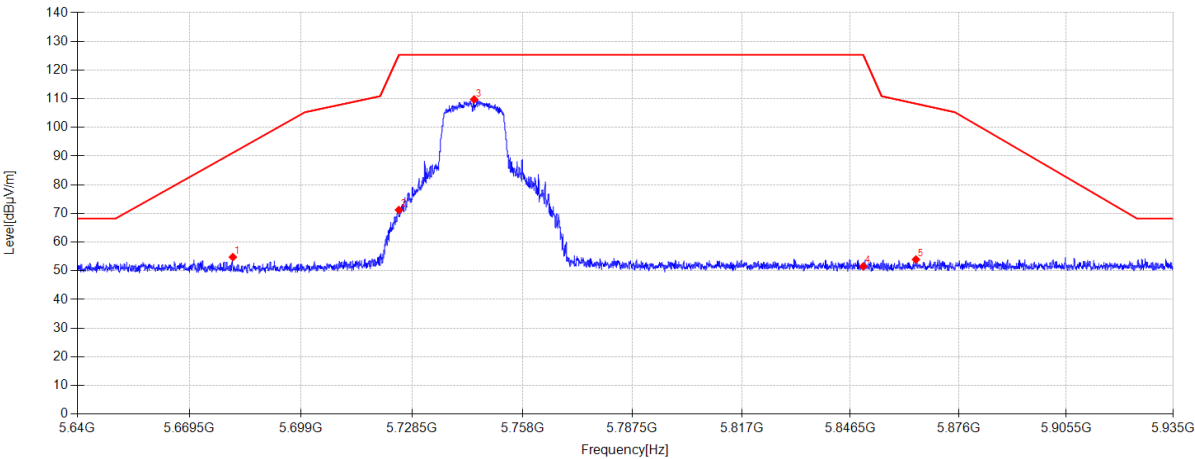


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5680.946	45.94	33.25	5.24	-29.66	54.77	91.16	36.39	PK	Vertical
2	5725.000	62.16	33.45	5.26	-29.65	71.22	125.30	54.08	PK	Vertical
3	5745.079	100.41	33.73	5.27	-29.65	109.76	125.30	15.54	PK	Vertical
4	5850.000	41.97	33.90	5.31	-29.63	51.55	125.30	73.75	PK	Vertical
5	5864.348	44.25	34.01	5.32	-29.63	53.95	108.28	54.33	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT2 TX 11A 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\15
Memo: Sample Numbler:S25081332-003 Power Setting:21

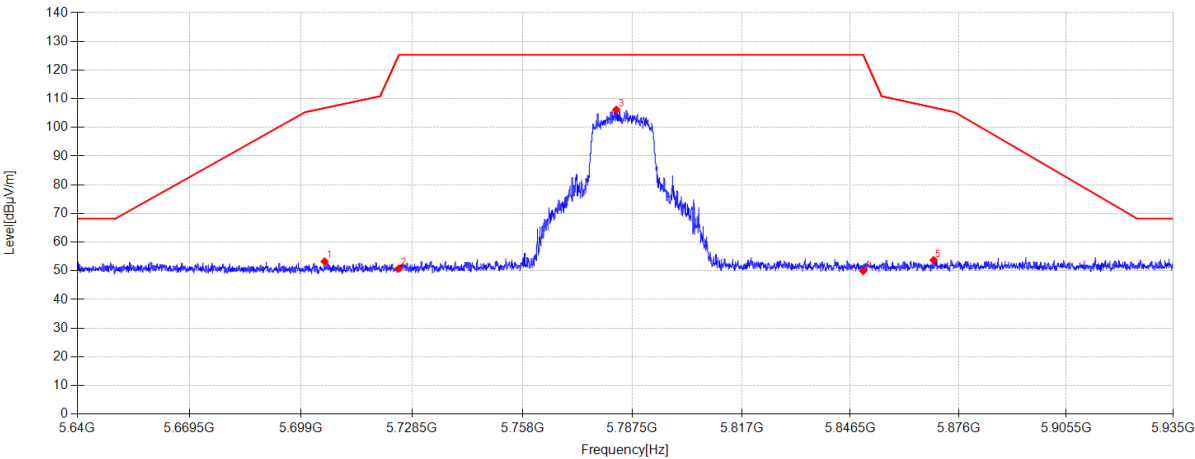

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5705.254	44.49	33.17	5.25	-29.66	53.25	106.77	53.52	PK	Horizontal
2	5725.000	41.74	33.45	5.26	-29.65	50.80	125.30	74.50	PK	Horizontal
3	5783.193	96.67	33.87	5.28	-29.64	106.18	125.30	19.12	PK	Horizontal
4	5850.000	40.37	33.90	5.31	-29.63	49.95	125.30	75.35	PK	Horizontal
5	5869.186	43.99	34.05	5.32	-29.63	53.73	106.93	53.20	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:ANT2 TX 11A 5785MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\16

Memo:Sample Numbre:S25081332-003 Power Setting:21

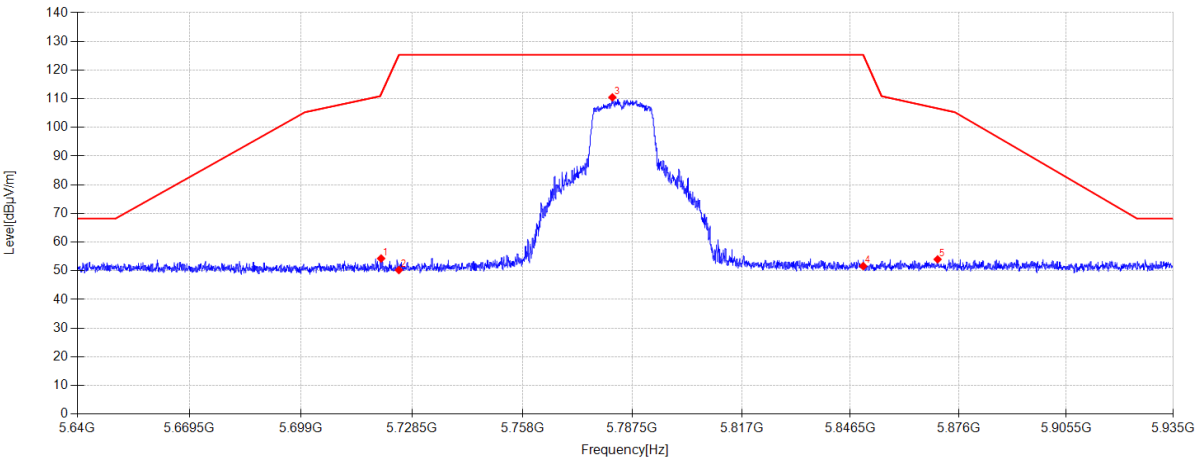

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.270	45.31	33.38	5.26	-29.66	54.29	111.68	57.39	PK	Vertical
2	5725.000	41.19	33.45	5.26	-29.65	50.25	125.30	75.05	PK	Vertical
3	5782.131	101.00	33.86	5.28	-29.64	110.50	125.30	14.80	PK	Vertical
4	5850.000	42.06	33.90	5.31	-29.63	51.64	125.30	73.66	PK	Vertical
5	5870.277	44.23	34.06	5.32	-29.63	53.98	106.62	52.64	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\17

Memo:

Sample Numbler:S25081332-003 Power Setting:21

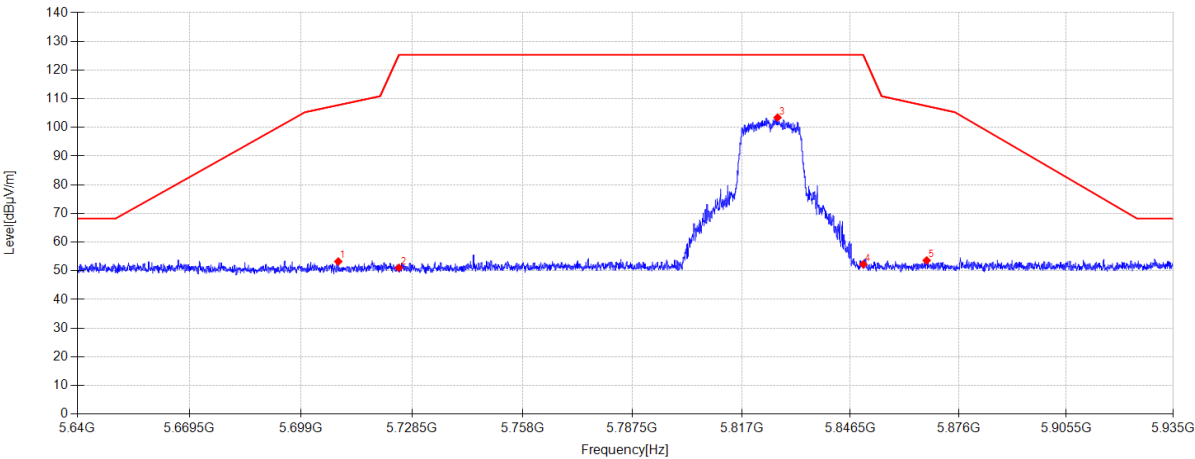

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.883	44.43	33.22	5.25	-29.66	53.24	107.79	54.55	PK	Horizontal
2	5725.000	42.00	33.45	5.26	-29.65	51.06	125.30	74.24	PK	Horizontal
3	5826.735	93.89	33.90	5.30	-29.63	103.46	125.30	21.84	PK	Horizontal
4	5850.000	42.67	33.90	5.31	-29.63	52.25	125.30	73.05	PK	Horizontal
5	5867.298	43.89	34.04	5.32	-29.63	53.62	107.46	53.84	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT2 TX 11A 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\18
Memo: Sample Numbler:S25081332-003 Power Setting:21

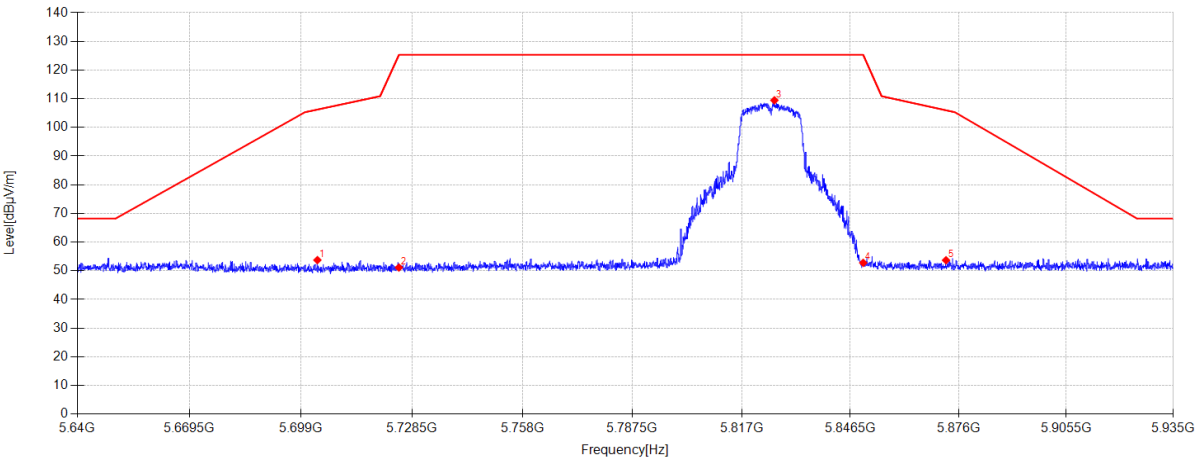

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5703.337	44.99	33.15	5.25	-29.66	53.73	106.23	52.50	PK	Vertical
2	5725.000	42.08	33.45	5.26	-29.65	51.14	125.30	74.16	PK	Vertical
3	5825.880	99.90	33.90	5.30	-29.63	109.47	125.30	15.83	PK	Vertical
4	5850.000	43.19	33.90	5.31	-29.63	52.77	125.30	72.53	PK	Vertical
5	5872.578	43.90	34.08	5.32	-29.63	53.67	105.98	52.31	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:ANT3 TX 11A 5745MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\23

Memo:Sample Numbler:S25081332-003 Power Setting:21

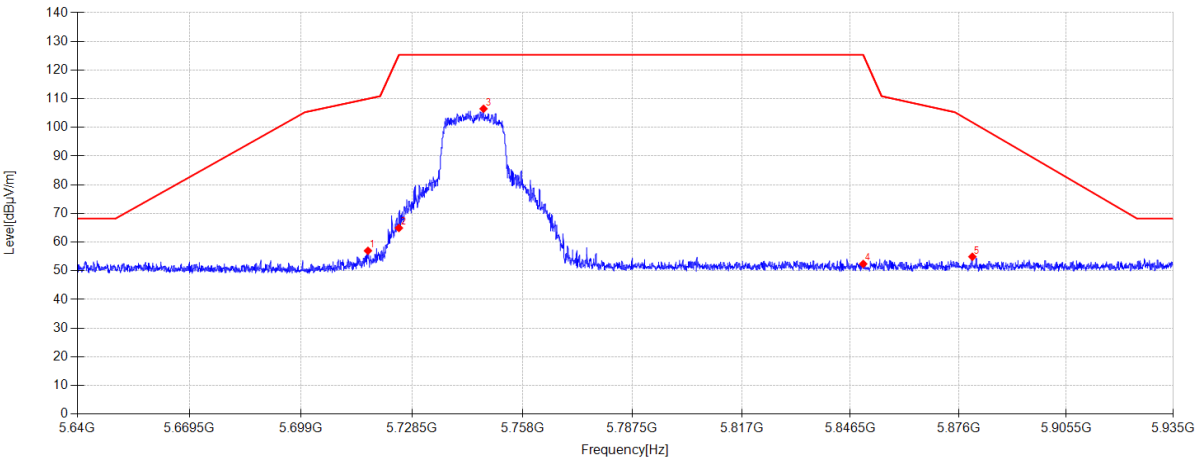

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.759	48.05	33.33	5.26	-29.66	56.98	109.99	53.01	PK	Horizontal
2	5725.000	55.86	33.45	5.26	-29.65	64.92	125.30	60.38	PK	Horizontal
3	5747.587	97.13	33.77	5.27	-29.65	106.52	125.30	18.78	PK	Horizontal
4	5850.000	42.82	33.90	5.31	-29.63	52.40	125.30	72.90	PK	Horizontal
5	5879.776	45.06	34.14	5.32	-29.62	54.90	101.76	46.86	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT3 TX 11A 5745MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\24
Memo: Sample Numbler:S25081332-003 Power Setting:21

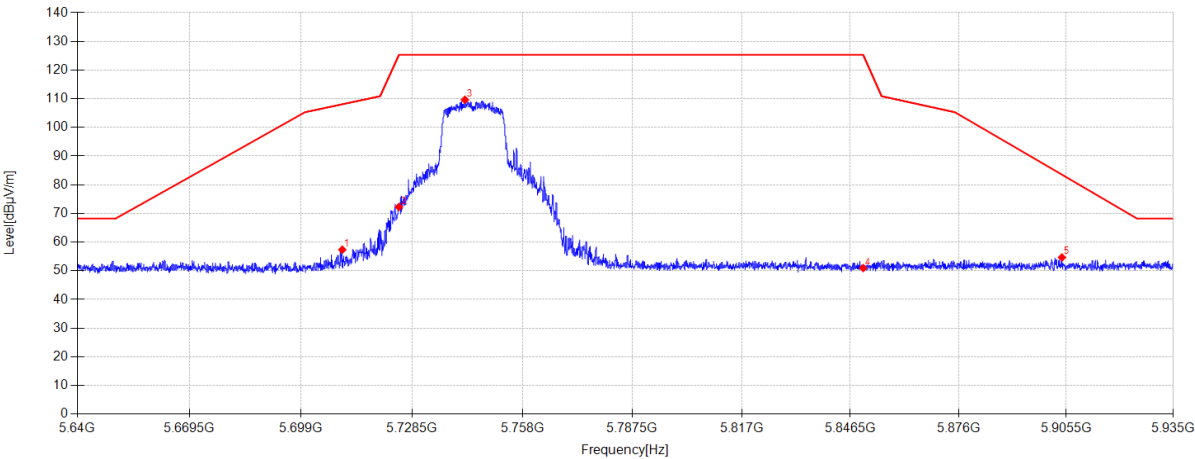

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.945	48.53	33.24	5.25	-29.66	57.36	108.08	50.72	PK	Vertical
2	5725.000	63.21	33.45	5.26	-29.65	72.27	125.30	53.03	PK	Vertical
3	5742.601	100.34	33.70	5.27	-29.65	109.66	125.30	15.64	PK	Vertical
4	5850.000	41.37	33.90	5.31	-29.63	50.95	125.30	74.35	PK	Vertical
5	5904.320	44.64	34.31	5.33	-29.62	54.66	83.54	28.88	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

ANT3 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\21

Memo:

Sample Numbler:S25081332-003 Power Setting:21

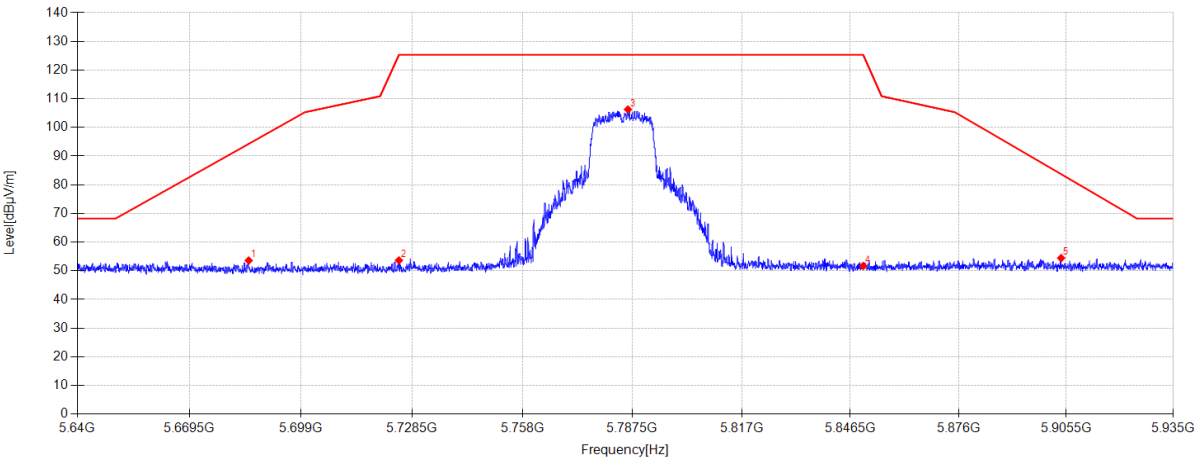

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5685.135	44.79	33.22	5.24	-29.66	53.59	94.27	40.68	PK	Horizontal
2	5725.000	44.56	33.45	5.26	-29.65	53.62	125.30	71.68	PK	Horizontal
3	5786.320	96.76	33.87	5.28	-29.64	106.27	125.30	19.03	PK	Horizontal
4	5850.000	42.09	33.90	5.31	-29.63	51.67	125.30	73.63	PK	Horizontal
5	5904.114	44.42	34.31	5.33	-29.62	54.44	83.70	29.26	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: ANT3 TX 11A 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\22
Memo: Sample Numbler:S25081332-003 Power Setting:21

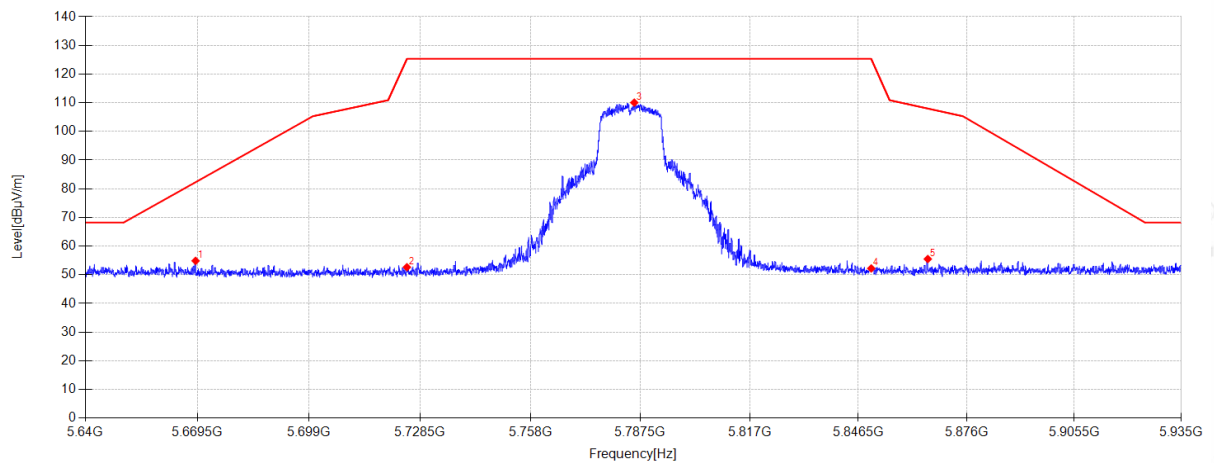**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5668.999	45.94	33.35	5.24	-29.67	54.86	82.30	27.44	PK	Vertical
2	5725.000	43.58	33.45	5.26	-29.65	52.64	125.30	72.66	PK	Vertical
3	5785.878	100.54	33.87	5.28	-29.64	110.05	125.30	15.25	PK	Vertical
4	5850.000	42.63	33.90	5.31	-29.63	52.21	125.30	73.09	PK	Vertical
5	5865.410	45.79	34.02	5.32	-29.63	55.50	107.99	52.49	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT3 TX 11A 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\19
Memo: Sample Numbler:S25081332-003 Power Setting:21

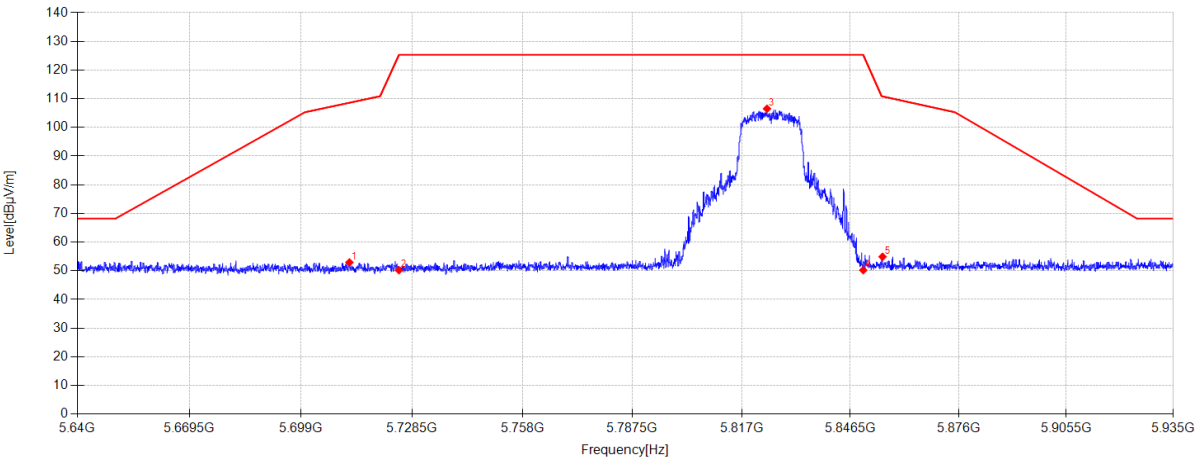


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.833	44.06	33.27	5.25	-29.66	52.92	108.61	55.69	PK	Horizontal
2	5725.000	41.13	33.45	5.26	-29.65	50.19	125.30	75.11	PK	Horizontal
3	5823.874	96.95	33.90	5.30	-29.64	106.51	125.30	18.79	PK	Horizontal
4	5850.000	40.63	33.90	5.31	-29.63	50.21	125.30	75.09	PK	Horizontal
5	5855.262	45.28	33.94	5.31	-29.63	54.90	110.83	55.93	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: ANT3 TX 11A 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\20
Memo: Sample Numbler:S25081332-003 Power Setting:21

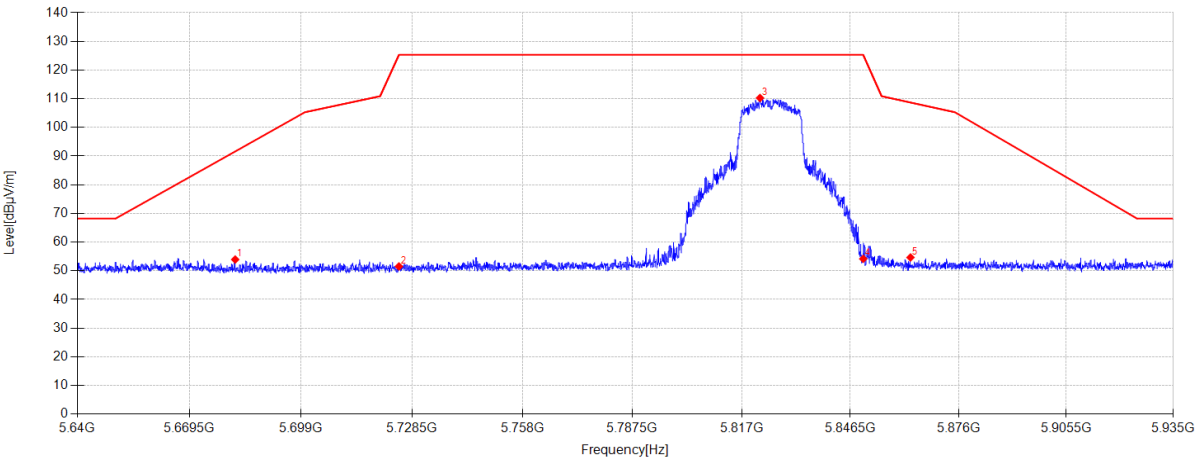

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5681.566	45.10	33.25	5.24	-29.66	53.93	91.62	37.69	PK	Vertical
2	5725.000	42.46	33.45	5.26	-29.65	51.52	125.30	73.78	PK	Vertical
3	5821.986	100.72	33.90	5.30	-29.64	110.28	125.30	15.02	PK	Vertical
4	5850.000	44.60	33.90	5.31	-29.63	54.18	125.30	71.12	PK	Vertical
5	5862.873	44.96	34.00	5.32	-29.63	54.65	108.70	54.05	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\25

Memo:

Sample Numbler:S25081332-003 Power Setting:21

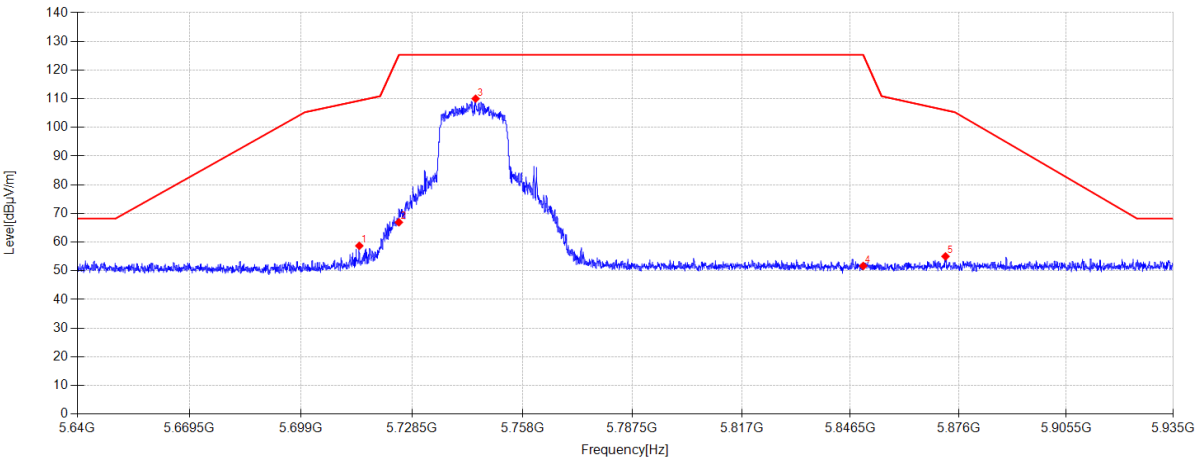

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.458	49.81	33.30	5.26	-29.66	58.71	109.35	50.64	PK	Horizontal
2	5725.000	57.84	33.45	5.26	-29.65	66.90	125.30	58.40	PK	Horizontal
3	5745.463	100.67	33.74	5.27	-29.65	110.03	125.30	15.27	PK	Horizontal
4	5850.000	42.10	33.90	5.31	-29.63	51.68	125.30	73.62	PK	Horizontal
5	5872.431	45.24	34.08	5.32	-29.63	55.01	106.02	51.01	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11N20 5745MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\26
Memo: Sample Numbler:S25081332-003 Power Setting:21

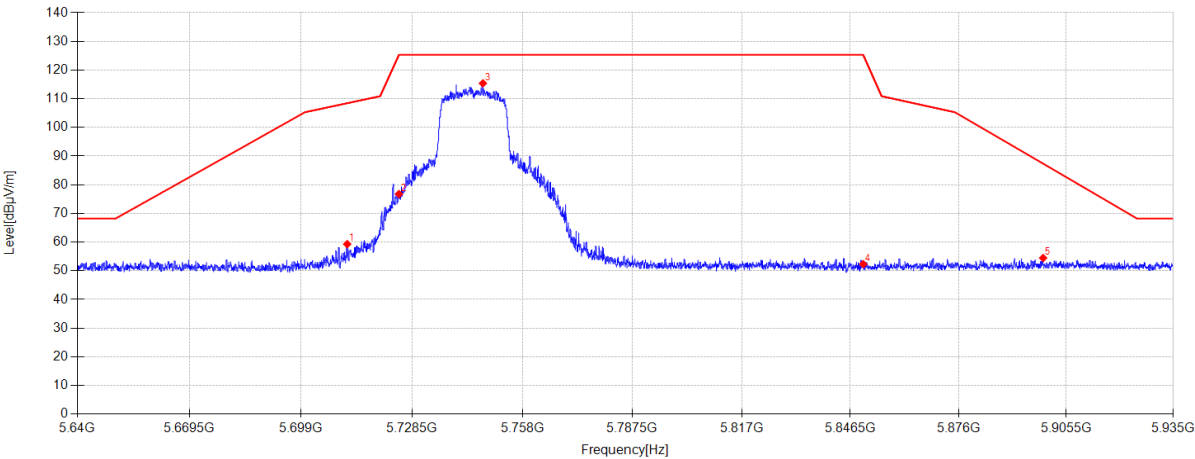


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.243	50.44	33.26	5.25	-29.66	59.29	108.45	49.16	PK	Vertical
2	5725.000	67.71	33.45	5.26	-29.65	76.77	125.30	48.53	PK	Vertical
3	5747.410	106.00	33.76	5.27	-29.65	115.38	125.30	9.92	PK	Vertical
4	5850.000	42.73	33.90	5.31	-29.63	52.31	125.30	72.99	PK	Vertical
5	5899.158	44.46	34.29	5.33	-29.62	54.46	87.38	32.92	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11N20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\27
Memo: Sample Numbler:S25081332-003 Power Setting:21

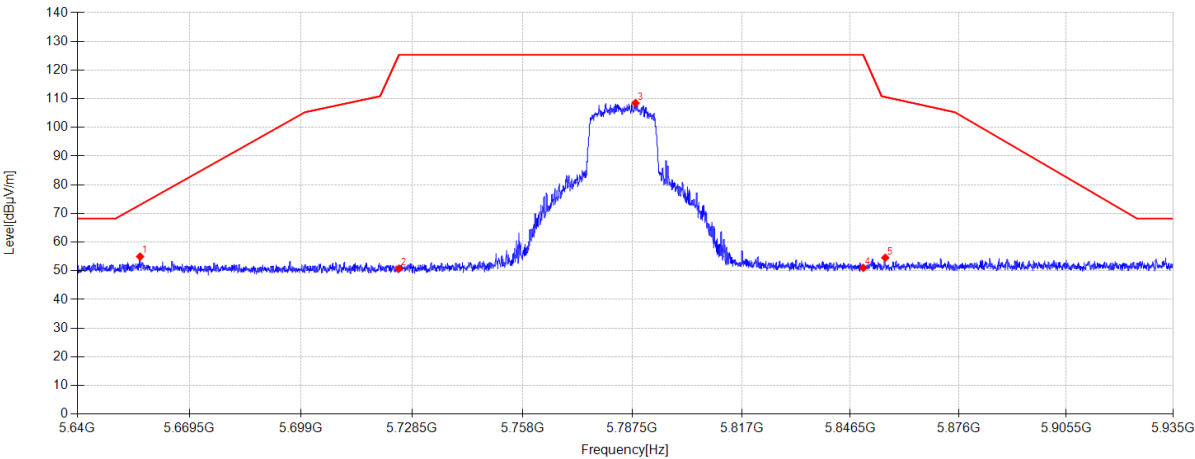


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5656.491	45.94	33.45	5.23	-29.67	54.95	73.02	18.07	PK	Horizontal
2	5725.000	41.70	33.45	5.26	-29.65	50.76	125.30	74.54	PK	Horizontal
3	5788.356	98.97	33.88	5.29	-29.64	108.50	125.30	16.80	PK	Horizontal
4	5850.000	41.45	33.90	5.31	-29.63	51.03	125.30	74.27	PK	Horizontal
5	5855.999	44.92	33.95	5.31	-29.63	54.55	110.62	56.07	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\28
Memo: Sample Numbler:S25081332-003 Power Setting:21

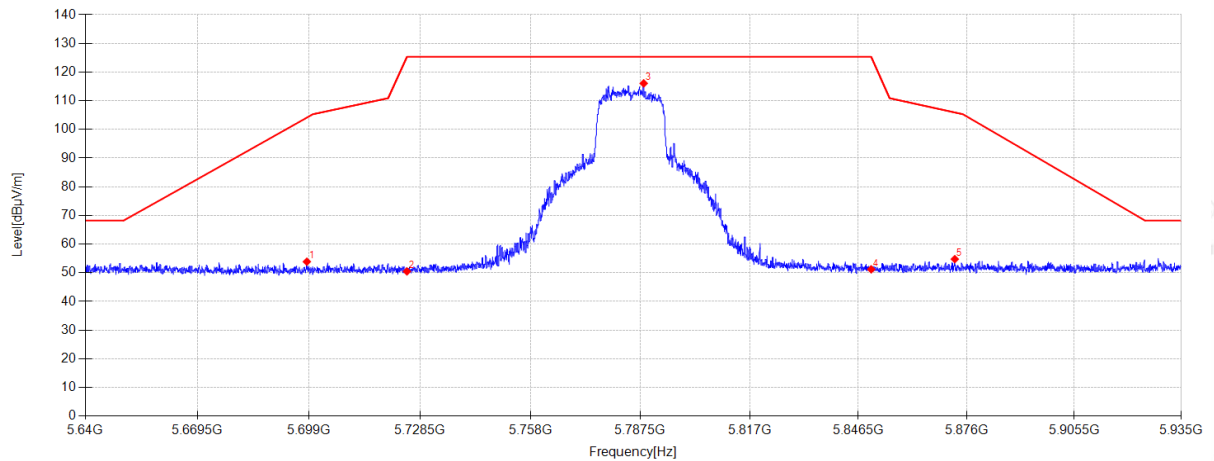**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5698.410	45.17	33.11	5.25	-29.66	53.87	104.12	50.25	PK	Vertical
2	5725.000	41.43	33.45	5.26	-29.65	50.49	125.30	74.81	PK	Vertical
3	5788.415	106.53	33.88	5.29	-29.64	116.06	125.30	9.24	PK	Vertical
4	5850.000	41.62	33.90	5.31	-29.63	51.20	125.30	74.10	PK	Vertical
5	5872.785	45.00	34.08	5.32	-29.63	54.77	105.92	51.15	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11N20 5825MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\29

Memo:Sample Numbler:S25081332-003 Power Setting:21

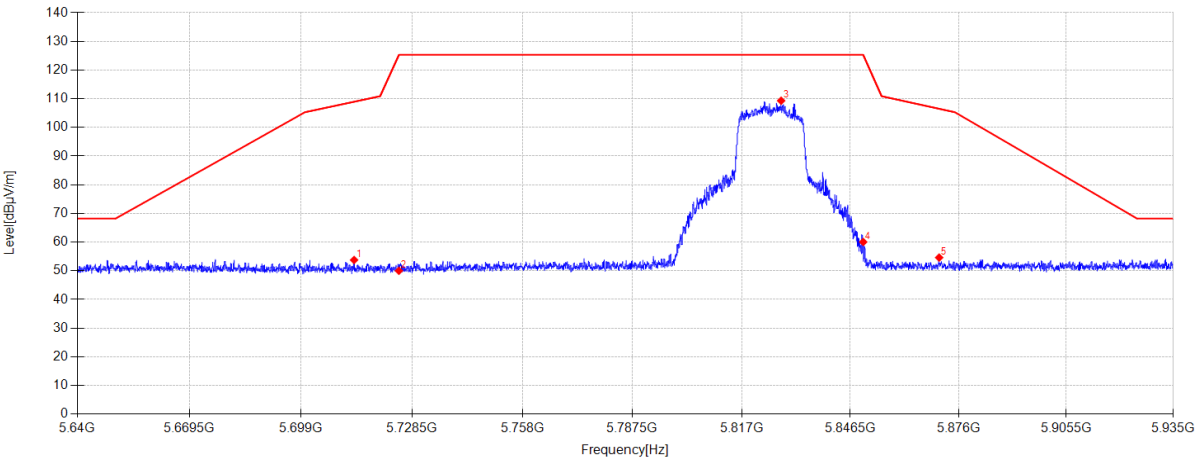

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.072	44.89	33.28	5.26	-29.66	53.77	108.96	55.19	PK	Horizontal
2	5725.000	40.94	33.45	5.26	-29.65	50.00	125.30	75.30	PK	Horizontal
3	5827.709	99.75	33.90	5.30	-29.63	109.32	125.30	15.98	PK	Horizontal
4	5850.000	50.47	33.90	5.31	-29.63	60.05	125.30	65.25	PK	Horizontal
5	5870.690	44.85	34.07	5.32	-29.63	54.61	106.51	51.90	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-16

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\30

Memo:

Sample Numbler:S25081332-003 Power Setting:21

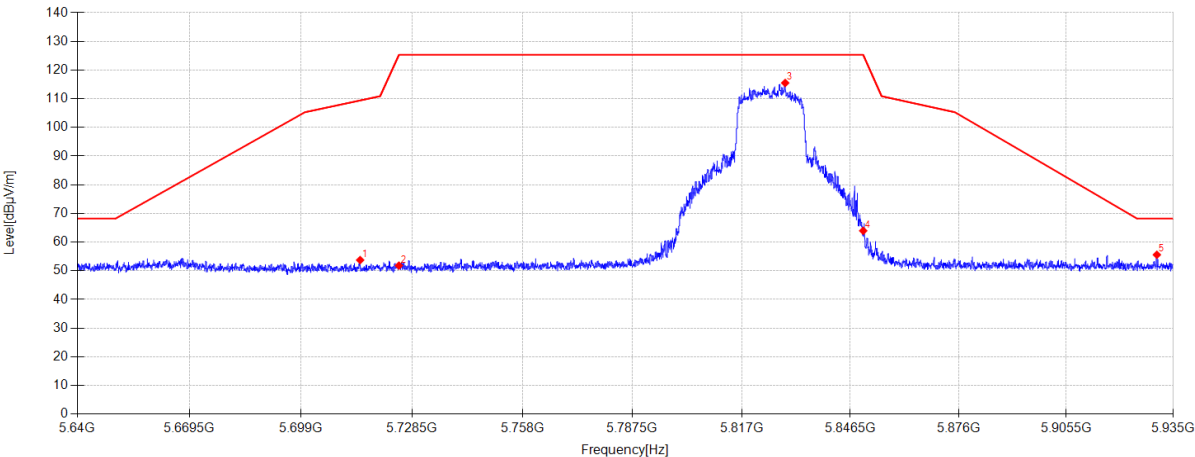

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.694	44.83	33.31	5.26	-29.66	53.74	109.41	55.67	PK	Vertical
2	5725.000	42.75	33.45	5.26	-29.65	51.81	125.30	73.49	PK	Vertical
3	5828.800	105.95	33.90	5.30	-29.63	115.52	125.30	9.78	PK	Vertical
4	5850.000	54.37	33.90	5.31	-29.63	63.95	125.30	61.35	PK	Vertical
5	5930.457	45.49	34.36	5.34	-29.61	55.58	68.20	12.62	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-16

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11N40 5755MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\33

Memo:Sample Numbler:S25081332-003 Power Setting:21

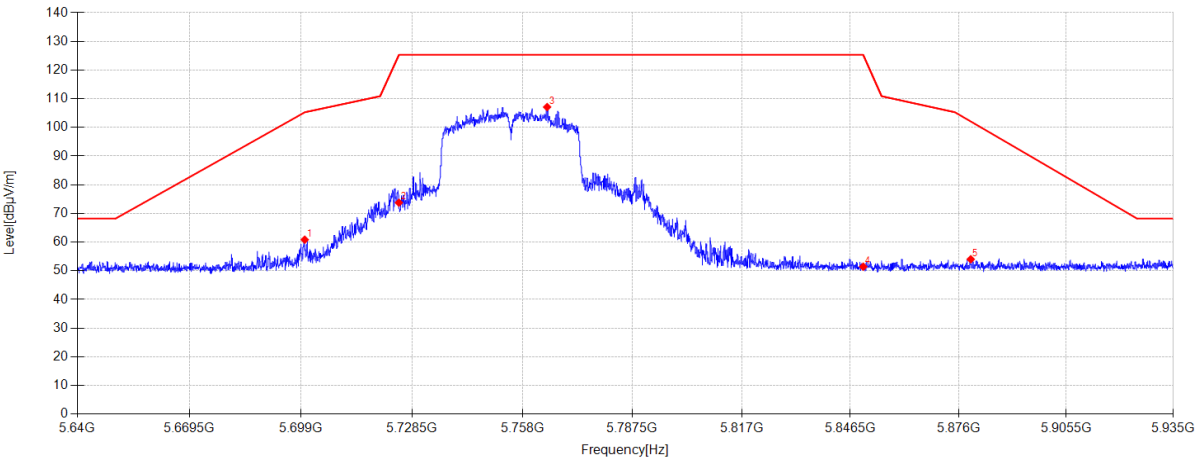

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.974	52.16	33.10	5.25	-29.66	60.85	105.28	44.43	PK	Horizontal
2	5725.000	64.70	33.45	5.26	-29.65	73.76	125.30	51.54	PK	Horizontal
3	5764.608	97.65	33.83	5.28	-29.65	107.11	125.30	18.19	PK	Horizontal
4	5850.000	41.85	33.90	5.31	-29.63	51.43	125.30	73.87	PK	Horizontal
5	5879.334	44.20	34.13	5.32	-29.62	54.03	102.08	48.05	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11N40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\34
Memo: Sample Numbler:S25081332-003 Power Setting:21

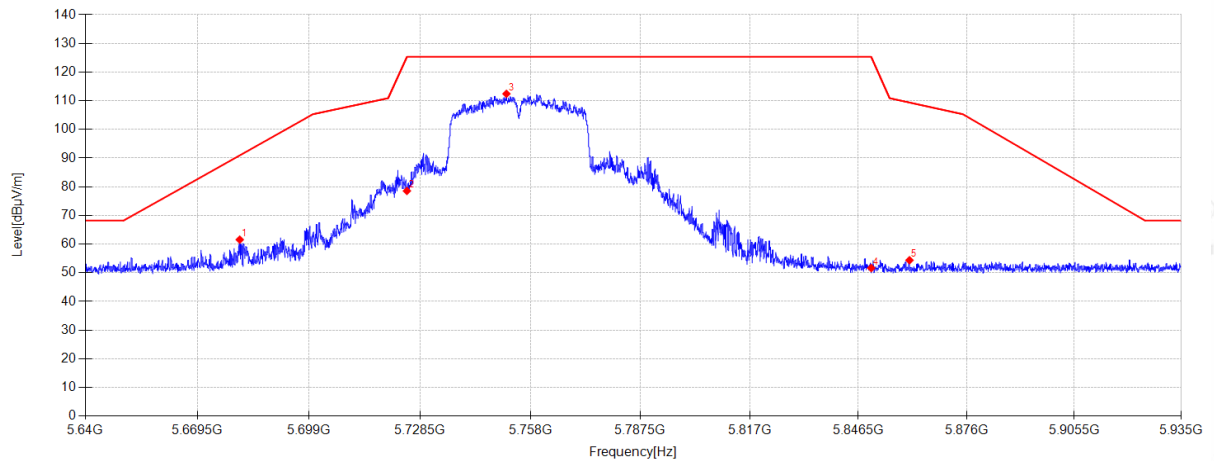**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5680.651	52.72	33.25	5.24	-29.66	61.55	90.94	29.39	PK	Vertical
2	5725.000	69.50	33.45	5.26	-29.65	78.56	125.30	46.74	PK	Vertical
3	5751.569	103.00	33.80	5.27	-29.65	112.42	125.30	12.88	PK	Vertical
4	5850.000	42.08	33.90	5.31	-29.63	51.66	125.30	73.64	PK	Vertical
5	5860.424	44.72	33.98	5.31	-29.63	54.38	109.38	55.00	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11N40 5795MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\31
Memo: Sample Numbler:S25081332-003 Power Setting:21

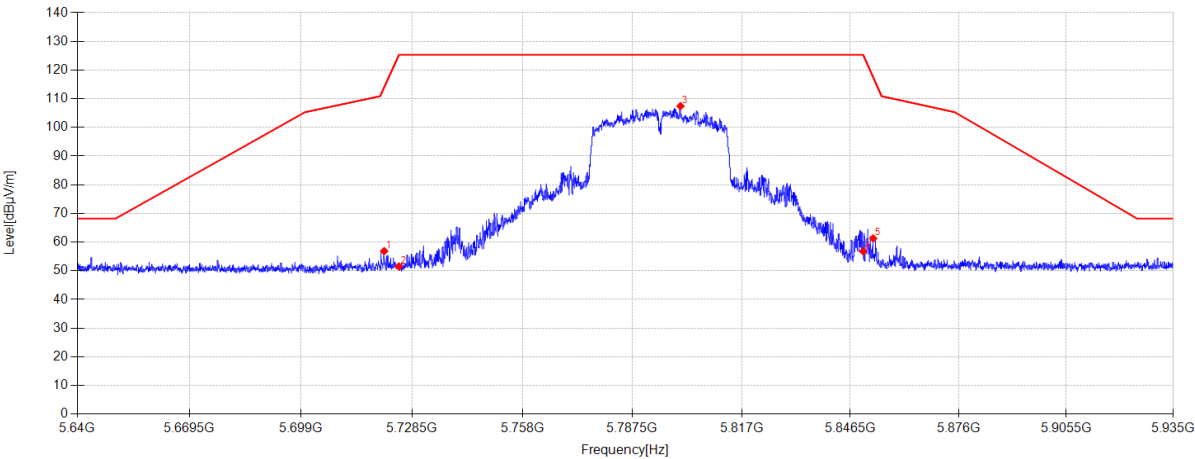


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.066	47.88	33.39	5.26	-29.66	56.87	113.97	57.10	PK	Horizontal
2	5725.000	42.45	33.45	5.26	-29.65	51.51	125.30	73.79	PK	Horizontal
3	5800.480	97.88	33.90	5.29	-29.64	107.43	125.30	17.87	PK	Horizontal
4	5850.000	47.21	33.90	5.31	-29.63	56.79	125.30	68.51	PK	Horizontal
5	5852.725	51.69	33.92	5.31	-29.63	61.29	117.45	56.16	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-16 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11N40 5795MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\32
Memo: Sample Numbler:S25081332-003 Power Setting:21

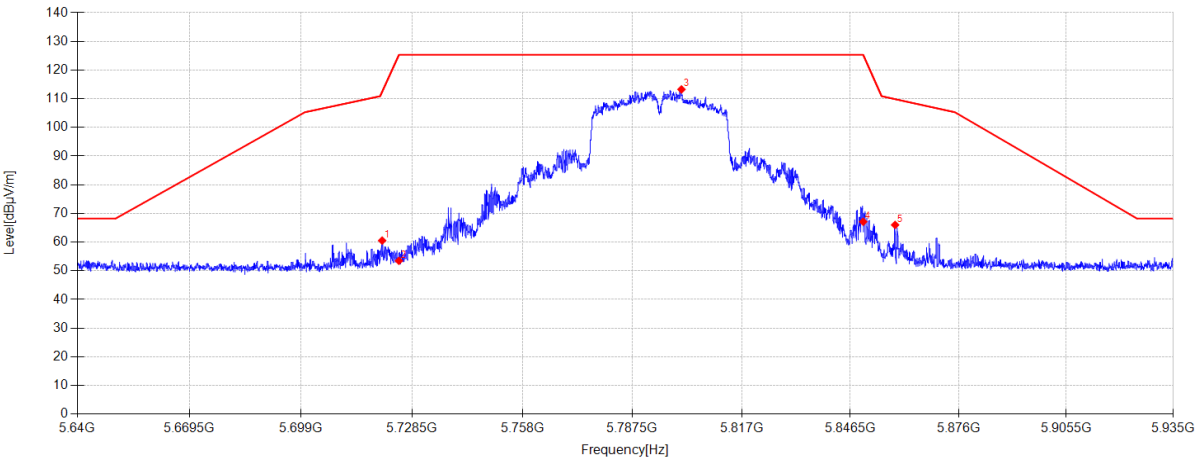

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.535	51.55	33.39	5.26	-29.66	60.54	112.44	51.90	PK	Vertical
2	5725.000	44.42	33.45	5.26	-29.65	53.48	125.30	71.82	PK	Vertical
3	5800.746	103.71	33.90	5.29	-29.64	113.26	125.30	12.04	PK	Vertical
4	5850.000	57.53	33.90	5.31	-29.63	67.11	125.30	58.19	PK	Vertical
5	5858.684	56.34	33.97	5.31	-29.63	65.99	109.87	43.88	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-17

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AC20 5745MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\35

Memo:Sample Numbler:S25081332-003 Power Setting:21

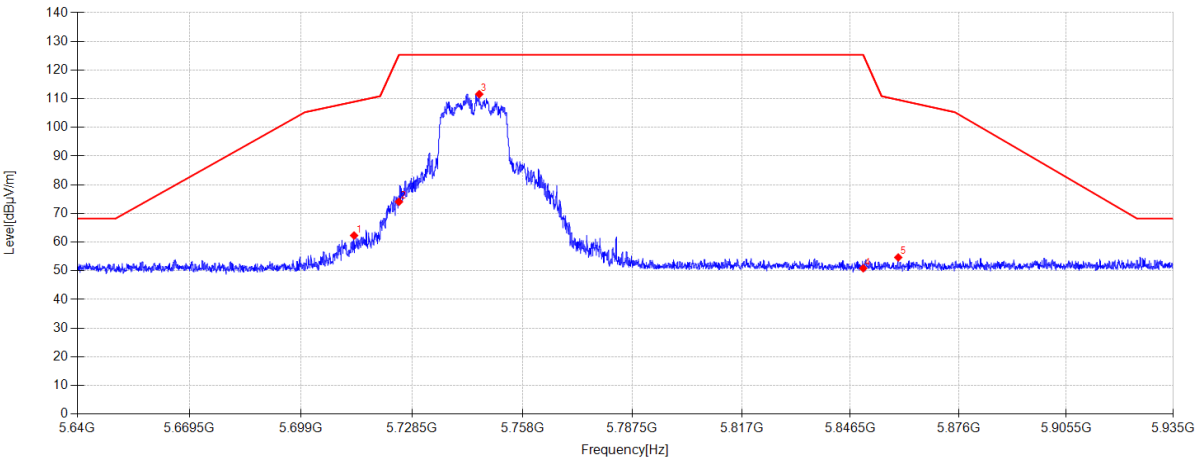


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.072	53.43	33.28	5.26	-29.66	62.31	108.96	46.65	PK	Horizontal
2	5725.000	65.00	33.45	5.26	-29.65	74.06	125.30	51.24	PK	Horizontal
3	5746.436	102.22	33.75	5.27	-29.65	111.59	125.30	13.71	PK	Horizontal
4	5850.000	41.29	33.90	5.31	-29.63	50.87	125.30	74.43	PK	Horizontal
5	5859.539	45.00	33.98	5.31	-29.63	54.66	109.63	54.97	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC20 5745MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\36
Memo: Sample Numbler:S25081332-003 Power Setting:21

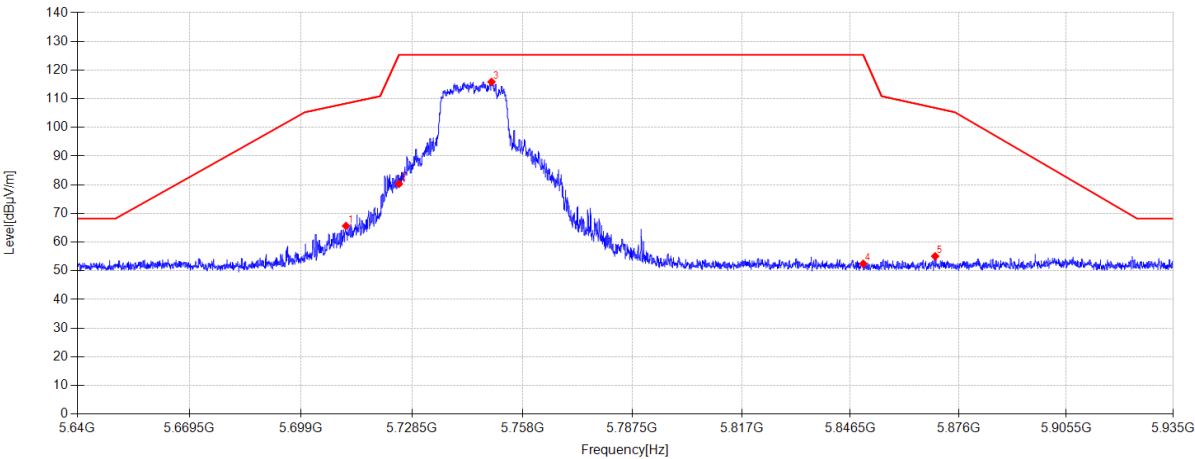


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5710.918	56.79	33.25	5.25	-29.66	65.63	108.36	42.73	PK	Vertical
2	5725.000	71.25	33.45	5.26	-29.65	80.31	125.30	44.99	PK	Vertical
3	5749.711	106.46	33.80	5.27	-29.65	115.88	125.30	9.42	PK	Vertical
4	5850.000	42.89	33.90	5.31	-29.63	52.47	125.30	72.83	PK	Vertical
5	5869.599	45.32	34.06	5.32	-29.63	55.07	106.81	51.74	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\37
Memo: Sample Numbler:S25081332-003 Power Setting:21

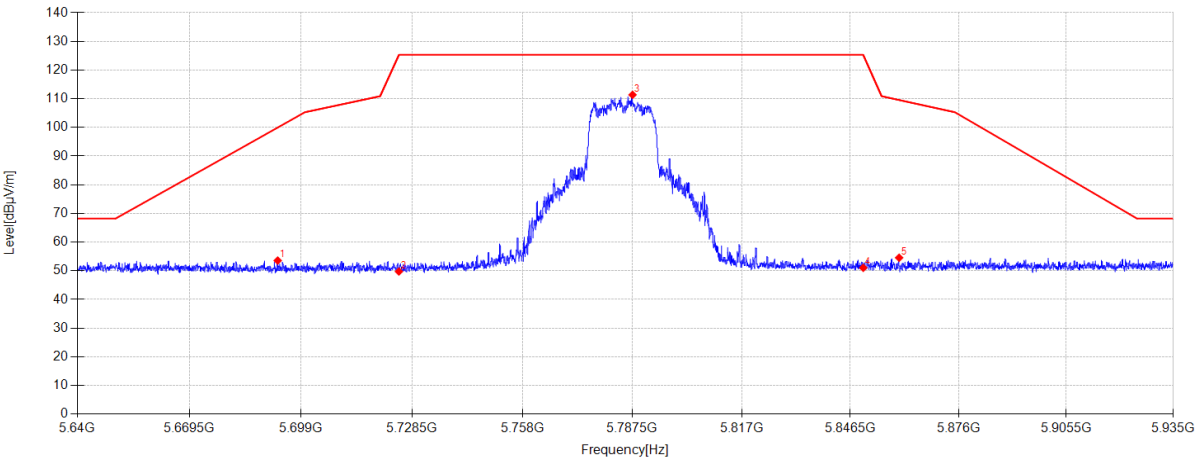


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.805	44.81	33.16	5.25	-29.66	53.56	99.96	46.40	PK	Horizontal
2	5725.000	40.69	33.45	5.26	-29.65	49.75	125.30	75.55	PK	Horizontal
3	5787.559	101.84	33.88	5.29	-29.64	111.37	125.30	13.93	PK	Horizontal
4	5850.000	41.46	33.90	5.31	-29.63	51.04	125.30	74.26	PK	Horizontal
5	5859.775	44.89	33.98	5.31	-29.63	54.55	109.56	55.01	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\38
Memo: Sample Numbler:S25081332-003 Power Setting:21

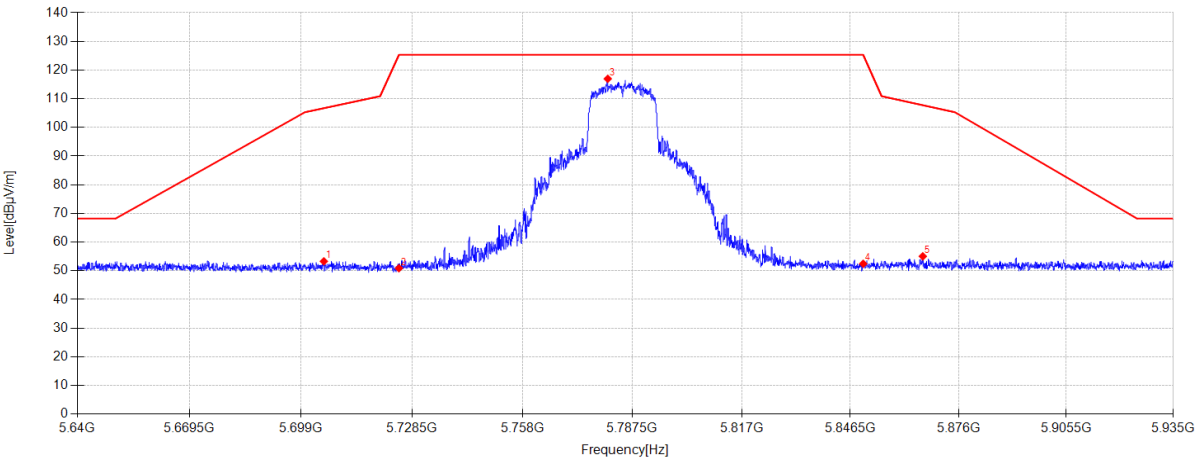

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5705.048	44.54	33.17	5.25	-29.66	53.30	106.71	53.41	PK	Vertical
2	5725.000	41.83	33.45	5.26	-29.65	50.89	125.30	74.41	PK	Vertical
3	5780.892	107.47	33.86	5.28	-29.64	116.97	125.30	8.33	PK	Vertical
4	5850.000	42.87	33.90	5.31	-29.63	52.45	125.30	72.85	PK	Vertical
5	5866.236	45.32	34.03	5.32	-29.63	55.04	107.75	52.71	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-17

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:MIMO TX 11AC20 5825MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\39

Memo:Sample Numbler:S25081332-003 Power Setting:21

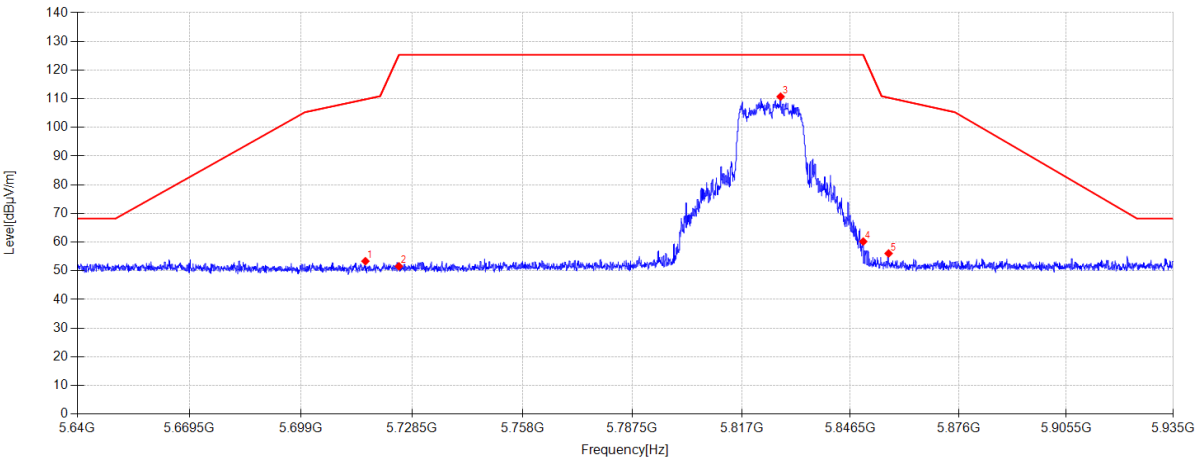

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.081	44.42	33.33	5.26	-29.66	53.35	109.80	56.45	PK	Horizontal
2	5725.000	42.50	33.45	5.26	-29.65	51.56	125.30	73.74	PK	Horizontal
3	5827.561	101.17	33.90	5.30	-29.63	110.74	125.30	14.56	PK	Horizontal
4	5850.000	50.62	33.90	5.31	-29.63	60.20	125.30	65.10	PK	Horizontal
5	5856.914	46.40	33.96	5.31	-29.63	56.04	110.36	54.32	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC20 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\40
Memo: Sample Numbler:S25081332-003 Power Setting:21

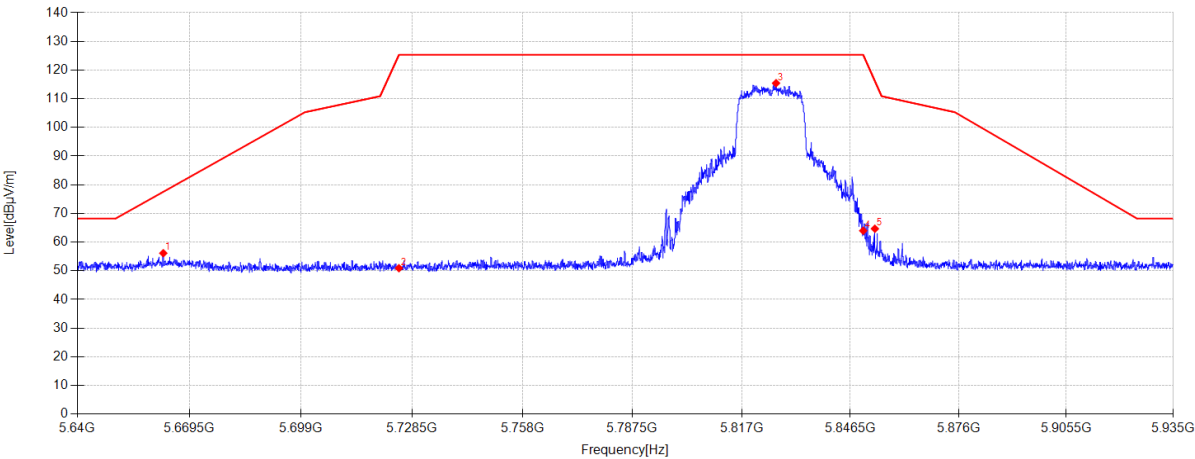

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.597	47.17	33.40	5.24	-29.67	56.14	77.55	21.41	PK	Vertical
2	5725.000	41.84	33.45	5.26	-29.65	50.90	125.30	74.40	PK	Vertical
3	5826.322	105.87	33.90	5.30	-29.63	115.44	125.30	9.86	PK	Vertical
4	5850.000	54.40	33.90	5.31	-29.63	63.98	125.30	61.32	PK	Vertical
5	5853.167	55.06	33.93	5.31	-29.63	64.67	116.18	51.51	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan


EUT: Wireless Access Point Model Number: L2537

Test Mode: MIMO TX 11AC40 5755MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\43

Memo: Sample Numbler:S25081332-003 Power Setting:21

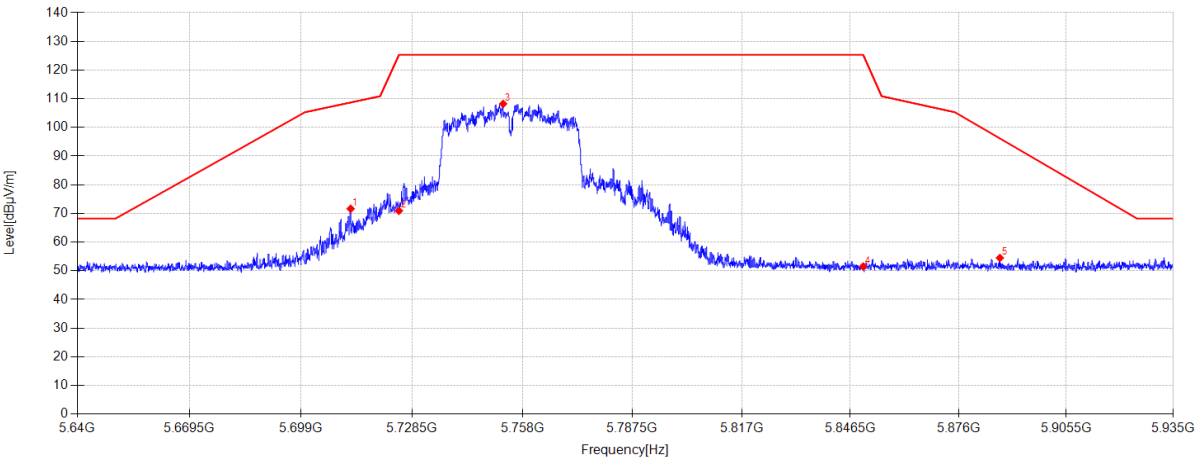

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.157	62.78	33.27	5.25	-29.66	71.64	108.70	37.06	PK	Horizontal
2	5725.000	61.86	33.45	5.26	-29.65	70.92	125.30	54.38	PK	Horizontal
3	5752.838	98.81	33.81	5.27	-29.65	108.24	125.30	17.06	PK	Horizontal
4	5850.000	41.92	33.90	5.31	-29.63	51.50	125.30	73.80	PK	Horizontal
5	5887.299	44.58	34.20	5.32	-29.62	54.48	96.17	41.69	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC40 5755MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\44
Memo: Sample Numbler:S25081332-003 Power Setting:21

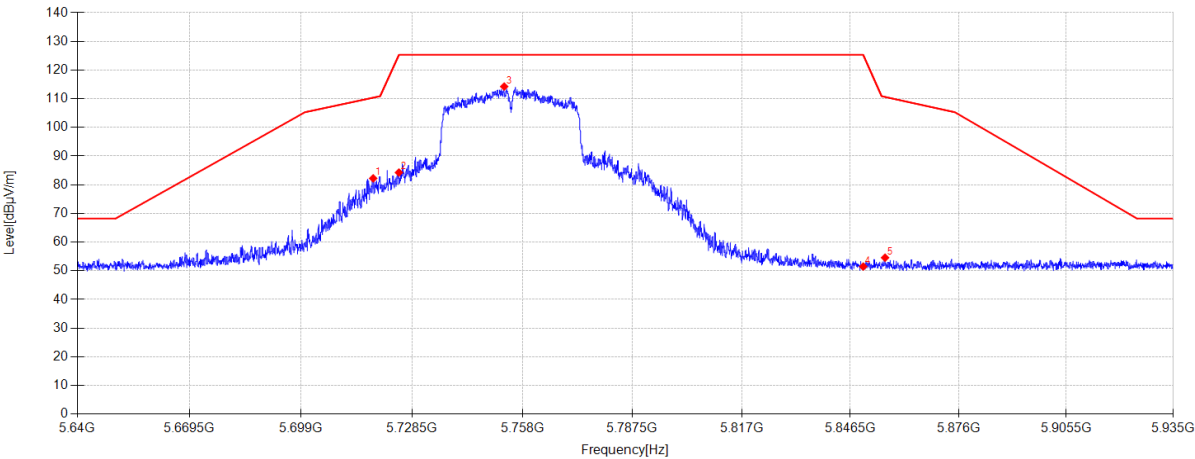


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.146	73.29	33.35	5.26	-29.66	82.24	110.38	28.14	PK	Vertical
2	5725.000	75.21	33.45	5.26	-29.65	84.27	125.30	41.03	PK	Vertical
3	5753.103	104.84	33.81	5.27	-29.65	114.27	125.30	11.03	PK	Vertical
4	5850.000	41.89	33.90	5.31	-29.63	51.47	125.30	73.83	PK	Vertical
5	5855.940	44.94	33.95	5.31	-29.63	54.57	110.64	56.07	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC40 5795MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\41
Memo: Sample Numbler:S25081332-003 Power Setting:21

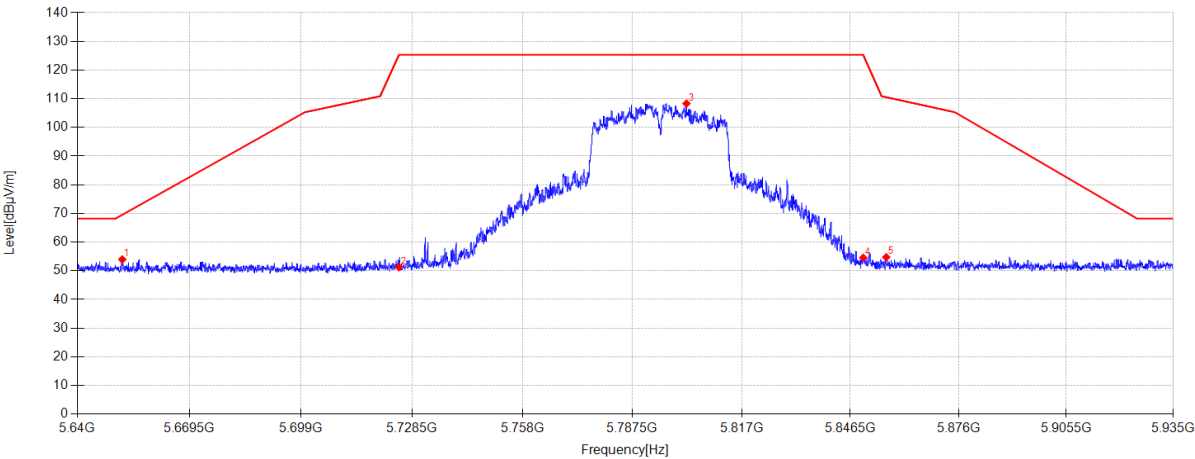


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5651.800	44.91	33.49	5.23	-29.67	53.96	69.54	15.58	PK	Horizontal
2	5725.000	42.18	33.45	5.26	-29.65	51.24	125.30	74.06	PK	Horizontal
3	5802.103	98.78	33.90	5.29	-29.64	108.33	125.30	16.97	PK	Horizontal
4	5850.000	44.96	33.90	5.31	-29.63	54.54	125.30	70.76	PK	Horizontal
5	5856.265	45.11	33.95	5.31	-29.63	54.74	110.55	55.81	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC40 5795MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\42
Memo: Sample Numbler:S25081332-003 Power Setting:21

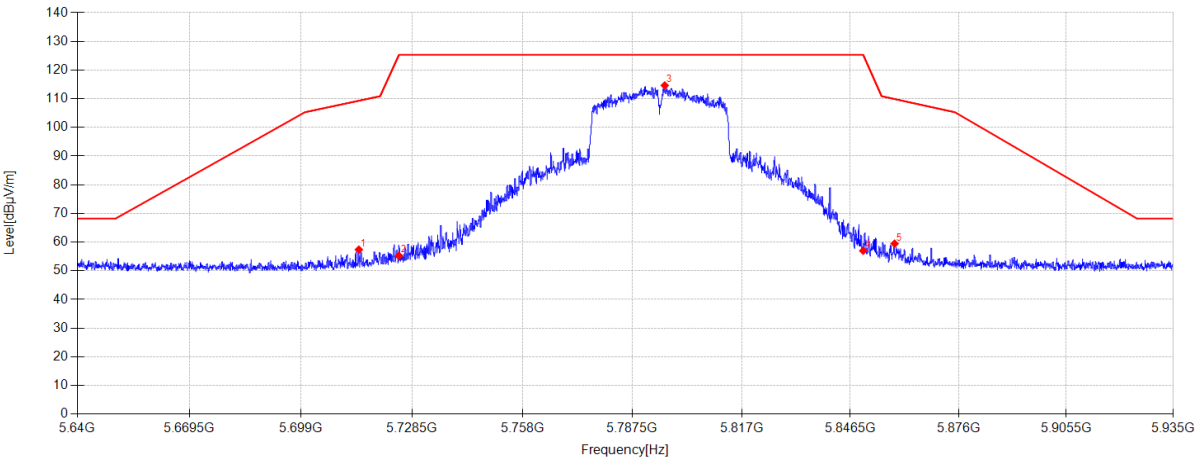


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.340	48.48	33.30	5.26	-29.66	57.38	109.32	51.94	PK	Vertical
2	5725.000	46.18	33.45	5.26	-29.65	55.24	125.30	70.06	PK	Vertical
3	5796.232	105.10	33.89	5.29	-29.64	114.64	125.30	10.66	PK	Vertical
4	5850.000	47.40	33.90	5.31	-29.63	56.98	125.30	68.32	PK	Vertical
5	5858.536	49.80	33.97	5.31	-29.63	59.45	109.91	50.46	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC80 5775MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\45
Memo: Sample Numbler:S25081332-003 Power Setting:21

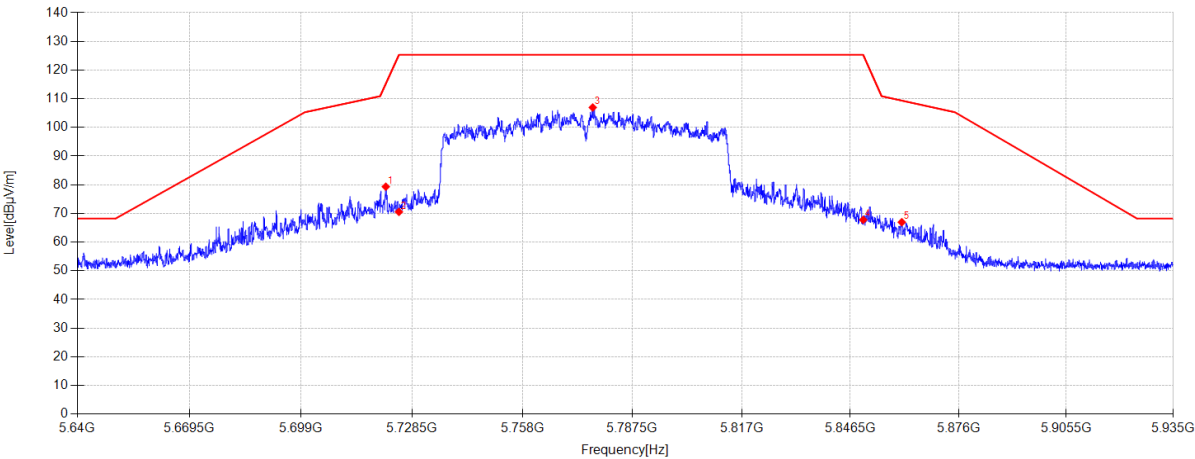


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.509	70.32	33.40	5.26	-29.66	79.32	115.24	35.92	PK	Horizontal
2	5725.000	61.49	33.45	5.26	-29.65	70.55	125.30	54.75	PK	Horizontal
3	5776.851	97.46	33.85	5.28	-29.64	106.95	125.30	18.35	PK	Horizontal
4	5850.000	58.20	33.90	5.31	-29.63	67.78	125.30	57.52	PK	Horizontal
5	5860.513	57.29	33.98	5.31	-29.63	66.95	109.36	42.41	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-17 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AC80 5775MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\46
Memo: Sample Numbler:S25081332-003 Power Setting:21

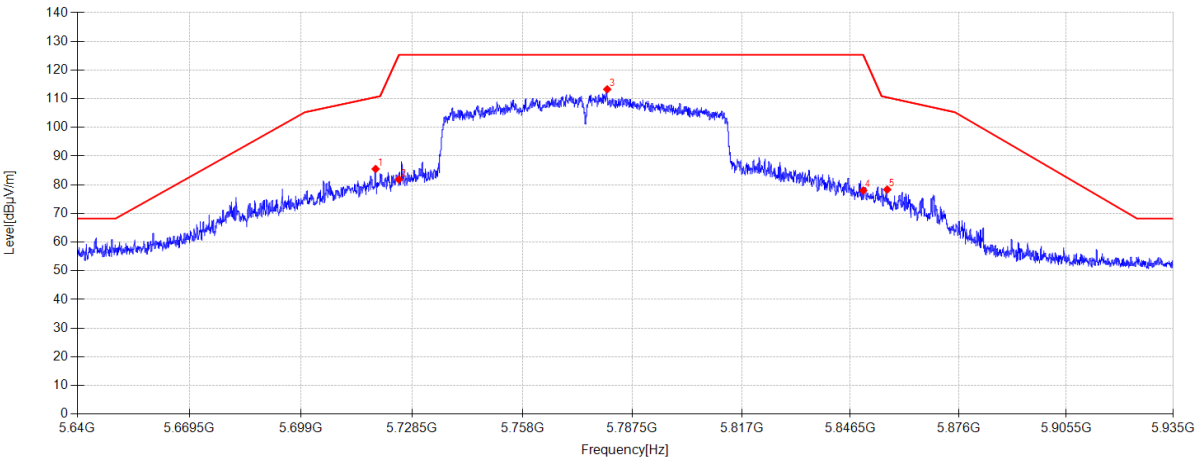

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.795	76.54	33.36	5.26	-29.66	85.50	110.56	25.06	PK	Vertical
2	5725.000	72.80	33.45	5.26	-29.65	81.86	125.30	43.44	PK	Vertical
3	5780.745	103.80	33.86	5.28	-29.64	113.30	125.30	12.00	PK	Vertical
4	5850.000	68.42	33.90	5.31	-29.63	78.00	125.30	47.30	PK	Vertical
5	5856.530	68.70	33.95	5.31	-29.63	78.33	110.47	32.14	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\53

Memo:

Sample Numbler:S25081332-003 Power Setting:21

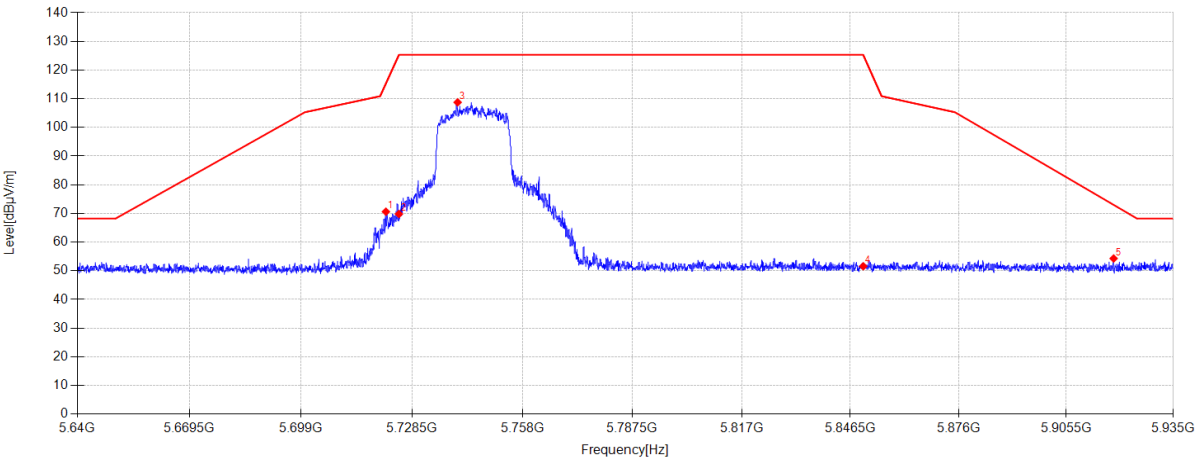

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.538	61.60	33.40	5.26	-29.66	70.60	115.33	44.73	PK	Horizontal
2	5725.000	60.75	33.45	5.26	-29.65	69.81	125.30	55.49	PK	Horizontal
3	5740.654	99.47	33.67	5.27	-29.65	108.76	125.30	16.54	PK	Horizontal
4	5850.000	41.99	33.90	5.31	-29.63	51.57	125.30	73.73	PK	Horizontal
5	5918.539	44.22	34.34	5.34	-29.62	54.28	72.99	18.71	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5745MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\54
Memo: Sample Numbler:S25081332-003 Power Setting:21

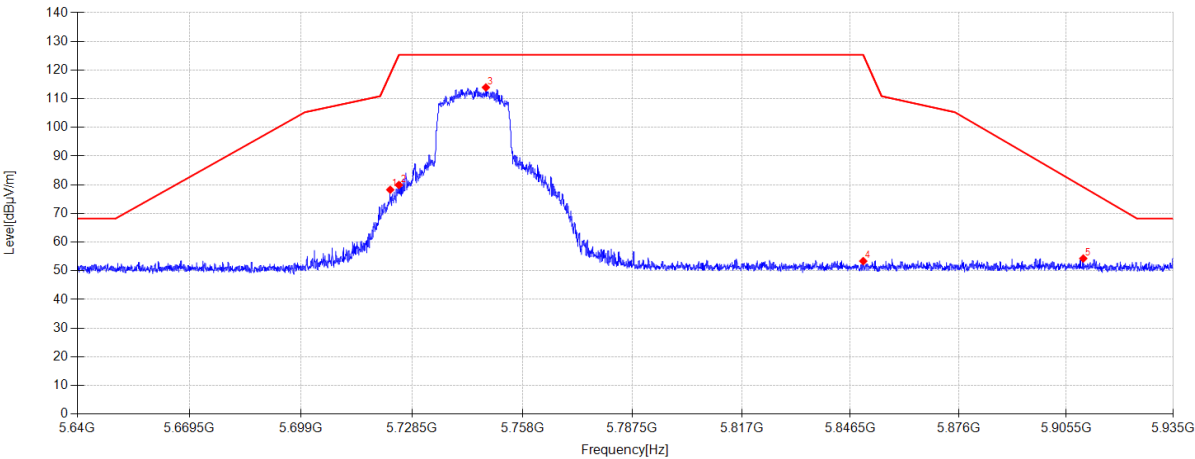


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.689	69.25	33.42	5.26	-29.66	78.27	118.64	40.37	PK	Vertical
2	5725.000	70.86	33.45	5.26	-29.65	79.92	125.30	45.38	PK	Vertical
3	5748.206	104.56	33.77	5.27	-29.65	113.95	125.30	11.35	PK	Vertical
4	5850.000	43.79	33.90	5.31	-29.63	53.37	125.30	71.93	PK	Vertical
5	5910.191	44.25	34.32	5.33	-29.62	54.28	79.19	24.91	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\55
Memo: Sample Numbler:S25081332-003 Power Setting:21

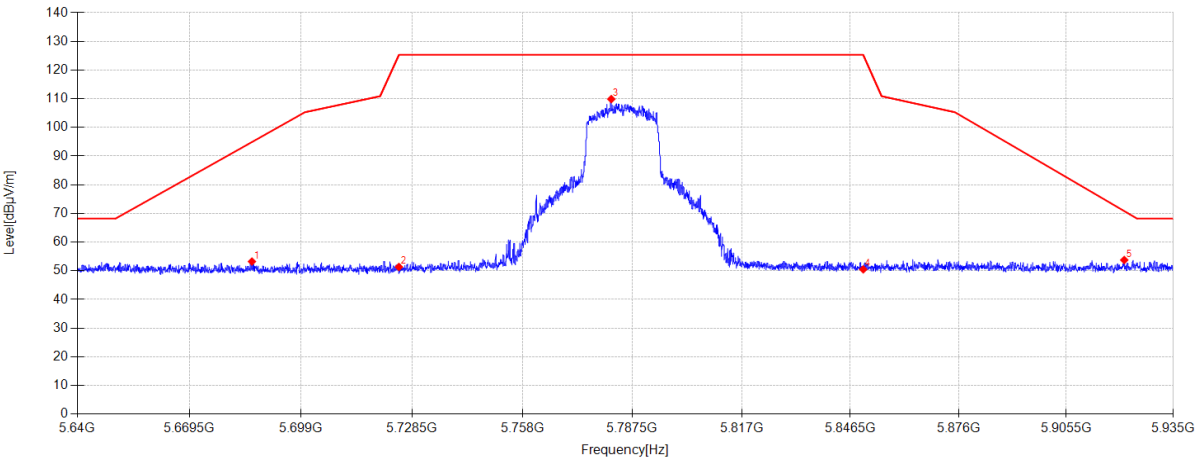


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5685.991	44.43	33.21	5.24	-29.66	53.22	94.90	41.68	PK	Horizontal
2	5725.000	42.27	33.45	5.26	-29.65	51.33	125.30	73.97	PK	Horizontal
3	5781.836	100.38	33.86	5.28	-29.64	109.88	125.30	15.42	PK	Horizontal
4	5850.000	40.92	33.90	5.31	-29.63	50.50	125.30	74.80	PK	Horizontal
5	5921.460	43.69	34.34	5.34	-29.62	53.75	70.83	17.08	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\56
Memo: Sample Numbler:S25081332-003 Power Setting:21

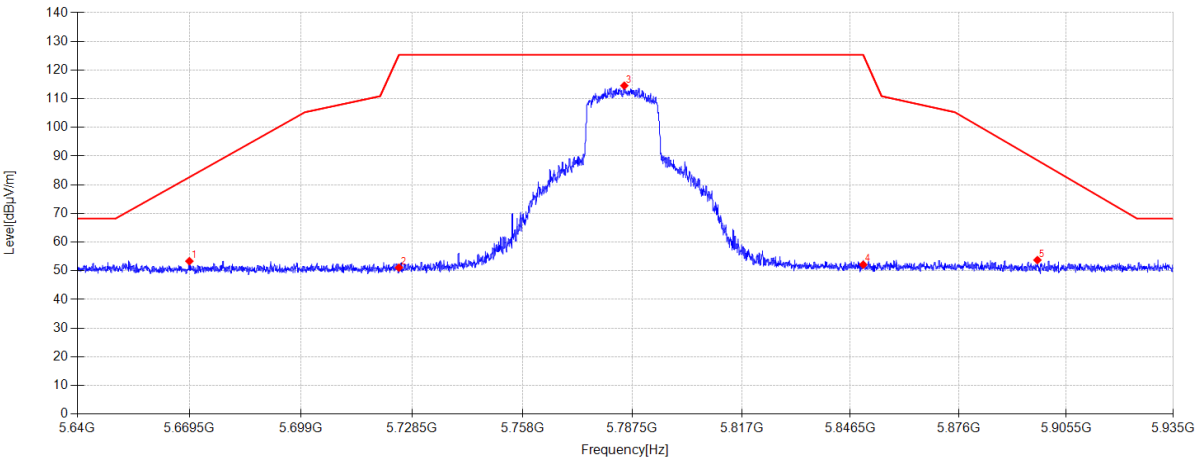


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5669.471	44.44	33.34	5.24	-29.67	53.35	82.65	29.30	PK	Vertical
2	5725.000	42.04	33.45	5.26	-29.65	51.10	125.30	74.20	PK	Vertical
3	5785.347	105.06	33.87	5.28	-29.64	114.57	125.30	10.73	PK	Vertical
4	5850.000	42.55	33.90	5.31	-29.63	52.13	125.30	73.17	PK	Vertical
5	5897.594	43.75	34.28	5.33	-29.62	53.74	88.54	34.80	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\57
Memo: Sample Numbler:S25081332-003 Power Setting:21

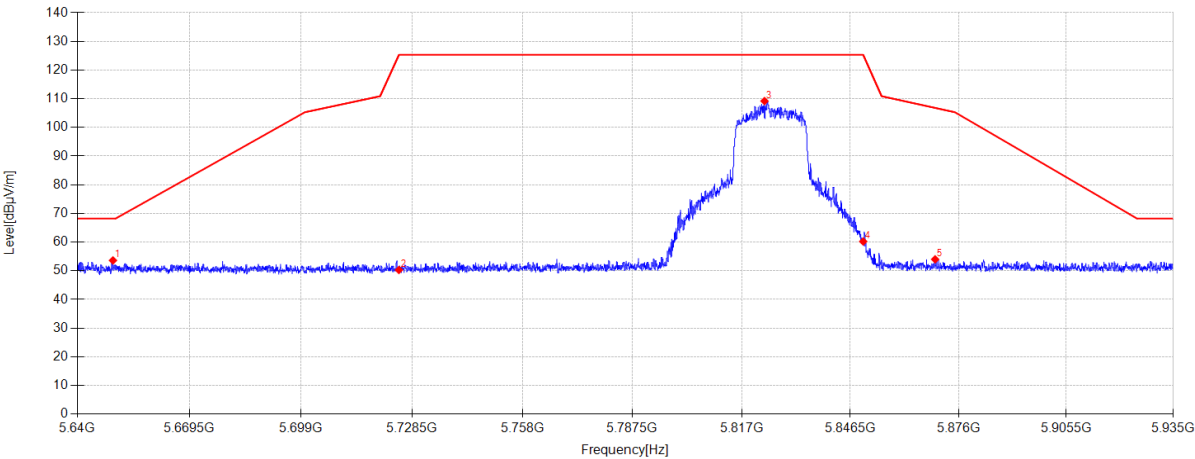


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5649.352	44.57	33.49	5.23	-29.67	53.62	68.20	14.58	PK	Horizontal
2	5725.000	41.22	33.45	5.26	-29.65	50.28	125.30	75.02	PK	Horizontal
3	5823.195	99.64	33.90	5.30	-29.64	109.20	125.30	16.10	PK	Horizontal
4	5850.000	50.64	33.90	5.31	-29.63	60.22	125.30	65.08	PK	Horizontal
5	5869.599	44.24	34.06	5.32	-29.63	53.99	106.81	52.82	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX20 5825MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\58
Memo: Sample Numbler:S25081332-003 Power Setting:21

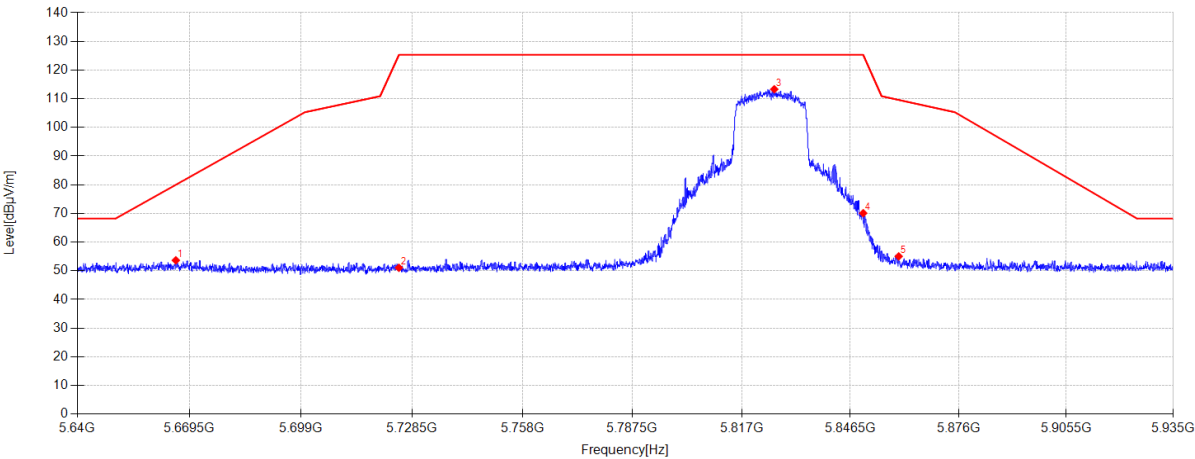

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5665.901	44.71	33.37	5.24	-29.67	53.65	80.00	26.35	PK	Vertical
2	5725.000	41.99	33.45	5.26	-29.65	51.05	125.30	74.25	PK	Vertical
3	5825.850	103.75	33.90	5.30	-29.63	113.32	125.30	11.98	PK	Vertical
4	5850.000	60.51	33.90	5.31	-29.63	70.09	125.30	55.21	PK	Vertical
5	5859.657	45.37	33.98	5.31	-29.63	55.03	109.60	54.57	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

MIMO TX 11AX40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\49

Memo:

Sample Numbler:S25081332-003 Power Setting:21

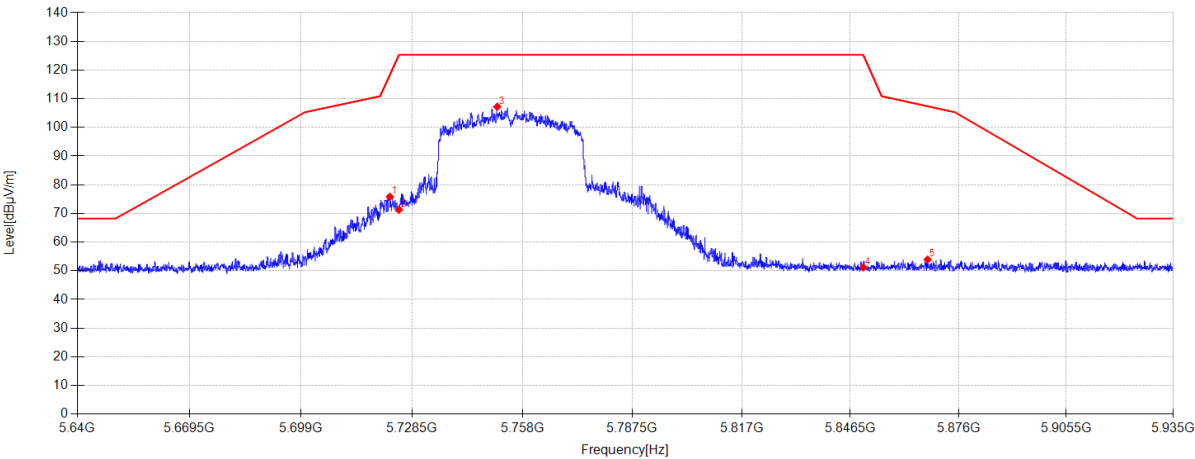

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.600	66.80	33.42	5.26	-29.66	75.82	118.39	42.57	PK	Horizontal
2	5725.000	62.25	33.45	5.26	-29.65	71.31	125.30	53.99	PK	Horizontal
3	5751.245	97.80	33.80	5.27	-29.65	107.22	125.30	18.08	PK	Horizontal
4	5850.000	41.58	33.90	5.31	-29.63	51.16	125.30	74.14	PK	Horizontal
5	5867.534	44.17	34.04	5.32	-29.63	53.90	107.39	53.49	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\50
Memo: Sample Numbler:S25081332-003 Power Setting:21

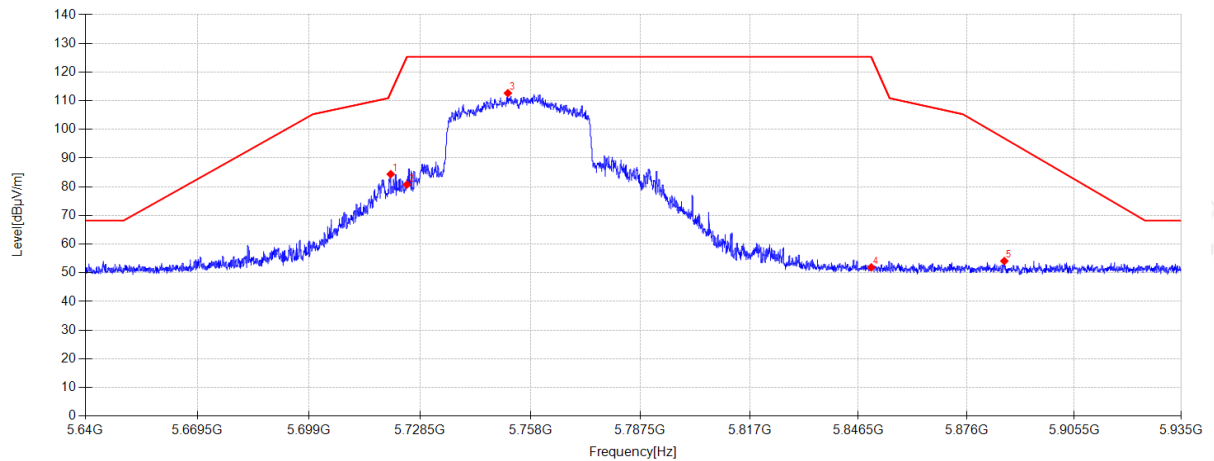**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.683	75.39	33.39	5.26	-29.66	84.38	112.87	28.49	PK	Vertical
2	5725.000	71.70	33.45	5.26	-29.65	80.76	125.30	44.54	PK	Vertical
3	5751.953	103.23	33.80	5.27	-29.65	112.65	125.30	12.65	PK	Vertical
4	5850.000	42.29	33.90	5.31	-29.63	51.87	125.30	73.43	PK	Vertical
5	5886.325	44.21	34.19	5.32	-29.62	54.10	96.90	42.80	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-19Tested By:Lin Guoyuan


EUT:Wireless Access PointModel Number:L2537

Test Mode:MIMO TX 11AX40 5795MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\51

Memo:Sample Numbre:S25081332-003 Power Setting:21

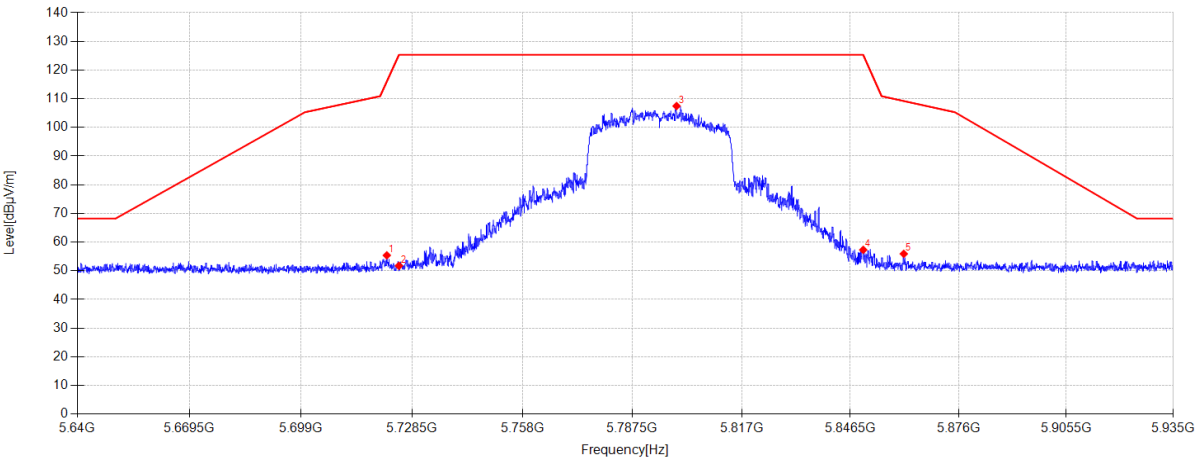

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.774	46.38	33.40	5.26	-29.66	55.38	116.01	60.63	PK	Horizontal
2	5725.000	42.67	33.45	5.26	-29.65	51.73	125.30	73.57	PK	Horizontal
3	5799.418	97.91	33.90	5.29	-29.64	107.46	125.30	17.84	PK	Horizontal
4	5850.000	47.72	33.90	5.31	-29.63	57.30	125.30	68.00	PK	Horizontal
5	5861.044	46.24	33.99	5.31	-29.63	55.91	109.21	53.30	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\52
Memo: Sample Numbler:S25081332-003 Power Setting:21

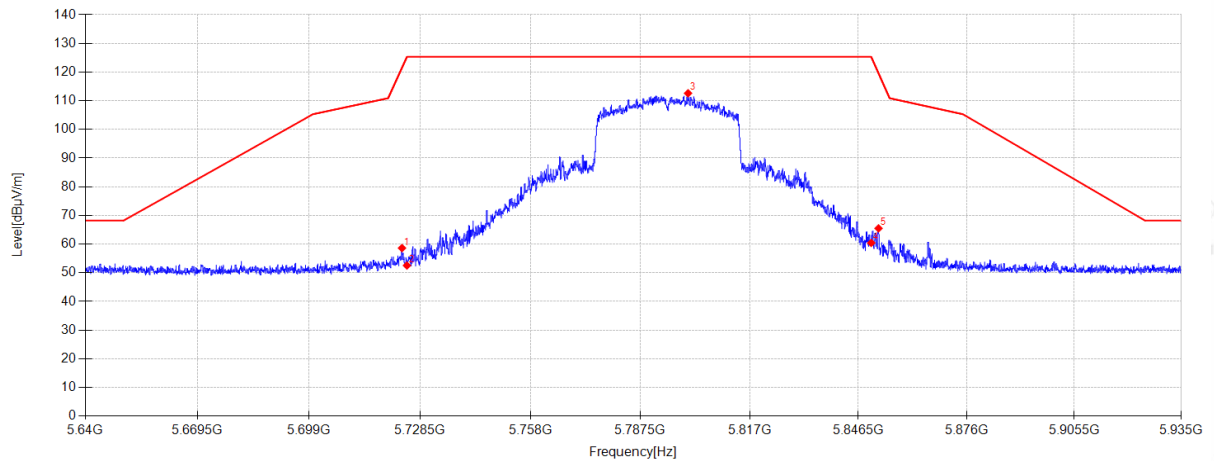**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.692	49.59	33.43	5.26	-29.66	58.62	121.53	62.91	PK	Vertical
2	5725.000	43.48	33.45	5.26	-29.65	52.54	125.30	72.76	PK	Vertical
3	5800.362	103.07	33.90	5.29	-29.64	112.62	125.30	12.68	PK	Vertical
4	5850.000	50.85	33.90	5.31	-29.63	60.43	125.30	64.87	PK	Vertical
5	5851.987	55.89	33.92	5.31	-29.63	65.49	119.58	54.09	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: MIMO TX 11AX80 5775MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\47
Memo: Sample Numbler:S25081332-003 Power Setting:21

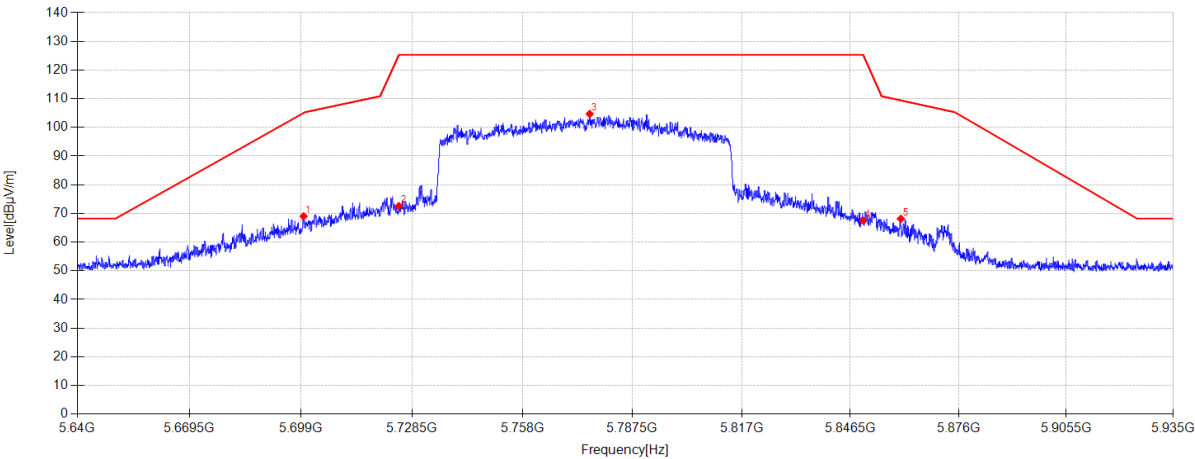


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.679	60.32	33.10	5.25	-29.66	69.01	105.06	36.05	PK	Horizontal
2	5725.000	63.51	33.45	5.26	-29.65	72.57	125.30	52.73	PK	Horizontal
3	5776.025	95.22	33.85	5.28	-29.64	104.71	125.30	20.59	PK	Horizontal
4	5850.000	57.92	33.90	5.31	-29.63	67.50	125.30	57.80	PK	Horizontal
5	5860.247	58.47	33.98	5.31	-29.63	68.13	109.43	41.30	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: MIMO TX 11AX80 5775MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\48
Memo: Sample Numbler:S25081332-003 Power Setting:21

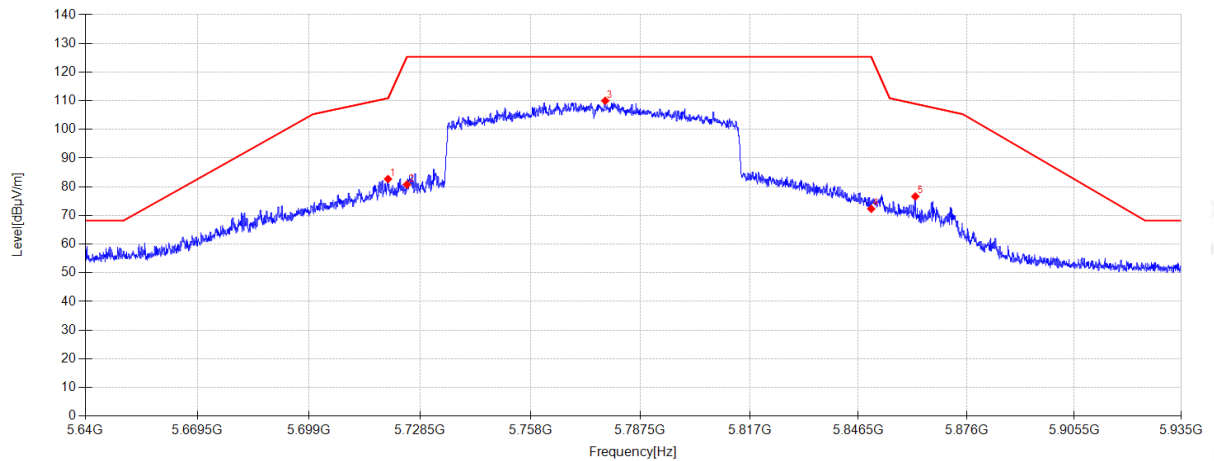**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.975	73.72	33.38	5.26	-29.66	82.70	110.89	28.19	PK	Vertical
2	5725.000	71.72	33.45	5.26	-29.65	80.78	125.30	44.52	PK	Vertical
3	5778.060	100.50	33.86	5.28	-29.64	110.00	125.30	15.30	PK	Vertical
4	5850.000	62.73	33.90	5.31	-29.63	72.31	125.30	52.99	PK	Vertical
5	5862.017	66.94	34.00	5.31	-29.63	76.62	108.94	32.32	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

TX 11BE20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\59

Memo:

Sample Numbler:S25081332-003 Power Setting:21

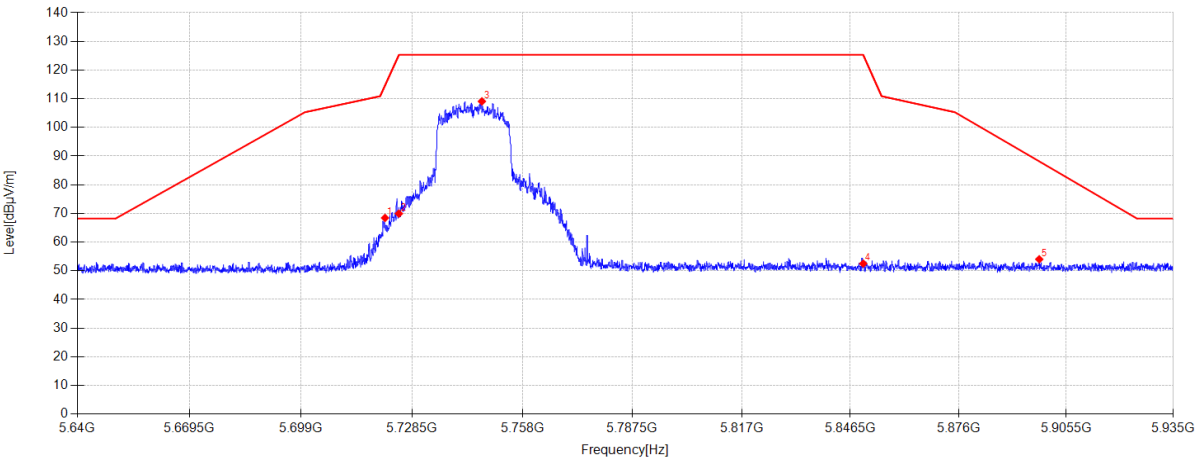

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.302	59.45	33.40	5.26	-29.66	68.45	114.65	46.20	PK	Horizontal
2	5725.000	60.88	33.45	5.26	-29.65	69.94	125.30	55.36	PK	Horizontal
3	5747.144	99.71	33.76	5.27	-29.65	109.09	125.30	16.21	PK	Horizontal
4	5850.000	42.93	33.90	5.31	-29.63	52.51	125.30	72.79	PK	Horizontal
5	5898.096	44.02	34.28	5.33	-29.62	54.01	88.16	34.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-19

Tested By:Lin Guoyuan

EUT:Wireless Access Point

Model Number:L2537

Test Mode:TX 11BE20 5745MHz Mode


Power Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%

Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\60

Memo:Sample Numbre:S25081332-003 Power Setting:21

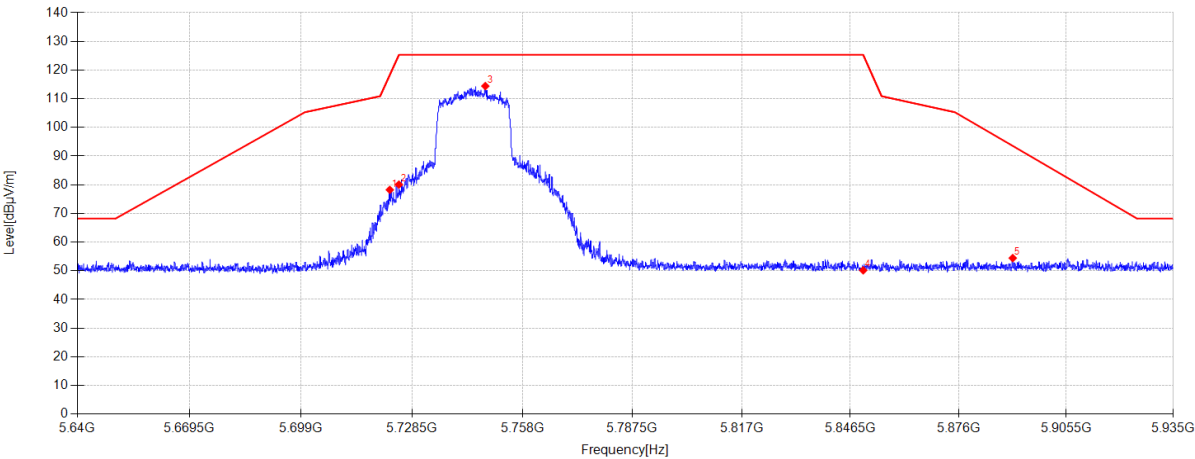

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.571	69.22	33.42	5.26	-29.66	78.24	118.30	40.06	PK	Vertical
2	5725.000	71.00	33.45	5.26	-29.65	80.06	125.30	45.24	PK	Vertical
3	5748.059	105.03	33.77	5.27	-29.65	114.42	125.30	10.88	PK	Vertical
4	5850.000	40.59	33.90	5.31	-29.63	50.17	125.30	75.13	PK	Vertical
5	5890.839	44.49	34.23	5.33	-29.62	54.43	93.55	39.12	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: TX 11BE20 5785MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\61
Memo: Sample Numbler:S25081332-003 Power Setting:21

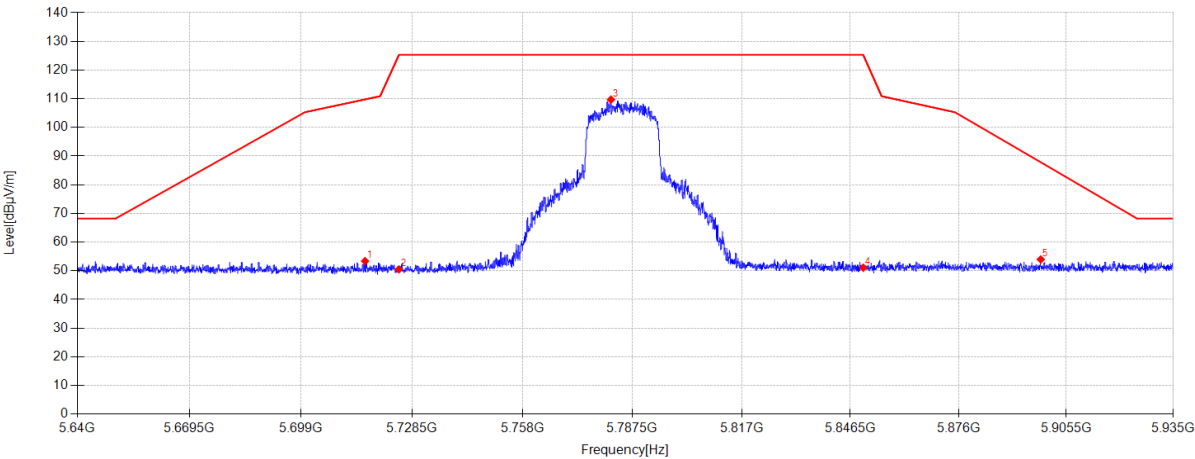


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.992	44.46	33.32	5.26	-29.66	53.38	109.78	56.40	PK	Horizontal
2	5725.000	41.44	33.45	5.26	-29.65	50.50	125.30	74.80	PK	Horizontal
3	5781.748	100.21	33.86	5.28	-29.64	109.71	125.30	15.59	PK	Horizontal
4	5850.000	41.51	33.90	5.31	-29.63	51.09	125.30	74.21	PK	Horizontal
5	5898.509	43.96	34.29	5.33	-29.62	53.96	87.86	33.90	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE20 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\62
Memo: Sample Numbler:S25081332-003 Power Setting:21

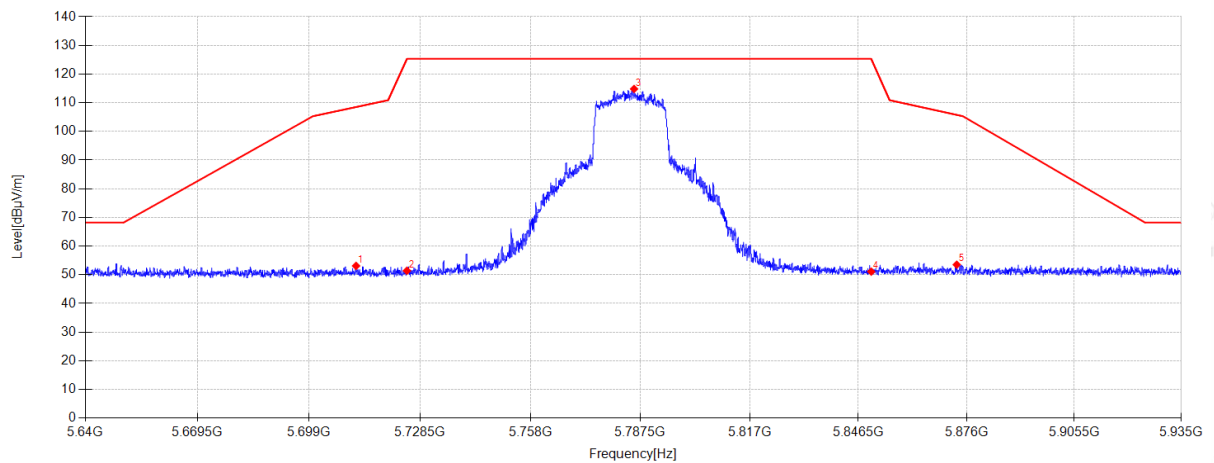**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.479	44.25	33.26	5.25	-29.66	53.10	108.51	55.41	PK	Vertical
2	5725.000	42.35	33.45	5.26	-29.65	51.41	125.30	73.89	PK	Vertical
3	5785.819	105.31	33.87	5.28	-29.64	114.82	125.30	10.48	PK	Vertical
4	5850.000	41.52	33.90	5.31	-29.63	51.10	125.30	74.20	PK	Vertical
5	5873.316	43.75	34.09	5.32	-29.63	53.53	105.77	52.24	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\63
Memo: Sample Numbler:S25081332-003 Power Setting:21

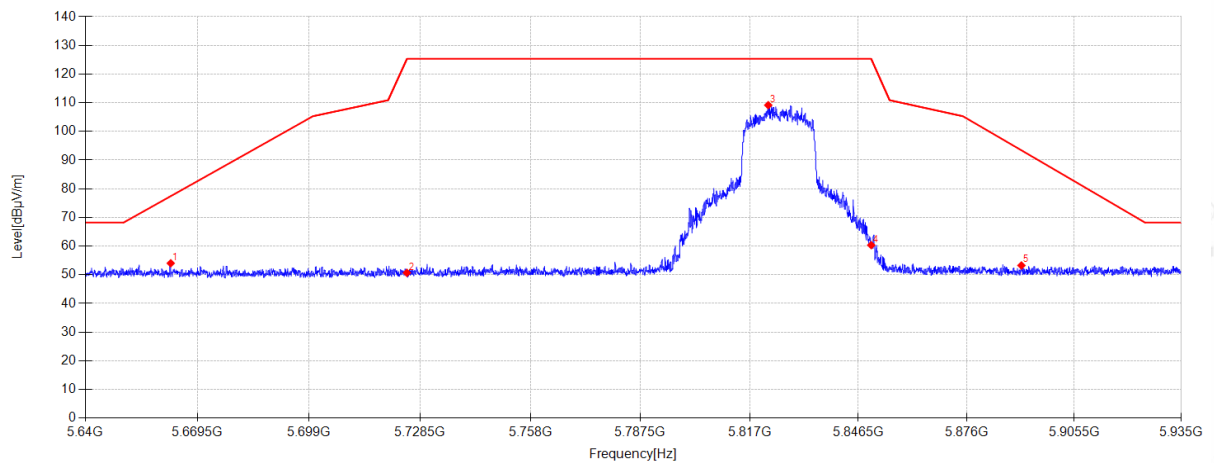

Suspected Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.450	45.07	33.40	5.23	-29.67	54.03	77.44	23.41	PK	Horizontal
2	5725.000	41.61	33.45	5.26	-29.65	50.67	125.30	74.63	PK	Horizontal
3	5822.045	99.60	33.90	5.30	-29.64	109.16	125.30	16.14	PK	Horizontal
4	5850.000	50.75	33.90	5.31	-29.63	60.33	125.30	64.97	PK	Horizontal
5	5891.016	43.31	34.23	5.33	-29.62	53.25	93.42	40.17	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE20 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\64
Memo: Sample Numbler:S25081332-003 Power Setting:21

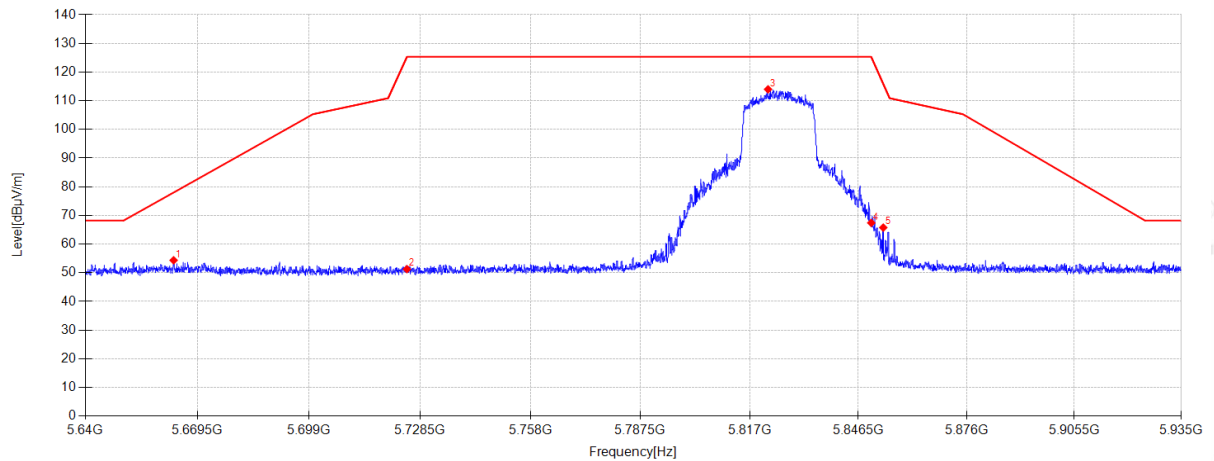**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5663.217	45.40	33.39	5.24	-29.67	54.36	78.01	23.65	PK	Vertical
2	5725.000	42.21	33.45	5.26	-29.65	51.27	125.30	74.03	PK	Vertical
3	5821.986	104.43	33.90	5.30	-29.64	113.99	125.30	11.31	PK	Vertical
4	5850.000	57.83	33.90	5.31	-29.63	67.41	125.30	57.89	PK	Vertical
5	5853.285	56.15	33.93	5.31	-29.63	65.76	115.84	50.08	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\65
Memo: Sample Numbler:S25081332-003 Power Setting:21

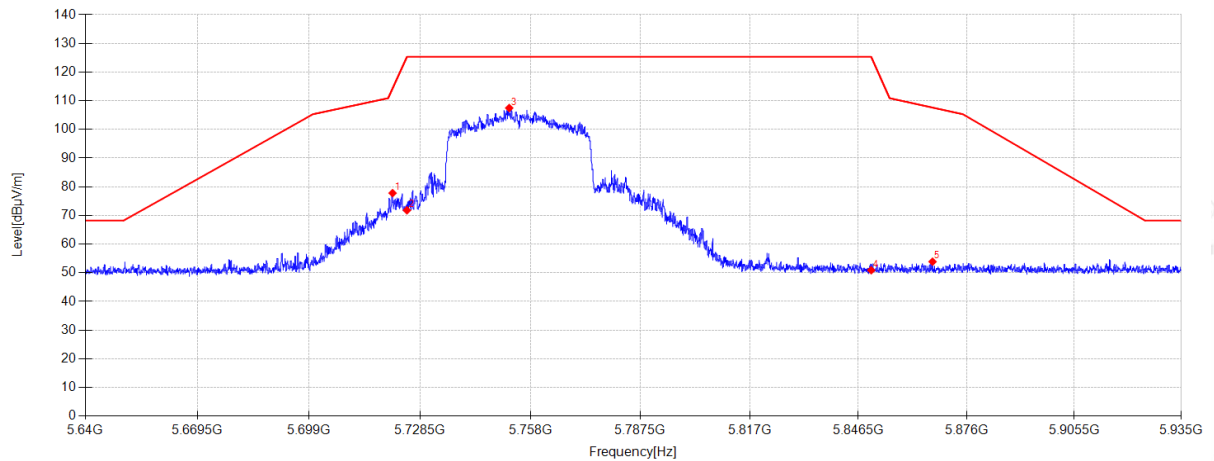**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.184	68.79	33.40	5.26	-29.66	77.79	114.31	36.52	PK	Horizontal
2	5725.000	62.74	33.45	5.26	-29.65	71.80	125.30	53.50	PK	Horizontal
3	5752.307	98.06	33.80	5.27	-29.65	107.48	125.30	17.82	PK	Horizontal
4	5850.000	41.31	33.90	5.31	-29.63	50.89	125.30	74.41	PK	Horizontal
5	5866.708	44.15	34.03	5.32	-29.63	53.87	107.62	53.75	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\66
Memo: Sample Numbler:S25081332-003 Power Setting:21

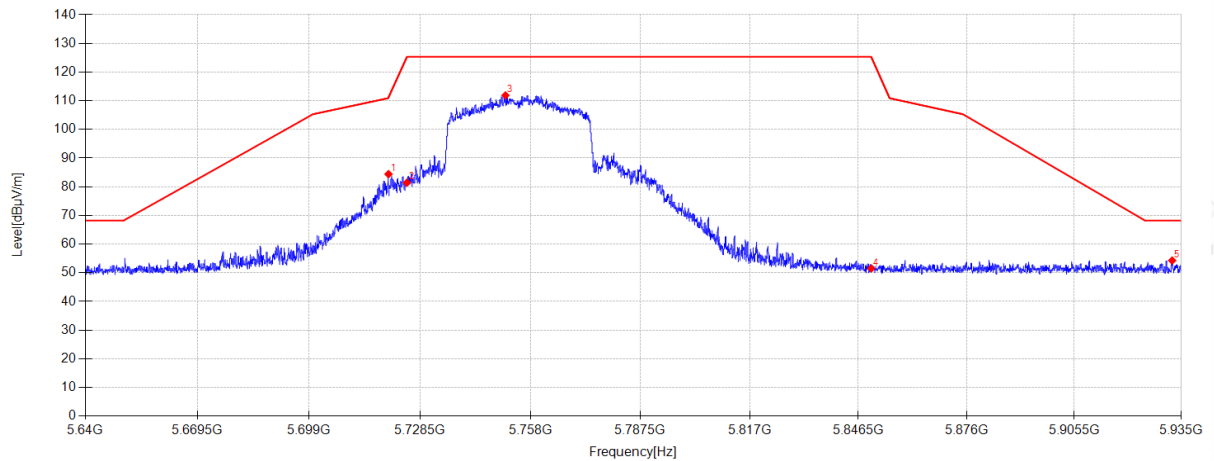**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.093	75.43	33.38	5.26	-29.66	84.41	111.17	26.76	PK	Vertical
2	5725.000	72.34	33.45	5.26	-29.65	81.40	125.30	43.90	PK	Vertical
3	5751.304	102.45	33.80	5.27	-29.65	111.87	125.30	13.43	PK	Vertical
4	5850.000	41.94	33.90	5.31	-29.63	51.52	125.30	73.78	PK	Vertical
5	5932.463	44.19	34.36	5.34	-29.61	54.28	68.20	13.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 Tested By: Lin Guoyuan
EUT: Wireless Access Point Model Number: L2537
Test Mode: TX 11BE40 5795MHz Mode Power Supply: AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\67
Memo: Sample Numbler:S25081332-003 Power Setting:21

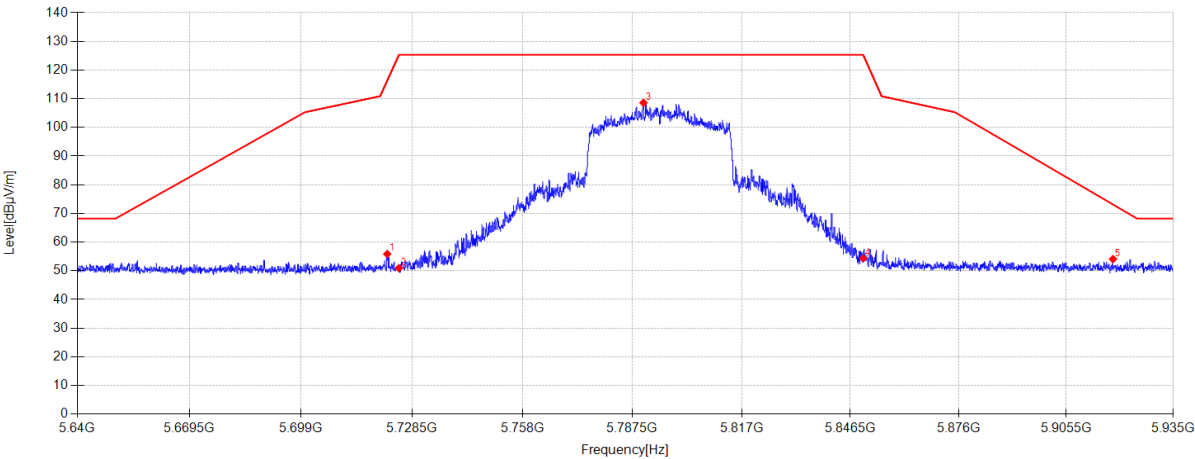


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.892	46.84	33.41	5.26	-29.66	55.85	116.35	60.50	PK	Horizontal
2	5725.000	41.87	33.45	5.26	-29.65	50.93	125.30	74.37	PK	Horizontal
3	5790.509	99.07	33.88	5.29	-29.64	108.60	125.30	16.70	PK	Horizontal
4	5850.000	44.77	33.90	5.31	-29.63	54.35	125.30	70.95	PK	Horizontal
5	5918.362	44.03	34.34	5.34	-29.62	54.09	73.13	19.04	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-10-19 **Tested By:** Lin Guoyuan
EUT: Wireless Access Point **Model Number:** L2537
Test Mode: TX 11BE40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\68
Memo: Sample Numbler:S25081332-003 Power Setting:21

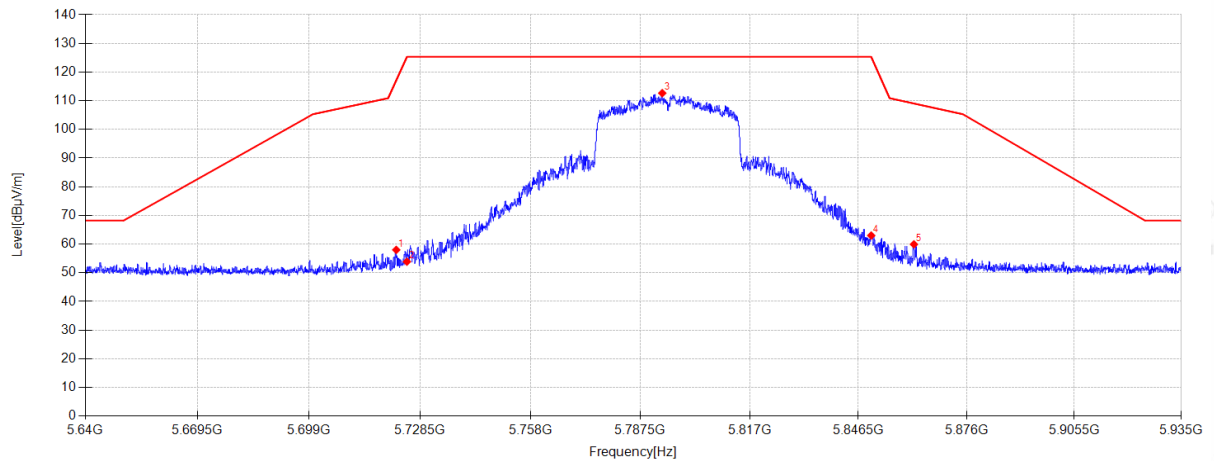**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.158	48.98	33.41	5.26	-29.66	57.99	117.11	59.12	PK	Vertical
2	5725.000	44.81	33.45	5.26	-29.65	53.87	125.30	71.43	PK	Vertical
3	5793.400	103.12	33.89	5.29	-29.64	112.66	125.30	12.64	PK	Vertical
4	5850.000	53.42	33.90	5.31	-29.63	63.00	125.30	62.30	PK	Vertical
5	5861.634	50.26	33.99	5.31	-29.63	59.93	109.04	49.11	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-10-19Tested By:Lin Guoyuan


EUT:Wireless Access PointModel Number:L2537

Test Mode:TX 11BE80 5775MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:22.5°C;Humi:54.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\69

Memo:Sample Numbler:S25081332-003 Power Setting:21

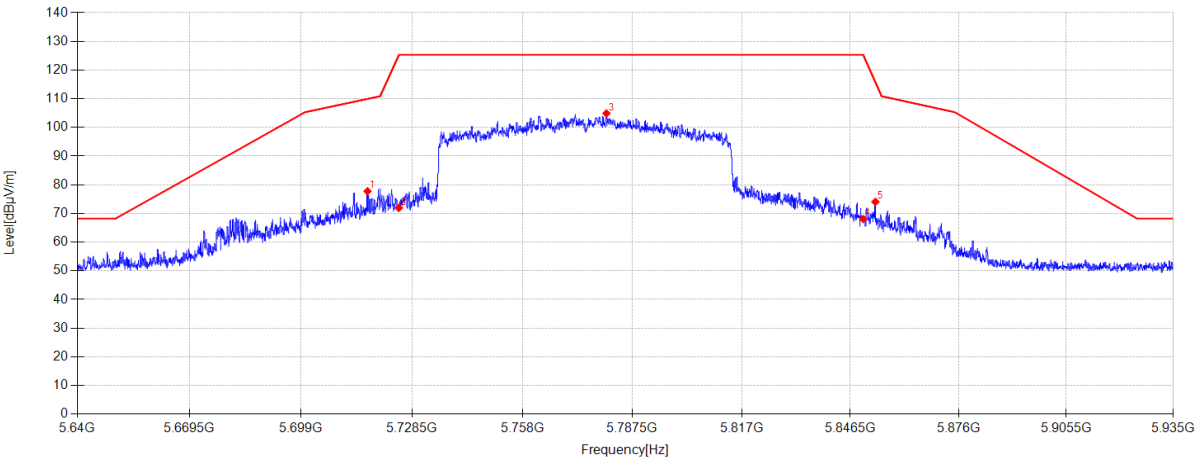

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.641	68.82	33.33	5.26	-29.66	77.75	109.96	32.21	PK	Horizontal
2	5725.000	62.88	33.45	5.26	-29.65	71.94	125.30	53.36	PK	Horizontal
3	5780.538	95.39	33.86	5.28	-29.64	104.89	125.30	20.41	PK	Horizontal
4	5850.000	58.46	33.90	5.31	-29.63	68.04	125.30	57.26	PK	Horizontal
5	5853.315	64.45	33.93	5.31	-29.63	74.06	115.75	41.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-19

Tested By:

Lin Guoyuan

EUT:

Wireless Access Point

Model Number:

L2537

Test Mode:

TX 11BE80 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25081332-1E\FCC ABOVE 1G 5.8G\70

Memo:

Sample Numbler:S25081332-003 Power Setting:21

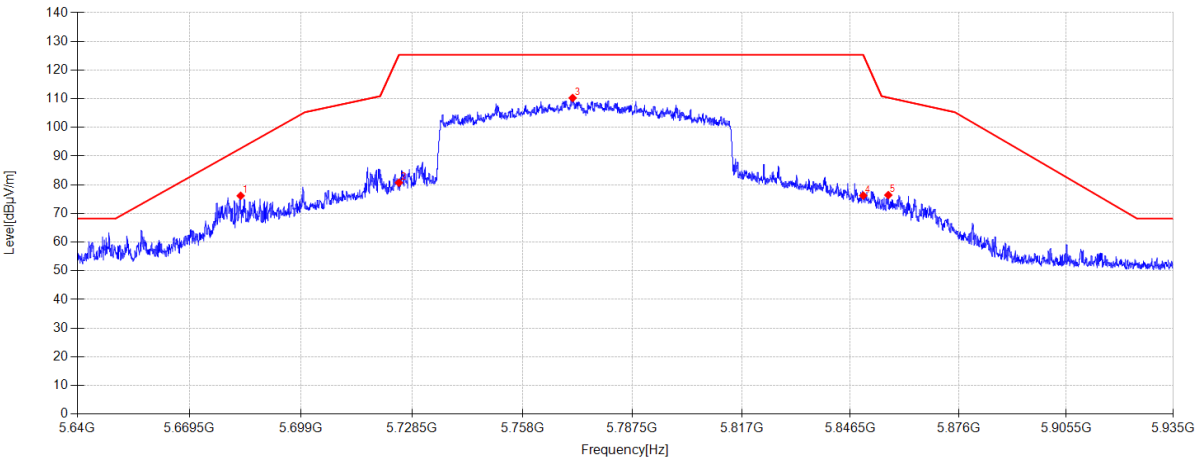

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5683.011	67.34	33.24	5.24	-29.66	76.16	92.69	16.53	PK	Vertical
2	5725.000	71.66	33.45	5.26	-29.65	80.72	125.30	44.58	PK	Vertical
3	5771.452	100.80	33.84	5.28	-29.65	110.27	125.30	15.03	PK	Vertical
4	5850.000	66.65	33.90	5.31	-29.63	76.23	125.30	49.07	PK	Vertical
5	5856.825	66.77	33.95	5.31	-29.63	76.40	110.39	33.99	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBEC K	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
EMI Test Software	Audix	e3	DDT-ZC01252	/

14.2. Block diagram of test setup

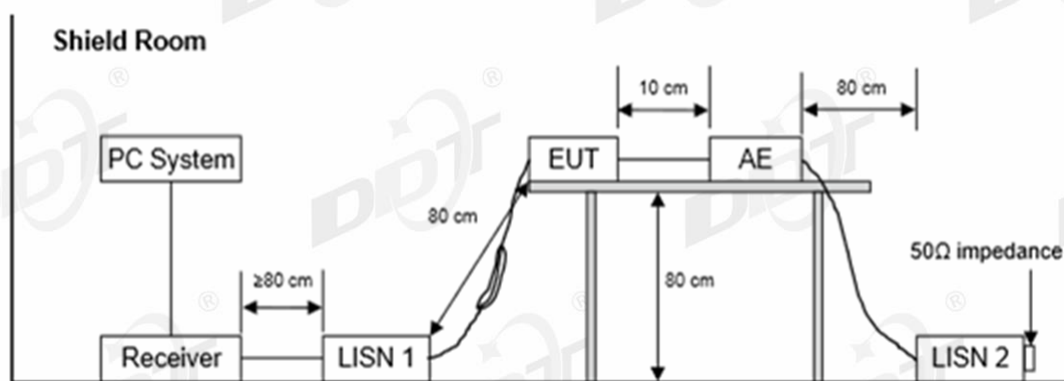

14.3. Limits

Frequency	Quasi-Peak Level dB(uV)	Average Level dB(uV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\Q25081332-1E\1206 CE.EM6**
Test Date : 2025-12-06 **Tested By** : Yisheng Ling
EUT : Wireless Access Point **Model Number** : L7/L2537
Power Supply : AC 120V/60Hz **Test Mode** : 5G mode
Condition : TEMP:23.6°C, RH:45.7% **LISN** : 2025 1# 216/LINE
Memo : Sample Numbler:S25081332-003(POE ADAPTER)

Data: 6

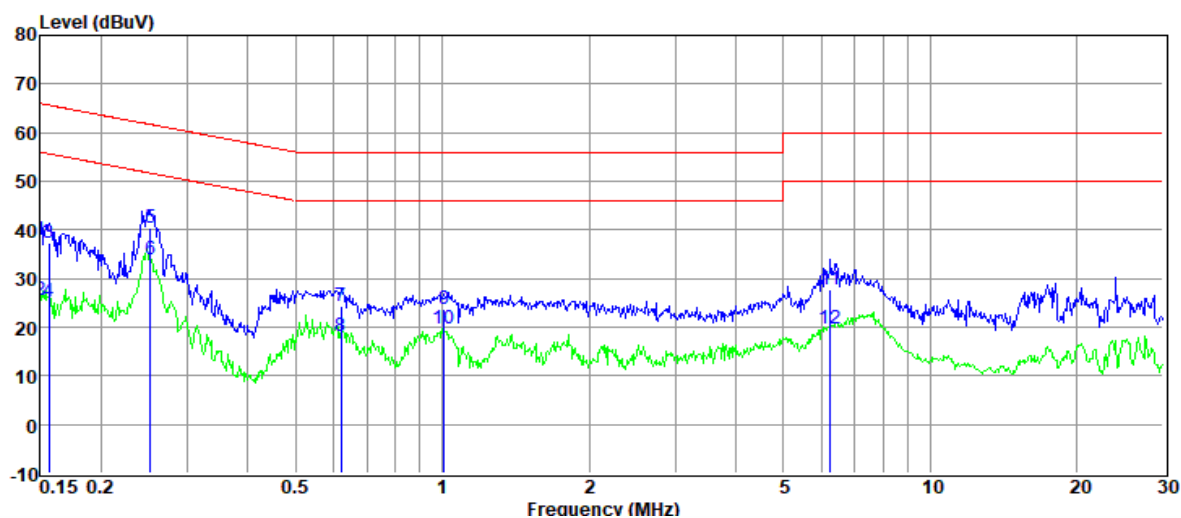

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.15	18.07	9.85	0.05	9.89	37.86	66.00	28.14	QP	LINE
2	0.15	5.78	9.85	0.05	9.89	25.57	56.00	30.43	Average	LINE
3	0.16	17.63	9.85	0.05	9.89	37.42	65.65	28.23	QP	LINE
4	0.16	5.49	9.85	0.05	9.89	25.28	55.65	30.37	Average	LINE
5	0.25	20.51	9.81	0.06	9.89	40.27	61.69	21.42	QP	LINE
6	0.25	14.24	9.81	0.06	9.89	34.00	51.69	17.69	Average	LINE
7	0.62	4.41	9.94	0.11	9.89	24.35	56.00	31.65	QP	LINE
8	0.62	-1.66	9.94	0.11	9.89	18.28	46.00	27.72	Average	LINE
9	1.01	3.81	9.97	0.15	9.90	23.83	56.00	32.17	QP	LINE
10	1.01	-0.26	9.97	0.15	9.90	19.76	46.00	26.24	Average	LINE
11	6.25	7.75	9.94	0.21	9.85	27.75	60.00	32.25	QP	LINE
12	6.25	-0.36	9.94	0.21	9.85	19.64	50.00	30.36	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\Q25081332-1E\1206 CE.EM6**
Test Date : 2025-12-06 **Tested By** : Yisheng Ling
EUT : Wireless Access Point **Model Number** : L7/L2537
Power Supply : AC 120V/60Hz **Test Mode** : 5G mode
Condition : TEMP:23.6°C, RH:45.7% **LISN** : 2025 1# 216/NEUTRAL
Memo : Sample Numbel:S25081332-003(POE ADAPTER)

Data: 8

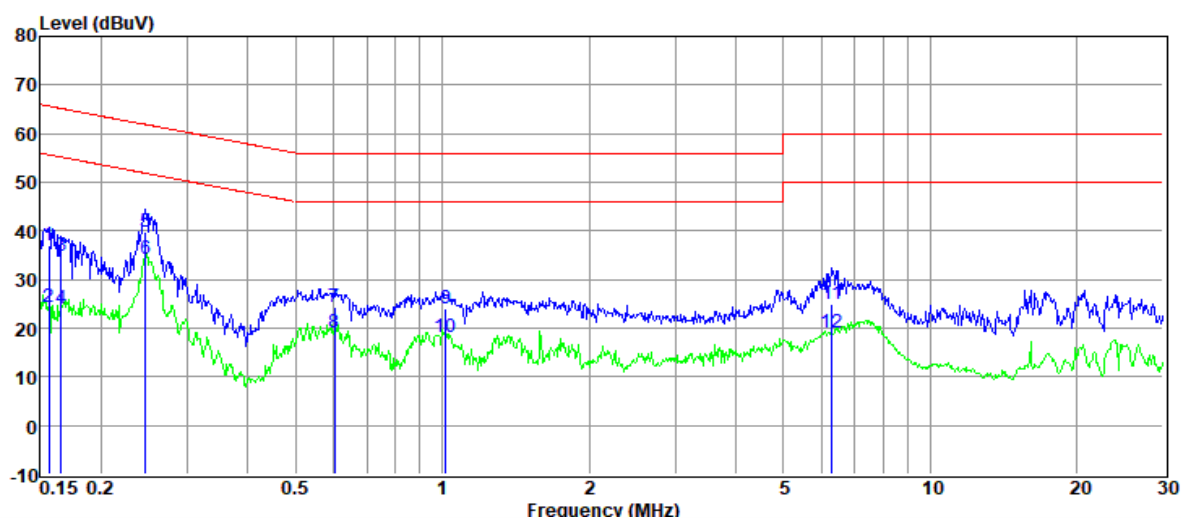

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.16	17.27	9.74	0.05	9.89	36.95	65.65	28.70	QP	NEUTRAL
2	0.16	4.77	9.74	0.05	9.89	24.45	55.65	31.20	Average	NEUTRAL
3	0.17	15.17	9.70	0.05	9.89	34.81	65.16	30.35	QP	NEUTRAL
4	0.17	4.43	9.70	0.05	9.89	24.07	55.16	31.09	Average	NEUTRAL
5	0.25	19.89	9.84	0.06	9.89	39.68	61.86	22.18	QP	NEUTRAL
6	0.25	14.43	9.84	0.06	9.89	34.22	51.86	17.64	Average	NEUTRAL
7	0.60	4.41	9.88	0.11	9.89	24.29	56.00	31.71	QP	NEUTRAL
8	0.60	-0.87	9.88	0.11	9.89	19.01	46.00	26.99	Average	NEUTRAL
9	1.02	4.00	9.94	0.15	9.90	23.99	56.00	32.01	QP	NEUTRAL
10	1.02	-1.76	9.94	0.15	9.90	18.23	46.00	27.77	Average	NEUTRAL
11	6.29	5.04	9.86	0.21	9.85	24.96	60.00	35.04	QP	NEUTRAL
12	6.29	-0.71	9.86	0.21	9.85	19.21	50.00	30.79	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\Q25081332-1E\1206 CE.EM6**
Test Date : 2025-12-06 **Tested By** : Yisheng Ling
EUT : Wireless Access Point **Model Number** : L7/L2537
Power Supply : AC 120V/60Hz **Test Mode** : 5.8G mode
Condition : TEMP:23.6°C, RH:45.7% **LISN** : 2025 1# 216/LINE
Memo : Sample Numbler:S25081332-003(AC/DC ADAPTER)

Data: 14

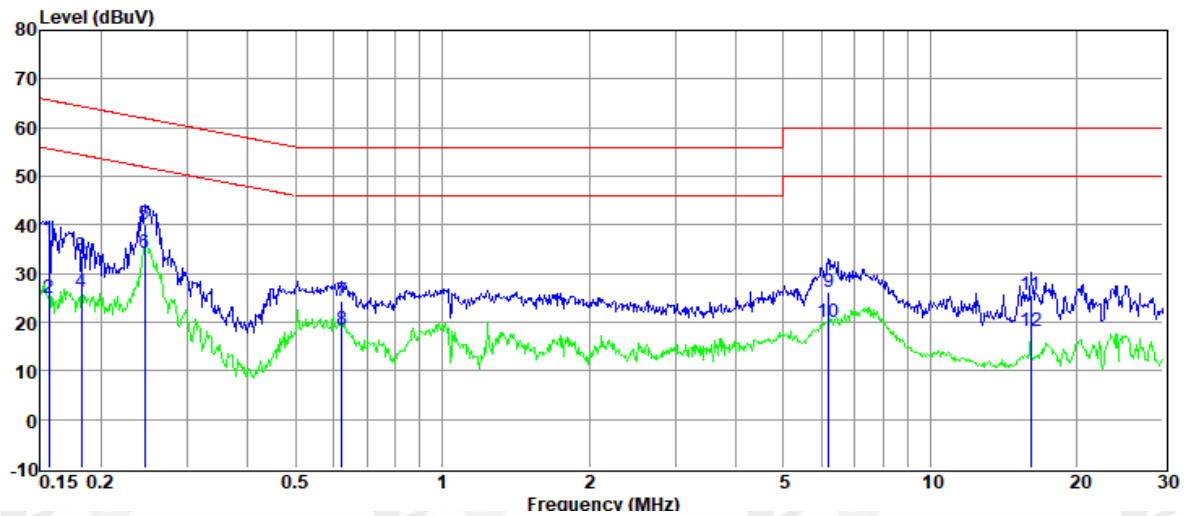

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	17.23	9.85	0.05	9.89	37.02	65.65	28.63	QP	LINE
2	0.16	5.30	9.85	0.05	9.89	25.09	55.65	30.56	Average	LINE
3	0.18	13.79	9.83	0.06	9.89	33.57	64.37	30.80	QP	LINE
4	0.18	6.29	9.83	0.06	9.89	26.07	54.37	28.30	Average	LINE
5	0.25	20.45	9.82	0.06	9.89	40.22	61.91	21.69	QP	LINE
6	0.25	14.45	9.82	0.06	9.89	34.22	51.91	17.69	Average	LINE
7	0.62	4.42	9.94	0.11	9.89	24.36	56.00	31.64	QP	LINE
8	0.62	-1.40	9.94	0.11	9.89	18.54	46.00	27.46	Average	LINE
9	6.19	6.27	9.94	0.21	9.85	26.27	60.00	33.73	QP	LINE
10	6.19	-0.07	9.94	0.21	9.85	19.93	50.00	30.07	Average	LINE
11	16.06	4.97	10.33	0.36	9.91	25.57	60.00	34.43	QP	LINE
12	16.06	-2.40	10.33	0.36	9.91	18.20	50.00	31.80	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\Q25081332-1E\1206 CE.EM6**
Test Date : 2025-12-06 **Tested By** : Yisheng Ling
EUT : Wireless Access Point **Model Number** : L7/L2537
Power Supply : AC 120V/60Hz **Test Mode** : 5.8G mode
Condition : TEMP:23.6°C, RH:45.7% **LISN** : 2025 1# 216/NEUTRAL
Memo : Sample Numbler:S25081332-003(AC/DC ADAPTER)

Data: 16

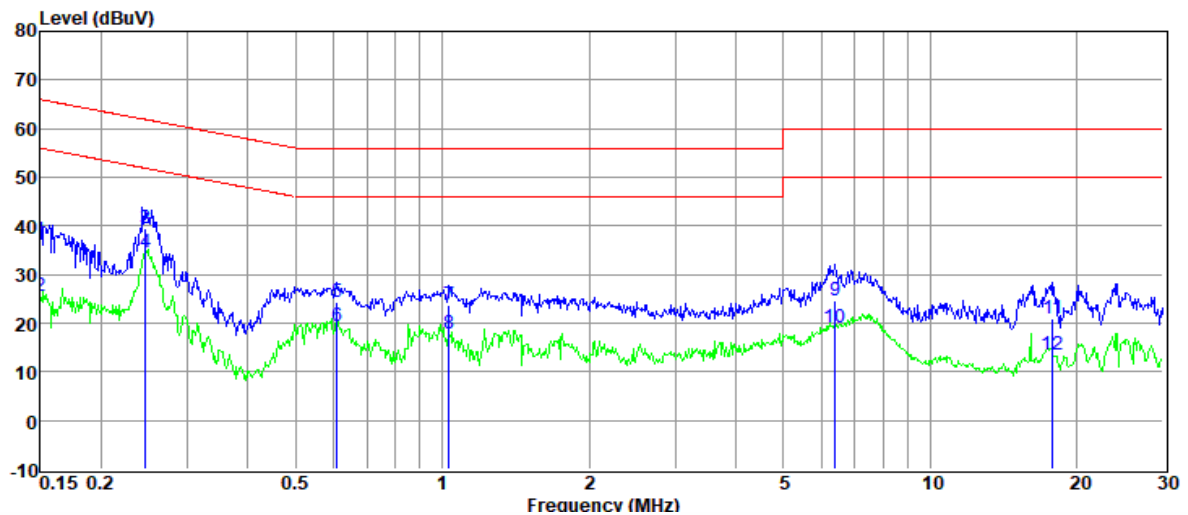

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.15	17.29	9.77	0.05	9.89	37.00	66.00	29.00	QP	NEUTRAL
2	0.15	5.91	9.77	0.05	9.89	25.62	56.00	30.38	Average	NEUTRAL
3	0.25	19.84	9.84	0.06	9.89	39.63	61.86	22.23	QP	NEUTRAL
4	0.25	14.70	9.84	0.06	9.89	34.49	51.86	17.37	Average	NEUTRAL
5	0.61	4.30	9.88	0.11	9.89	24.18	56.00	31.82	QP	NEUTRAL
6	0.61	-0.65	9.88	0.11	9.89	19.23	46.00	26.77	Average	NEUTRAL
7	1.03	3.63	9.93	0.15	9.90	23.61	56.00	32.39	QP	NEUTRAL
8	1.03	-2.03	9.93	0.15	9.90	17.95	46.00	28.05	Average	NEUTRAL
9	6.39	4.59	9.86	0.21	9.85	24.51	60.00	35.49	QP	NEUTRAL
10	6.39	-0.74	9.86	0.21	9.85	19.18	50.00	30.82	Average	NEUTRAL
11	17.85	0.11	10.45	0.39	9.93	20.88	60.00	39.12	QP	NEUTRAL
12	17.85	-7.22	10.45	0.39	9.93	13.55	50.00	36.45	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q25081332-2E appendix I

-----End Report-----