



BNetzA-CAB-21/21-21

Test Report

Test report no.: 25112181-49917-0

Date of issue: 2026-06-24

Test result: The test item - **passed** - and **complies** with below listed standards.

Applicant

Sensrad AB

Manufacturer

Sensrad AB

Test Item

Hugin D1

RF-Spectrum Testing according to:

FCC 47 CFR Part 95

Personal radio services – Subpart M
The 76-81 GHz Band Radar Service

Tested by
(name, function, signature)

Sebastian Janoschka
Head of Department RF

Approved by
(name, function, signature)

Karsten Geraldys
Lab Manager RF

Applicant and test item details	
Applicant	Sensrad AB Falkenbergsgatan 3 41285 , Göteborg, Sweden
Manufacturer	Sensrad AB Falkenbergsgatan 3 41285 , Göteborg, Sweden
Test item description	Vehicular radar for navigation and obstacle detection
Model/Type reference	Hugin D1
Standard specific information	
FCC ID	2BPZ2-SDP0045
Technology	FMCW radar
Frequency	76 to 81GHz
Antenna	Multilayer-waveguide- antenna
Power supply	6.0 to 32.0 V DC
Temperature range	-40 °C to +65 °C

Disclaimer and Notes

The content of this report relates to the mentioned test sample(s) only.
IBL-Lab GmbH does not take samples. The samples used for testing are provided by the applicant.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at TAMSys®.

Signatures are done electronically, if signer does not match stated signer, it is signed per order.
Information supplied by the applicant can affect the validity of results. The data is marked accordingly.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a ☒ point / ☐ comma is used as a decimal separator.
If otherwise, a detailed note is added adjected to its use.

Decision rule:

Decision rule based on simple acceptance without guard bands, binary statement, based on mutually agreed uncertainty tolerances with expansion factor k=2 according to ILAC-G8:09/2019

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS.....	3
2	GENERAL INFORMATION	4
2.1	Administrative details.....	4
2.2	Possible test case verdicts	5
2.3	Observations.....	5
2.4	Opinions and interpretations.....	5
2.5	Document history.....	5
2.6	Further documents.....	5
3	ENVIRONMENTAL & TEST CONDITIONS.....	6
3.1	Environmental conditions of test laboratory	6
3.2	Normal and extreme test conditions	6
4	TEST STANDARDS AND REFERENCES	6
5	EQUIPMENT UNDER TEST (EUT).....	7
5.1	Product description	7
5.1	Technical data of test item.....	7
5.1	Description of test item	7
5.1	Description of AE (auxiliary equipment)	7
5.1	Description of operating modes	8
5.1	Description of test setups	8
5.1	Additional information	8
5.1	Operating conditions.....	9
5.2	Antenna characteristics	11
6	SUMMARY OF TEST RESULTS.....	12
7	TEST RESULTS	13
7.1	RF power output (§2.1046 & §95.3367)	13
7.2	Modulation characteristics (§2.1047 & KDB 653005 D01 76-81 GHz Radars).....	17
7.3	Occupied bandwidth (§2.1049 & §95.3379)	18
7.4	Field strength of spurious radiation (§2.1053 & §95.3379)	34
7.5	Frequency stability (§2.1055 & §95.3379(b))	52
8	TEST SETUP DESCRIPTION	54
8.1	Semi Anechoic Chamber with Ground Plane	55
8.2	Fully Anechoic Chamber	56
8.3	Radiated measurements > 18 GHz	57
8.4	Radiated measurements > 50 GHz	57
8.5	Radiated measurements under extreme conditions	57
8.6	List of test equipment used for testing.....	59
8.7	Radiated spurious emissions from 9 kHz to 30 MHz.....	61
8.8	Radiated spurious emissions from 30 MHz to 1 GHz.....	62
8.9	Radiated spurious emissions from 1 GHz to 18 GHz.....	63
8.10	Radiated spurious emissions above 18 GHz	64
9	MEASUREMENT UNCERTAINTIES.....	65

2 GENERAL INFORMATION

2.1 Administrative details

Testing laboratory	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: https://ib-lenhardt.com/ E-Mail: info@ib-lenhardt.com
Accreditation / Designation	The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025:2018. Scope of testing and registration number: - Attachment to the accreditation certificate D-PL-21375-01-00 - Electronics - Electromagnetic Compatibility - Radio - Electromagnetic Compatibility and Telecommunication (FCC requirements) - Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards - Automotive EMC Website DAkkS: https://www.dakks.de/ The Deutsche Akkreditierungsstelle GmbH (DAkkS) is also a signatory to the ILAC Mutual Recognition Arrangement. - Designations - FCC Testing Laboratory Designation Number DE0024 - ISED ISED Company Number 27156 Testing Laboratory CAB Identifier DE0020 - Kraftfahrt-Bundesamt KBA-P 00120-23
Testing location	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany
Date of receipt of test samples	2026-05-18
Start – End of tests	2026-06-03 – 2026-06-09

2.2 Possible test case verdicts

Test sample meets the requirements	P (PASS) – the measured value is below the acceptance limit, AL = TL
Test sample does not meet the requirements	F (FAIL) – the measured value is above the acceptance limit, AL = TL
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Document history

-0 Initial Version

2.6 Further documents

List of further applicable documents belonging to the present test report:

External EUT photos: TR-Annex-A (EP)_25112181-49917-0_RF_Sensrad-AB_Hugin D1.pdf

Internal EUT photos: TR-Annex-B (IP)_25112181-49917-0_RF_Sensrad-AB_Hugin D1.pdf

Test Setup photos: TR-Annex-D (TSP-FCC)_25112181-49917-0_RF_Sensrad-AB_Hugin D1.pdf

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions of test laboratory

Temperature	20°C ± 5°C
Relative humidity	25-75 % r.H.
Barometric Pressure	860-1060 mbar

3.2 Normal and extreme test conditions

	minimum	normal	maximum
Temperature	-40 °C	20 °C	+65 °C
Relative humidity	-/-	45 % r.h.	-/-
Power supply	6.0 V DC	24.6 V DC	32 V DC

4 TEST STANDARDS AND REFERENCES

Test standard (accredited)	Description
FCC 47 CFR Part 95	Personal radio services – Subpart M The 76-81 GHz Band Radar Service

Reference	Description
ANSI C63.4-2014 / A1-2017	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014-06-13) + A1 (2017-09-15)
ANSI C63.10-2020 / Cor1-2023 / A1-2024 / A1-2024 (errata)	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (2020-09-10) + Cor1 (2023-04-10) + A1 (2024-08-08) + Errata A1 (2024-11-18)
ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 653005 D01, V01, R02	Equipment Authorization Guidance for 76-81 GHz Radar Devices

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product description

Vehicular radar for navigation and obstacle detection

5.1 Technical data of test item

Technology*	FMCW radar
Operational frequency band*	76 to 81GHz
Modulation type*	FMCW
Number of channels*	N/A
Channel bandwidth*	N/A
Channel spacing*	N/A
Receiver category*	N/A
Receiver bandwidth*	N/A
Antenna*	Multilayer-waveguide- antenna
Antenna gain	13.0 dBi
Power supply*	6.0 to 32.0 V DC
Temperature range*	-40 °C to +65 °C

*: as declared by applicant

5.1 Description of test item

Short designation	EUT Model	EUT Description	Serial number	Hardware	Software
EUT A	Hugin D1	radiated sample	26160011	B3-R4A	3.5
EUT B	Hugin D1	radiated sample	26160010	B3-R4A	3.5

Note: as declared by applicant

5.1 Description of AE (auxiliary equipment)

Short designation	AE Name (if available)	AE Description	Serial number (if available)	Software (if used)	Remark
AE 1	technica 1000 Base-T1 Media Converter	/	210810120075	/	/
AE 2	Cable black	/	/	/	/
AE 3	Laptop	Measurement laptop with software from the manufacturer to initiate transition and switching modes.	Laptop from IBL-Lab GmbH	hugin-someip.exe	Softwar from (2026-06-03)

Note: as declared by applicant

5.1 Description of operating modes

OP 1	Ultra Long Mode (BF6)
OP 2	Mid Mode

5.1 Description of test setups

Setup no.	Description
SET 1	EUT A + AE 1 + AE 2 +AE 3
SET 2	EUT B + AE 1 + AE 2 +AE 3

Note: SET 2 was only used for radiated spurious measurements below 18 GHz.

5.1 Additional information

Model differences	N/A
Ancillaries tested with	N/A
Additional equipment used for testing	N/A

5.1 Operating conditions

Following information is derived from document “*Hugin_D1_SDP0045-B1-R4A_-
_System_specification_and_safety_instructions.pdf*”, provided by applicant.

6.2 Ultra Long Mode (BF6)

Parameter	min	nom	max	Unit	Comment
Modulation					
Occupied bandwidth		340		MHz	
Chirp bandwidth		85		MHz	
Slope		11.7		MHz/us	
PRI		8.8		µs	
# of Chirps		1024+3072			coarse + fine frame
Range					
Max Range (Sensitivity)		445		m	10 dBsm target
Instrumented Range		300		m	
Max Effective Range ¹		281		m	
Range Resolution		1.05		m	incl. window (Hann)
Minimal range		1.05		m	
Doppler					
Vmax Target Radial Velocity	-54		108	m/s	Possible to reorder the span
First Ambiguity		>163		m/s	
Velocity Resolution		0.08		m/s	incl. window (Hamming)
Azimuth					
Azimuth (FoV) ²		100		degrees	at 0° elevation
Azimuth Resolution		1.2		degrees	
Azimuth Separability		2.2		degrees	incl. window (Hamming)
Elevation					
Elevation (FoV) ³		30		degrees	at 0° azimuth
Elevation Resolution ⁴		2.0		degrees	
Elevation Separability		3.7		degrees	incl. window (Hamming)
Frames per second	>0	20	20	FPS	

¹ Max Effective Range includes the effect of the internal low pass filter corner frequency. Targets may be detected up to the instrumented range, but with reduced SNR.

² Possible to extend at the expense of accuracy and detection range.

³ Applies to 6-transmit element analog beamforming using beam-spoiling technique at the expense of realized gain.

⁴ Resolution measured at 3dB beam width point.

Table 6.2: Ultra Long Range Mode Specifications

6.1 Mid Mode

Parameter	min	nom	max	Unit	Comment
Modulation					
Occupied bandwidth		700		MHz	
Chirp bandwidth		175		MHz	
Slope		26		MHz/us	
PRI		8.8		µs	
# of Chirps		1024+3072			coarse + fine frame
Range					
Max Range (Sensitivity)		135		m	10 dBsm target
Max. Instrumented Range		135		m	
Max Effective Range ¹		126		m	
Range Resolution		0.56		m	incl. window (Hann)
Minimal range		0.56		m	
Doppler					
Vmax Target Radial Velocity		-44	+66	m/s	Possible to reorder the span
Velocity Resolution		0.08		m/s	incl. window (Hamming)
Azimuth					
Azimuth (FoV) ²		100		degrees	at 0° elevation
Azimuth Resolution		1.2		degrees	
Azimuth Separability		2.2		degrees	incl. window (Hamming)
Elevation					
Elevation (FoV) ³		30		degrees	at 0° azimuth
Elevation Resolution ⁴		1.6		degrees	
Elevation Separability		3.0		degrees	incl. window (Hamming)
Frames per second	>0	20	20	FPS	

¹ Max Effective Range includes the effect of the internal low-pass filter corner frequency. Targets may be detected up to the instrumented range, but with reduced SNR.

² Possible to extend at the expense of angle estimation accuracy and detection range.



³ Not possible to extend due to grating lobes. Grating lobes appear for strong scatterers, such as ground reflection.

⁴ Resolution measured at 3dB beam width point.

Table 6.1: Mid Mode Specifications

5.2 Antenna characteristics

Following information is derived from document “*Datasheet_-_Sensrad_Hugin_D_Antenna_-_spin_4s-1780471514.pdf*”, provided by applicant.

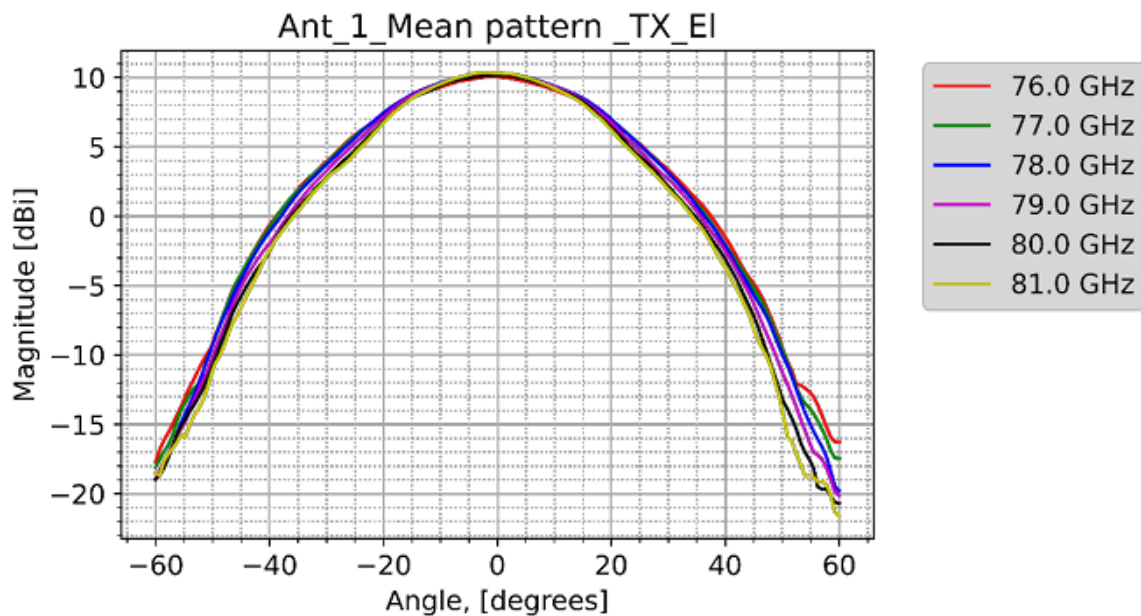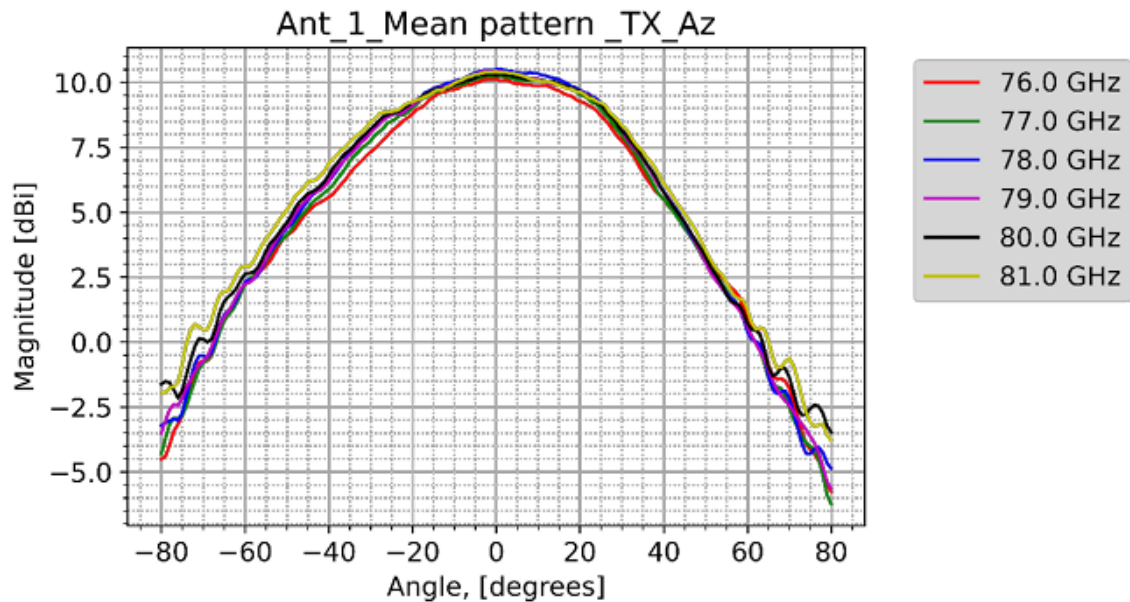

6 SUMMARY OF TEST RESULTS

Test specification

FCC 47 CFR Part 95 – Subpart M

Clause	Requirement / Test case	Test Conditions	Result / Remark	Verdict
§2.1046 §95.3367 (a) (b)	RF power output	Nominal	29.38 dBm mean 33.85 dBm peak	- PASS -
§2.1047	Modulation characteristics	Nominal		- PASS -
§2.1049 §95.3379 (b)	Occupied bandwidth	Nominal	1074.170 MHz	- PASS -
§2.1051	Spurious emissions at antenna terminals	Nominal	see note	- N/A -
§2.1053 §95.3379 (a)(1) §95.3379 (a)(2) §95.3379 (a)(3)	Field strength of spurious radiation	Nominal	< limit	- PASS -
§2.1055 §95.3379 (b)	Frequency stability	Nominal Extreme	within band	- PASS -

Notes

FCC's Millimeter Wave Test Procedures:

I. A radiated method of measurements in order to demonstrate compliance with the various regulatory requirements has been chosen in consideration of test equipment availability and the limitations of many external harmonic mixers. A conducted method of measurement could be employed if EUT and mixer waveguides both are accessible and of the same type (WG number) and if waveguide sections and transitions can be found. Another potential problem is that the peak power output may exceed the +20 dBm input power limit of many commercially available mixers. For these reasons a radiated method is preferred.

Comments and observations

– none –

7 TEST RESULTS

7.1 RF power output (§2.1046 & §95.3367)

Description

§2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

Limits

§95.3367 76-81 GHz Band Radar Service radiated power limits

The fundamental radiated emission limits within the 76-81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as follows:

- (a) The maximum power (EIRP) within the 76-81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW).
- (b) The maximum peak power (EIRP) within the 76-81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.

Test procedure

Mean Power

Method with spectrum analyser

A spectrum analyser with the following settings is used as measuring receiver in the test set-up:

- Start frequency: lower than the lower edge of the operating frequency range.
- Stop frequency: higher than the upper edge of the operating frequency range.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: 3 MHz.
- Detector mode: RMS.
- Display mode: clear write.
- Averaging time: larger than one EUT cycle time.
- Sweep time: averaging time × number of sweep points.

Channel Power function needs to be used to calculate the average power. Boundaries for the calculation needs to be defined. This is typically the operating frequency range.

KDB 653005 D01 76-81 GHz Radars v01r02, 4. b)

The maximum fundamental emission power (EIRP) shall be measured using a power averaging (rms) detector with a 1 MHz resolution bandwidth (RBW) and integrated over the full 99% occupied bandwidth (OBW) to obtain the data necessary to demonstrate compliance to the 50 dBm limit.

Test procedure

Peak Power

Method with a spectrum analyser

A spectrum analyser with the following settings is used as measuring receiver in the test set-up:

- Start frequency: lower than the lower edge of the operating frequency range.
- Stop frequency: higher than the upper edge of the operating frequency range.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: 3 MHz.
- Detector mode: Peak detector.
- Display mode: Maxhold.
- Sweep time: EUT cycle time × number of sweep points.
- Measurement is done until trace is stabilised.

The peak power to be considered is the maximum value recorded.

KDB 653005 D01 76-81 GHz Radars v01r02, 4. c)

The maximum peak fundamental emission power (EIRP) measurement shall be performed by sweeping over the transmitted occupied bandwidth using a positive peak power detector with peak hold activated, and a 1 MHz RBW. Power integration is not to be used in performing this measurement. The resultant peak power spectral density (maximum in any 1 MHz) data shall be used to demonstrate compliance to the 55 dBm/MHz limit.

Peak power measurements of swept frequency radar implementations (e.g., high sweep rate FMCW) may require a desensitization correction factor to be applied to the measurement results. See relevant Application Note(s) from the measurement instrumentation vendor for details.


Test procedure used: Method with Spectrum Analyzer

Test setup: 8.3


Test results

EUT mode	Test distance [m]	Radiated Mean Power (EIRP) [dBm]	Radiated Peak Power (EIRP) [dBm]
OP 1	1.5	29.38	33.85
OP 2	1.5	19.67	24.72

Plot no.1 : OP 1 – Mean Power – RMS detector – 20.0 °C – V_{nom} – RBW = 1 MHz

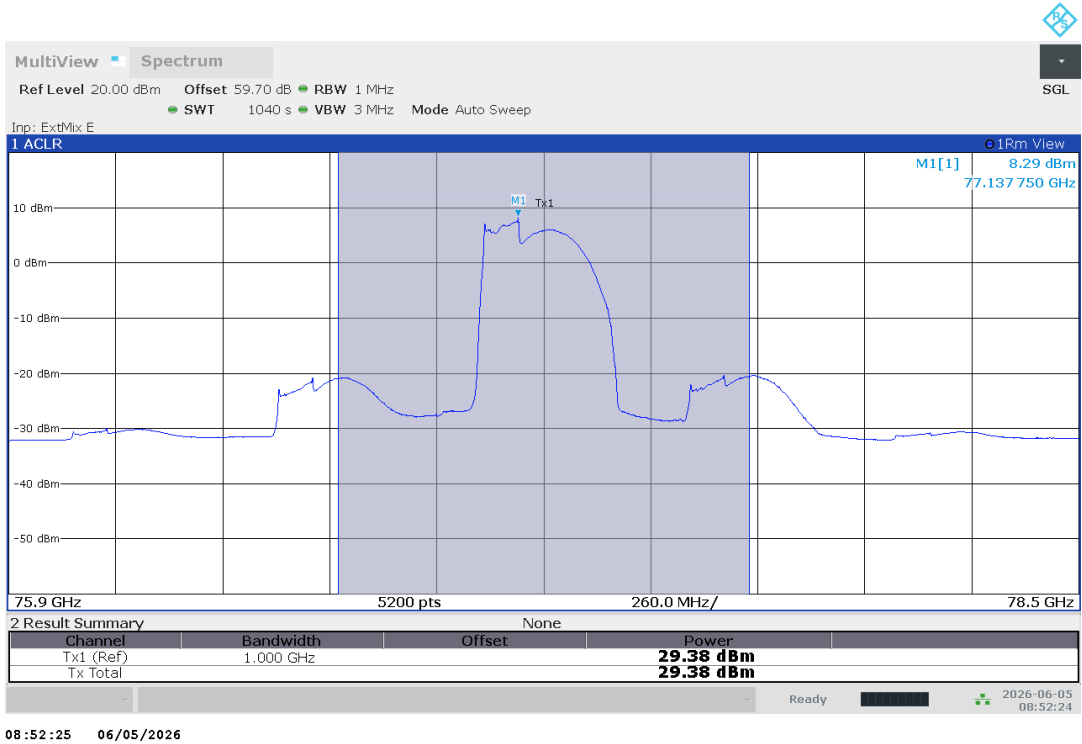


Plot no.2 : OP 2 – Mean Power – RMS detector – 20.0 °C – V_{nom} – RBW = 1 MHz

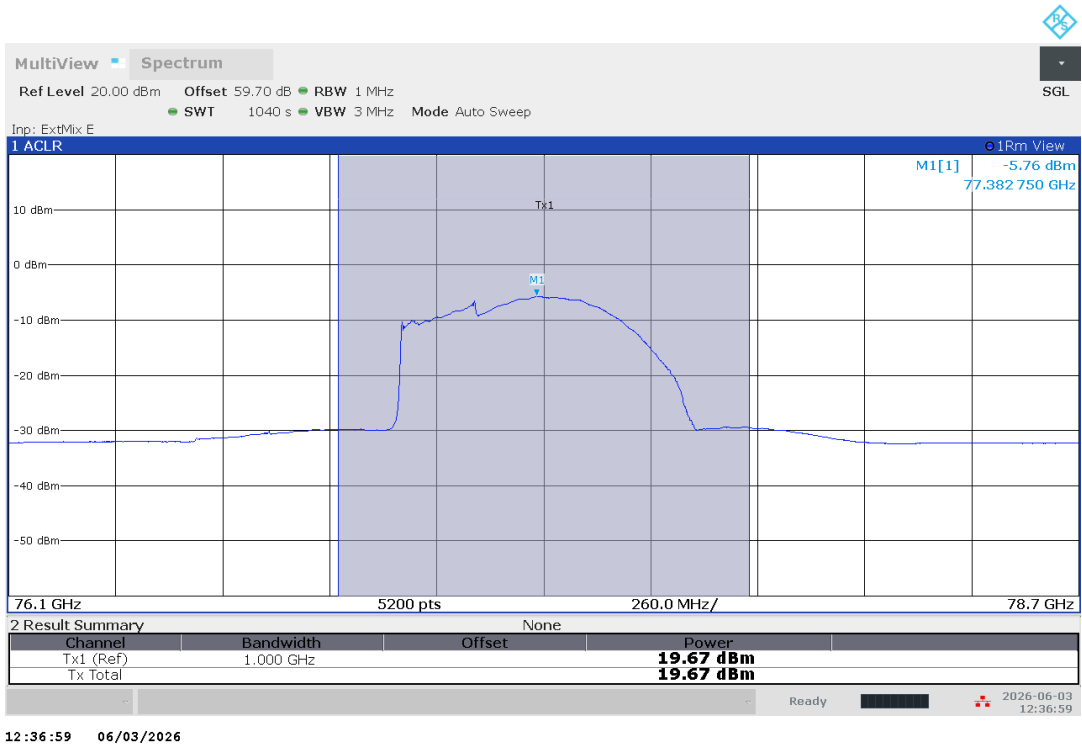

TR No.: 25112181-49917-0

2026-06-24

Plot no.3 : OP 1 – Peak Power – Peak detector – 20.0 °C – V_{nom} – RBW = 10 MHz

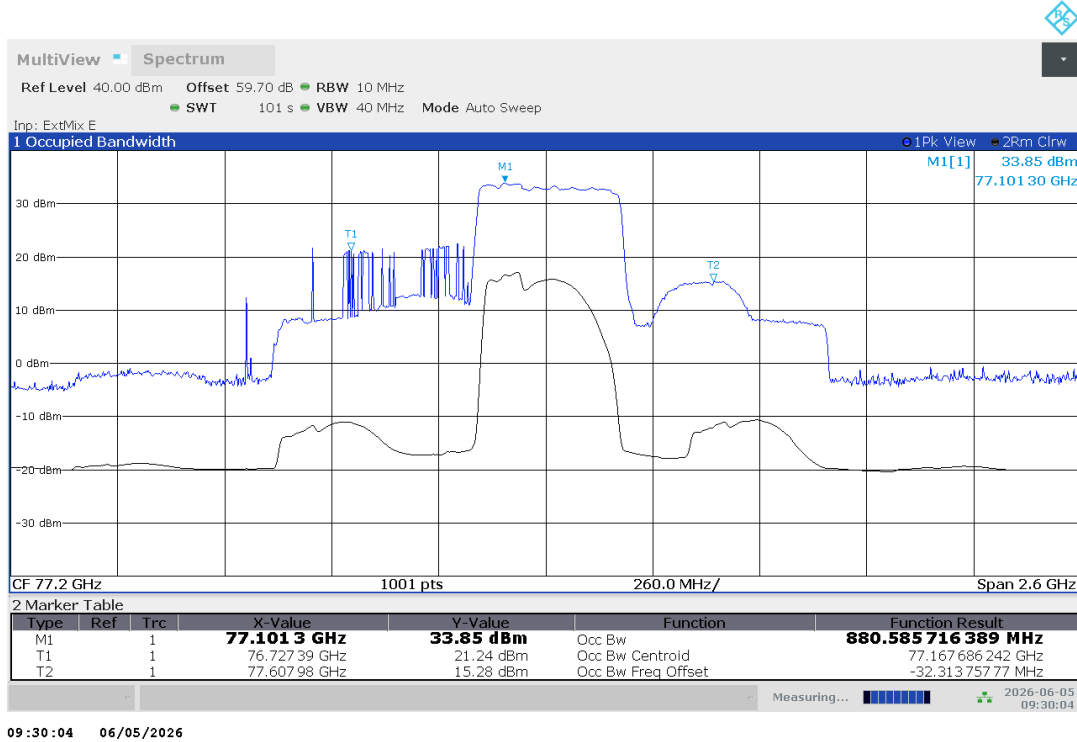

Plot no.4 : OP 2 – Peak Power – Peak detector – 20.0 °C – V_{nom} – RBW = 10 MHz



7.2 Modulation characteristics (§2.1047 & KDB 653005 D01 76-81 GHz Radars)

Description

§2.1047 Modulation characteristics

(d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

KDB 653005 D01 76-81 GHz Radars v01r02, 3. g)

Concerning the Section 2.1047 modulation characteristics requirement, the following information should be provided:

- 1) Pulsed radar: pulse width and pulse repetition frequency (if PRF is variable, then report maximum and minimum values).
- 2) Non-pulsed radar (e.g., FMCW): modulation type (i.e., sawtooth, sinusoid, triangle, or square wave) and sweep characteristics (sweep bandwidth, sweep rate, sweep time).

Note: For the modulation characteristic, please refer to Chapter 5.1.

7.3 Occupied bandwidth (§2.1049 & §95.3379)

Description

§2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Limits

§95.3379 (b)

Fundamental emissions (i.e. 99% emission bandwidth) must be contained within the frequency bands specified in this section during all conditions of operation.

Test procedure

ANSI C63.26, 5.4.4

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Note: Step a) through step c) may require iteration to adjust within the specified tolerances.

- Set the detection mode to peak, and the trace mode to max-hold.
- If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s)

KDB 653005 D01 76-81 GHz Radars v01r02, 4. d)

The occupied bandwidth of the radar device shall be measured, reported, and shown to be fully contained within the designated 76-81 GHz frequency band under normal operating conditions as well as under those extreme ambient temperature and input voltage conditions as described in Section 2.1057.

The OBW measurement of an FMCW radar shall be performed with the transmitter operating in normal mode (i.e., with frequency sweep or step active).

Note


Measurements with the peak detector are also suitable to demonstrate compliance of an EUT, as long as the required resolution bandwidth is used, because peak detection will yield amplitudes equal to or greater than amplitudes measured with RMS detector. The measurement data from a spectrum analyser peak detector will represent the worst-case results (see ANSI C63.26, chapter D2: general considerations).

Test setup: 8.3, 8.4


Test results under normal and extreme test conditions:

EUT mode	Temperature [°C]	Voltage [V]	f _L [GHz]	f _H [GHz]	99% OBW [MHz]
OP 1	-40.0	V _{nom}	76.924	77.672	748.736
OP 1	-30.0	V _{nom}	76.902	77.663	760.813
OP 1	-20.0	V _{nom}	76.882	77.624	742.143
OP 1	-10.0	V _{nom}	76.880	77.602	722.448
OP 1	0.0	V _{nom}	77.026	77.389	363.773
OP 1	10.0	V _{nom}	76.984	77.653	669.559
OP 1	20.0	V _{nom}	76.727	77.608	880.586
OP 1	20.0	V _{min}	76.768	77.617	849.442
OP 1	20.0	V _{max}	76.797	77.588	790.830
OP 1	30.0	V _{nom}	76.744	77.575	831.012
OP 1	40.0	V _{nom}	76.863	77.559	695.930
OP 1	50.0	V _{nom}	76.878	77.390	511.894
OP 1	65.0	V _{nom}	76.599	77.673	1074.170
OP 2	-40.0	V _{nom}	77.044	77.835	790.541
OP 2	-30.0	V _{nom}	77.044	77.809	765.449
OP 2	-20.0	V _{nom}	77.041	77.784	742.912
OP 2	-10.0	V _{nom}	77.041	77.933	891.158
OP 2	0.0	V _{nom}	77.044	77.955	910.960
OP 2	10.0	V _{nom}	77.047	77.890	843.225
OP 2	20.0	V _{nom}	77.043	77.847	803.730
OP 2	20.0	V _{min}	77.043	77.845	802.745
OP 2	20.0	V _{max}	77.043	77.845	801.772
OP 2	30.0	V _{nom}	77.043	77.945	901.313
OP 2	40.0	V _{nom}	77.044	77.970	925.460
OP 2	50.0	V _{nom}	77.043	77.953	910.553
OP 2	65.0	V _{nom}	77.045	77.866	821.187


Plot no.5 : OP 1 – OBW – Peak detector – -40.0 °C – V_{nom} – RBW = 10 MHz

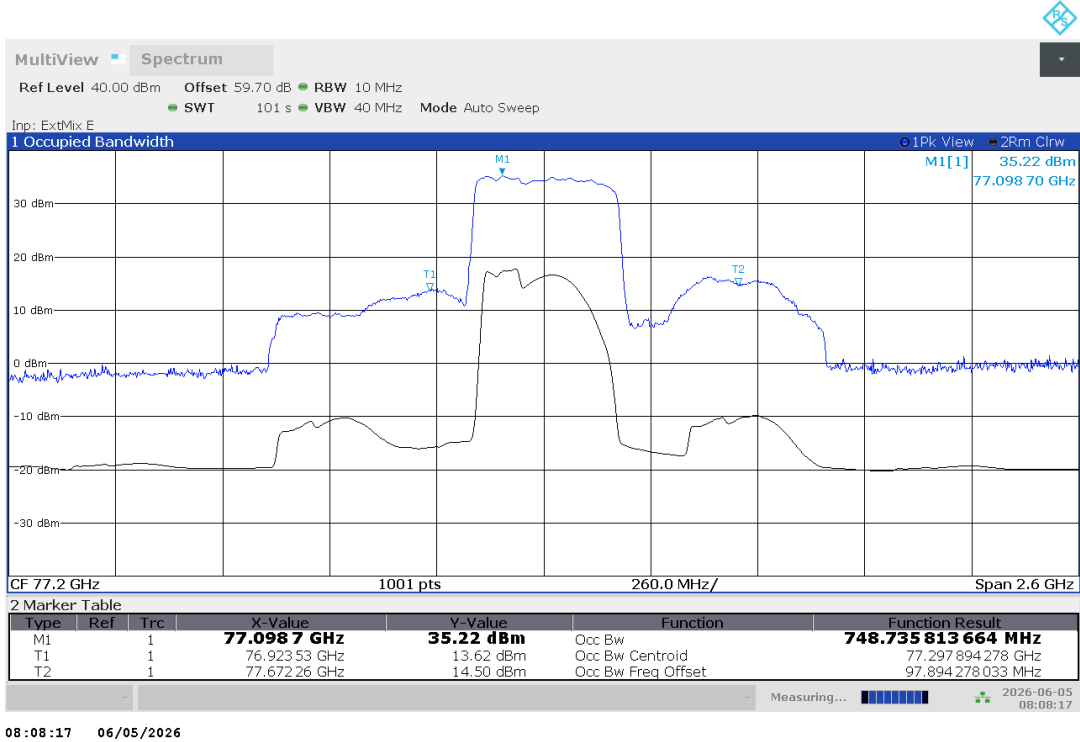


Plot no.6 : OP 1 – OBW – Peak detector – -30.0 °C – V_{nom} – RBW = 10 MHz

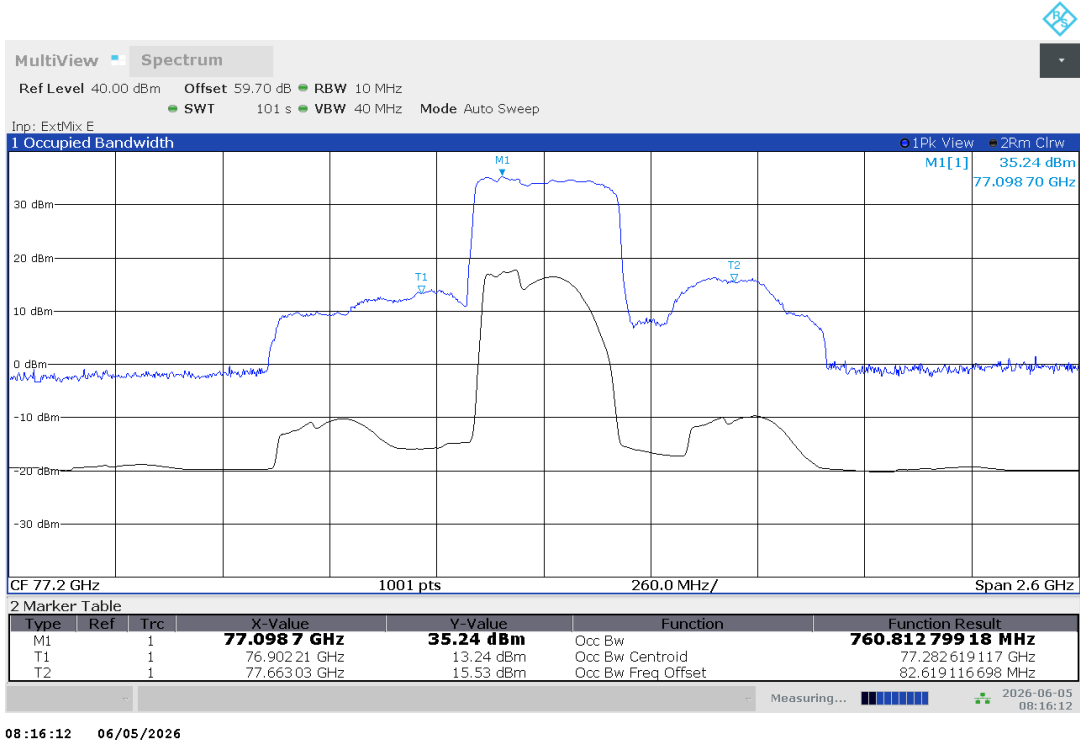


Plot no.7 : OP 1 – OBW – Peak detector – -20.0 °C – V_{nom} – RBW = 10 MHz

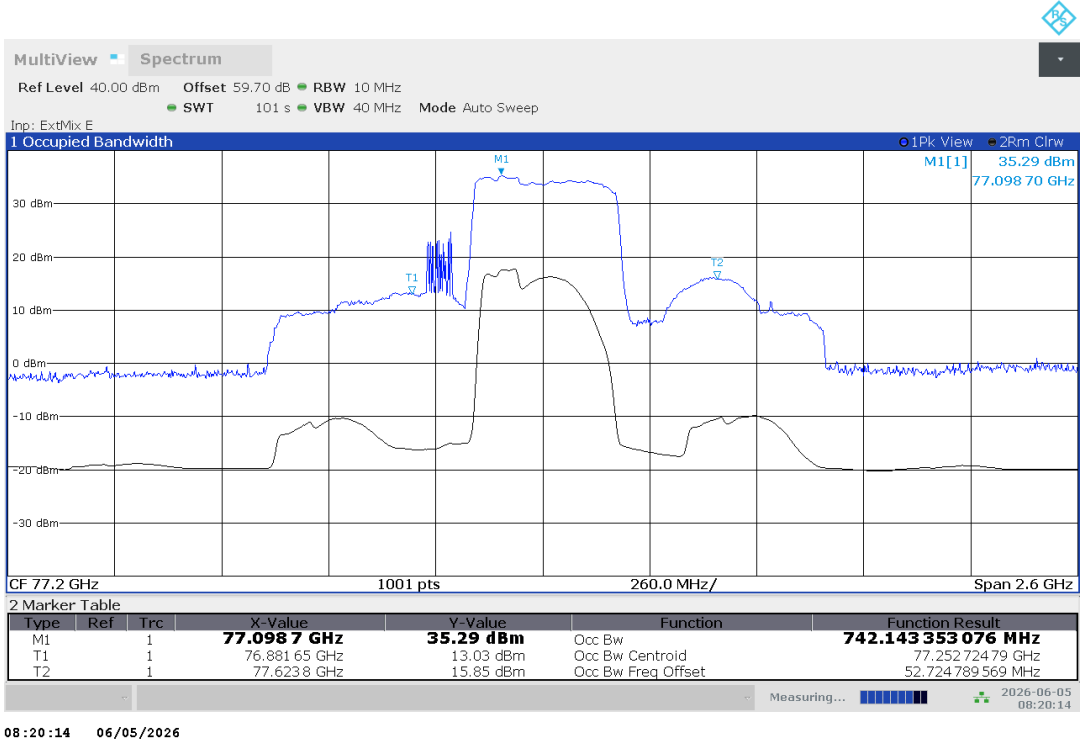


Plot no.8 : OP 1 – OBW – Peak detector – -10.0 °C – V_{nom} – RBW = 10 MHz

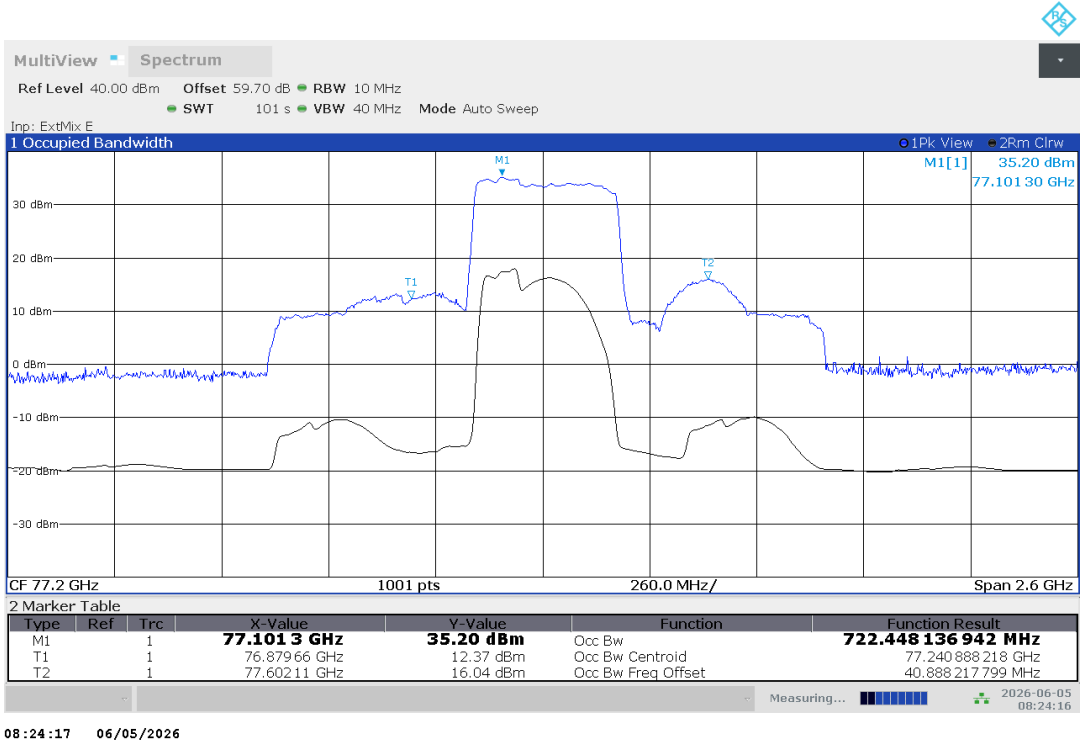

Plot no.9 : OP 1 – OBW – Peak detector – 0.0 °C – V_{nom} – RBW = 10 MHz

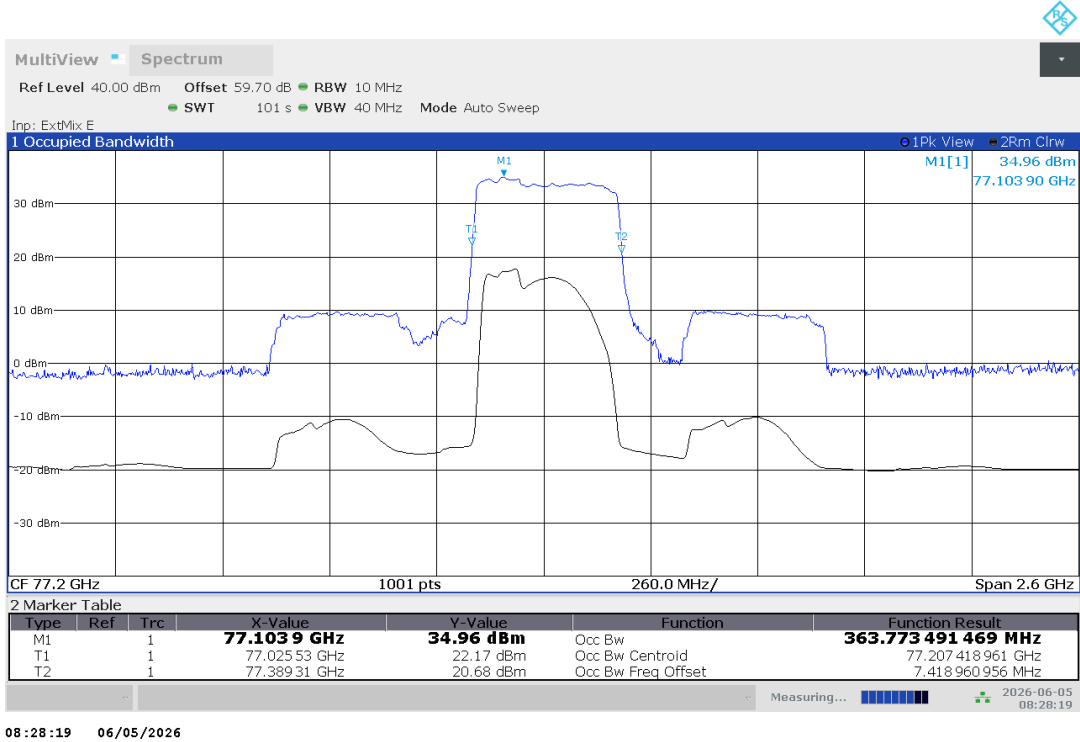


Plot no.10 : OP 1 – OBW – Peak detector – 10.0 °C – V_{nom} – RBW = 10 MHz

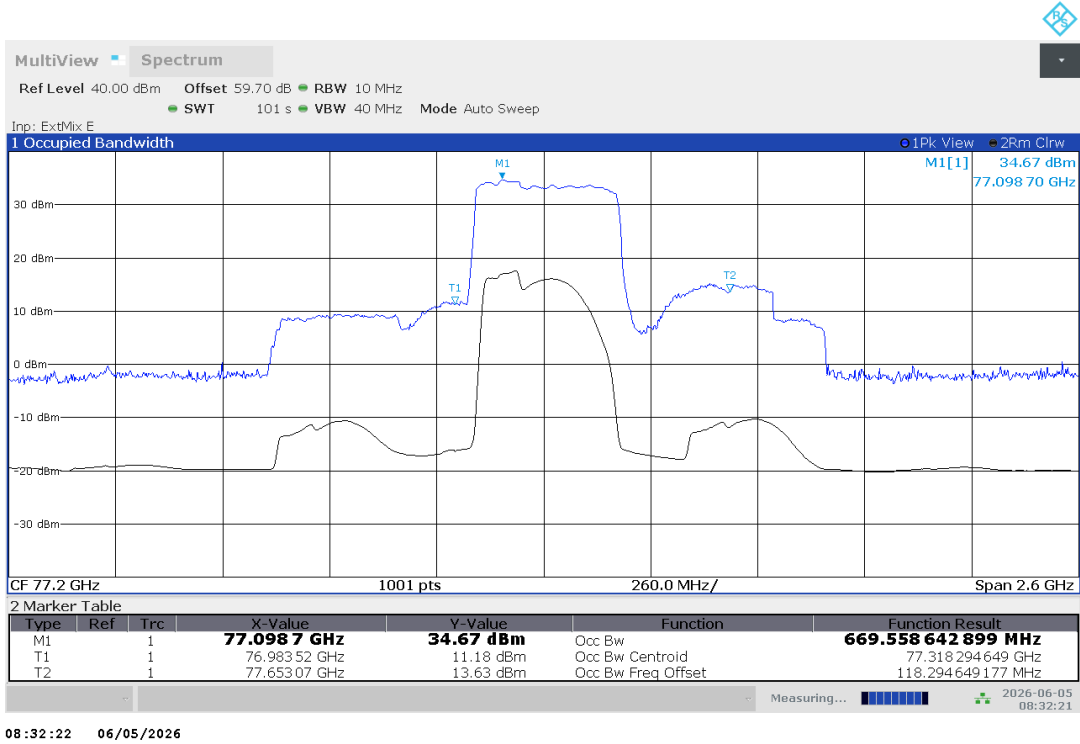

TR No.: 25112181-49917-0

2026-06-24

Plot no.11 : OP 1 – OBW – Peak detector – 20.0 °C – V_{nom} – RBW = 10 MHz

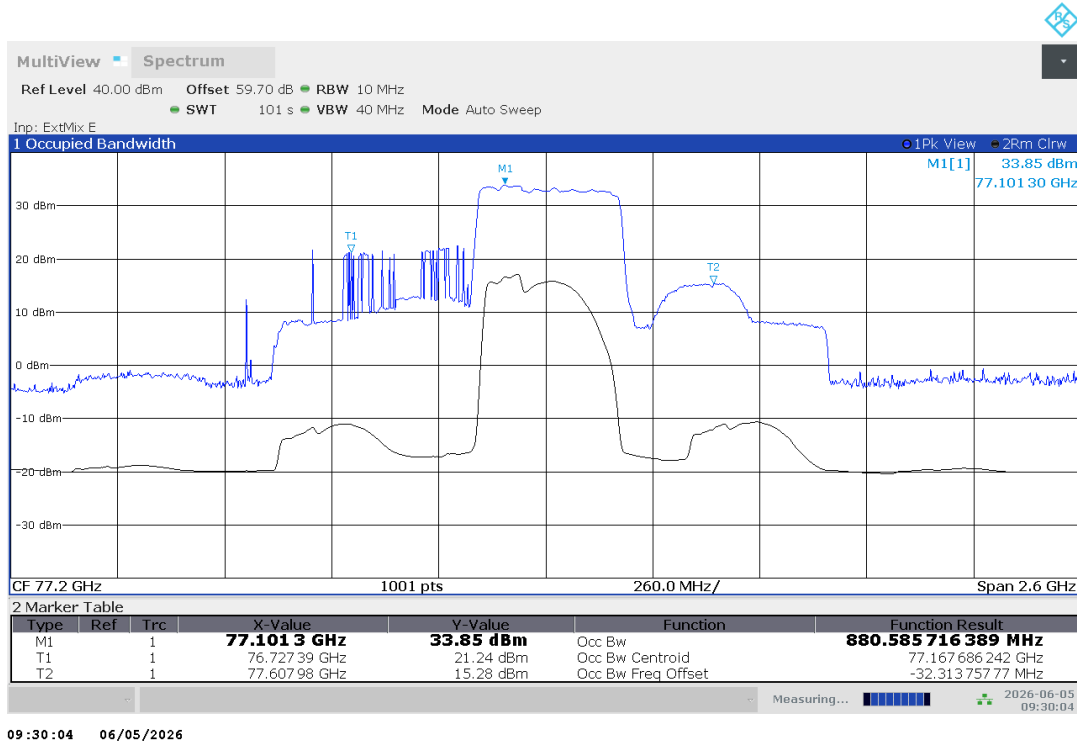

Plot no.12 : OP 1 – OBW – Peak detector – 20.0 °C – V_{min} – RBW = 10 MHz




Plot no.13 : OP 1 – OBW – Peak detector – 20.0 °C – V_{max} – RBW = 10 MHz




Plot no.14 : OP 1 – OBW – Peak detector – 30.0 °C – V_{nom} – RBW = 10 MHz




Plot no.15 : OP 1 – OBW – Peak detector – 40.0 °C – V_{nom} – RBW = 10 MHz

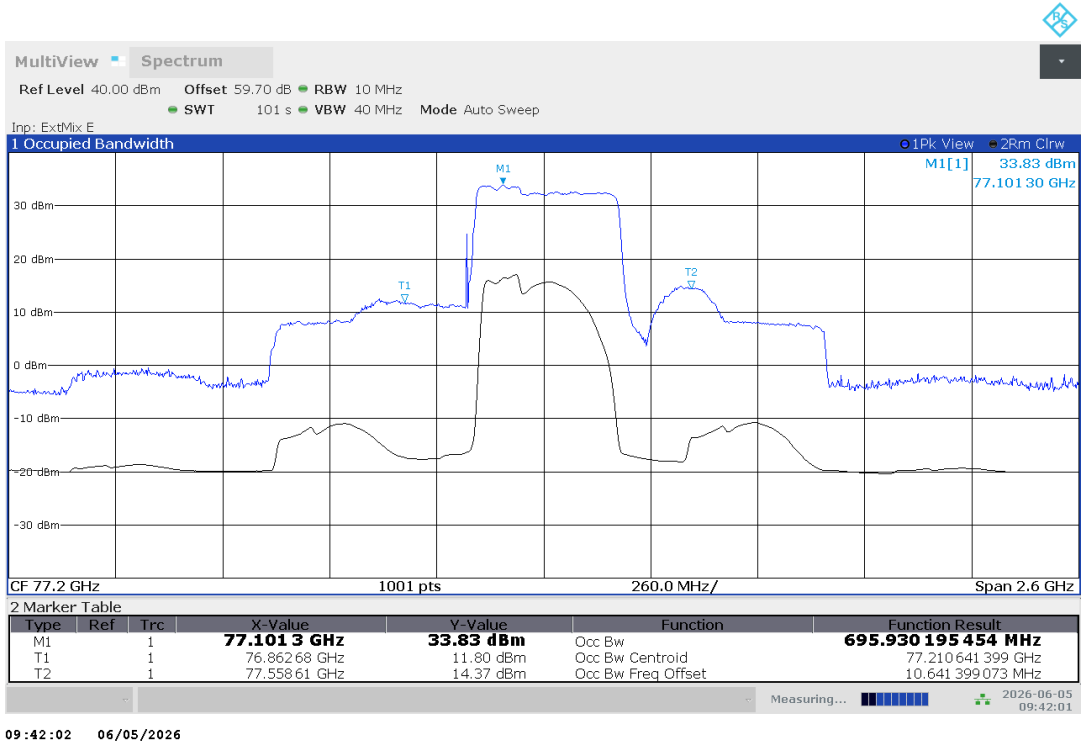

Plot no.16 : OP 1 – OBW – Peak detector – 50.0 °C – V_{nom} – RBW = 10 MHz

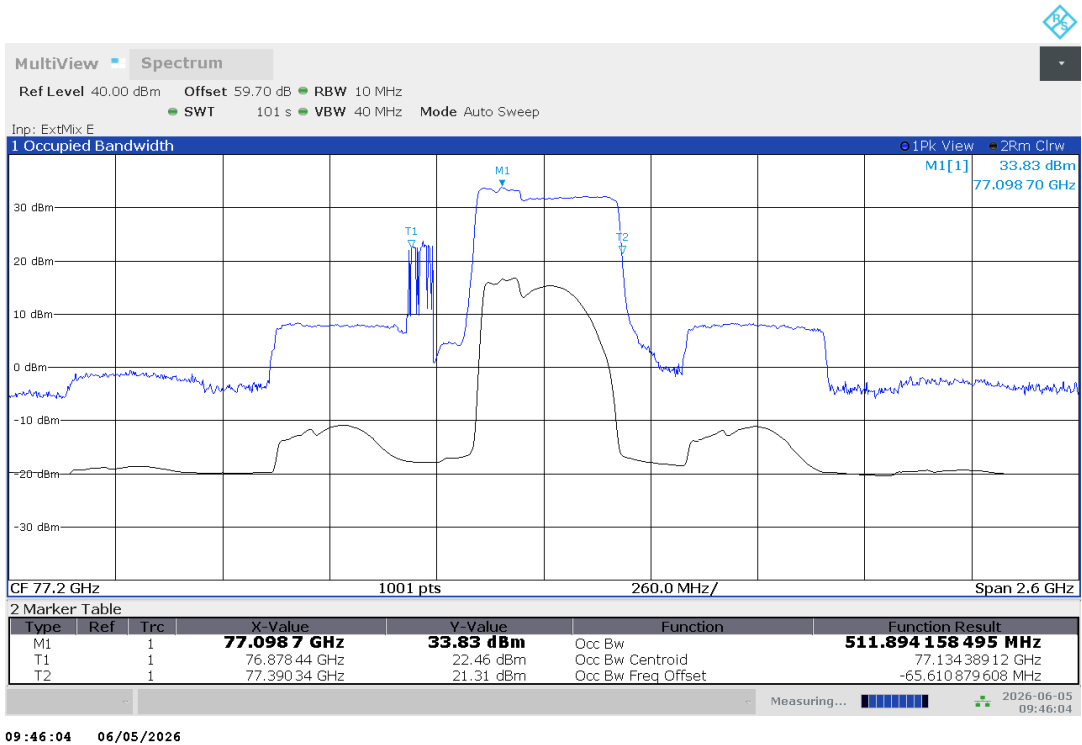


Plot no.17 : OP 1 – OBW – Peak detector – 65.0 °C – V_{nom} – RBW = 10 MHz

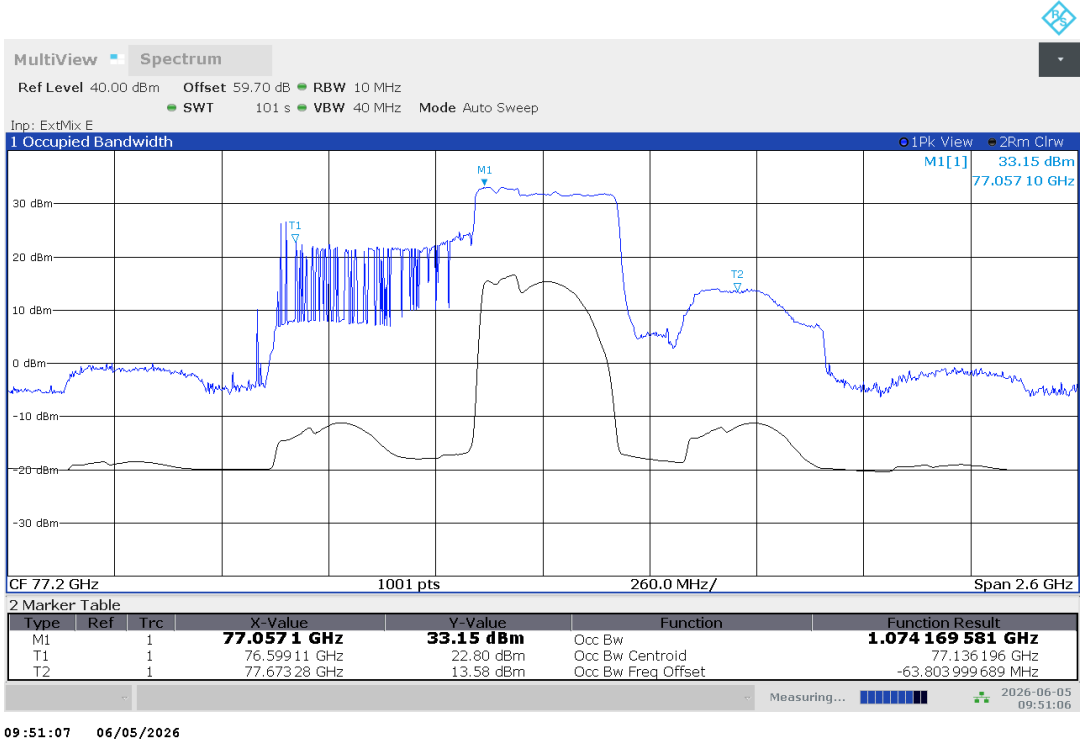


TR No.: 25112181-49917-0

2026-06-24

Plot no.18 : OP 2 – OBW – Peak detector – -40.0 °C – V_{nom} – RBW = 10 MHz

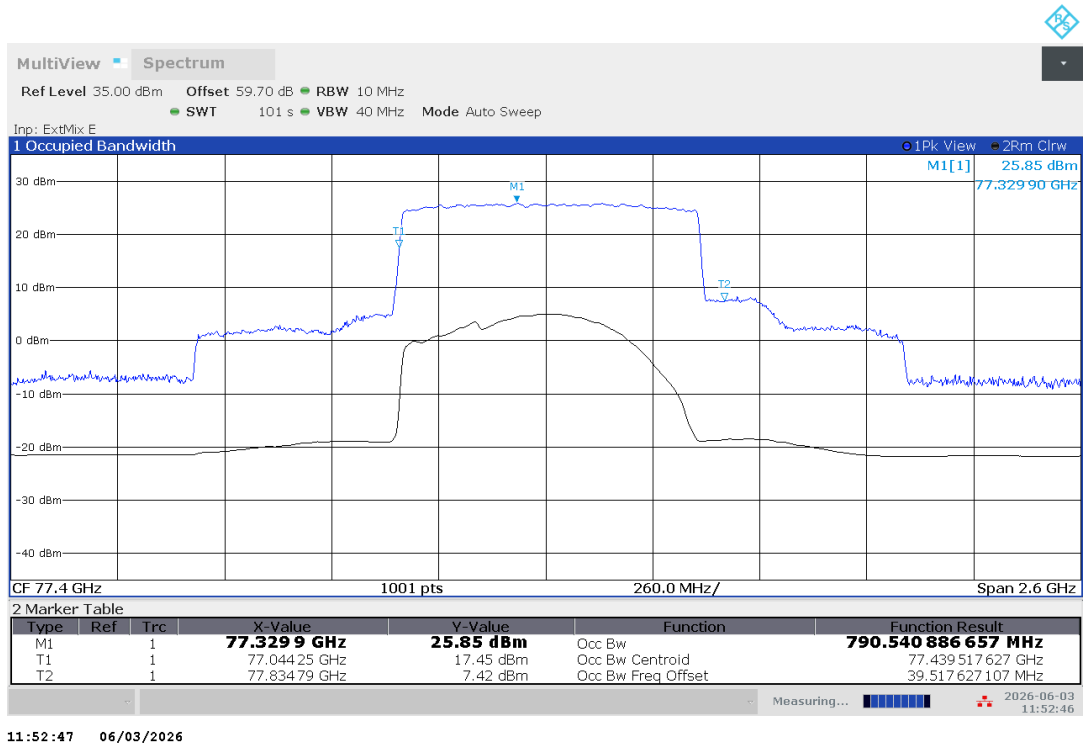


Plot no.19 : OP 2 – OBW – Peak detector – -30.0 °C – V_{nom} – RBW = 10 MHz

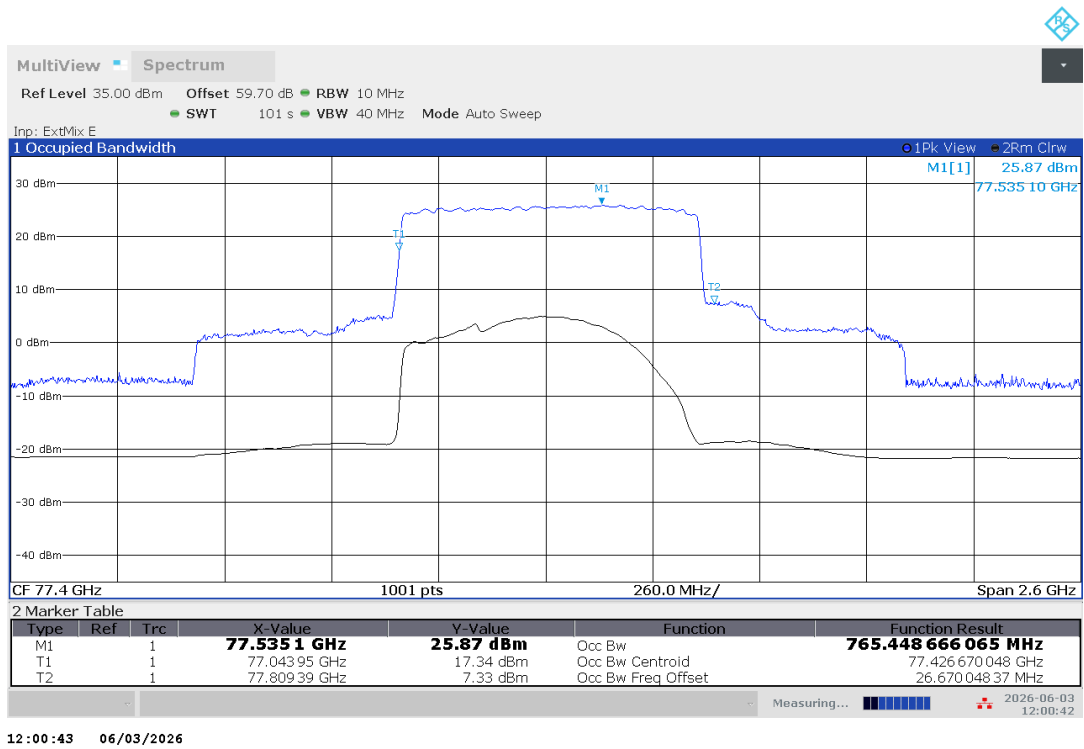


TR No.: 25112181-49917-0

2026-06-24

Plot no.20 : OP 2 – OBW – Peak detector – -20.0 °C – V_{nom} – RBW = 10 MHz

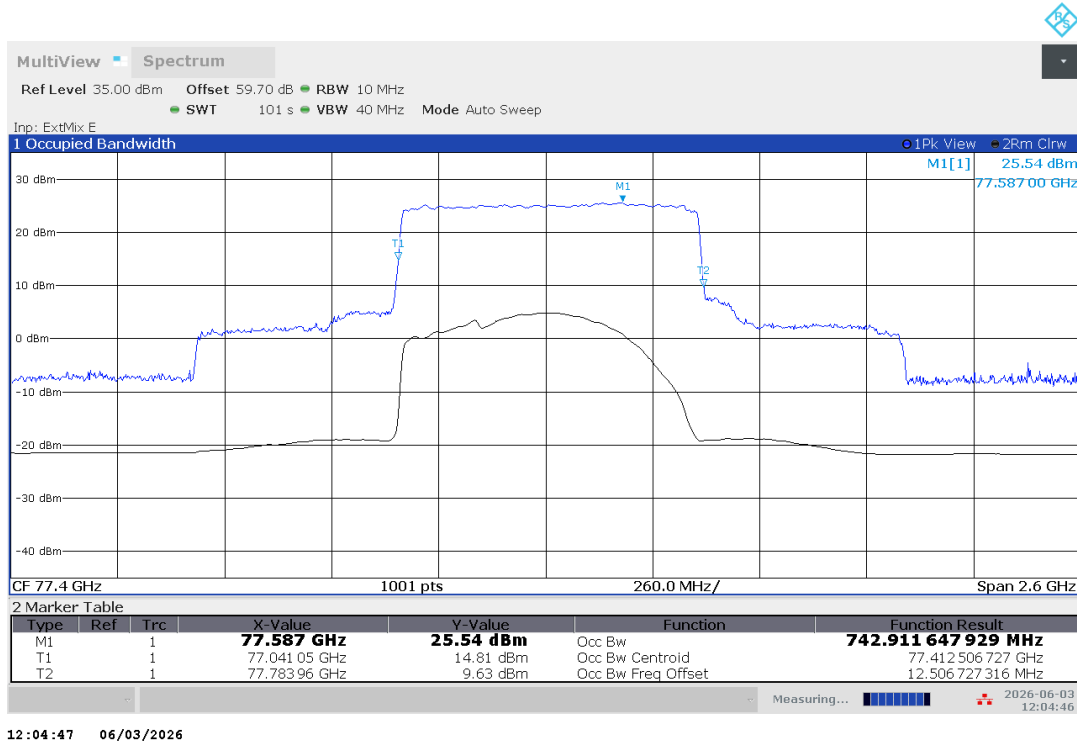


Plot no.21 : OP 2 – OBW – Peak detector – -10.0 °C – V_{nom} – RBW = 10 MHz

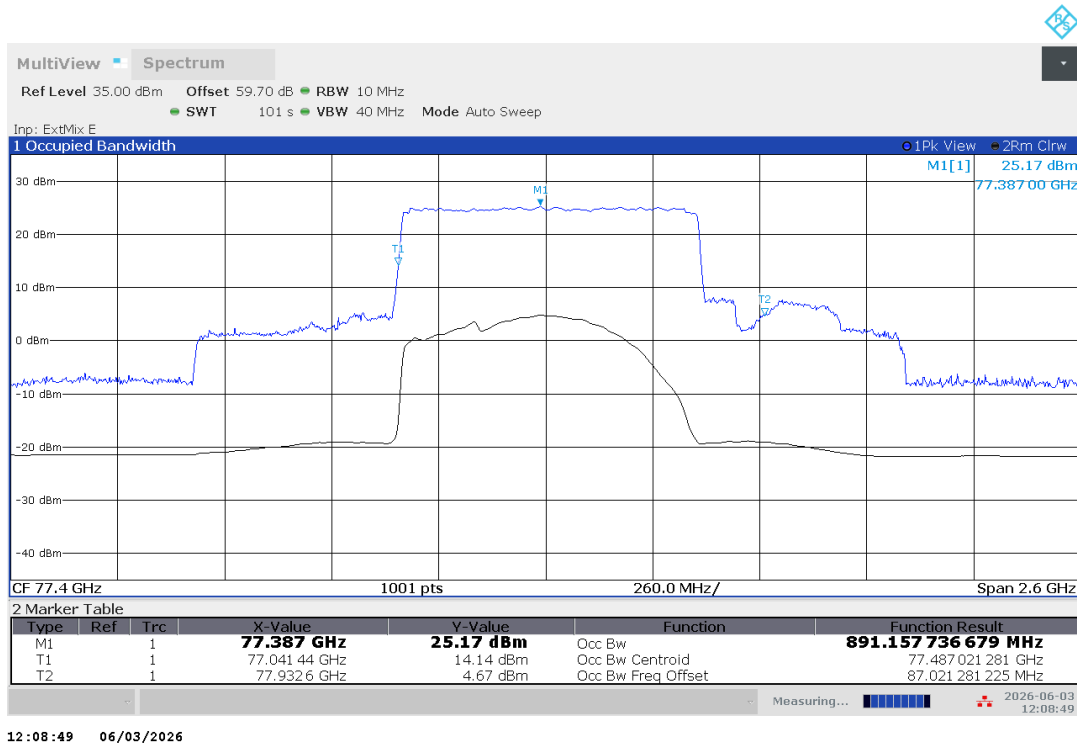


TR No.: 25112181-49917-0

2026-06-24


Plot no.22 : OP 2 – OBW – Peak detector – 0.0 °C – V_{nom} – RBW = 10 MHz

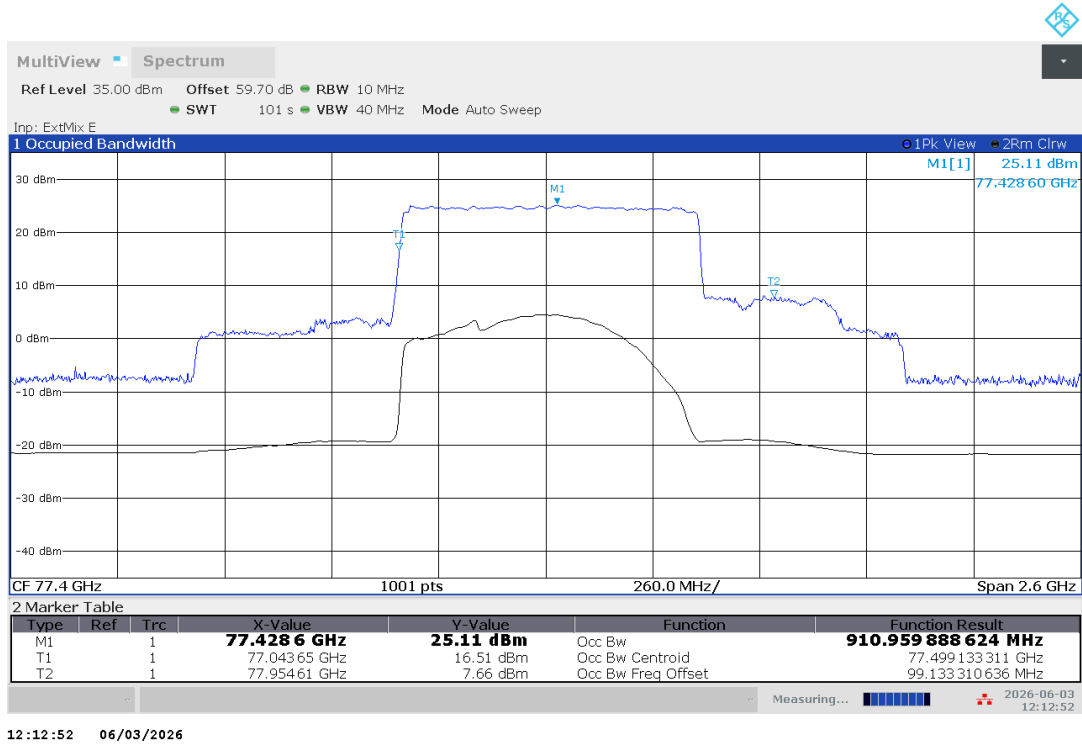

Plot no.23 : OP 2 – OBW – Peak detector – 10.0 °C – V_{nom} – RBW = 10 MHz

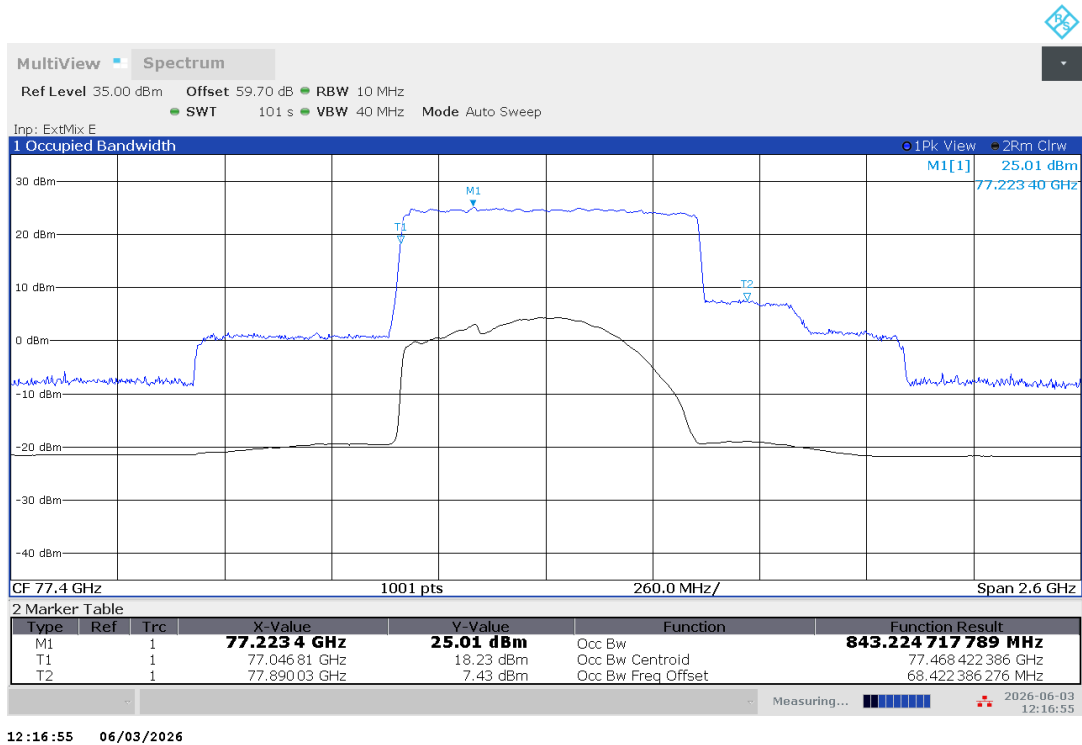


Plot no.24 : OP 2 – OBW – Peak detector – 20.0 °C – V_{nom} – RBW = 10 MHz

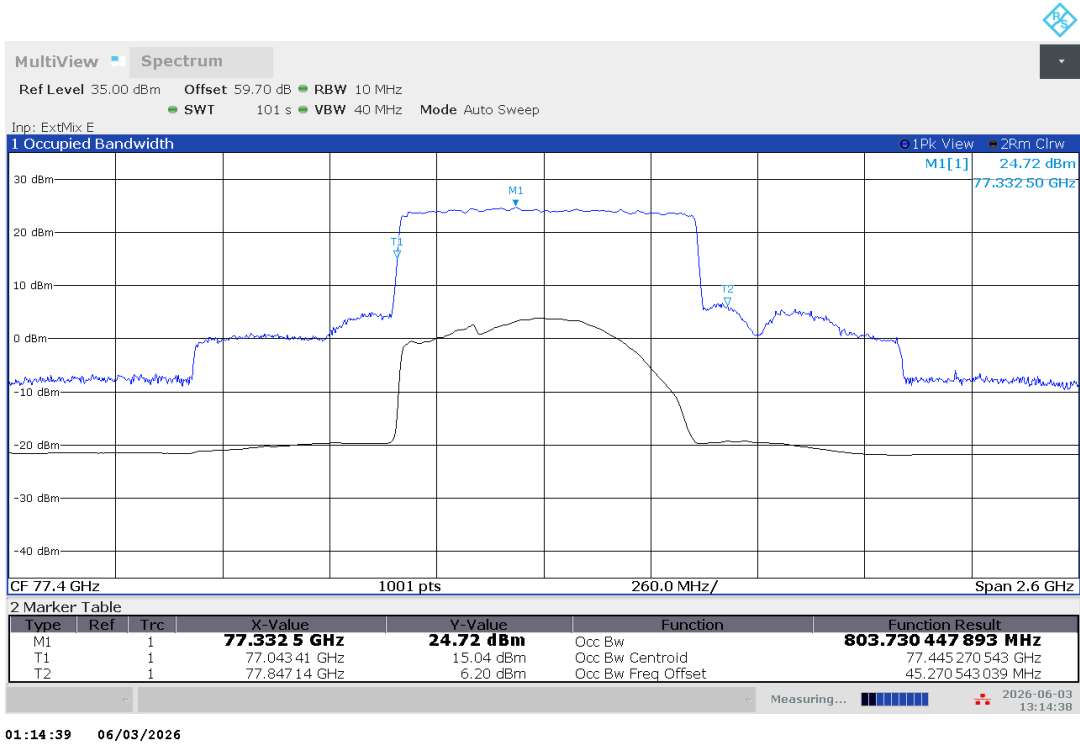


Plot no.25 : OP 2 – OBW – Peak detector – 20.0 °C – V_{min} – RBW = 10 MHz



Plot no.26 : OP 2 – OBW – Peak detector – 20.0 °C – V_{max} – RBW = 10 MHz

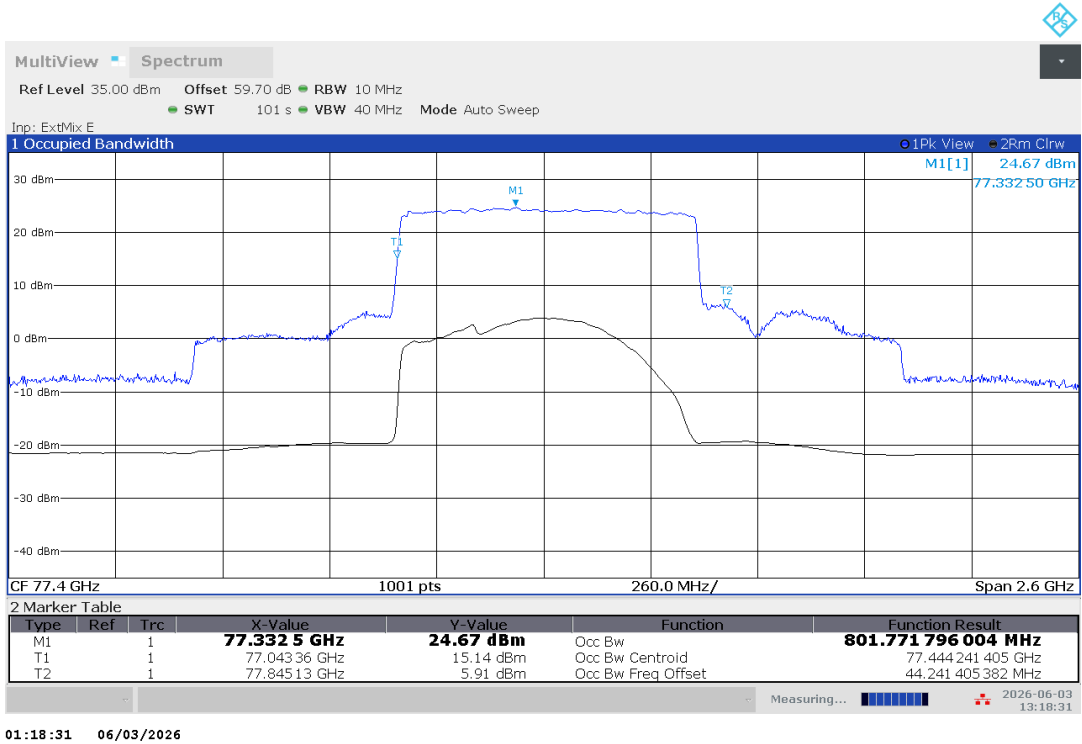


Plot no.27 : OP 2 – OBW – Peak detector – 30.0 °C – V_{nom} – RBW = 10 MHz

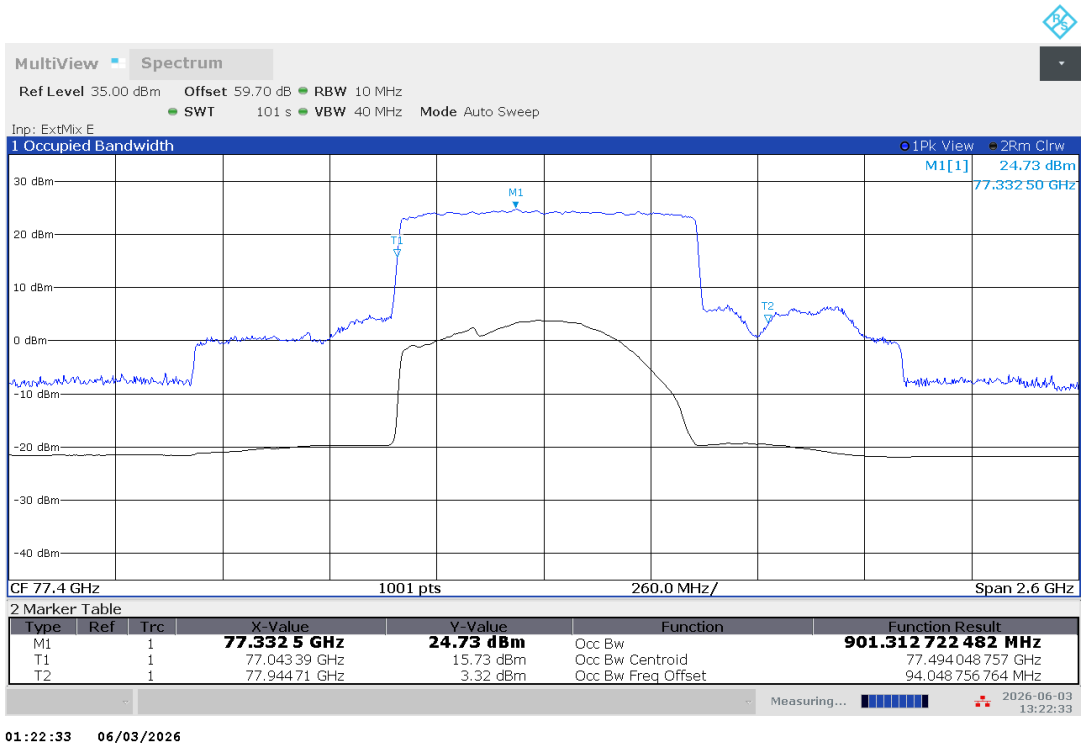


TR No.: 25112181-49917-0

2026-06-24


Plot no.28 : OP 2 – OBW – Peak detector – 40.0 °C – V_{nom} – RBW = 10 MHz

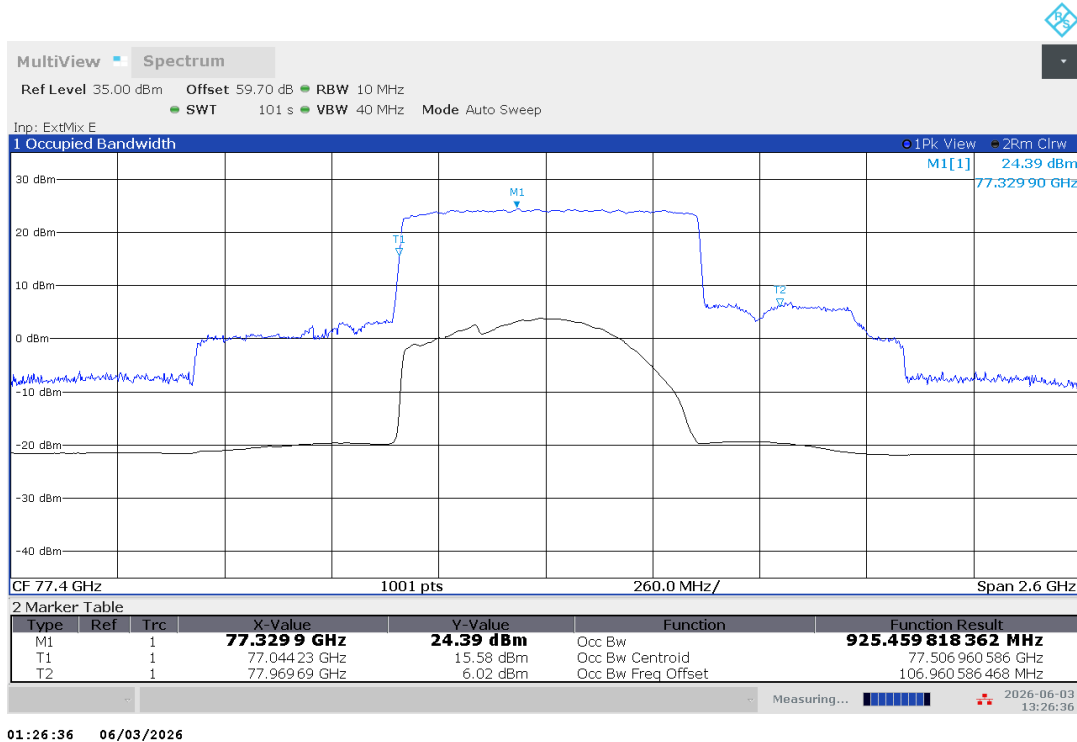

Plot no.29 : OP 2 – OBW – Peak detector – 50.0 °C – V_{nom} – RBW = 10 MHz

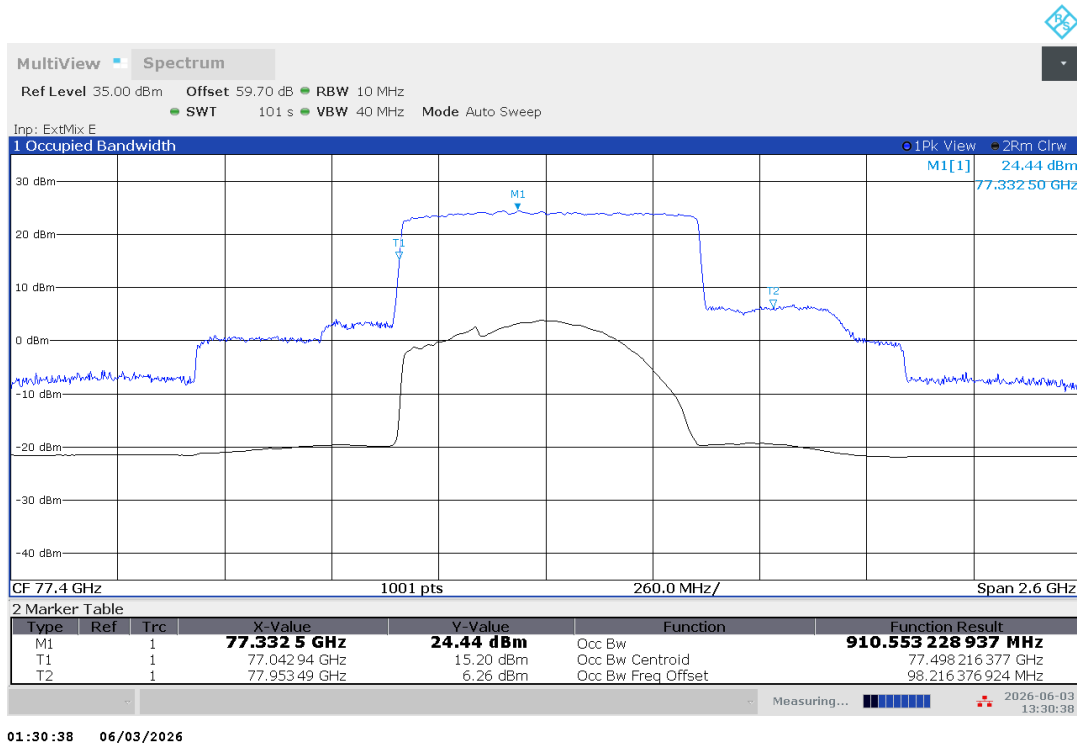

Plot no.30 : OP 2 – OBW – Peak detector – 65.0 °C – V_{nom} – RBW = 10 MHz

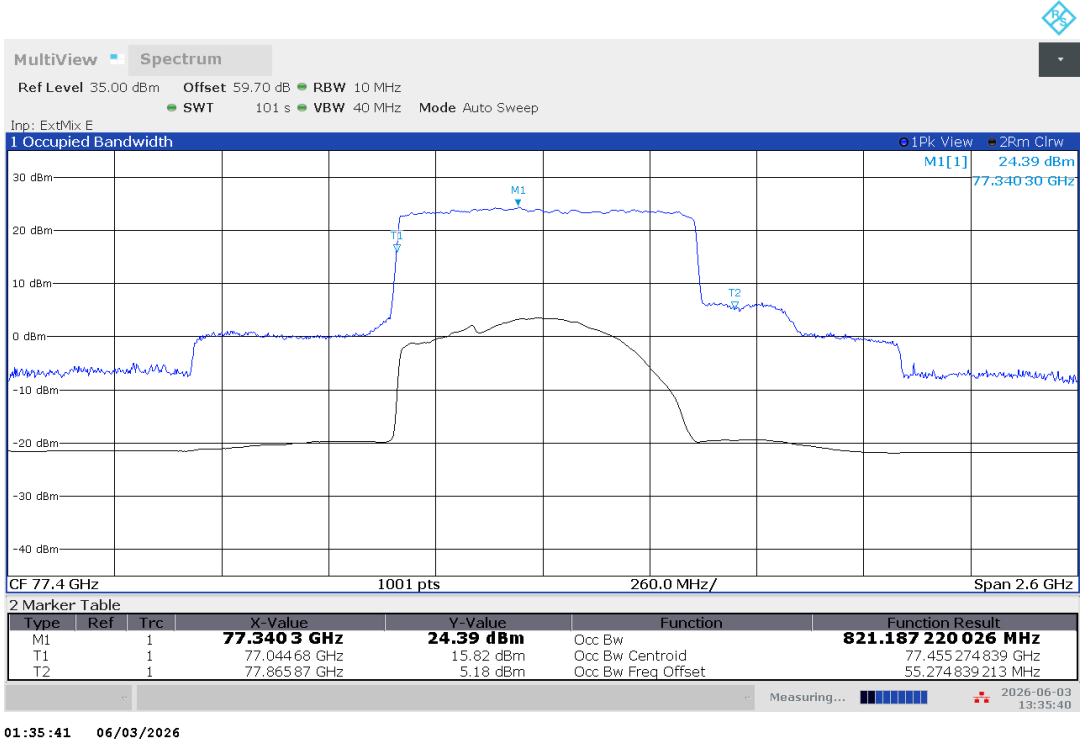

7.4 Field strength of spurious radiation (§2.1053 & §95.3379)

Description

§2.1053 Measurements required: Field strength of spurious radiation.

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

Limits

§95.3379 76-81 GHz Band Radar Service unwanted emissions limits.

(a) The power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:

(1) Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequency [MHz]	Field Strength [$\mu\text{V/m}$] / [dB $\mu\text{V/m}$]	Measurement distance [m]
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0 / 29.5	30
30 – 88	100 / 40.0	3
88 – 216	150 / 43.5	3
216 – 960	200 / 46.0	3
960 – 40 000	500 / 54.0	3

(2) The power density of radiated emissions outside the 76-81 GHz band above 40.0 GHz shall not exceed the following, based on measurements employing an average detector with a 1 MHz RBW:

Frequency [GHz]	Power Density / EIRP	Measurement distance [m]
40 – 200	600 pW/cm ² → -1.7 dBm	3
200 – 243	1000 pW/cm ² → +0.5 dBm	3

Note

Measurements with the peak detector are also suitable to demonstrate compliance of an EUT, as long as the required resolution bandwidth is used, because peak detection will yield amplitudes equal to or greater than amplitudes measured with RMS detector. The measurement data from a spectrum analyser peak detector will represent the worst-case results (see ANSI C63.26, chapter D2: general considerations).

Calculation of the far field distance (Rayleigh distance):

The aperture dimensions of these horn antennas shall be small enough so that the measurement distance in meters is equal to or greater than the Rayleigh distance (i.e. $R_m = 2D^2 / \lambda$), where D is the largest linear dimension (i.e. width or height) of the antenna aperture in m and λ is the free-space wavelength in meters at the frequency of measurement.

Antenna type	Frequency range [GHz]	D [m]	Highest frequency in use [GHz]	Far field distance R_m [m]
20240-20	18.0 – 26.5	0.0520	26.5	0.478
22240-20	26.5 – 40.0	0.0342	40	0.312
23240-20	33.0 – 50.0	0.0280	50	0.261
24240-20	40.0 – 60.0	0.0230	60	0.212
25240-20	50.0 – 75.0	0.0185	75	0.171
26240-20	60.0 – 90.0	0.0150	90	0.135
27240-20	75.0 – 110	0.0124	110	0.113
28240-20	90.0 – 140	0.0100	140	0.093
29240-20	110 – 170	0.0085	170	0.082
30240-20	140 – 220	0.0068	220	0.068
32240-20	220 – 325	0.00446	243	0.032

Used test distances

Up to 18 GHz: 3.00 m
18 – 40 GHz: 1.00 m
40 – 75 GHz: 1.00 m
75 – 78 GHz: 1.50 m
78 – 90 GHz: 1.50 m
90 – 140 GHz: 0.25 m
140 – 325 GHz: 0.50 m
In-band / OOB: 3.00 m

Test setup: 8.1 – 8.4 (in case of field strength measurements below 40 GHz: test distance correction factor of 20dB/decade is already considered in the plots / test result table)


Test results

Channel / Mode	Frequency [GHz]	Detector	Test distance [m]	Level [dBμV/dBm @LD]	Limit [dBμV/dBm @LD]	Margin [dB]
No critical peaks found. Please refer to plots.						
N/A	N/A	N/A	N/A	N/A	N/A	N/A


Note:

LD = Limit Distance of 300m / 30m / 3m depending on frequency range, see limit table

Plot no. 31: OP 1 - radiated spurious emissions 9 kHz – 30 MHz, hor./vert. polarization

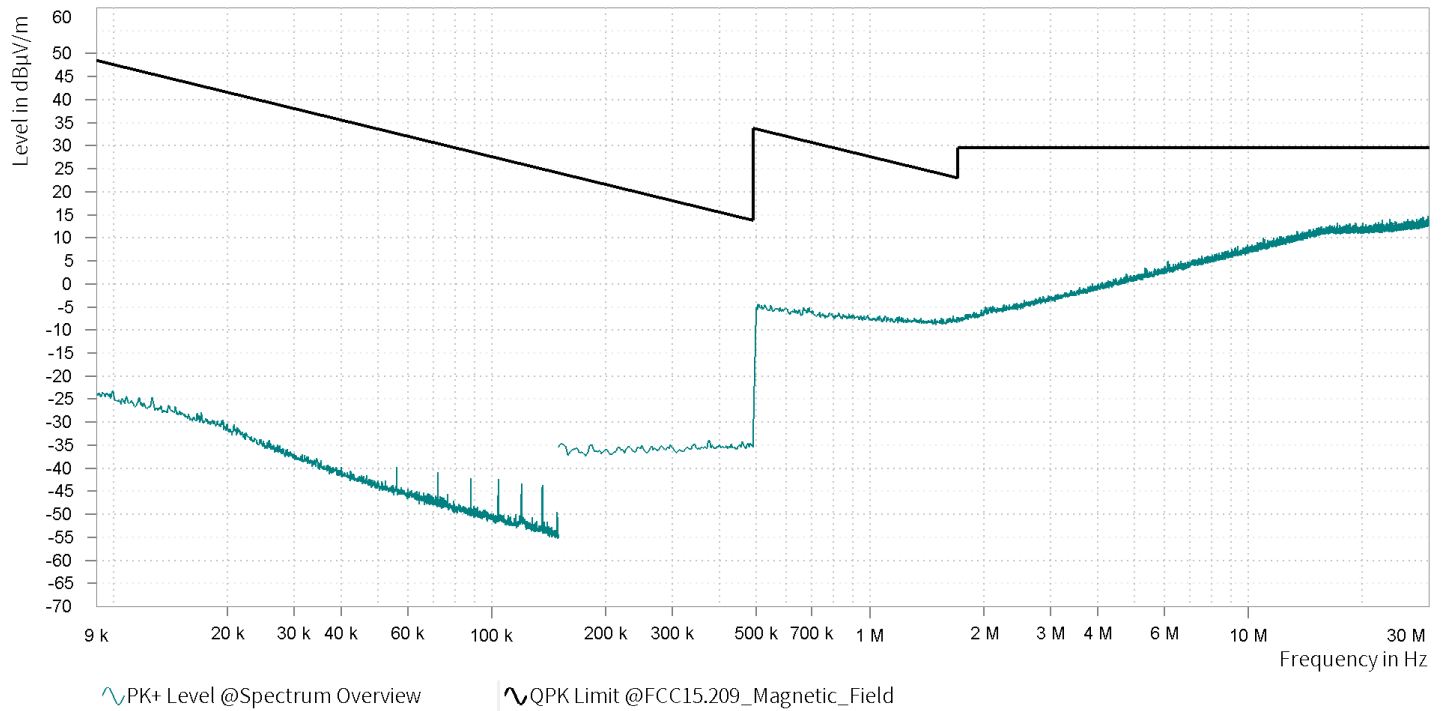


Plot no. 32: OP 1 - radiated spurious emissions 30 MHz – 1 GHz, hor./vert. polarization

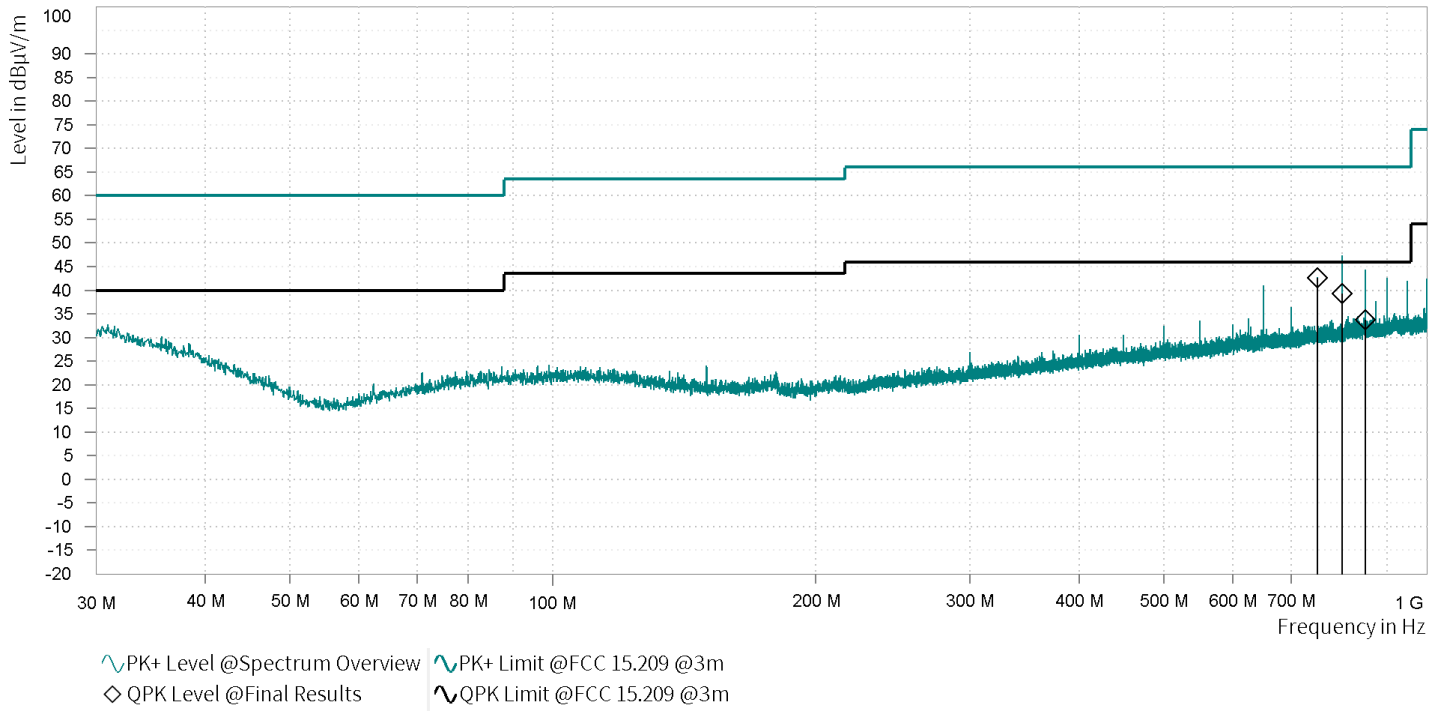


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Meas. BW [kHz]	Comment
1	749,997	42,59	46,00	3,41	19,95	H	284	120,000	
1	799,996	39,22	46,00	6,78	20,51	V	5	120,000	
1	849,995	33,80	46,00	12,20	20,98	V	-4	120,000	

Plot no. 33: OP 1 - radiated spurious emissions 1 GHz – 18 GHz, hor./vert. polarization

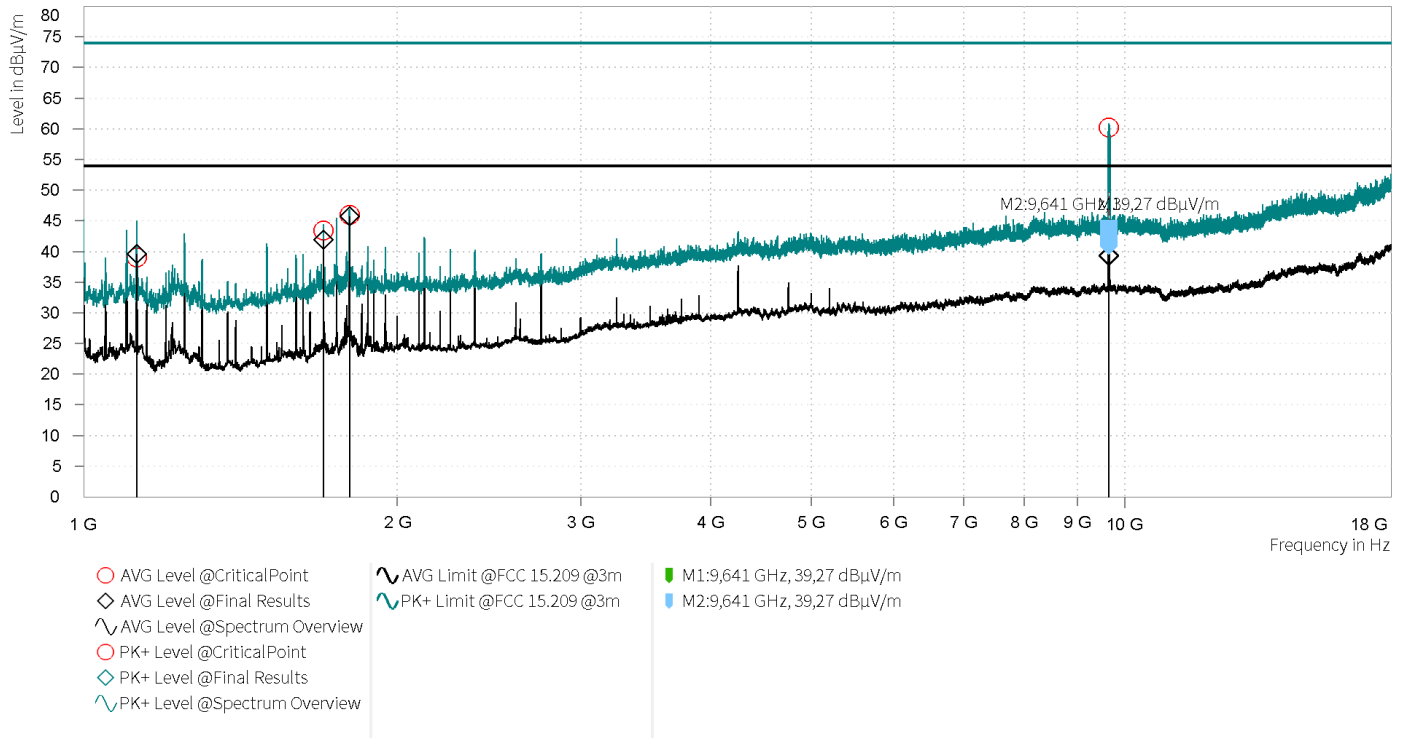


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
1	1.125,000	39,62	54,00	14,38	-1,43	H	105	188,5	1,50
1	1.700,000	41,97	54,00	12,03	1,59	H	105,1	181	1,50
1	1.799,950	45,73	54,00	8,27	1,74	H	105	189,4	1,50
1	9.641,075	39,32	54,00	14,68	15,09	H	104,9	283,4	1,50
1	9.641,325	39,27	54,00	14,73	15,09	H	105,1	283,4	1,50


Plot no.34 : OP 1 - radiated spurious emissions 18 GHz – 26.5 GHz, hor./vert. polarization.

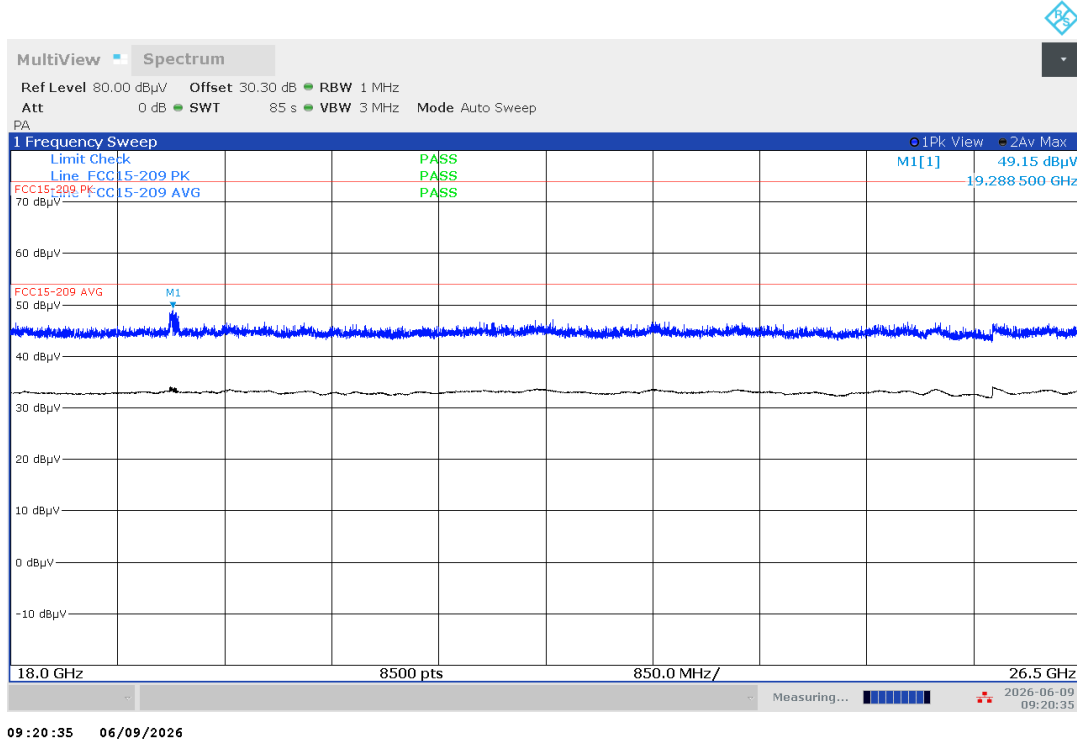


Plot no.35 : OP 1 - radiated spurious emissions 26.5 GHz – 40 GHz, hor./vert. polarization.

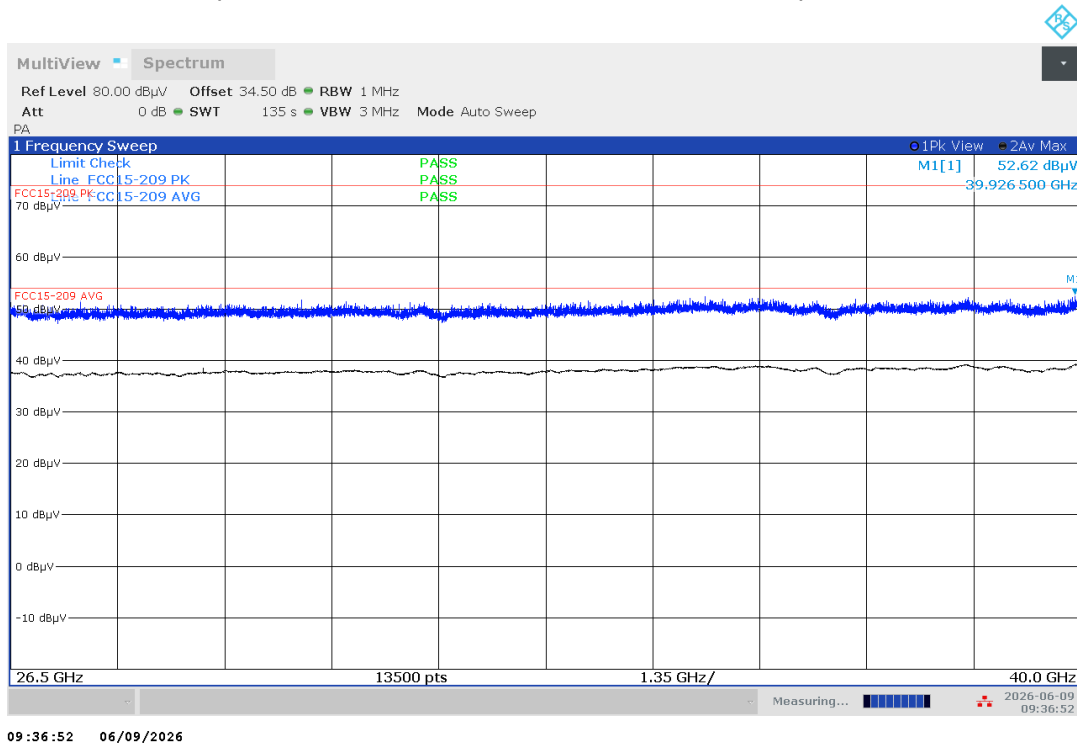


Plot no.36 : OP 1 - radiated spurious emissions 40 GHz – 60 GHz, hor./vert. polarization.

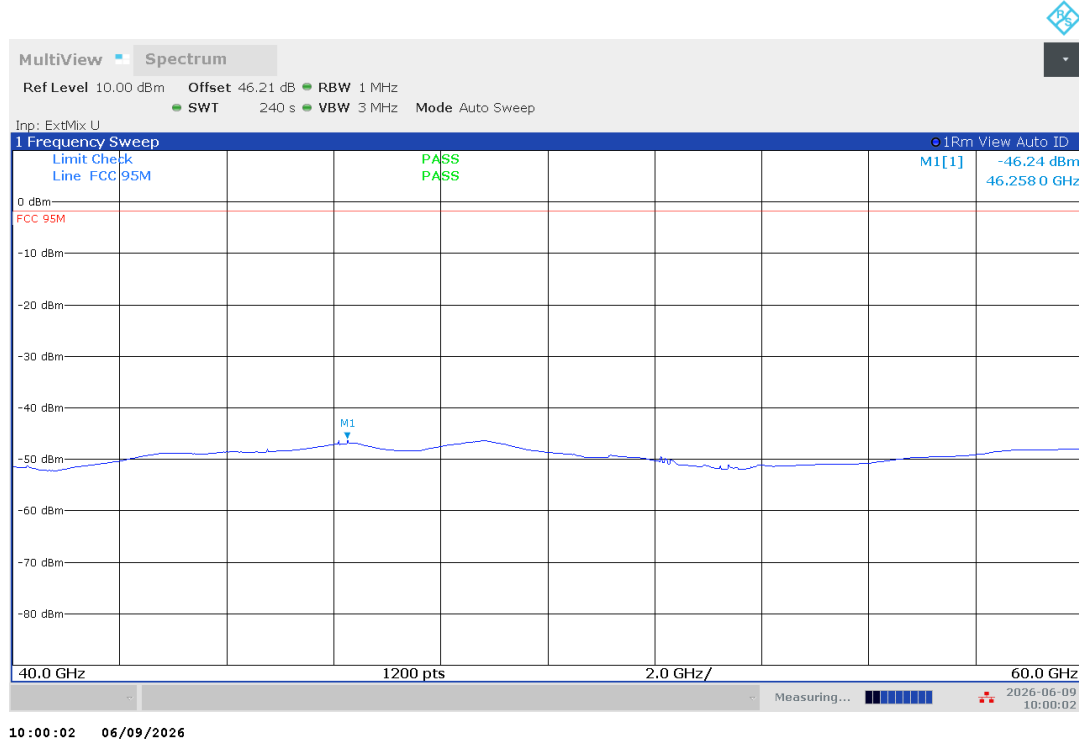


Plot no.37 : OP 1 - radiated spurious emissions 60 GHz – 76 GHz, hor./vert. polarization.

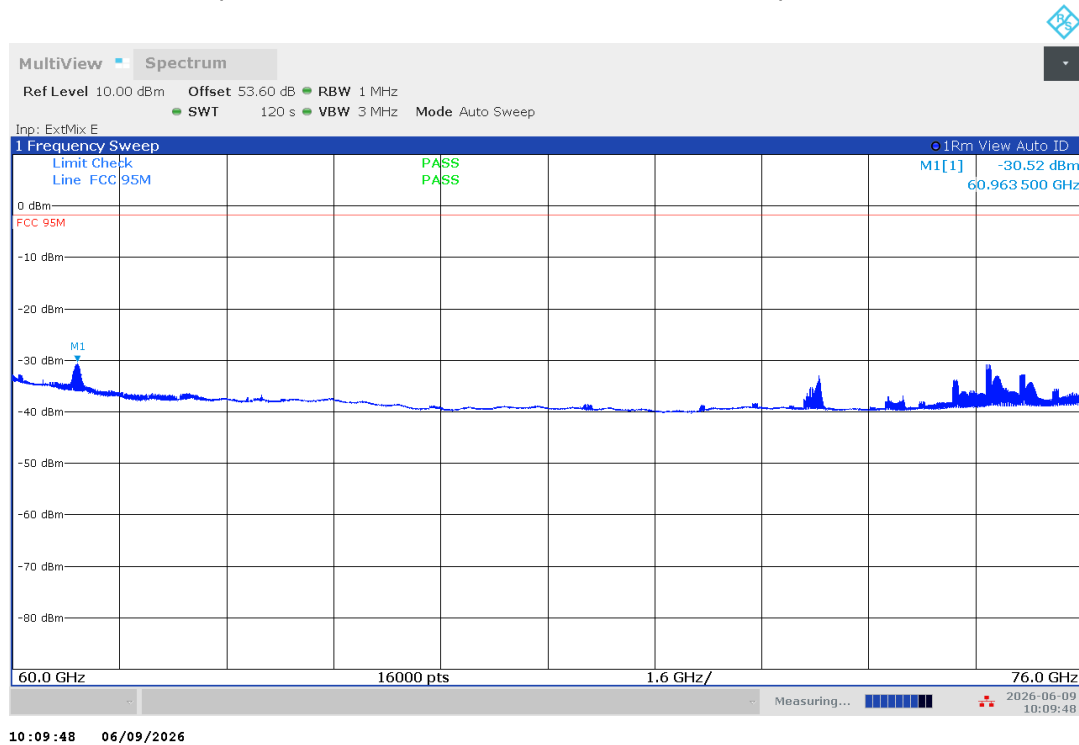


Plot no.38 : OP 1 - radiated spurious emissions 78 GHz – 84 GHz, hor./vert. polarization.

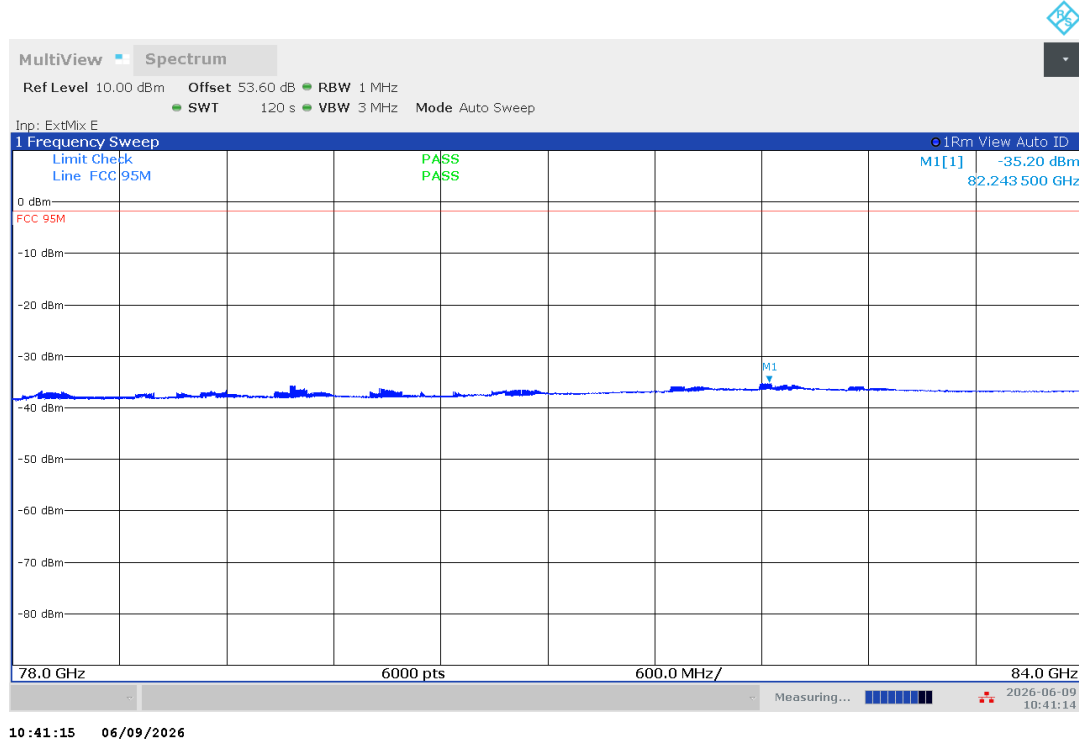


Plot no.39 : OP 1 - radiated spurious emissions 84 GHz – 110 GHz, hor./vert. polarization.

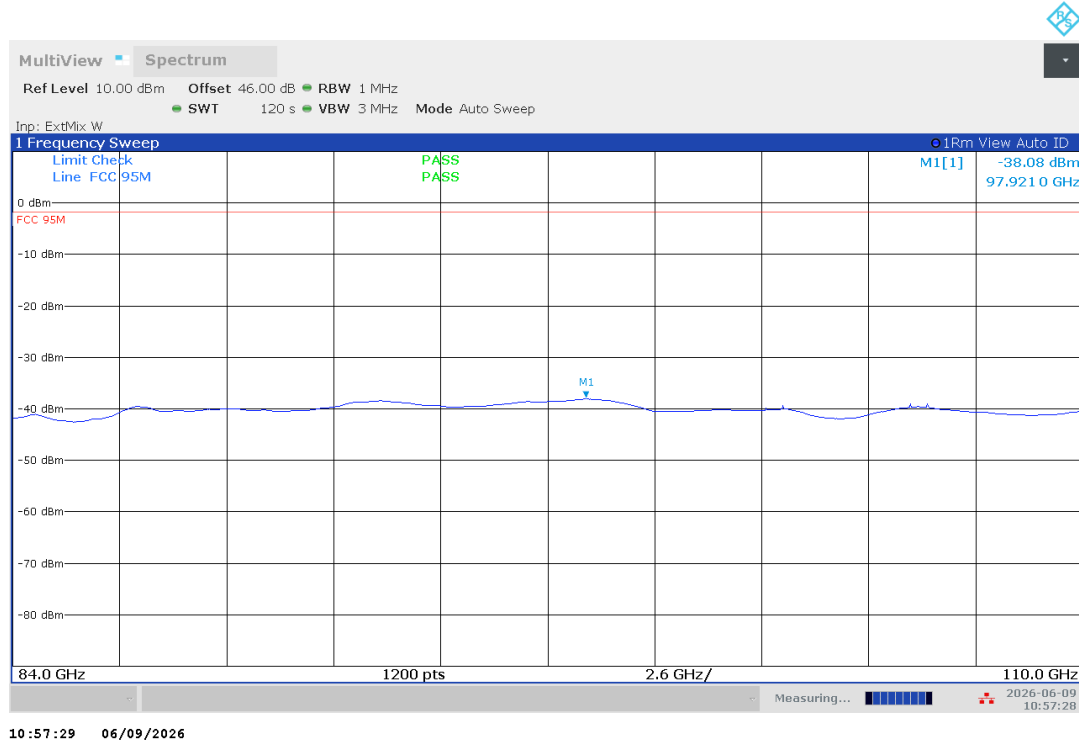


Plot no.40 : OP 1 - radiated spurious emissions 110 GHz – 170 GHz, hor./vert. polarization.

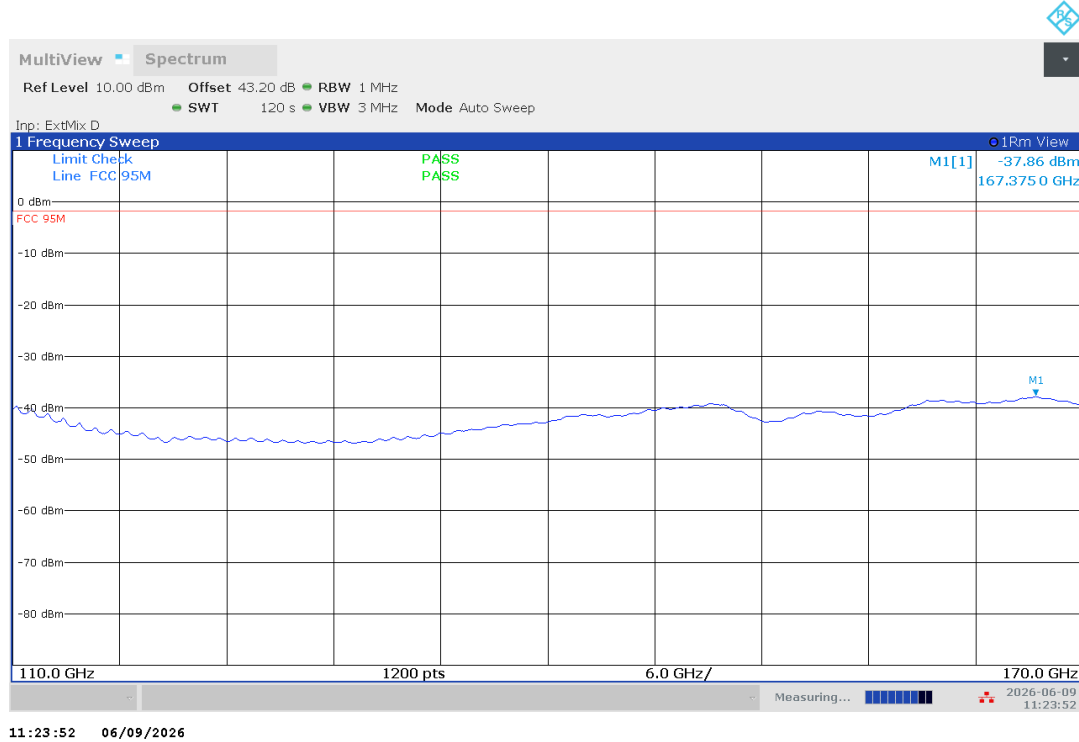

Plot no.41 : OP 1 - radiated spurious emissions 170 GHz – 220 GHz, hor./vert. polarization.

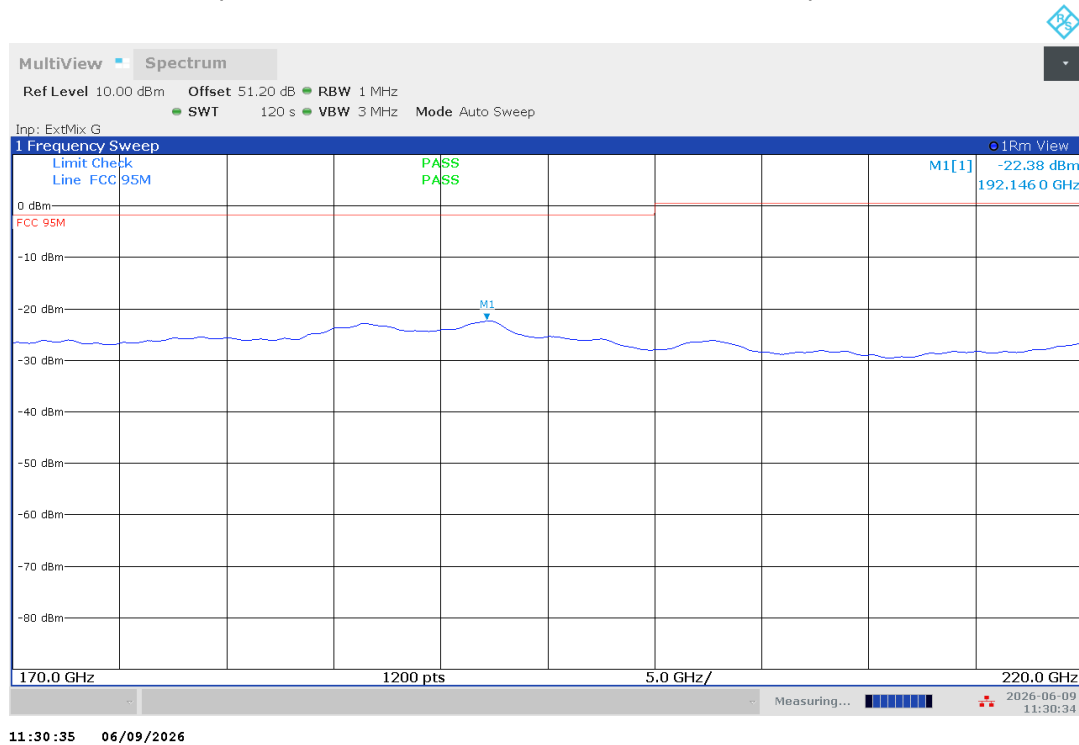


Plot no.42 : OP 1 - radiated spurious emissions 220 GHz – 325 GHz, hor./vert. polarization.

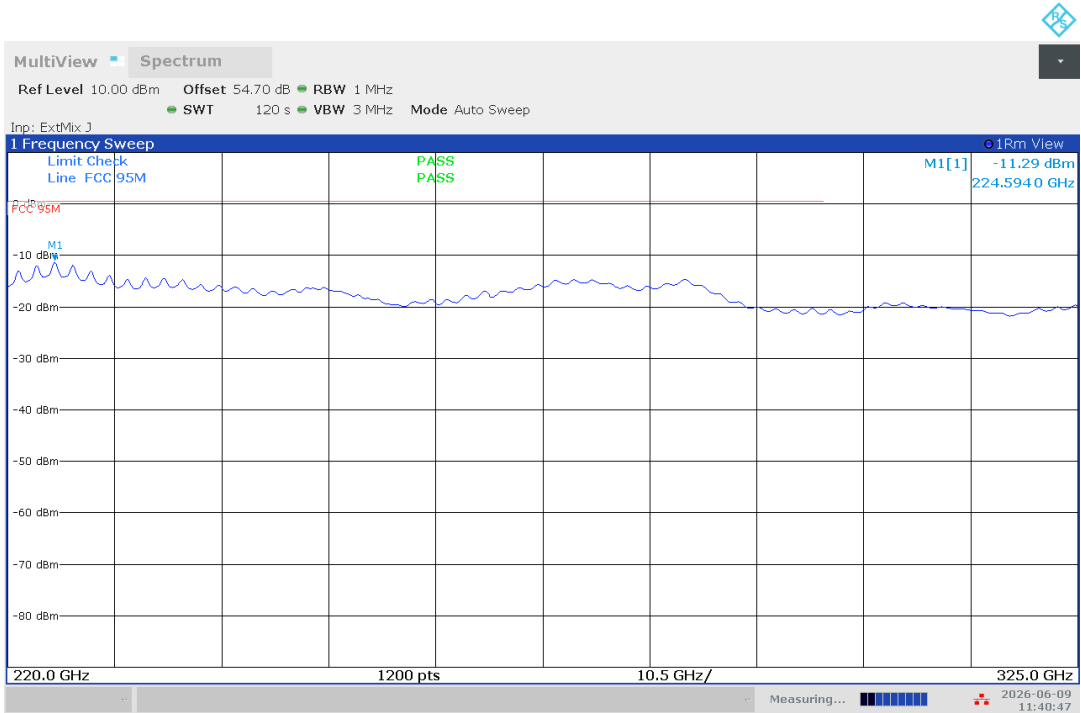


11:40:48 06/09/2026

Plot no. 43: OP 1 - radiated spurious emissions 9 kHz – 30 MHz, hor./vert. polarization

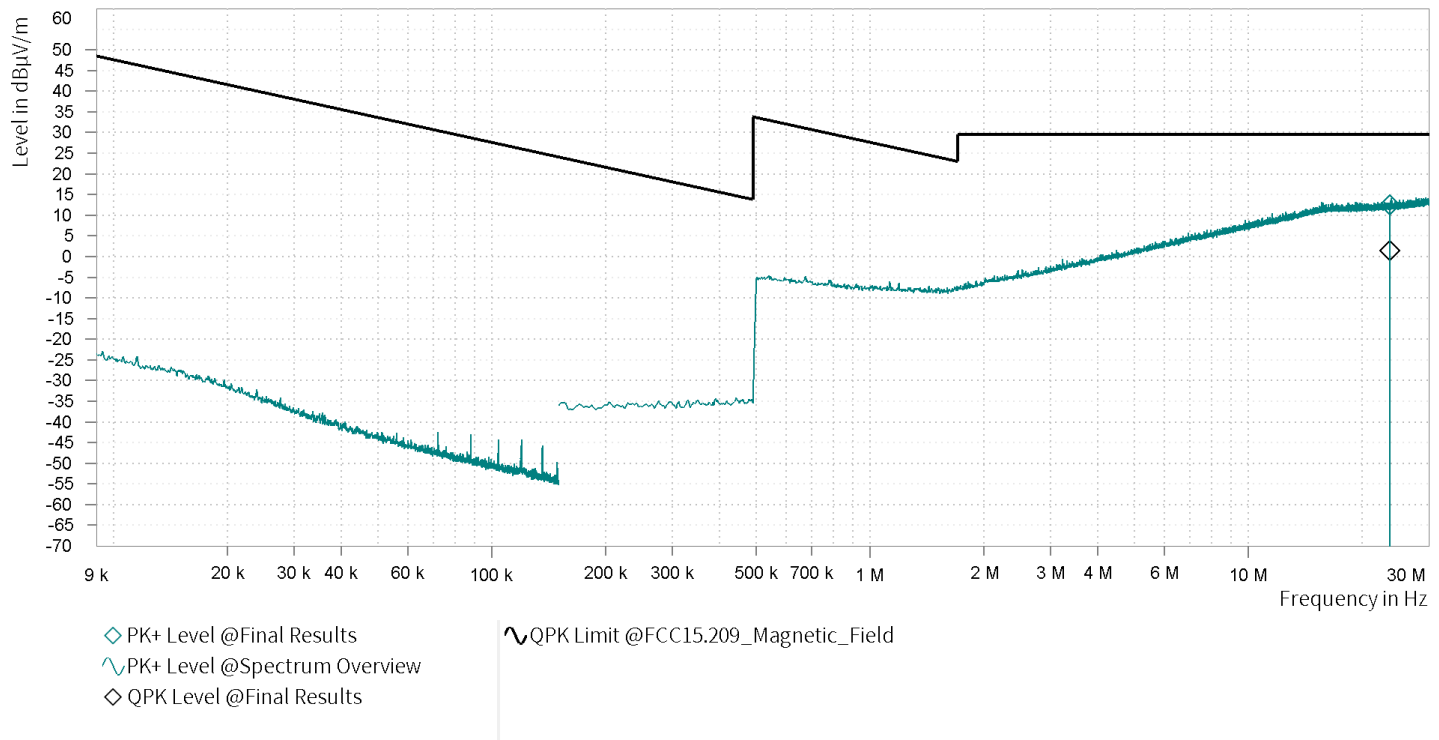


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	PK+ Level [dBµV/m]	PK+: QPK Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Azimuth [deg]	Meas. BW [kHz]	Comment
2	23,667	1,45	29,54	28,09	12,42	29,54	17,12	1,03	190	9,000	

Plot no. 44: OP 1 - radiated spurious emissions 30 MHz – 1 GHz, hor./vert. polarization

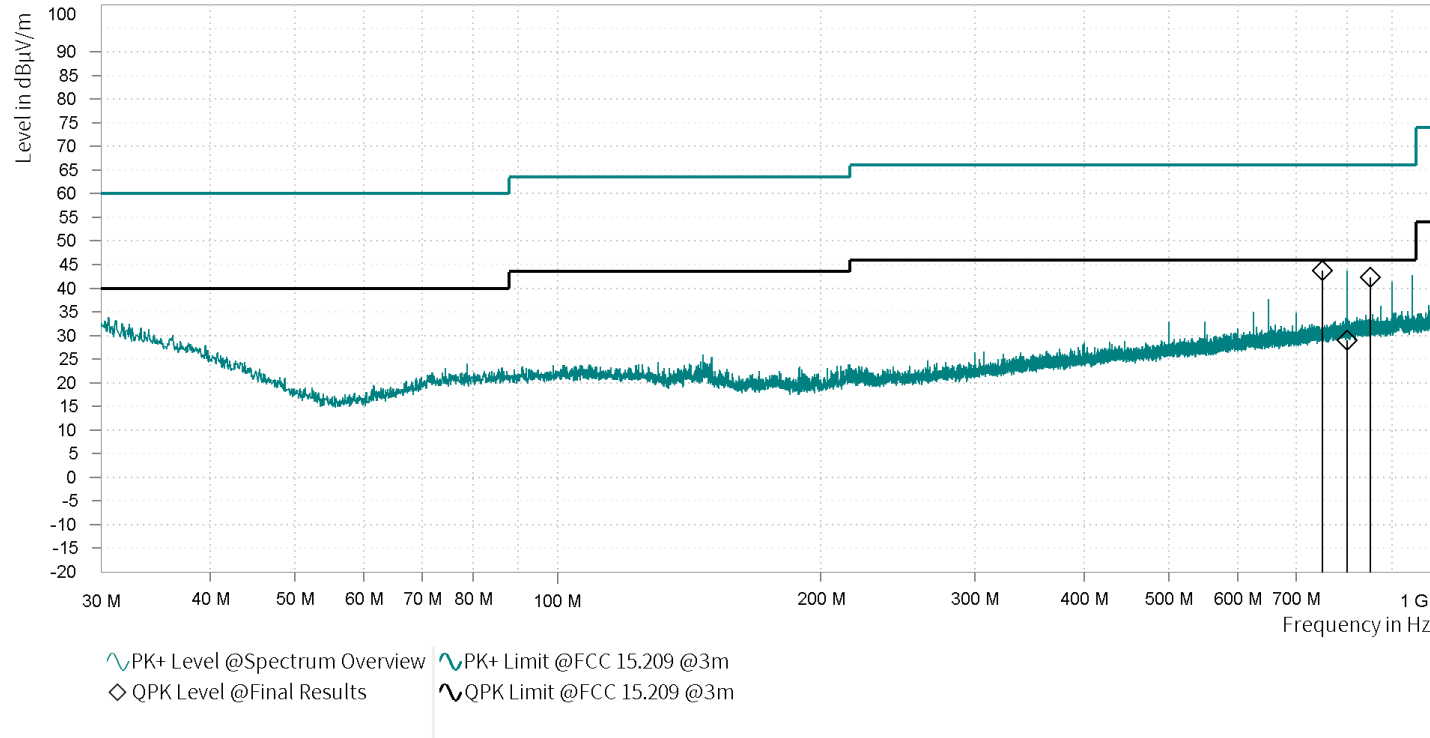


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Meas. BW [kHz]	Comment
1	749,994	43,73	46,00	2,27	19,95	H	96	120,000	
1	799,994	28,99	46,00	17,01	20,51	V	34	120,000	
1	849,994	42,35	46,00	3,65	20,98	H	56	120,000	

Plot no. 45: OP 1 - radiated spurious emissions 1 GHz – 18 GHz, hor./vert. polarization

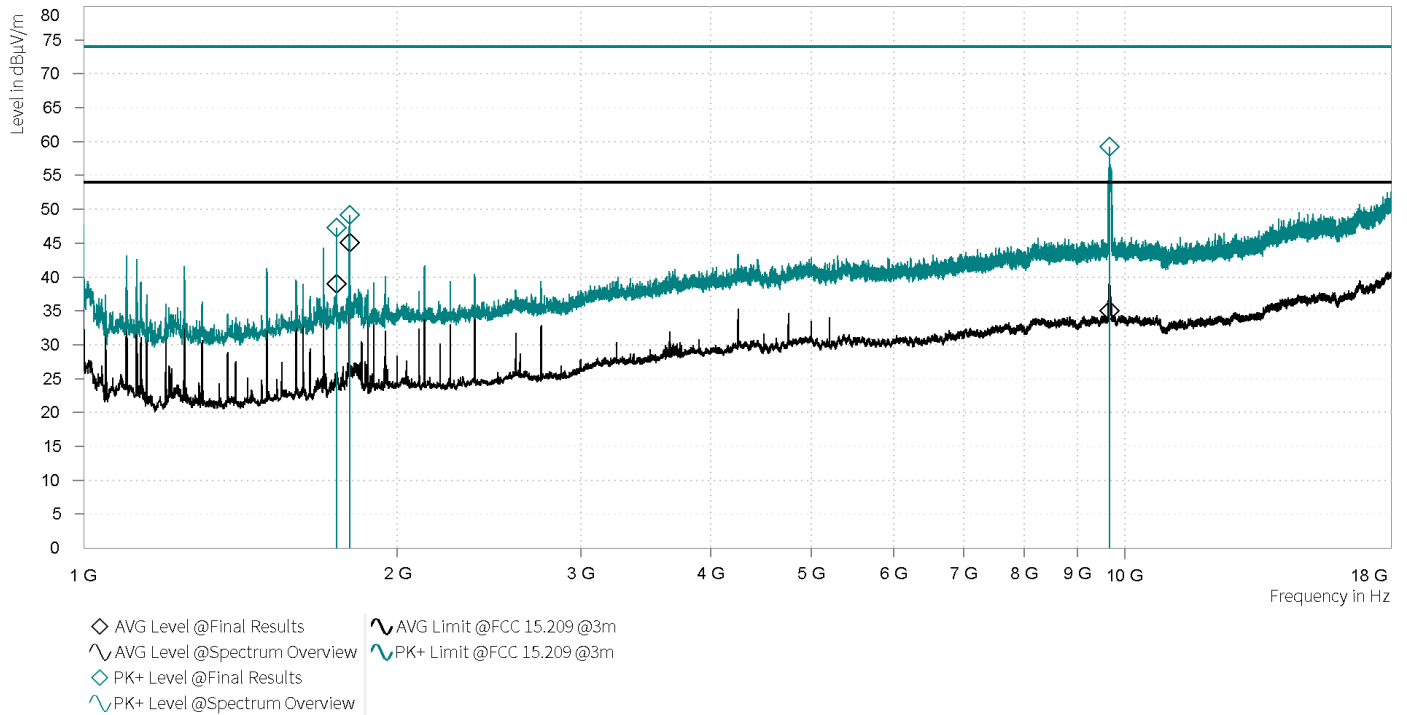


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
1	1.749,975	47,31	74,00	26,69	38,96	54,00	15,04	1,30	H	103,7	188,8	1,50
1	1.800,050	49,17	74,00	24,83	45,09	54,00	8,91	1,74	H	105	187,7	1,50
1	9.657,625	59,20	74,00	14,80	35,06	54,00	18,94	15,09	H	75	308,4	1,50


Plot no.46 : OP 2 - radiated spurious emissions 18 GHz – 26.5 GHz, hor./vert. polarization.

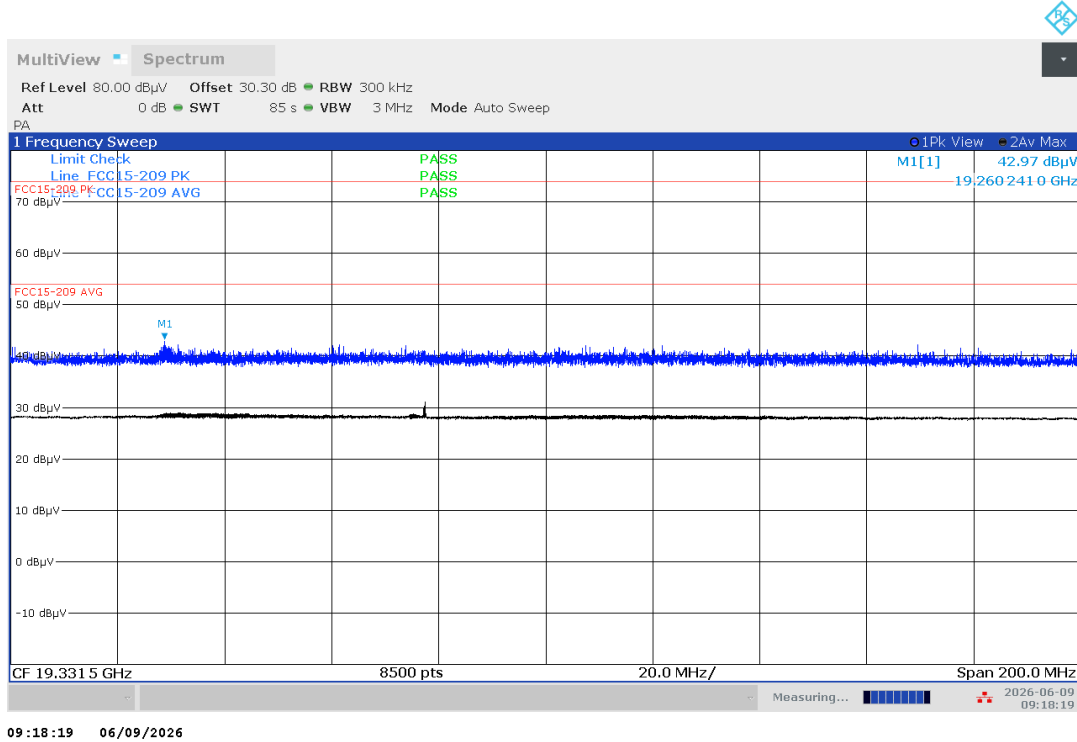


Plot no.47 : OP 2 - radiated spurious emissions 26.5 GHz – 40 GHz, hor./vert. polarization.

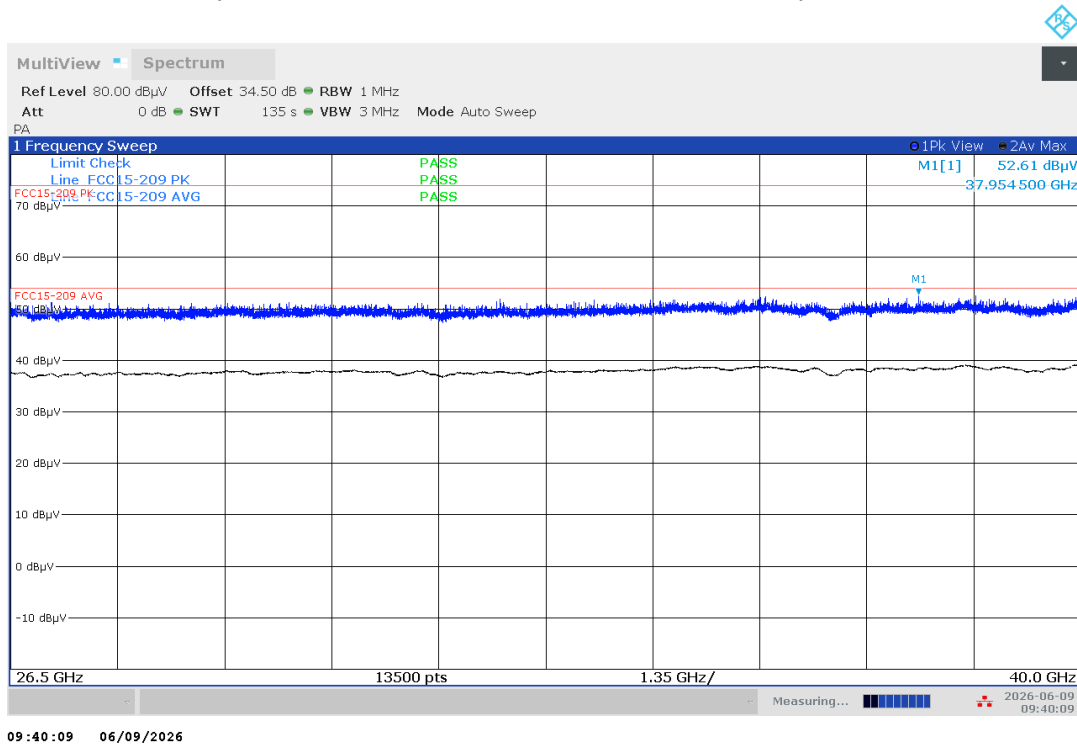


Plot no.48 : OP 2 - radiated spurious emissions 40 GHz – 60 GHz, hor./vert. polarization.

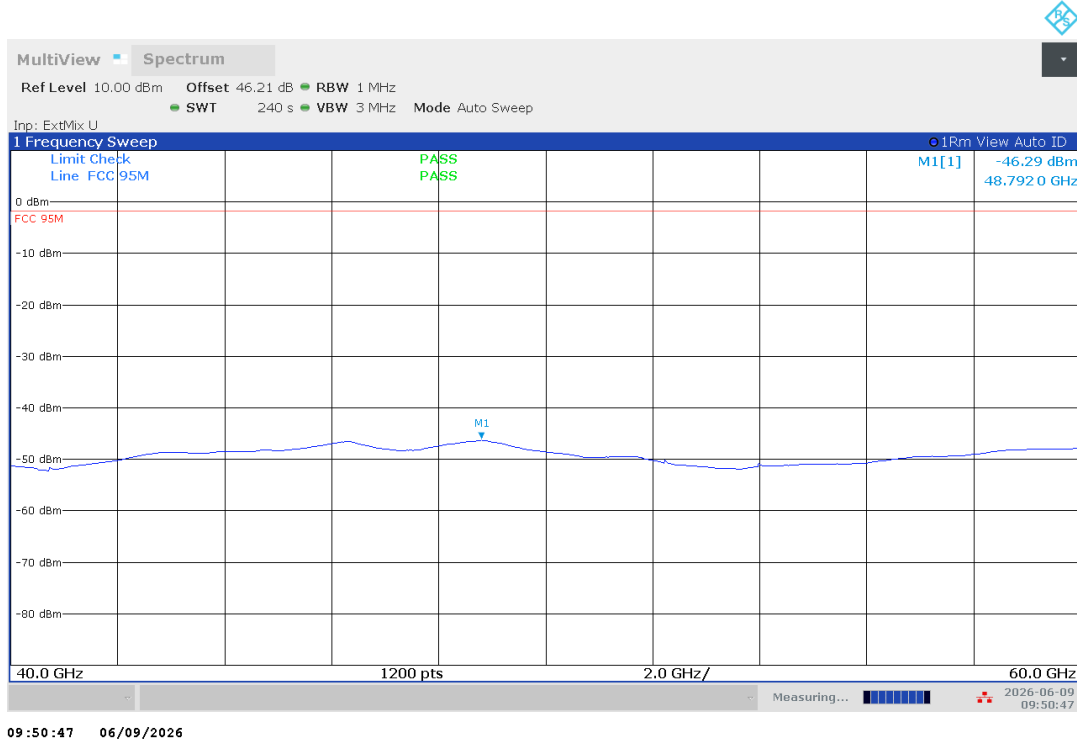


Plot no.49 : OP 2 - radiated spurious emissions 60 GHz – 76 GHz, hor./vert. polarization.

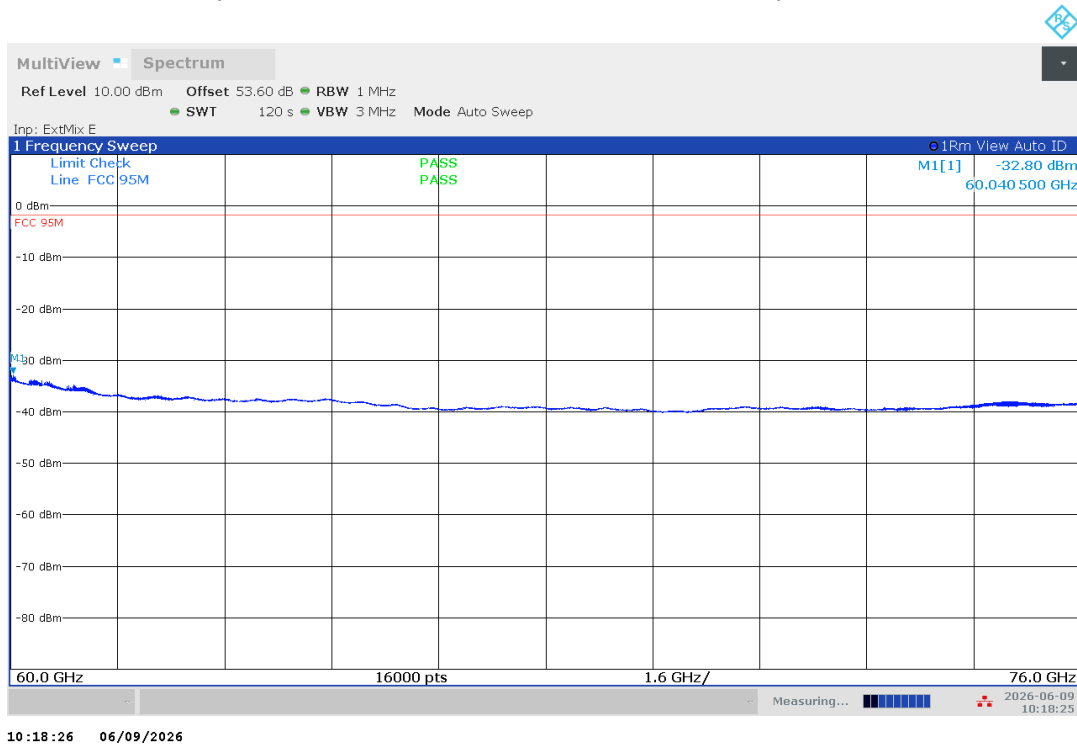


Plot no.50 : OP 2 - radiated spurious emissions 78 GHz – 84 GHz, hor./vert. polarization.

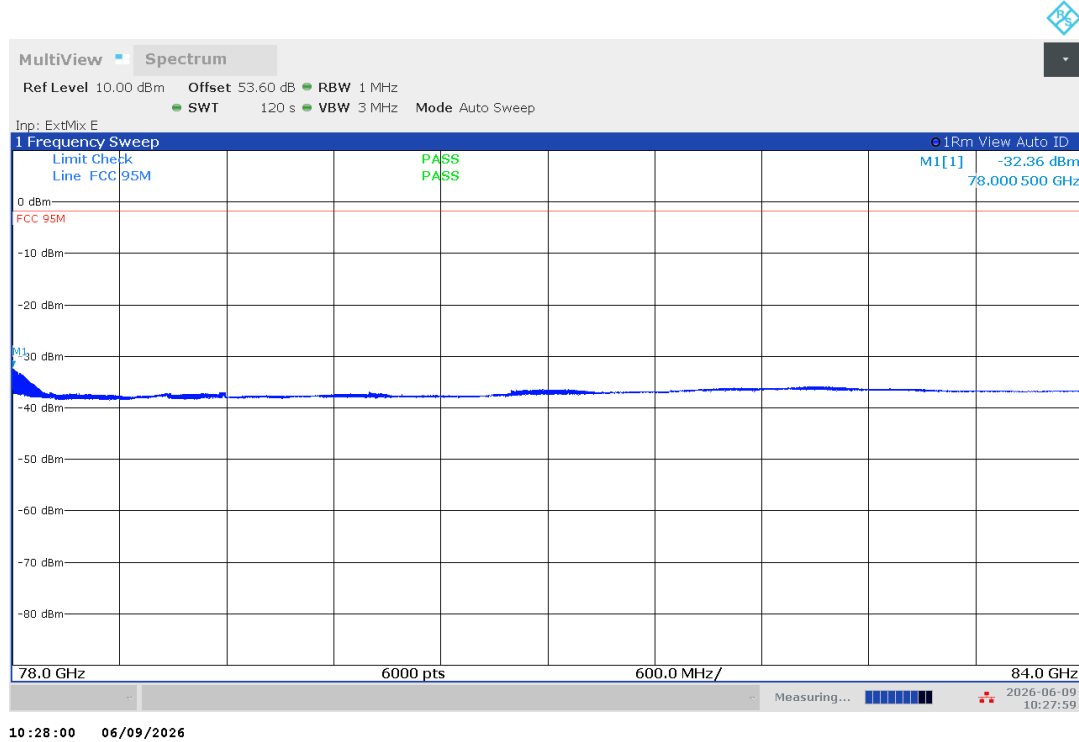


Plot no.51 : OP 2 - radiated spurious emissions 84 GHz – 110 GHz, hor./vert. polarization.

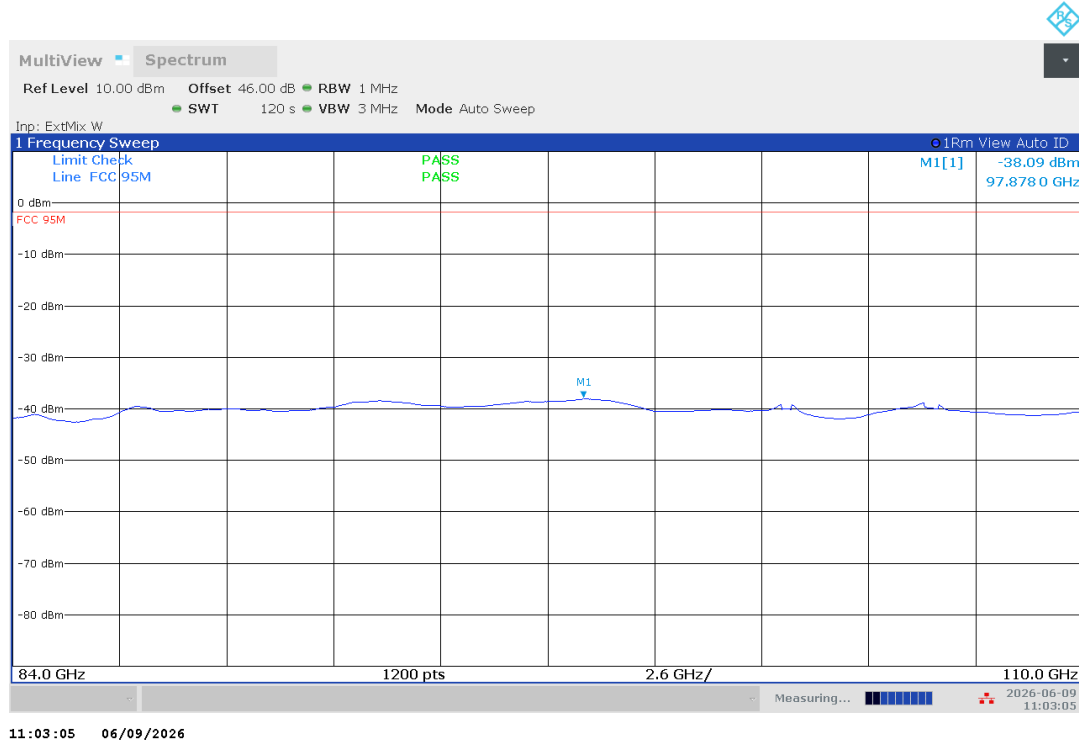


Plot no.52 : OP 2 - radiated spurious emissions 110 GHz – 170 GHz, hor./vert. polarization.

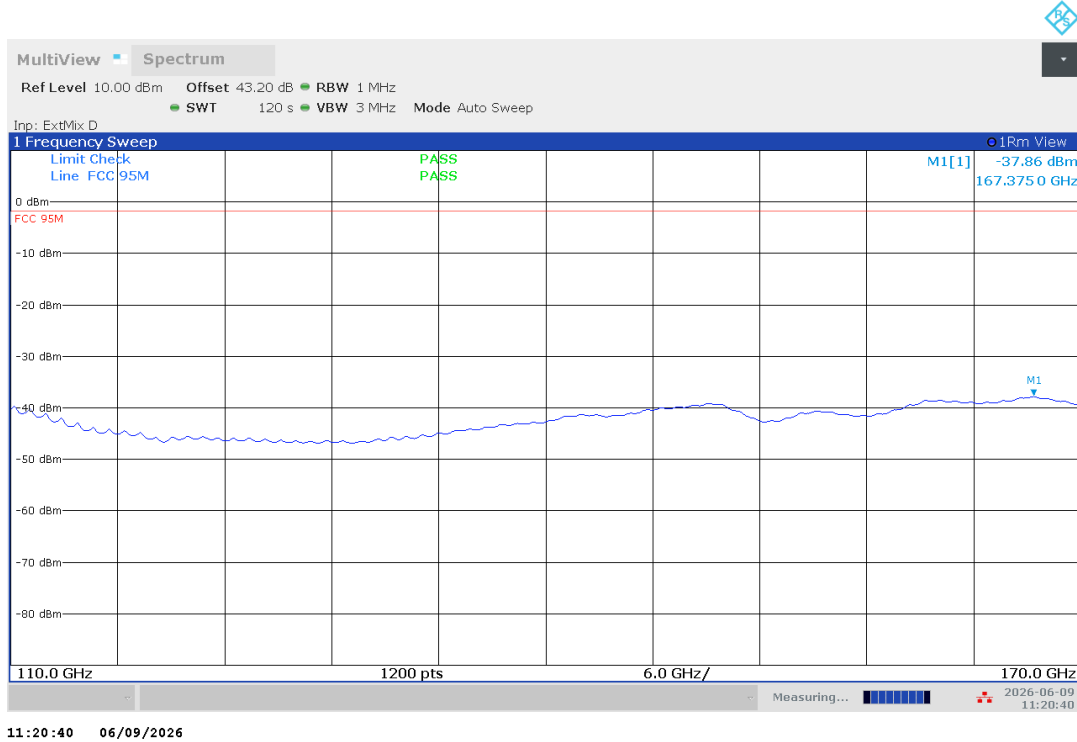

Plot no.53 : OP 2 - radiated spurious emissions 170 GHz – 220 GHz, hor./vert. polarization.

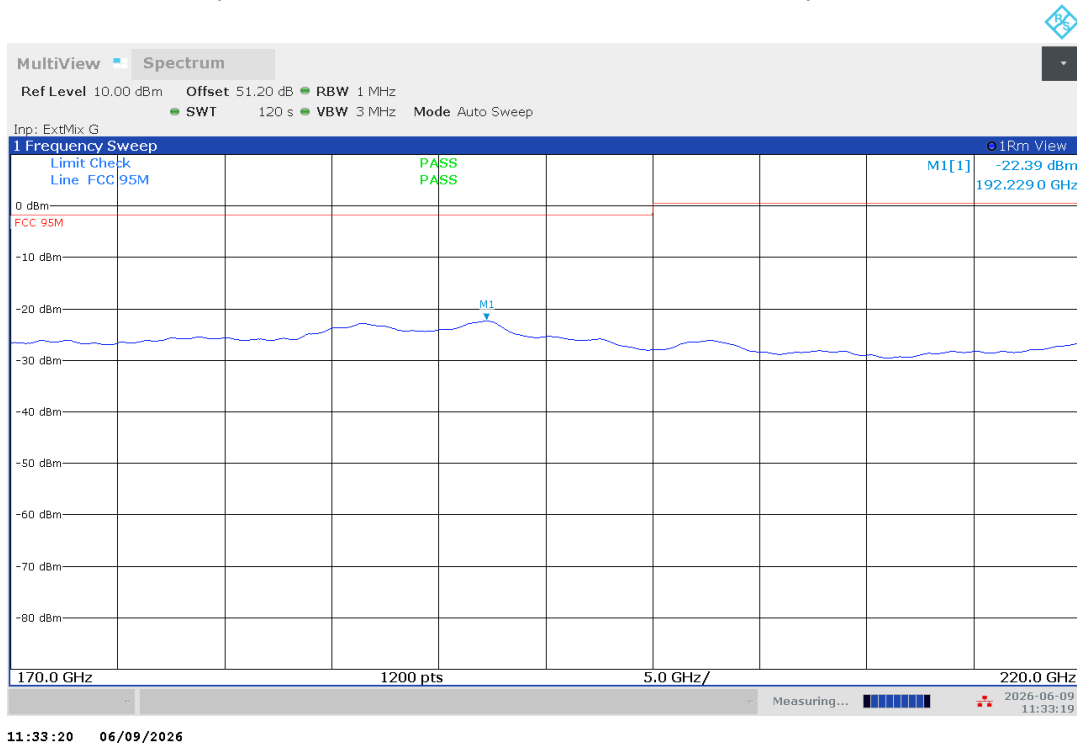

Plot no.54 : OP 2 - radiated spurious emissions 220 GHz – 325 GHz, hor./vert. polarization.

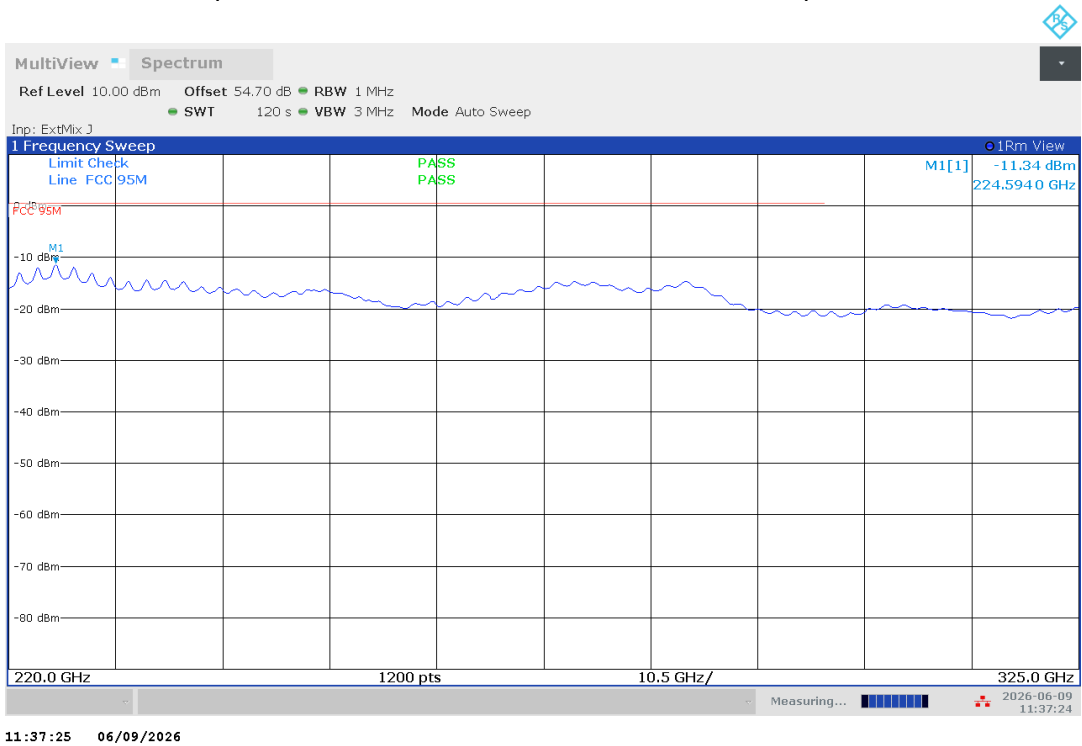

7.5 Frequency stability (§2.1055 & §95.3379(b))

Description

§2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

Limits

§95.3379 76-81 GHz Band Radar Service unwanted emissions limits.

(b) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test procedure

ANSI C63.26, 5.4.4

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

Note: Step a) through step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s)

KDB 653005 D01 76-81 GHz Radars v01r02, 4. d)

The occupied bandwidth of the radar device shall be measured, reported, and shown to be fully contained within the designated 76-81 GHz frequency band under normal operating conditions as well as under those extreme ambient temperature and input voltage conditions as described in Section 2.1057.

The OBW measurement of an FMCW radar shall be performed with the transmitter operating in normal mode (i.e., with frequency sweep or step active).

Note

Measurements with the peak detector are also suitable to demonstrate compliance of an EUT, as long as the required resolution bandwidth is used, because peak detection will yield amplitudes equal to or greater than amplitudes measured with RMS detector. The measurement data from a spectrum analyser peak detector will represent the worst-case results (see ANSI C63.26, chapter D2: general considerations).

Test setup: 8.3, 8.4

Test results / Note

Please see measurement results for occupied bandwidth.

8 TEST SETUP DESCRIPTION

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Cyclic chamber inspections and range calibrations are performed. Where possible, RF generating and signalling equipment as well as measuring receivers and analysers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Kind of calibration (abbreviations):

- C = calibrated
- CM = cyclic maintenance
- NR = not required
- L = locked

8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

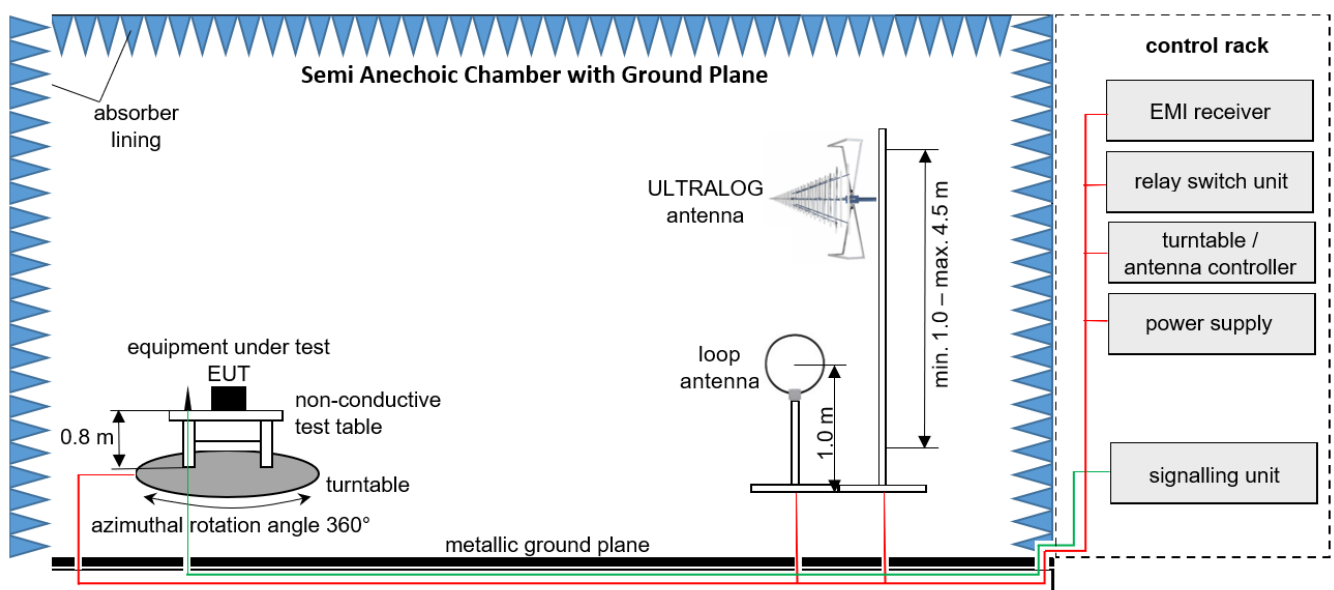

Measurement distance: ULTRALOG antenna at 3 m; loop antenna at 3 m
ELEKTRA software version: 5.21


$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

8.2 Fully Anechoic Chamber

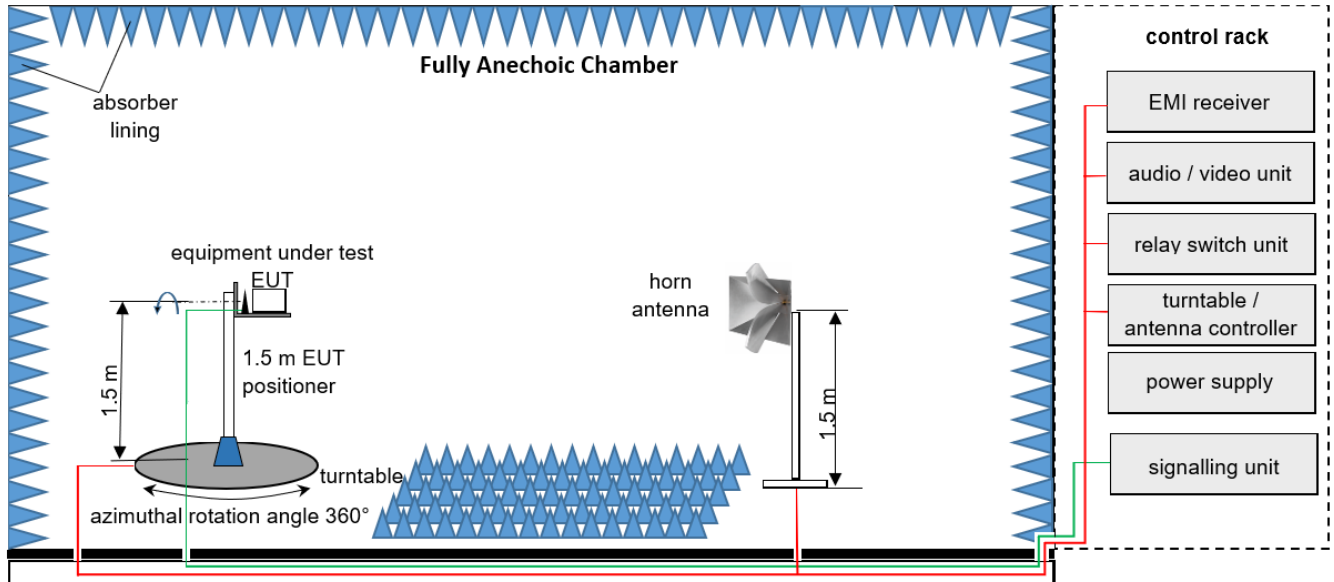

Measurement distance: horn antenna at 3 m

ELEKTRA software version: 5.21


$$ROP = AV + D - G$$

(ROP -rad. output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain)


Example calculation:

$$ROP \text{ [dBm]} = -54.0 \text{ [dBm]} + 64.0 \text{ [dB]} - 20.0 \text{ [dBi]} = -10 \text{ [dBm]} \text{ (100 } \mu\text{W)}$$


8.3 Radiated measurements > 18 GHz

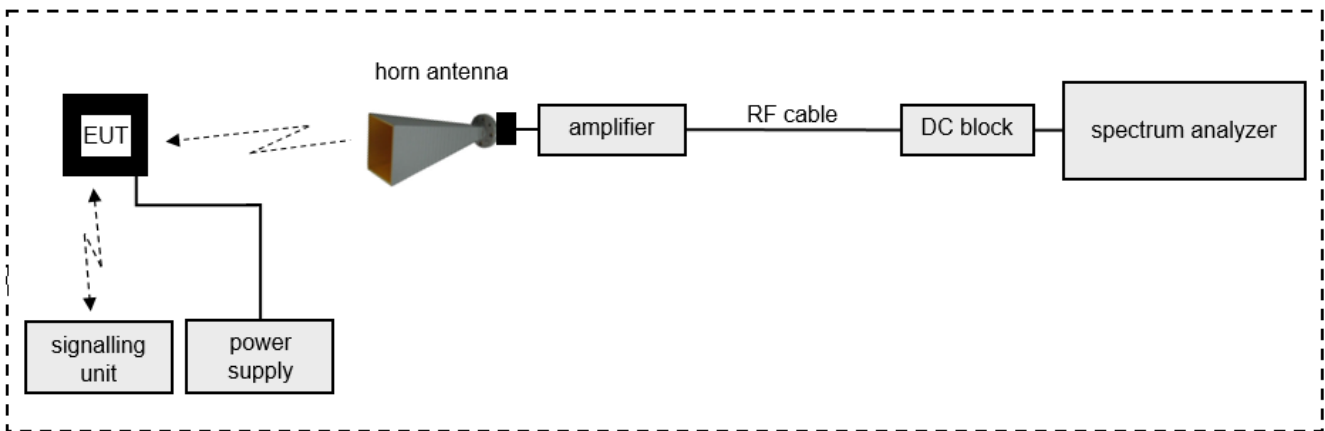

8.4 Radiated measurements > 50 GHz

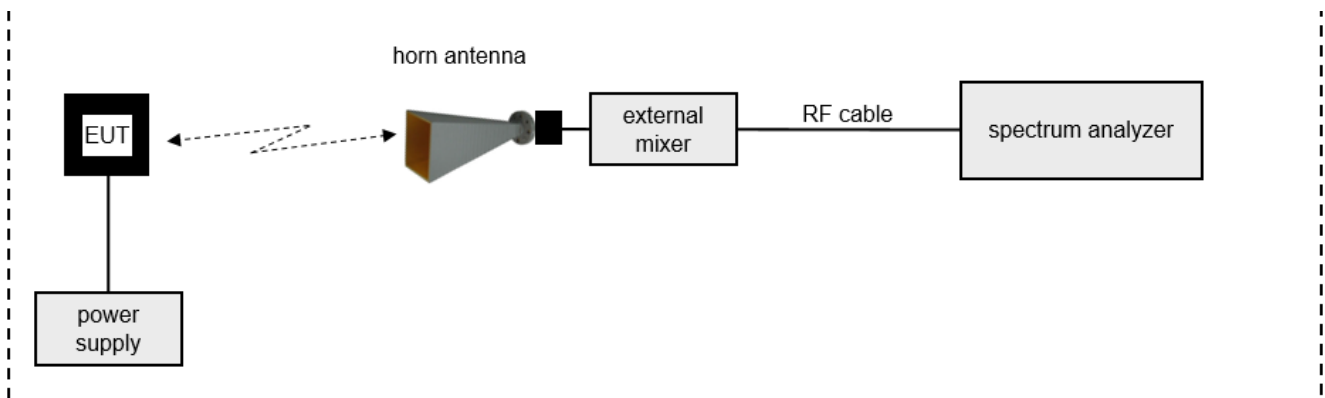

8.5 Radiated measurements under extreme conditions

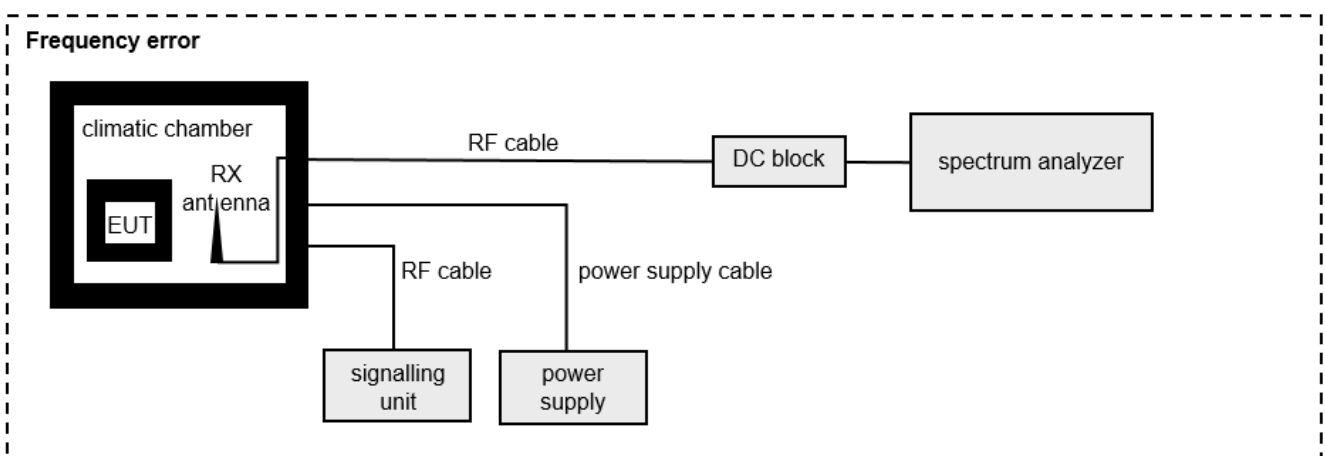

Measurement distance: Horn antenna e.g. 10 cm @ 170 GHz

$$\text{ROP} = \text{AV} + \text{D} - \text{PA} - \text{G}$$

(ROP -rad. output power; AV-analyzer value; PA preamplifier; D-free field attenuation of measurement distance; G-antenna gain)

Example calculation:

$$\text{ROP [dBm]} = -72.63 \text{ [dBm]} + 57.05 \text{ [dB]} - 26.4 \text{ [dB]} - 20.02 \text{ [dBi]} = -62 \text{ [dBm]}$$

Note: Conversion loss of mixer, as well as above mentioned values (e.g. PA, D, G) are already included in analyzer value, due to corresponding transducer file and given offset.

Values in plots are final measurement values.

8.6 List of test equipment used for testing

#	Equipment	Manufacturer	Type	S/N	IBL/N	Kind of calibration	Last / Next calibration
RF - Radiated Emissions - SkyLab 3 (FAC3)							
1	Open Switch and Control Platform	Rohde & Schwarz	OSP130	100632	LAB001169	NR	-
2	Antenna Mast	innco systems GmbH	MA3000-PP-NS	9380722	LAB000864	NR	-
3	Antenna Mast	innco systems GmbH	AS2500-PP-HK	2990722	LAB000863	NR	-
4	Positioner	innco systems GmbH	DE3750-RH	1380722	LAB000862	NR	-
5	Turntable	innco systems GmbH	Turntable	5740722	LAB000861	NR	-
6	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 9080-20 T	2500230006	LAB000696	NR	-
7	Fully Anechoic Chamber (FAC)	Albatross Projects GmbH	SkyLab 3 (FAC 3)	P31018	LAB000686	CM	2025-03-18 → 36M → 2028-03-18
8	Power Supply	Rohde & Schwarz	IN 600	101126	LAB000684	NR	-
9	Spectrum Analyser	Rohde & Schwarz	FSW43	101391	LAB000289	C	2025-06-12 → 12M → 2026-06-12
10	Antenna	Rohde & Schwarz	HF907	102898	LAB000124	C	2023-06-13 → 36M → 2026-06-13
11	Antenna	Rohde & Schwarz	HL562E	102001	LAB000123	C	2026-04-21 → 12M → 2027-04-21
RF - Radiated Emissions - Babylon (SAC5)							
1	Antenna	Rohde & Schwarz	HF907	103157	LAB000833	C	2026-04-20 → 24M → 2028-04-20
2	Antenna	Rohde & Schwarz	HL562E	102219	LAB000832	C	2023-09-12 → 36M → 2026-09-12
3	Power Supply	Rohde & Schwarz	IN 600	101554	LAB000824	NR	-
4	Power Supply	Chroma	61602		LAB000507	NR	-
5	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	C	2025-12-10 → 6M → 2026-06-10
6	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NR	-
7	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NR	-
8	Antenna Mast	Berlebach	Tripod HFH2-Z8 & -Z9	101762	LAB000292	NR	-
9	Positioner	mature GmbH	TD 1.5-10KG		LAB000258	NR	-
10	Compressed Air	Implotex	1-850-30	-	LAB000256	NR	-
11	Semi/Fully Anechoic Chamber	Albatross Projects GmbH	Babylon 5 (SAC 5)	20168.PR.B	LAB000235	CM	2025-03-18 → 36M → 2028-03-18
12	Measurement Software	Rohde & Schwarz	EMC32 V11.20		LAB000226	NR	-
13	Turntable	mature GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NR	-
14	Antenna Mast	mature GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NR	-
15	Antenna Mast	mature GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NR	-
16	Controller	mature GmbH	FCU 3.0	10082	LAB000222	NR	-
17	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350292	LAB000191	NR	-
18	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	CM	2025-11-13 → 12M → 2026-11-13
19	Open Switch and Control Platform	Rohde & Schwarz	OSP220 Base Unit 2HU	101748	LAB000149	NR	-
20	Antenna	Rohde & Schwarz	HFH2-Z2E	100954	LAB000108	C	2025-06-24 → 24M → 2027-06-24
RF - Radar-Lab - Radiated Emissions > 18 GHz							
1	Coaxial Cable	Rosenberger	LU7-022-1000	91	LAB000524	CM	2026-04-08 → 12M → 2027-04-08
2	Coaxial Cable	Rosenberger	LU7-022-1000	45	LAB000523	CM	2026-04-08 → 12M → 2027-04-08
3	Antenna	Flann Microwave Ltd	24240-20 (40.0-60.0 GHz)	275176	LAB000376	CM	2026-05-21 → 12M → 2027-05-21
4	Harmonic Mixer	Rohde & Schwarz	FS-Z060	101350	LAB000375	C	2026-05-04 → 12M → 2027-05-04
5	Absorber	Telemeter Electronic	EPP 12	-	LAB000327	NR	-
6	Test table	innco systems GmbH	PT0707-RH light	-	LAB000303	NR	-
7	Filter (Coax/WG, LPF, HPF, Band)	TTE	10-WHPF-84.5-UG387	-	LAB000299	NR	-
8	Antenna	Flann Microwave Ltd	570240-20 (325-500 GHz)	226025	LAB000228	CM	2026-04-21 → 12M → 2027-04-21
9	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350255	LAB000189	NR	-
10	WG-Coax-Adapter	Flann Microwave Ltd	23373-TF30 UG383/U	273384	LAB000184	CM	2025-06-24 → 12M → 2026-06-24
11	WG-Coax-Adapter	Flann Microwave Ltd	22093-TF30 UG599/U	273263	LAB000183	CM	2025-06-24 → 12M → 2026-06-24

TR No.: 25112181-49917-0

2026-06-24

#	Equipment	Manufacturer	Type	S/N	IBL/N	Kind of calibration	Last / Next calibration
12	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273373	LAB000180	CM	2025-06-24 → 12M → 2026-06-24
13	Antenna	Flann Microwave Ltd	30240-20 (140-220 GHz)	273390	LAB000178	CM	2026-04-21 → 12M → 2027-04-21
14	Antenna	Flann Microwave Ltd	28240-20 (90.0-140 GHz)	273371	LAB000176	CM	2026-04-21 → 12M → 2027-04-21
15	Antenna	Flann Microwave Ltd	32240-20 (220-325 GHz)	273469	LAB000152	CM	2026-04-21 → 12M → 2027-04-21
16	Antenna	Flann Microwave Ltd	29240-20 (110-170 GHz)	273382	LAB000139	CM	2026-04-21 → 12M → 2027-04-21
17	Antenna	Flann Microwave Ltd	27240-20 (75.0-110 GHz)	273367	LAB000137	CM	2026-04-21 → 12M → 2027-04-21
18	Antenna	Flann Microwave Ltd	26240-20 (60.0-90.0 GHz)	273417	LAB000135	CM	2026-04-21 → 12M → 2027-04-21
19	Antenna	Flann Microwave Ltd	25240-20 (50.0-75.0 GHz)	272860	LAB000133	CM	2026-04-21 → 12M → 2027-04-21
20	Antenna	Flann Microwave Ltd	23240-20 (33.0-50.0 GHz)	273431	LAB000131	CM	2026-04-21 → 12M → 2027-04-21
21	Antenna	Flann Microwave Ltd	22240-20 (26.5-40.0 GHz)	270448	LAB000130	CM	2026-04-21 → 12M → 2027-04-21
22	Antenna	Flann Microwave Ltd	20240-20 (18.0-26.5 GHz)	266402	LAB000127	CM	2026-04-21 → 12M → 2027-04-21
23	Harmonic Mixer	Rohde & Schwarz	FS-Z170	100996	LAB000126	C	2026-04-24 → 12M → 2027-04-24
24	Harmonic Mixer	Rohde & Schwarz	FS-Z325	101015	LAB000117	C	2026-04-23 → 12M → 2027-04-23
25	Harmonic Mixer	Rohde & Schwarz	FS-Z220	101039	LAB000116	C	2026-05-13 → 12M → 2027-05-13
26	Harmonic Mixer	Rohde & Schwarz	FS-Z140	101144	LAB000115	C	2026-04-23 → 12M → 2027-04-23
27	Harmonic Mixer	Rohde & Schwarz	FS-Z110	102000	LAB000114	C	2026-05-05 → 12M → 2027-05-05
28	Harmonic Mixer	Rohde & Schwarz	FS-Z090	102020	LAB000113	C	2026-05-04 → 12M → 2027-05-04
29	Harmonic Mixer	Rohde & Schwarz	FS-Z075	102015	LAB000112	C	2026-04-20 → 12M → 2027-04-20
30	Spectrum Analyser	Rohde & Schwarz	FSW50	101450	LAB000111	C	2025-06-12 → 12M → 2026-06-12
31	Antenna Mast	Schwarzbeck Mess-Elektronik OHG	AM 9104	99	LAB000109	NR	-
32	Multimeter	Keysight	U1242B	MY59110034	LAB000009	C	2025-09-05 → 12M → 2026-09-05
RF - Extreme Test Conditions (JP requirements)							
1	Climatic Chamber	CTS GmbH	C-70/350	194027	LAB000066	CM	2025-09-26 → 12M → 2026-09-26

8.7 Radiated spurious emissions from 9 kHz to 30 MHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- For each turntable position the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated with special 3D adapter set to find maximum level of emissions.
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade of distance in the region closer than λ in m divided by 2π (i.e., $\lambda/2\pi$), and at 20 dB/decade of distance beyond that, using the measurement of a single point at the radial angle that produces the maximum emission.

This correction is already included in the limit line of corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

8.8 Radiated spurious emissions from 30 MHz to 1 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable position / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

8.9 Radiated spurious emissions from 1 GHz to 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 360° continuously.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable position / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

8.10 Radiated spurious emissions above 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- EUT is powered on and set into operation.
- Test distance depends on EUT size and test antenna size (farfield conditions shall be met).

Pre-scan

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and for different polarizations of the antenna.

Final measurement

- Significant emissions found during the pre-scan will be maximized, i.e. position and antenna orientation causing the highest emissions with Peak and RMS detector
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C63.4 / C63.10).
- Final plot showing measurement data, levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit is recorded.

Note

- In case of measurements with external harmonic mixers (e.g. above 50 GHz) special care is taken to avoid possible overloading of the external mixer's input.
- As external harmonic mixers may generate false images, care is taken to ensure that any emission measured by the spectrum analyzer is indeed radiated from the EUT and not internally generated by the external harmonic mixer. Signal identification feature of spectrum analyzer is used to eliminate/reduce images of the external harmonic mixer.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 10 \text{ ppm}$
Radio frequency	$\leq \pm 1 \times 10^{-7}$
RF power, conducted	$\leq \pm 0.75 \text{ dB}$
Power spectral density	$\leq \pm 3 \text{ dB}$
Maximum frequency deviation	$\leq \pm 5 \%$
Deviation limitation Duty Cycle, Tx-sequence, Tx-gap	$\leq \pm 5 \%$
Occupied channel bandwidth	$\leq \pm 5 \%$
Conducted spurious emission of transmitter	$\leq \pm 4 \text{ dB}$
Conducted emission of receivers	$\leq \pm 4 \text{ dB}$
Radiated emission of transmitter	$\leq \pm 6 \text{ dB}$
Radiated emission of receiver	$\leq \pm 6 \text{ dB}$
Temperature	$\leq \pm 1 \text{ }^{\circ}\text{C}$
Humidity	$\leq \pm 5 \%$
DC and low frequency voltages	$\leq \pm 3 \%$

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.

End of Test Report
