



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 5 for Head& Body
LTE Band 7 for Head& Body
LTE Band 66 for Head& Body
4. WIFI
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body
4. Bluetooth
Bluetooth for Head& Body

Date:2026/10/4

Test Laboratory: LCS-SAR Lab

GSM 850 190CH Left Cheek

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1: 1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 40.906$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.562 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.364 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.517 W/kg

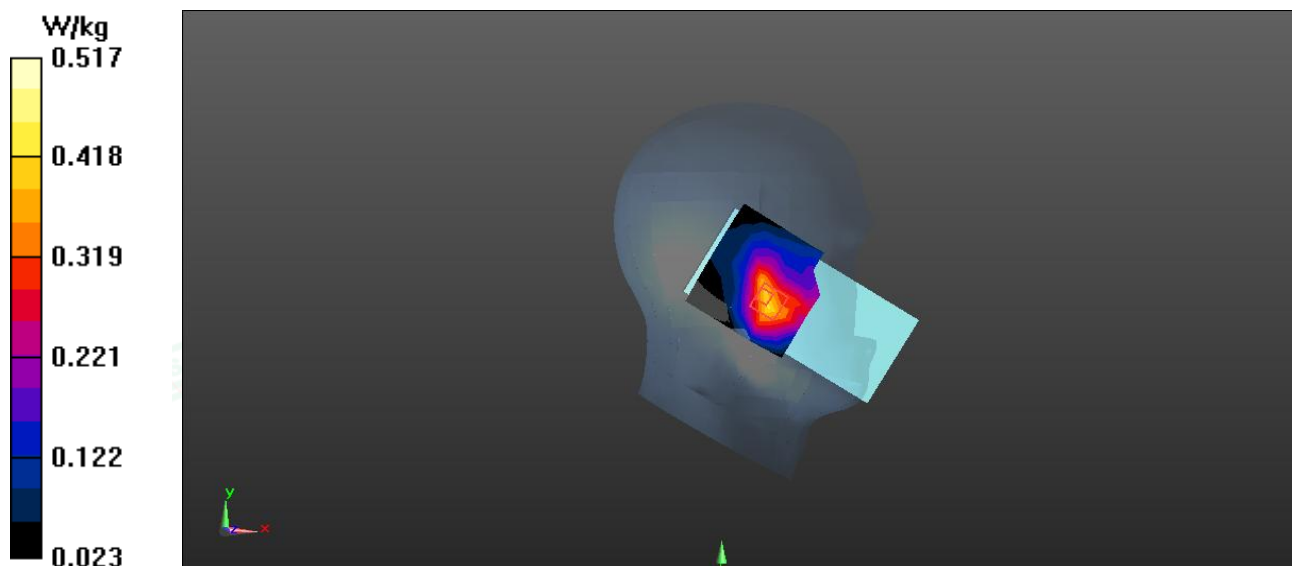



Date: 2026/10/4

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 4TX 190CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.075

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 40.906$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.943 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.872 W/kg

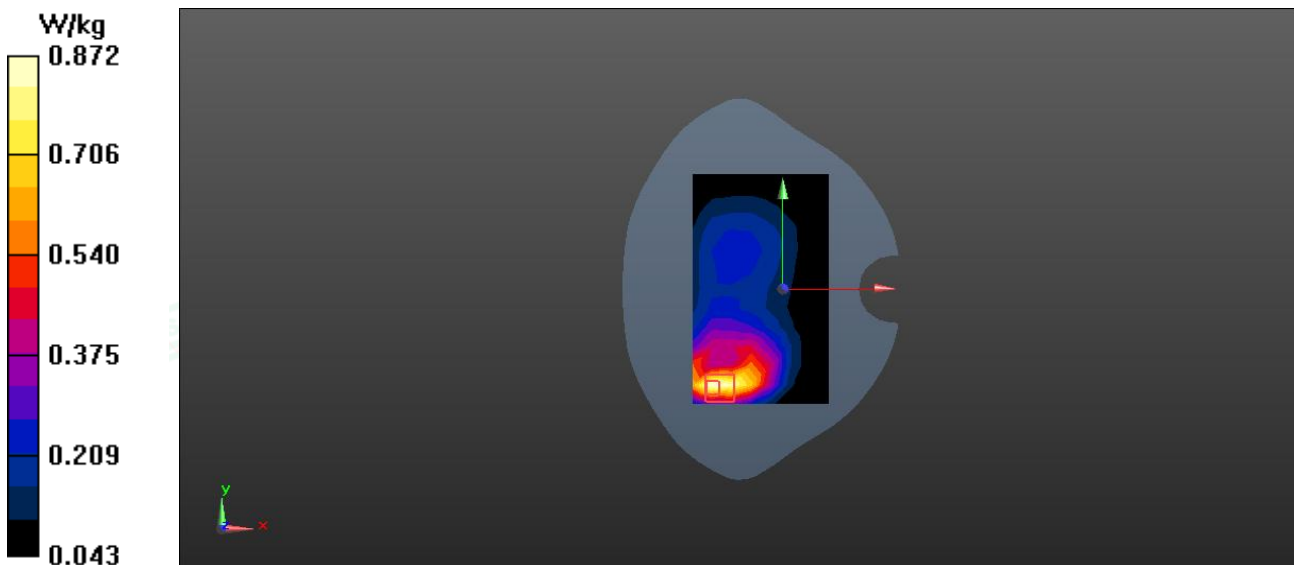

Date: 2026/10/8

Test Laboratory: LCS-SAR Lab
GSM 1900 512CH Left Cheek

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.769$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 185
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.386 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.169 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

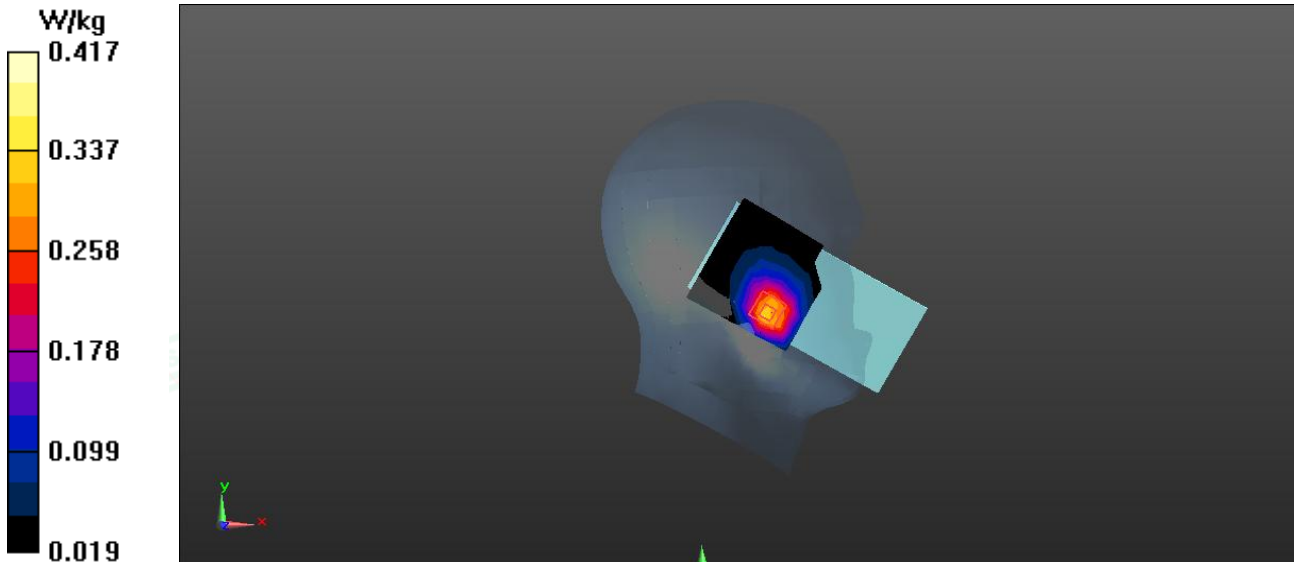



Date: 2026/10/8

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 4TX 512CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 2.075

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.769$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

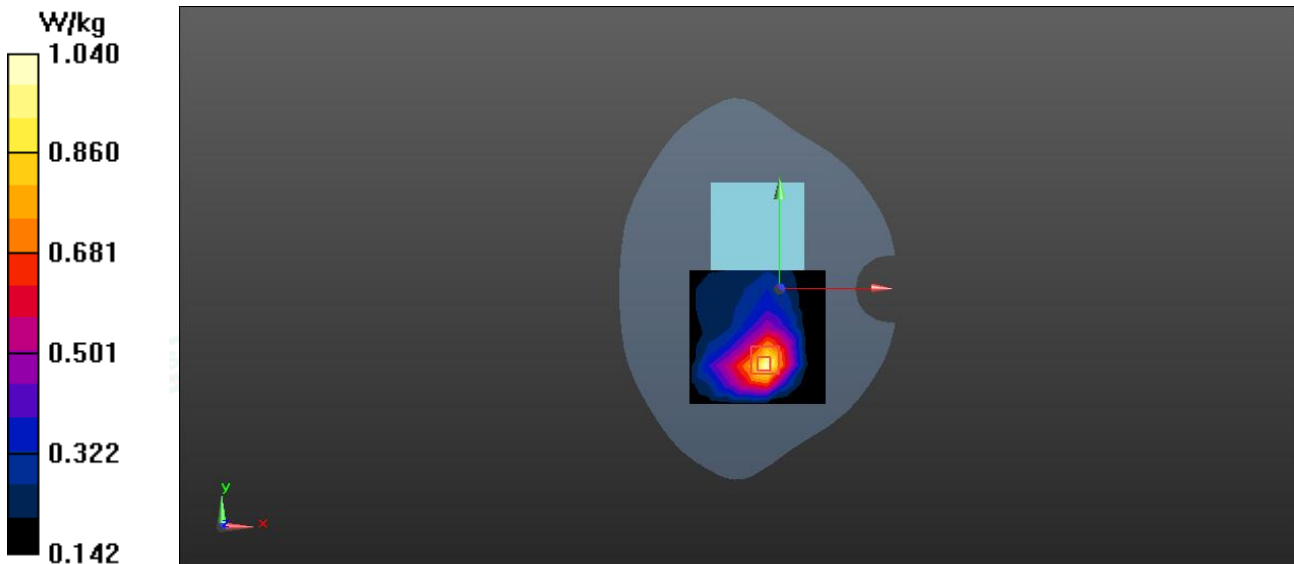



Date: 2026/10/8

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9538CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 40.174$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.854 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

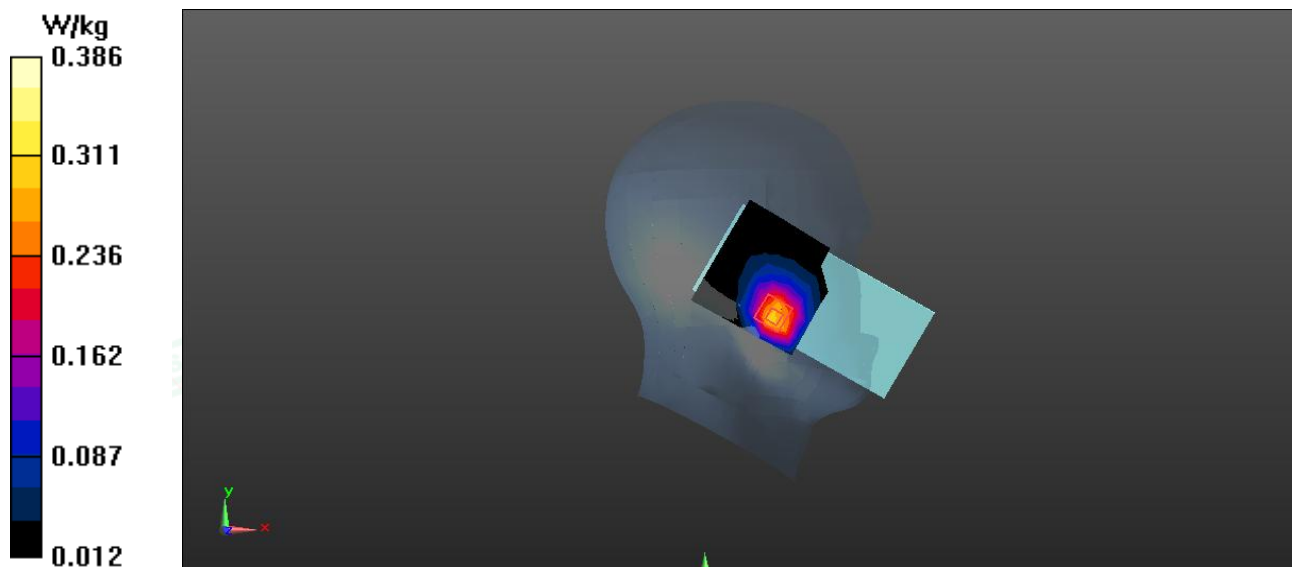



Date: 2026/10/8

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9538CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 40.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.967 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.946 W/kg

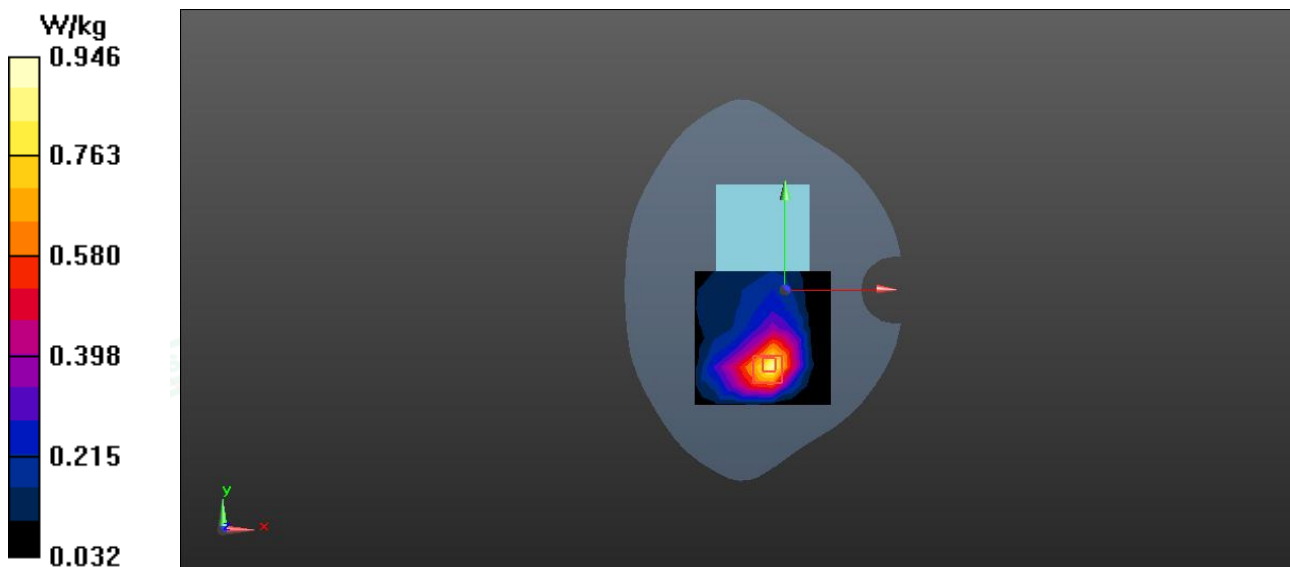

Date: 2026/10/8

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 18700CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.824$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.463 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.364 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

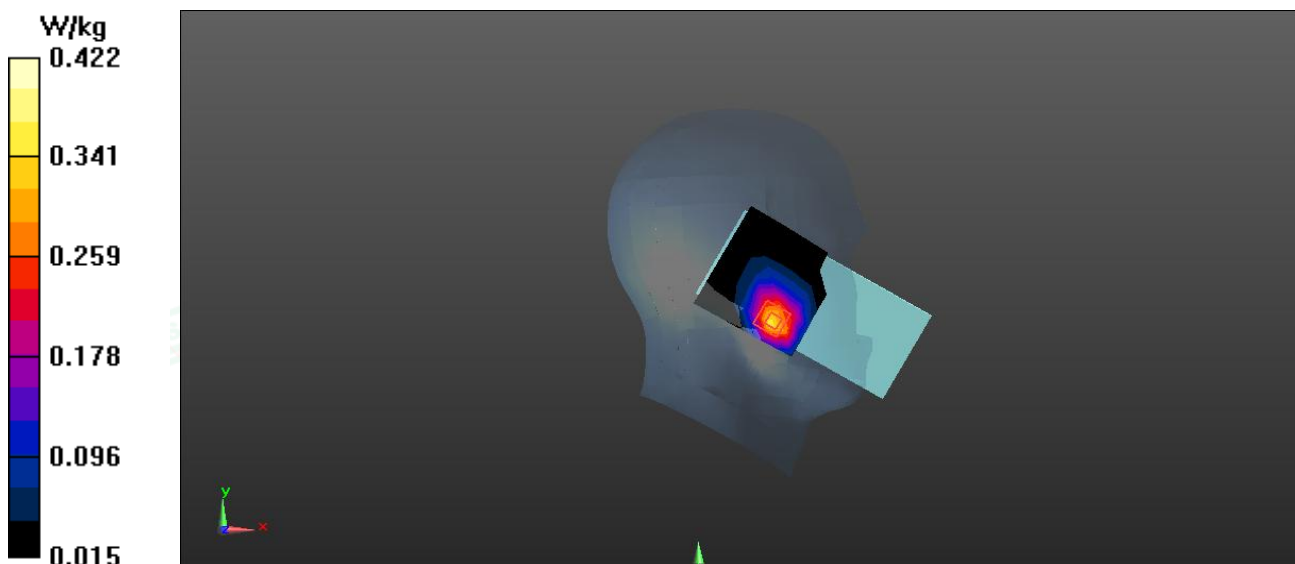

Date: 2026/10/8

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 18700CH 1RB49 Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.824$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

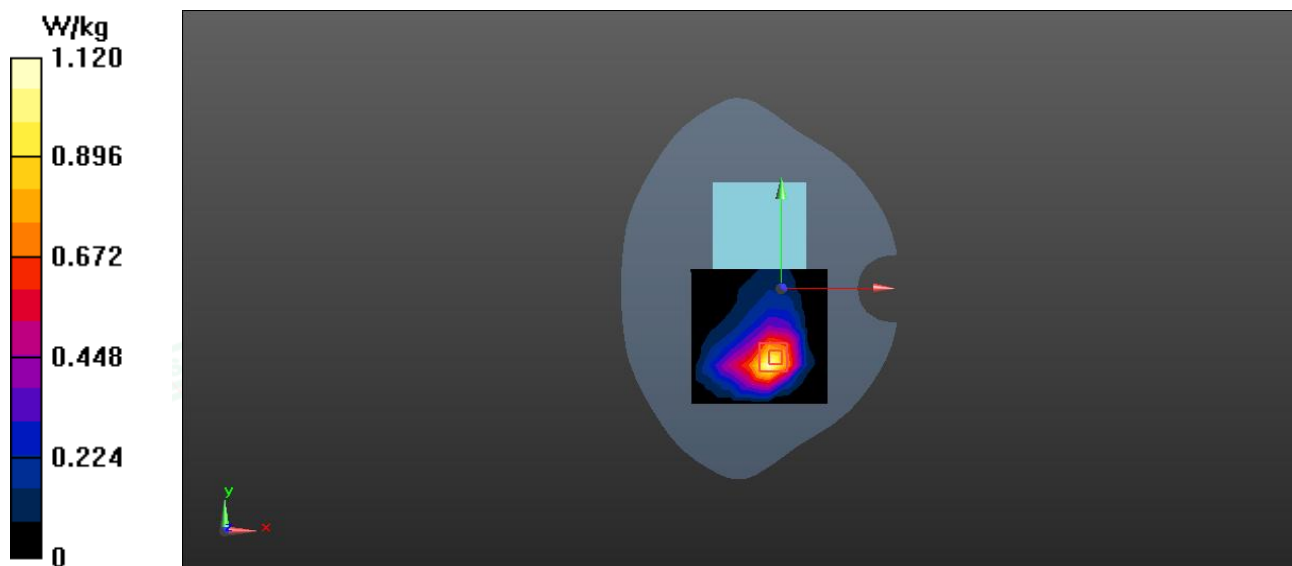

Date: 2026/10/4

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20600CH 1RB0 Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 40.954$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

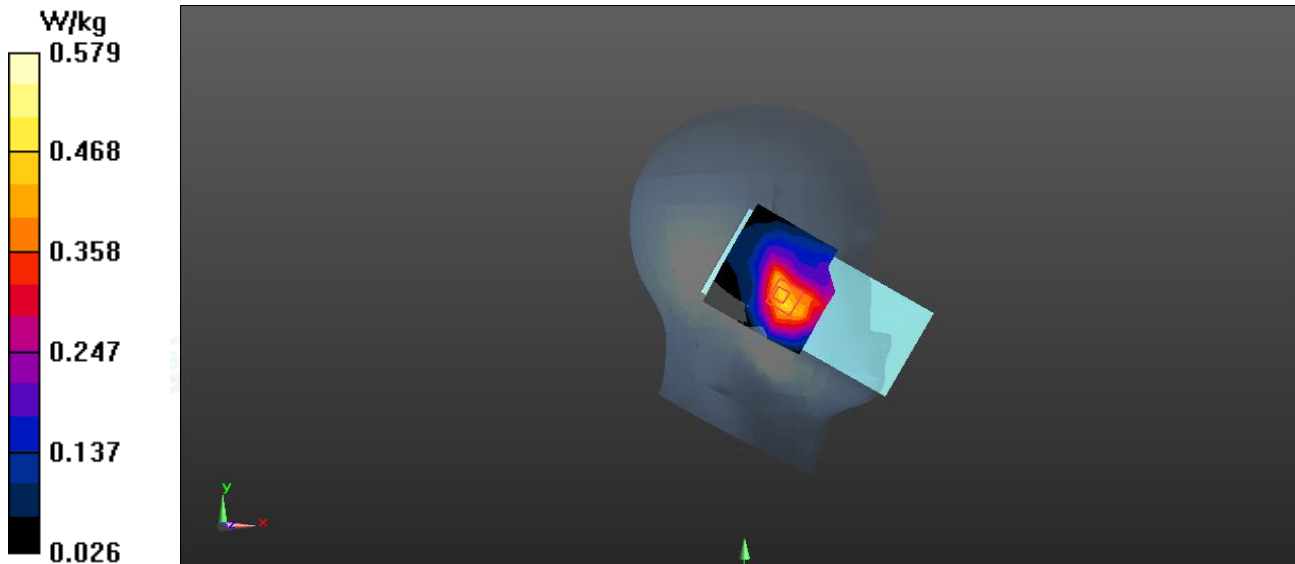Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.544 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.487 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.746 W/kg **SAR(1 g) = 0.352 W/kg ; SAR(10 g) = 0.173 W/kg** Maximum value of SAR (measured) = 0.579 W/kg 

Date: 2026/10/4

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20600CH 1RB0 Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 40.954$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

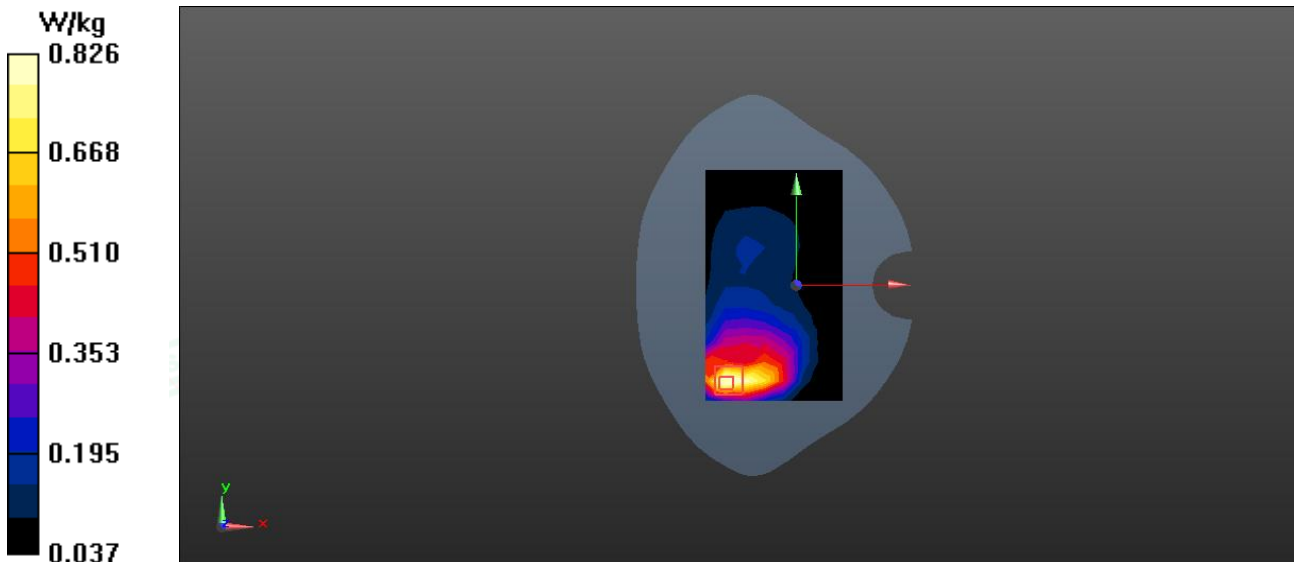Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.897 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.438 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.14 W/kg **SAR(1 g) = 0.512 W/kg ; SAR(10 g) = 0.269 W/kg** Maximum value of SAR (measured) = 0.826 W/kg 

Date: 2026/10/12

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 38.648$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.723 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.468 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

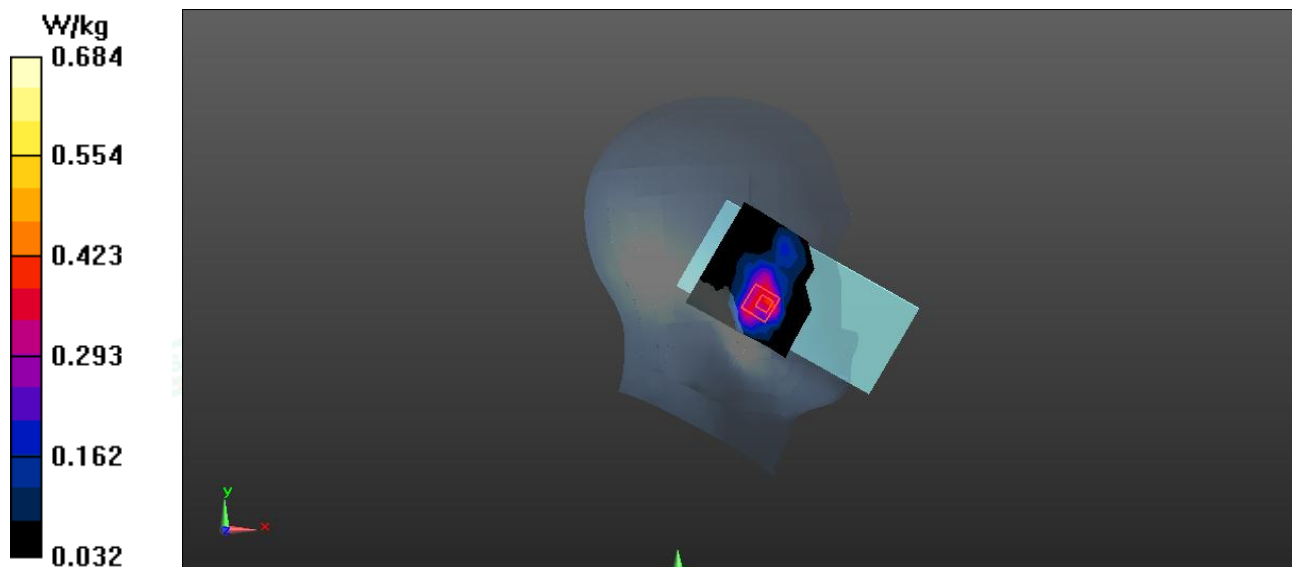

Date: 2026/10/12

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB49 Rear side 10mm

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 38.648$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.875 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.624 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.816 W/kg

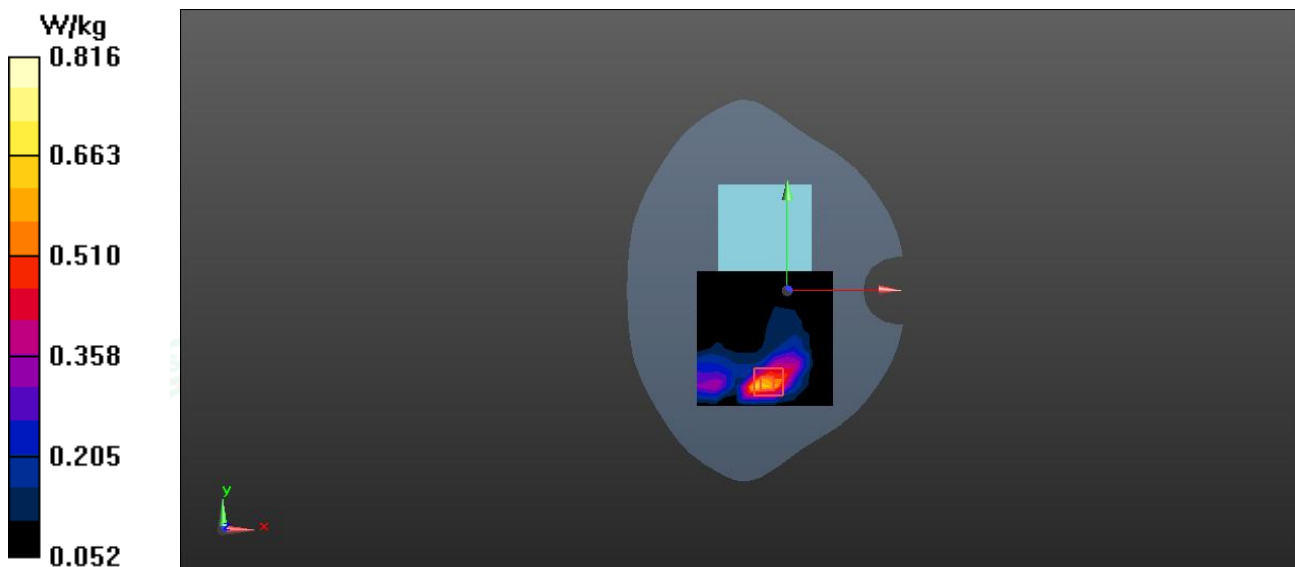

Date: 2026/10/6

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB0 Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.379 \text{ S/m}$; $\epsilon_r = 40.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

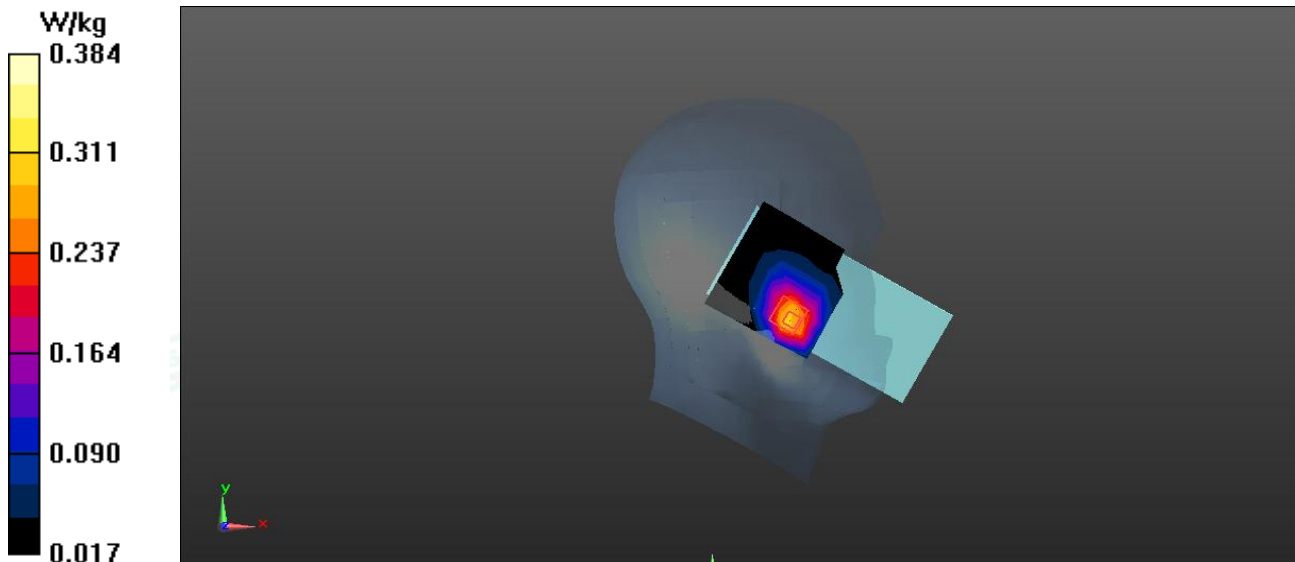Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.409 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.193 V/m ; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.453 W/kg **SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.122 W/kg** Maximum value of SAR (measured) = 0.384 W/kg 

Date: 2026/10/6

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB0 Rear Side 10mm

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.197$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.742 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.284 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.786 W/kg

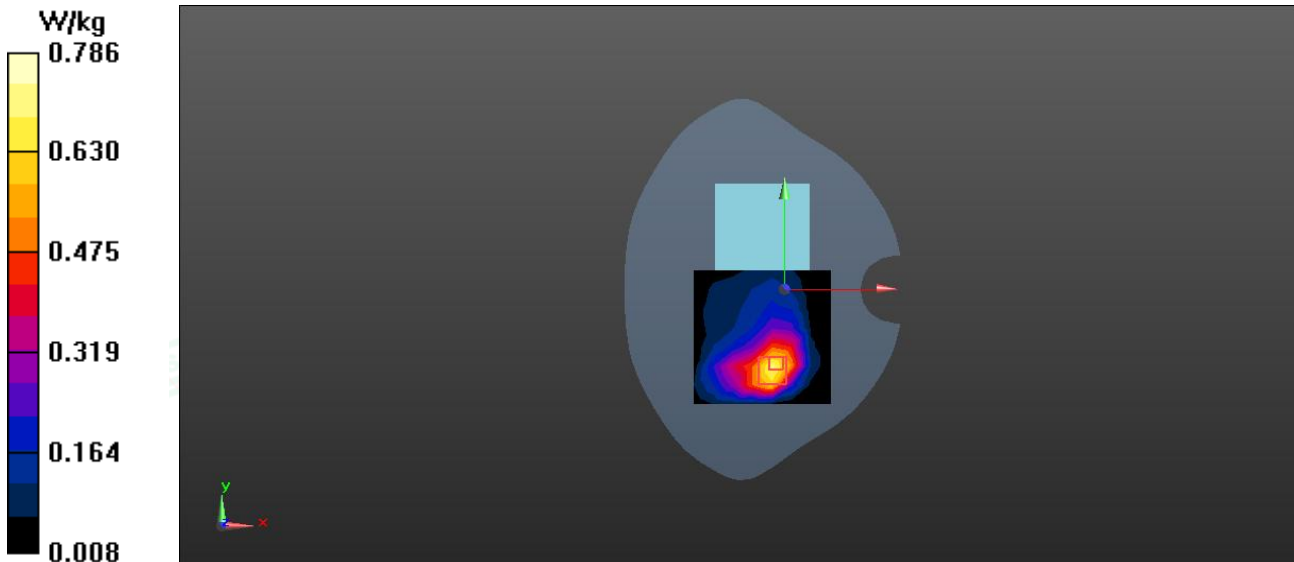

Date:2026/10/10

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 11CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.775$ S/m; $\epsilon_r = 38.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.934 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.874 W/kg

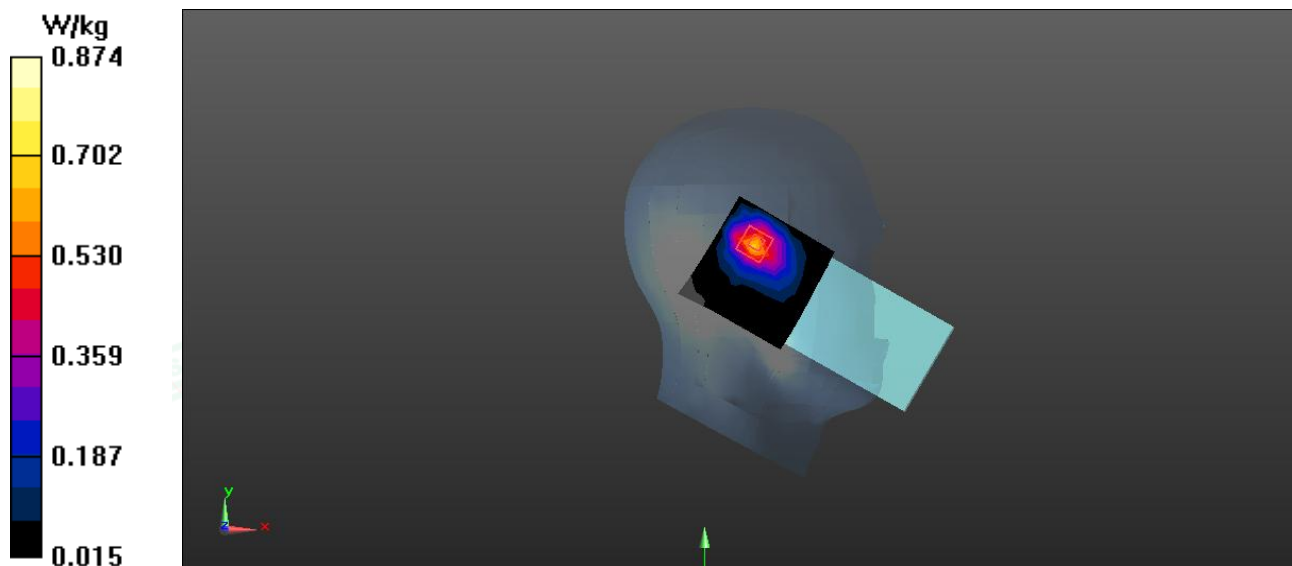



Date: 2026/10/10

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 11CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.775$ S/m; $\epsilon_r = 38.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.912 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.48 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.954 W/kg

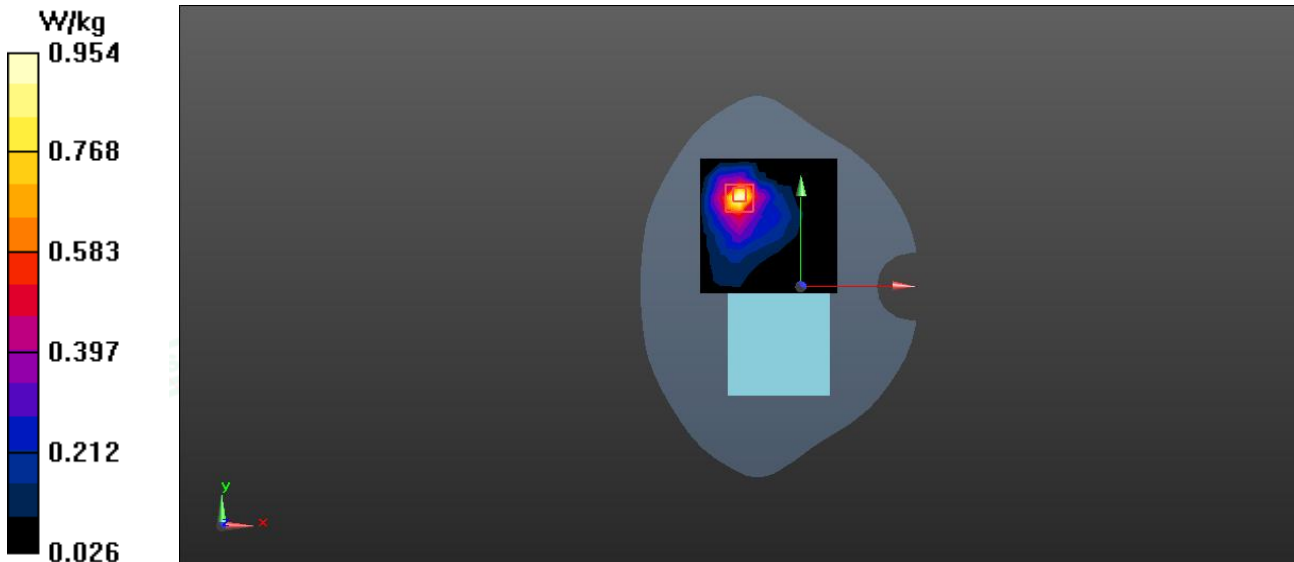

Date: 2026/10/13

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.702 \text{ S/m}$; $\epsilon_r = 36.276$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.583 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.394 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.628 W/kg

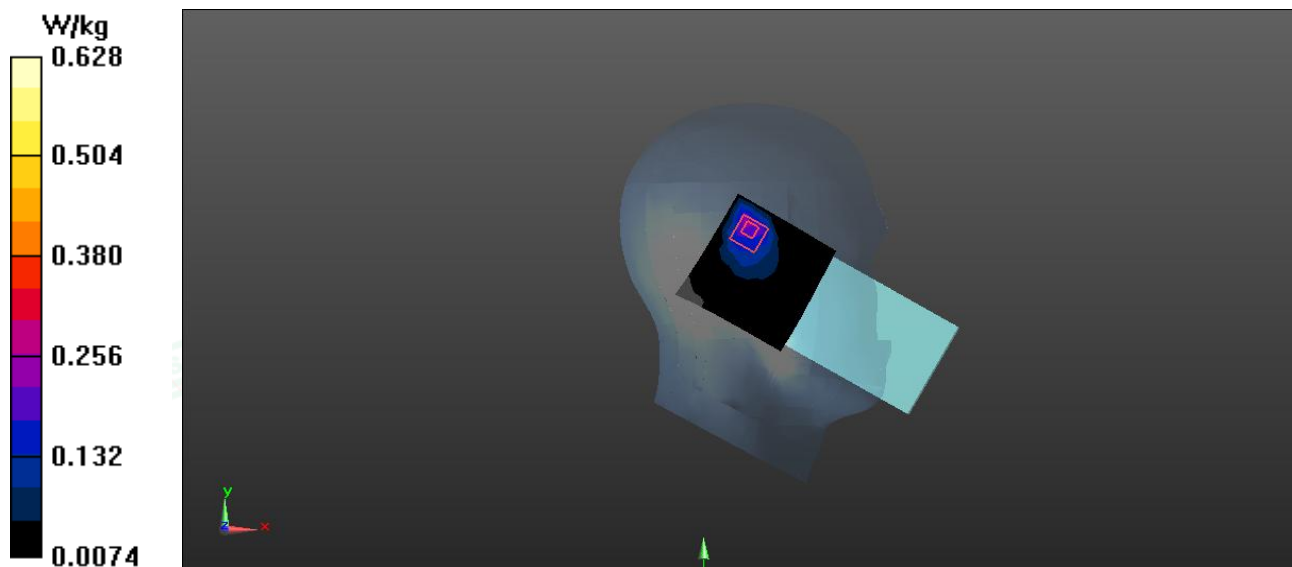

Date: 2026/10/13

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.702 \text{ S/m}$; $\epsilon_r = 36.276$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.779 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.195 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

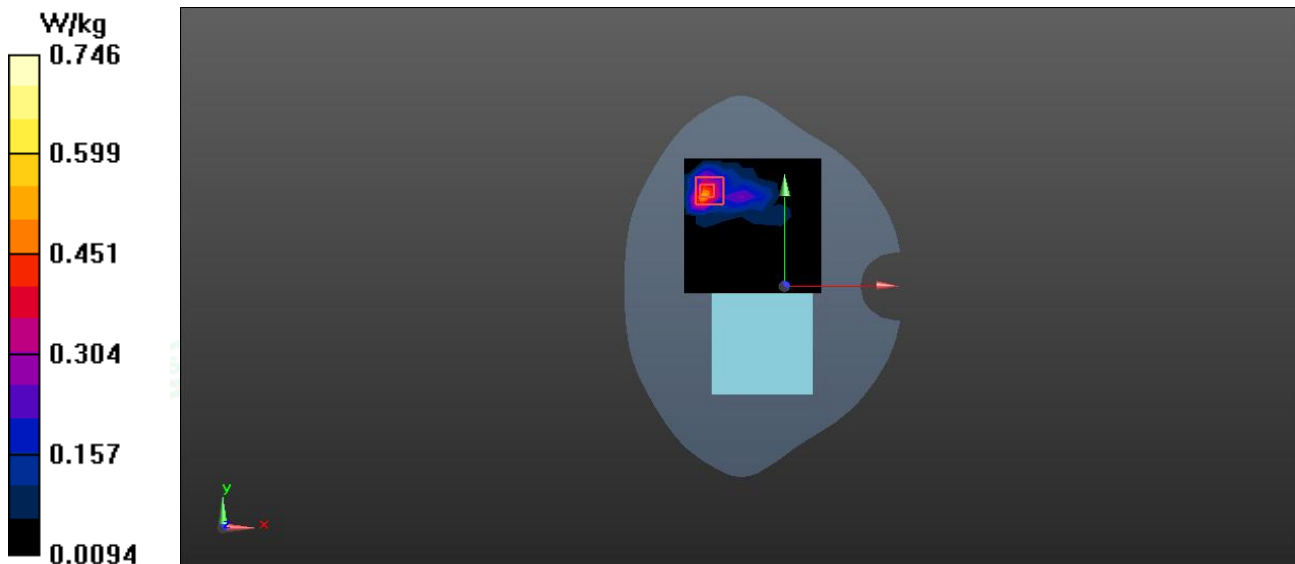

Date: 2026/10/13

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11ac40 54CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 36.406$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.512 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.184 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.473 W/kg

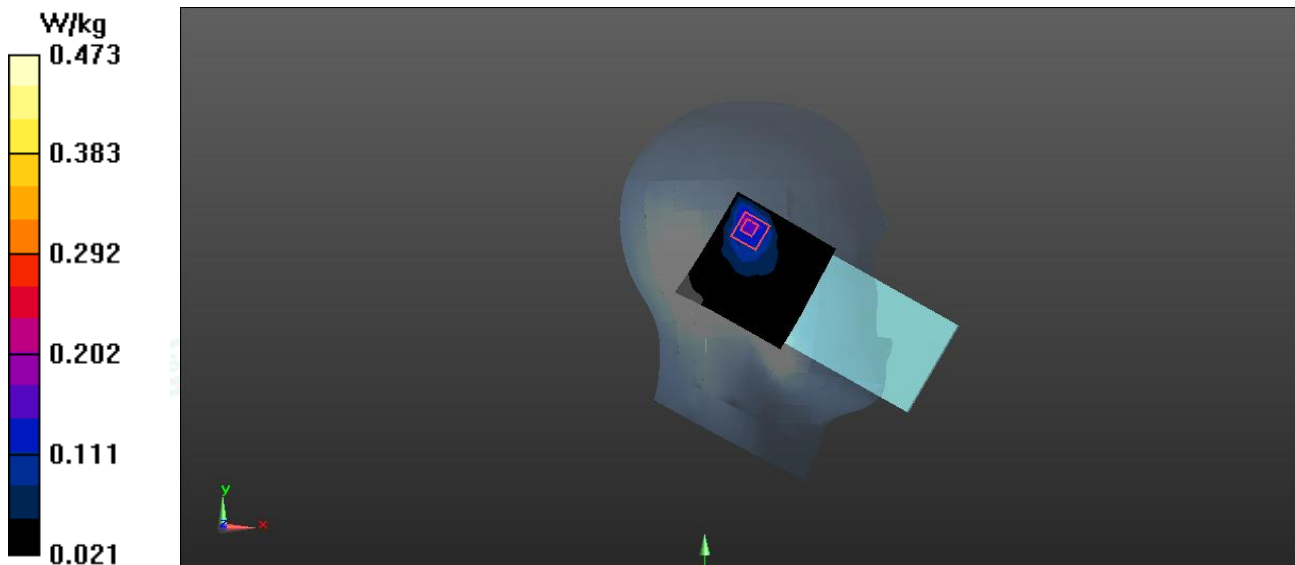

Date: 2026/10/13

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11ac40 54CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 36.406$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.612 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.432 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

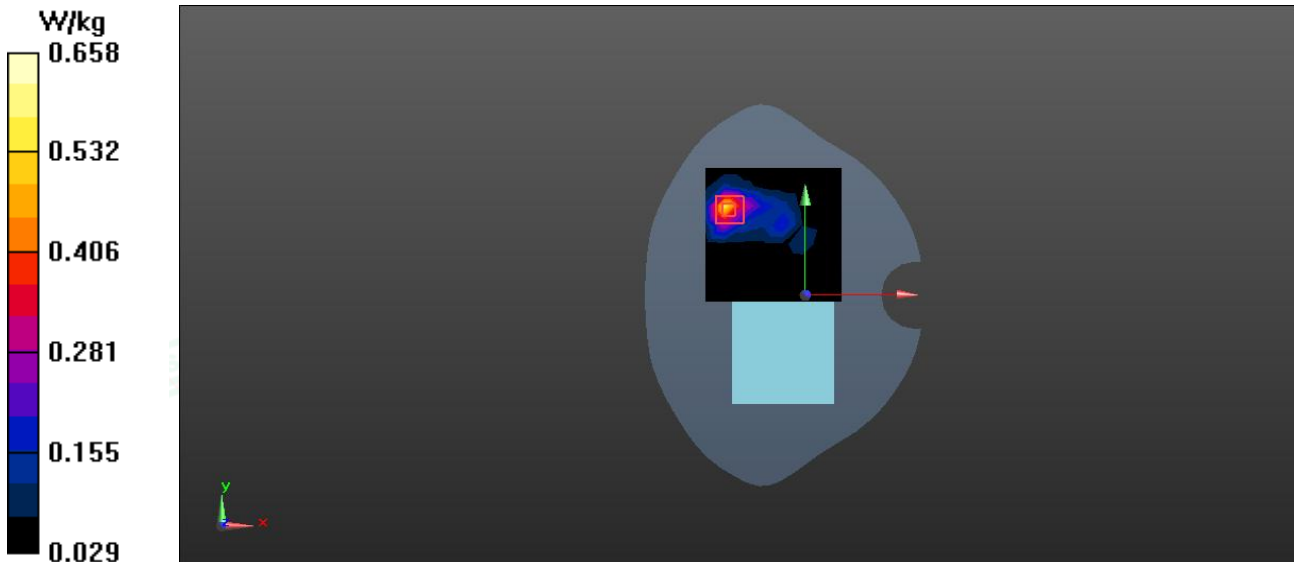

Date: 2026/10/14

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 100CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5500$ MHz; $\sigma = 5.042$ S/m; $\epsilon_r = 35.618$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.433 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.049 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

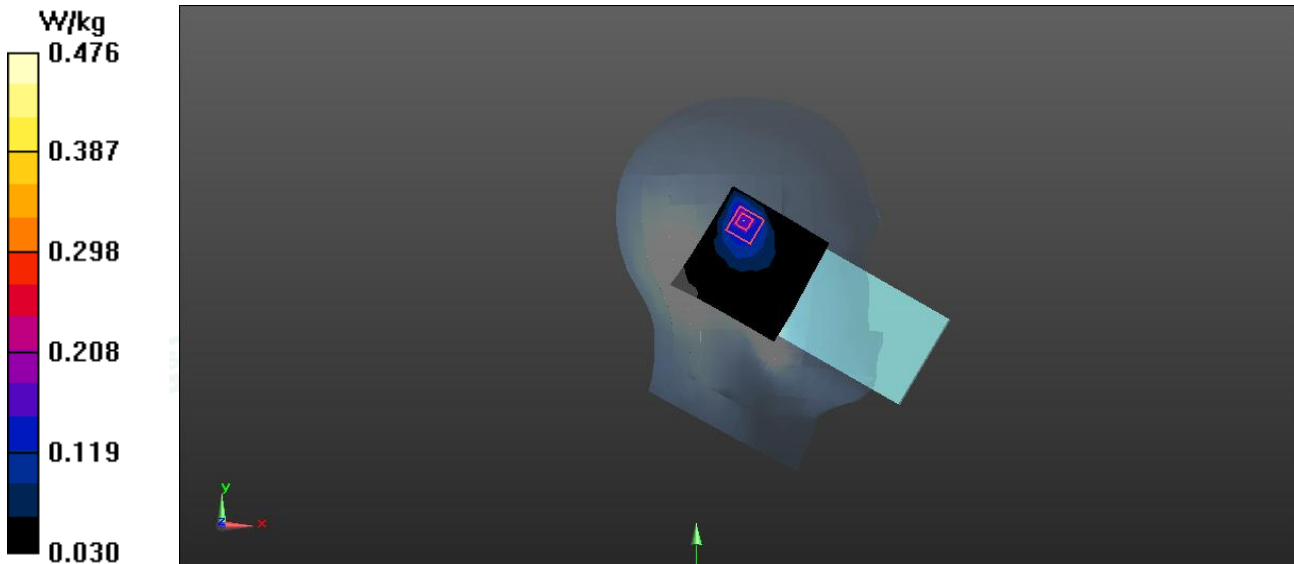



Date: 2026/10/14

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 100CH Rear side 0mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.042$ S/m; $\epsilon_r = 35.618$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.75, 4.75, 4.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.594 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.486 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

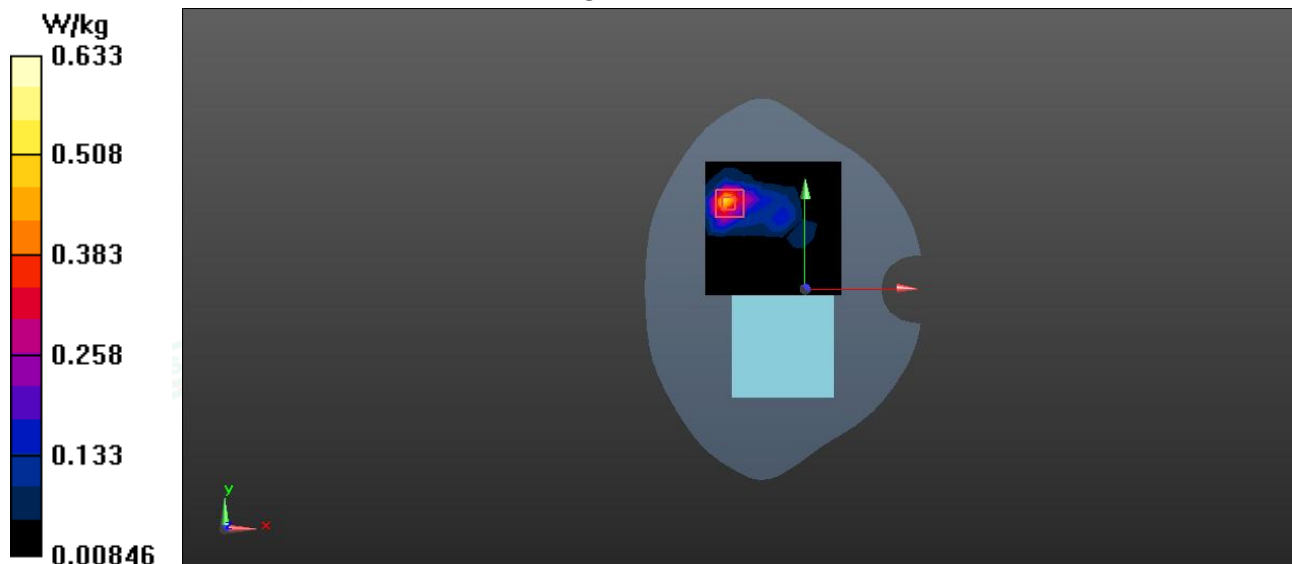

Date: 2026/10/14


Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 165CH Left Cheek**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.284 \text{ S/m}$; $\epsilon_r = 34.649$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

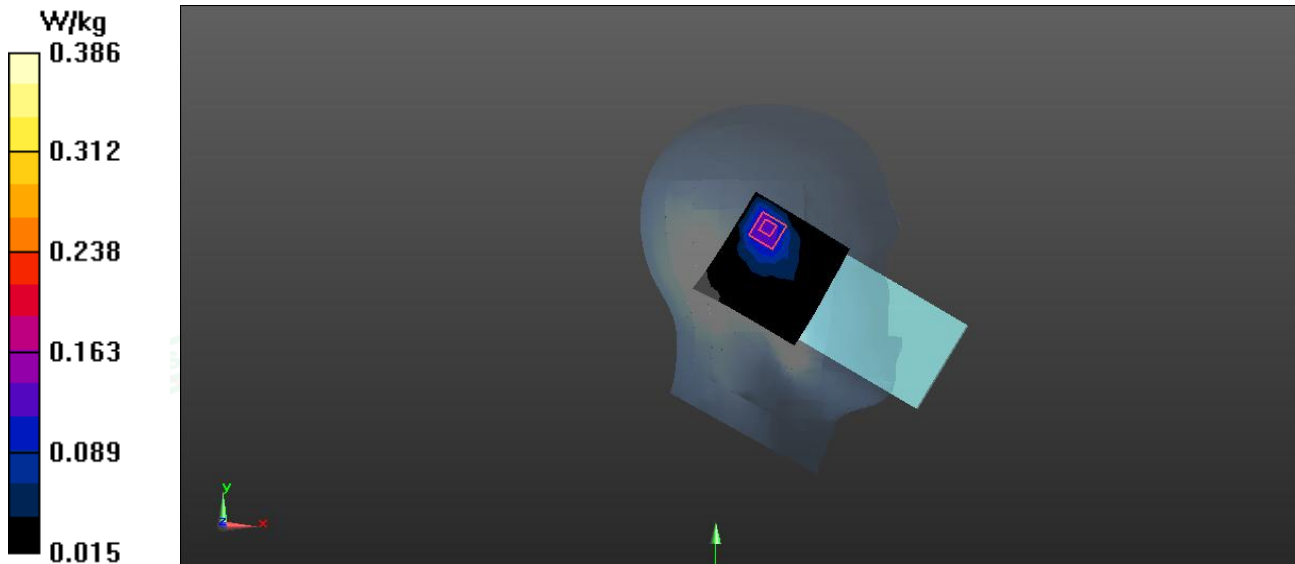Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.342 W/kg **Configuration/Head/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 6.642 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.496 W/kg **SAR(1 g) = 0.243 W/kg ; SAR(10 g) = 0.132 W/kg** Maximum value of SAR (measured) = 0.386 W/kg 



Date: 2026/10/14

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 165CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.284$ S/m; $\epsilon_r = 34.649$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.567 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.196 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.513 W/kg

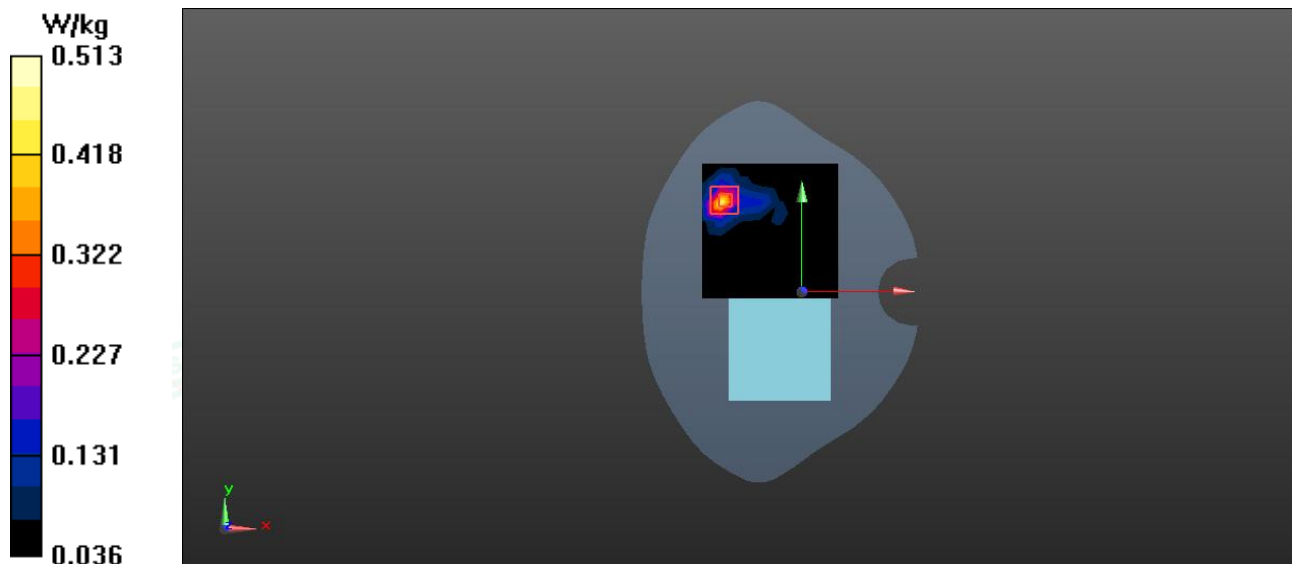

Date:2026/10/10

Test Laboratory: LCS-SAR Lab
Bluetooth 1-DH5 78CH Left Cheek

DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2480 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 38.863$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.346 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.493 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

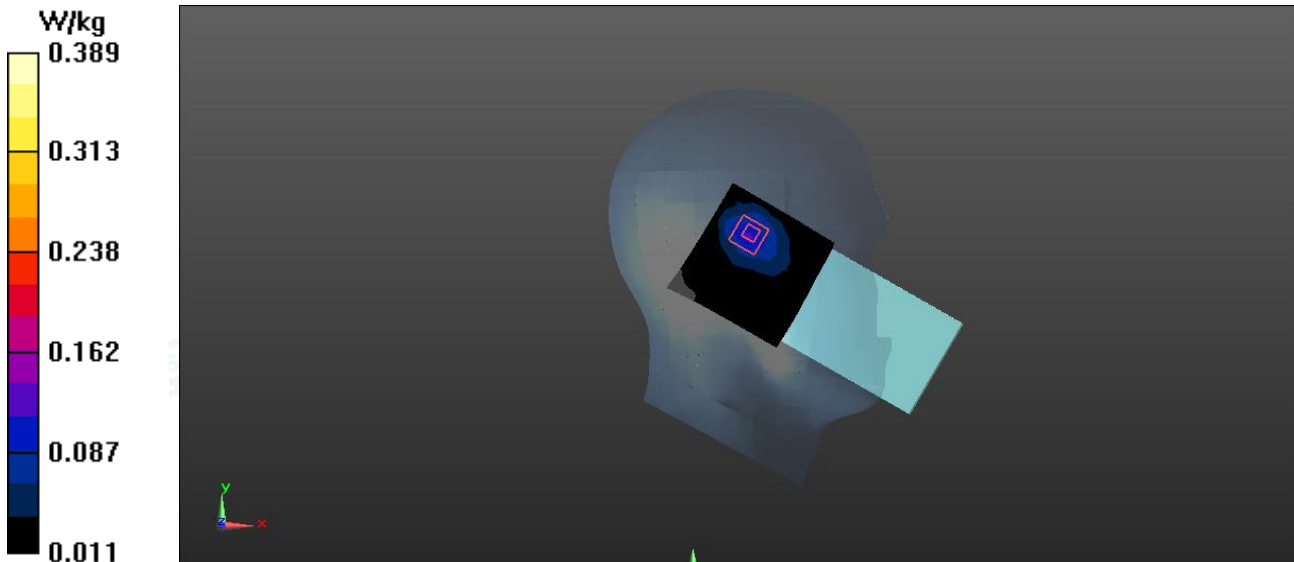

Date: 2026/10/10

Test Laboratory: LCS-SAR Lab

Bluetooth 1-DH5 78CH Rear side 10mm**DUT: Smart Phone ; Type: MC400 ; Serial: A260924032-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.781 \text{ S/m}$; $\epsilon_r = 38.863$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.597 W/kg **Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.348 V/m ; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.674 W/kg **SAR(1 g) = 0.308 W/kg ; SAR(10 g) = 0.167 W/kg** Maximum value of SAR (measured) = 0.564 W/kg 