



REPORT No.: SZ26060442S01

Annex D Plots of Maximum SAR Test Results

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/15

GSM850_GPRS(4 TX slots)_Right Tilt_Ch189_Ant 1

Communication System: UID 0, GSM850(class 12) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 40.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 836.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.850 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.79 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.688 W/kg

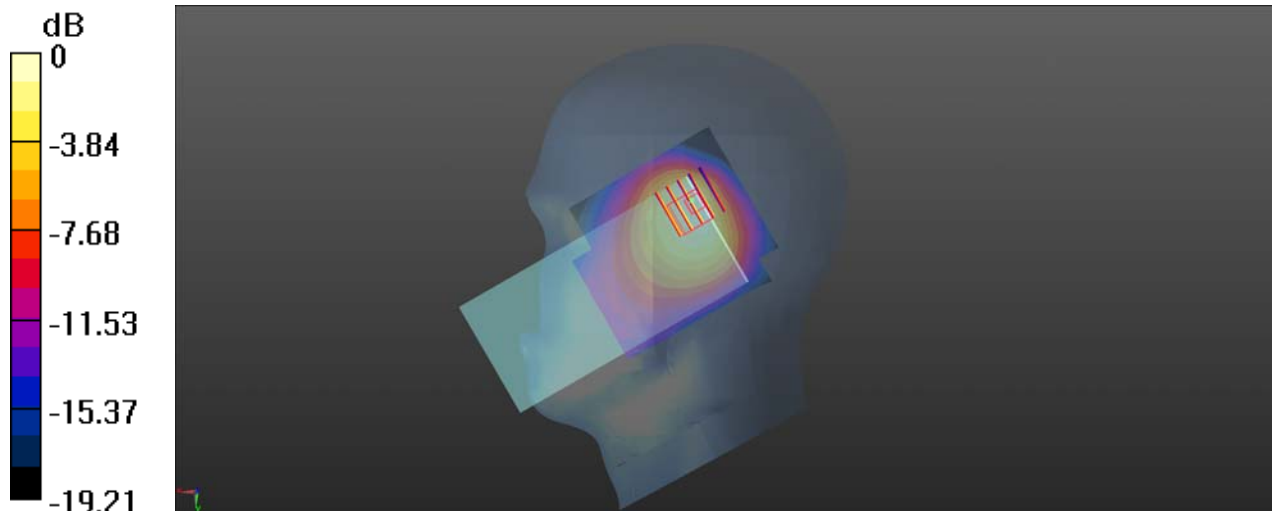

0 dB = 0.688 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/22

GSM1900_GPRS(4 TX slots)_Right Tilt_Ch810_Ant 1

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL_2000 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 39.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1909.8 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.919 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.20 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.923 W/kg

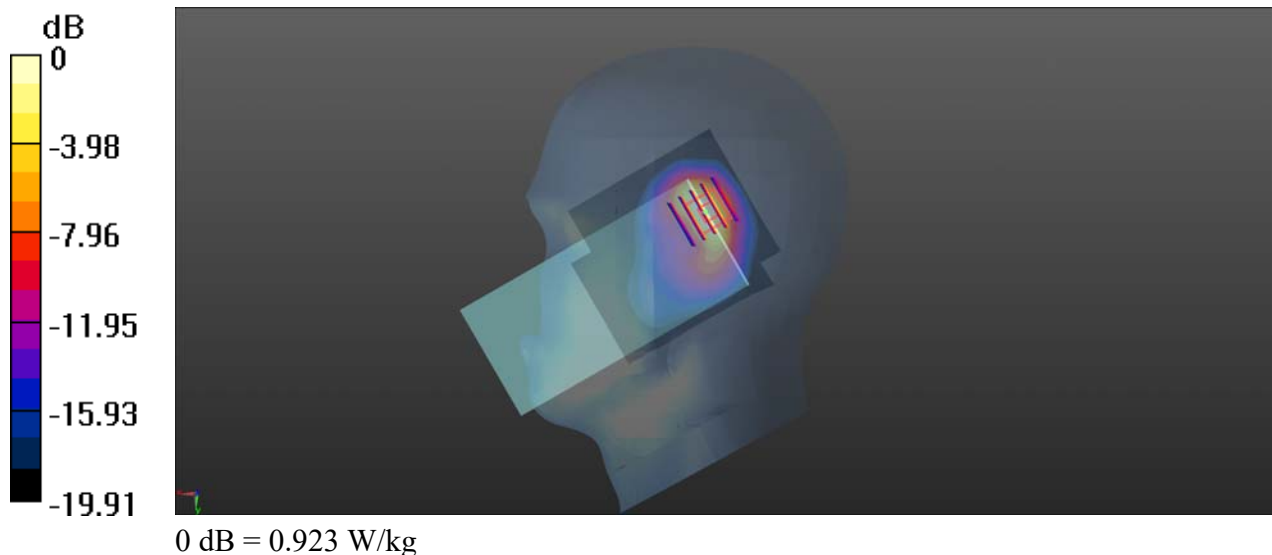

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

WCDMA Band II_RMC 12.2Kbps_Right Tilt_Ch9400_Ant 1

Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.25 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.21 W/kg

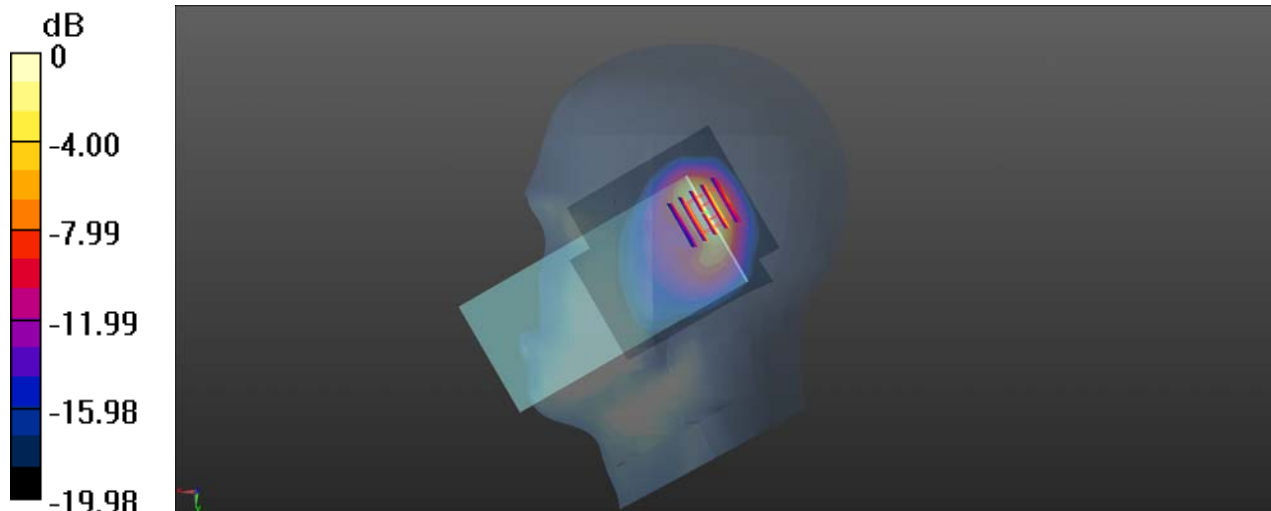

0 dB = 1.21 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

WCDMA Band IV_RMC 12.2Kbps_Right Tilt_Ch1513_Ant 1

Communication System: UID 0, UMTS-FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 39.456$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1752.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.61 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.07 W/kg

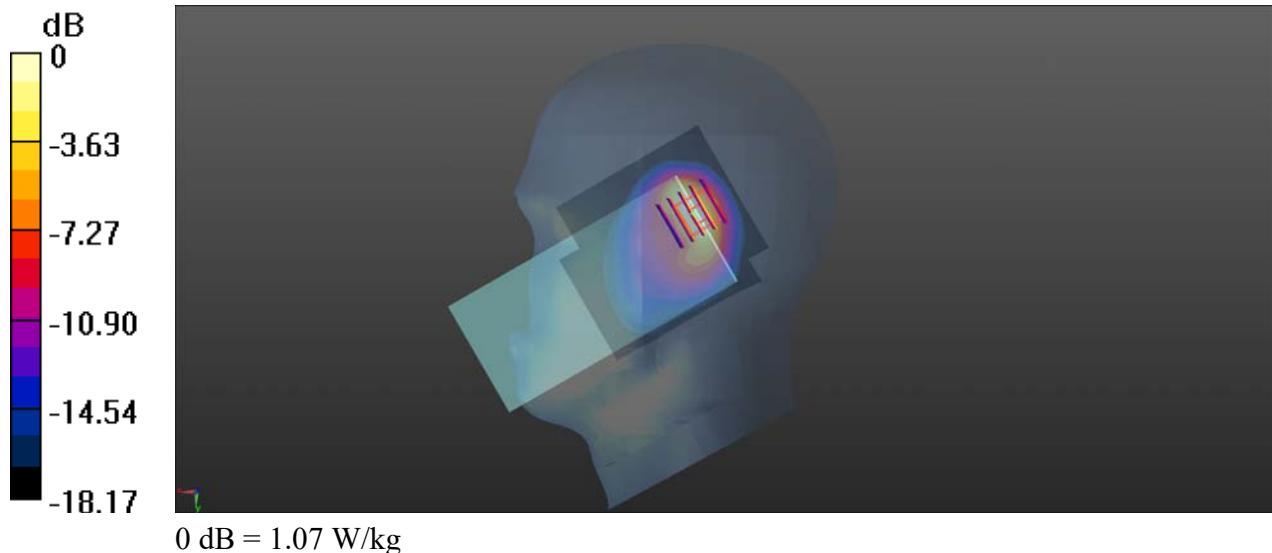

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/15

WCDMA Band V_RMC 12.2Kbps_Right Tilt_Ch4233_Ant 1

Communication System: UID 0, UMTS-FDD (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 847$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 846.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4233/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.60 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.477 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.890 W/kg

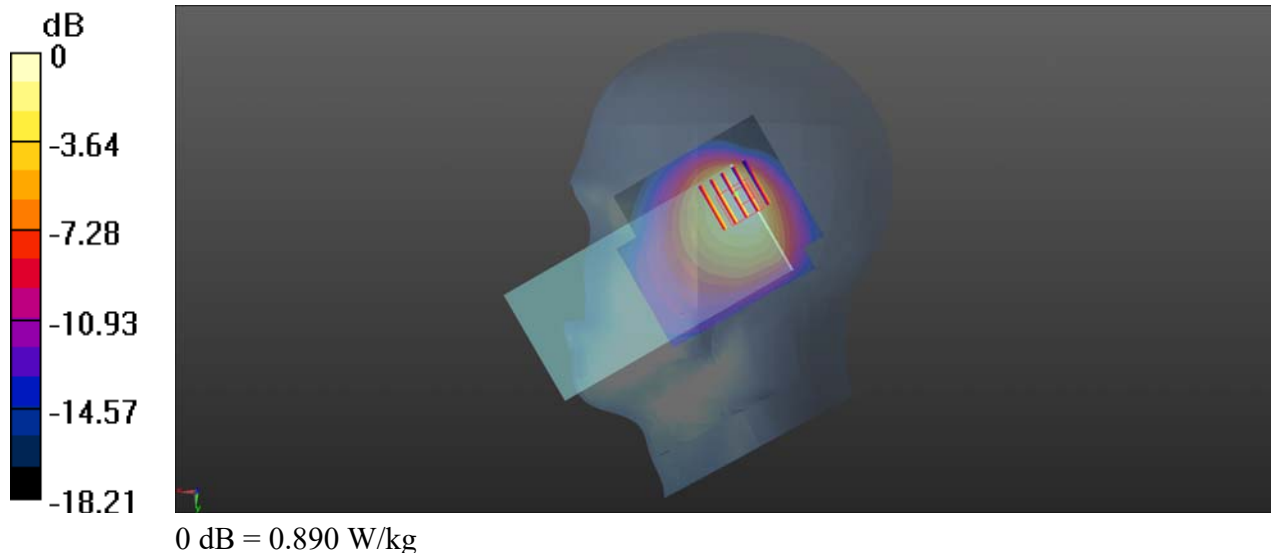

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

LTE Band 2_20MHz_QPSK_1RB_0Offset_Right Tilt_Ch18900_Ant 1

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.958 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.97 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.952 W/kg

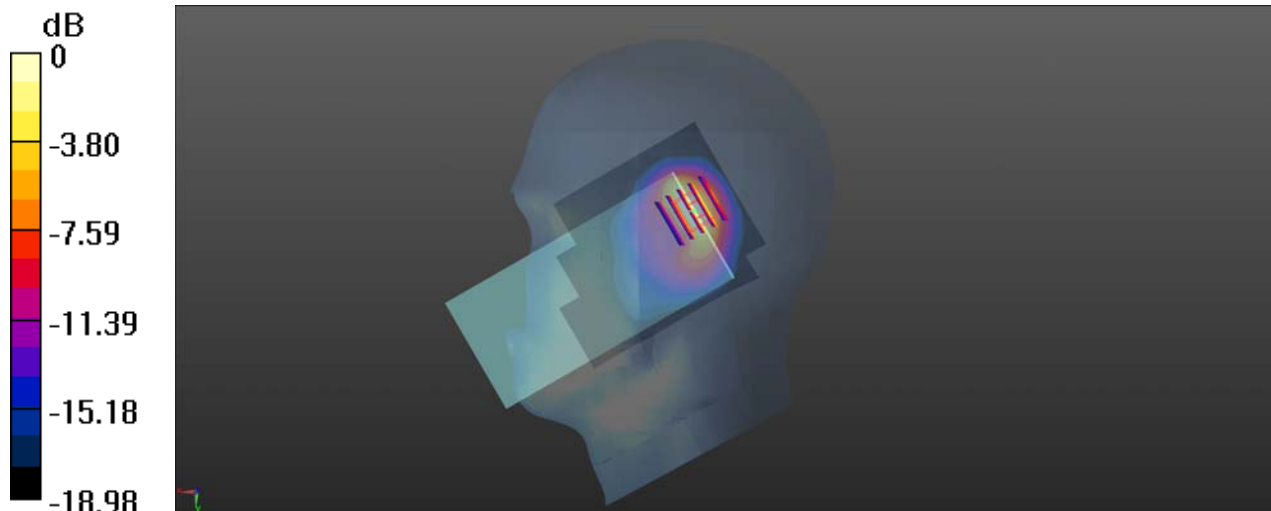

0 dB = 0.952 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/26

LTE Band 7_20MHz_QPSK_1RB_0Offset_Right Tilt_Ch21350_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.649 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.904 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.674 W/kg

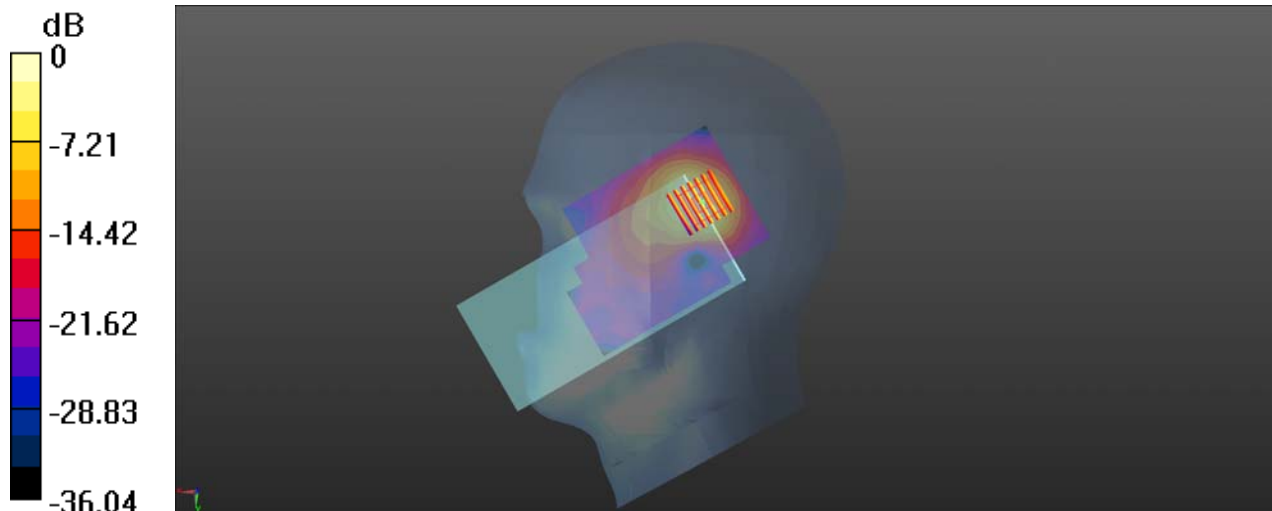

0 dB = 0.674 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/14

LTE Band 13_10MHz_QPSK_1RB_0Offset_Right Tilt_Ch23230_Ant 1

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 41.802$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 782 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.710 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.02 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.594 W/kg

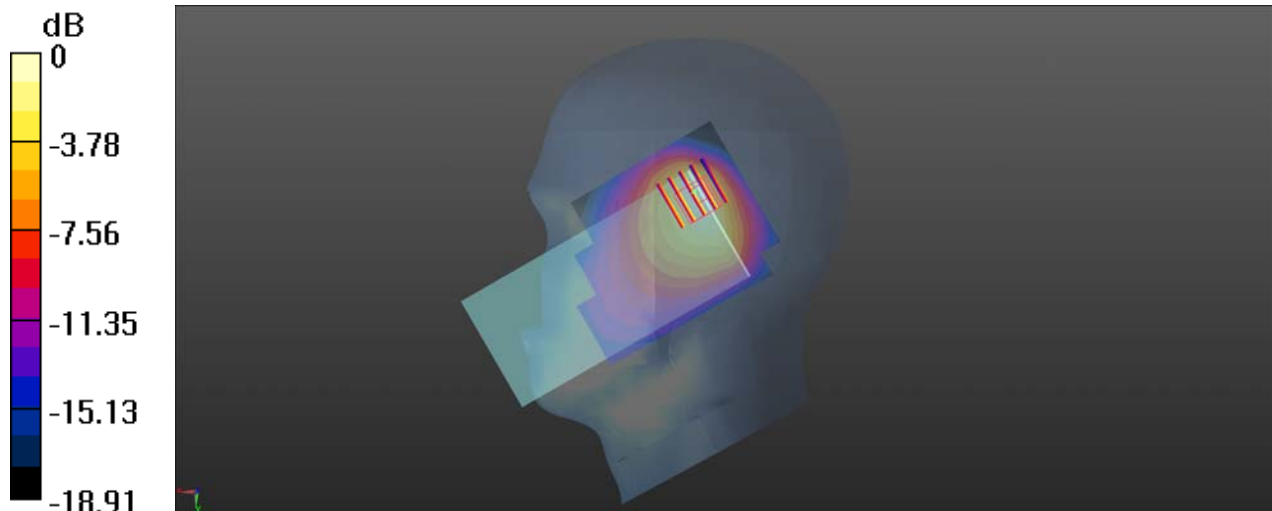

0 dB = 0.594 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/16

LTE Band 26_15MHz_QPSK_1RB_0Offset_Right Tilt_Ch26865_Ant 1

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_900 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 40.84$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 831.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.08 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.452 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.852 W/kg

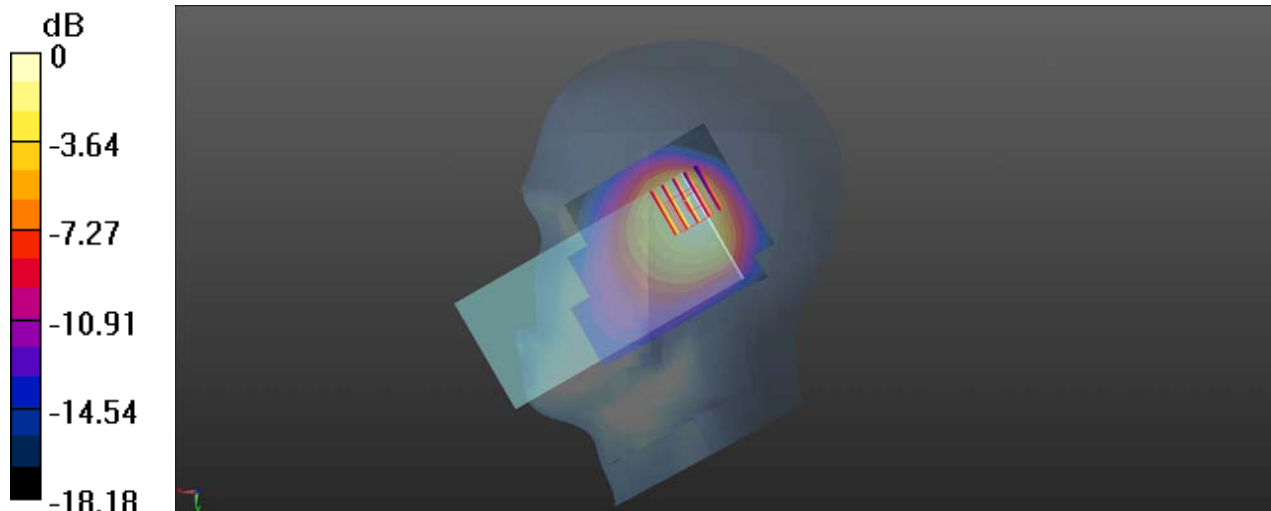

0 dB = 0.852 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/23

LTE Band 40_10MHz_QPSK_1RB_0Offset_Right Tilt_Ch38750_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.732$ S/m; $\epsilon_r = 38.722$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.91, 4.91, 4.91) @ 2310 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38750/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.724 W/kg

Ch38750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.742 W/kg

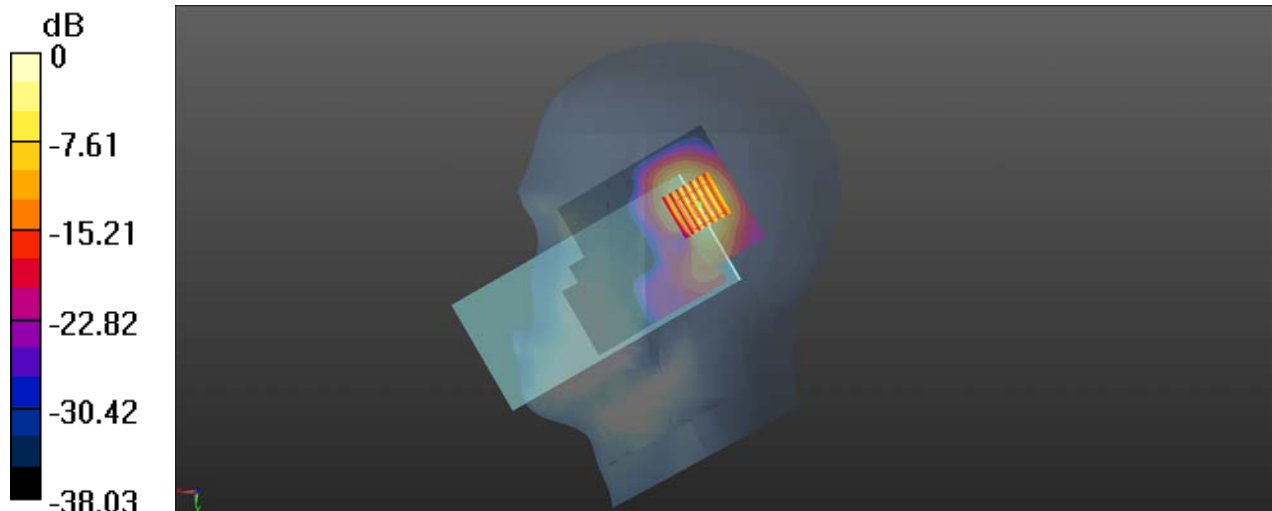

0 dB = 0.742 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/27

LTE Band 41_20MHz_QPSK_1RB_0Offset_Right Tilt_Ch39750_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used : $f = 2506$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 39.722$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2506 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Ch39750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.875 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.19 W/kg

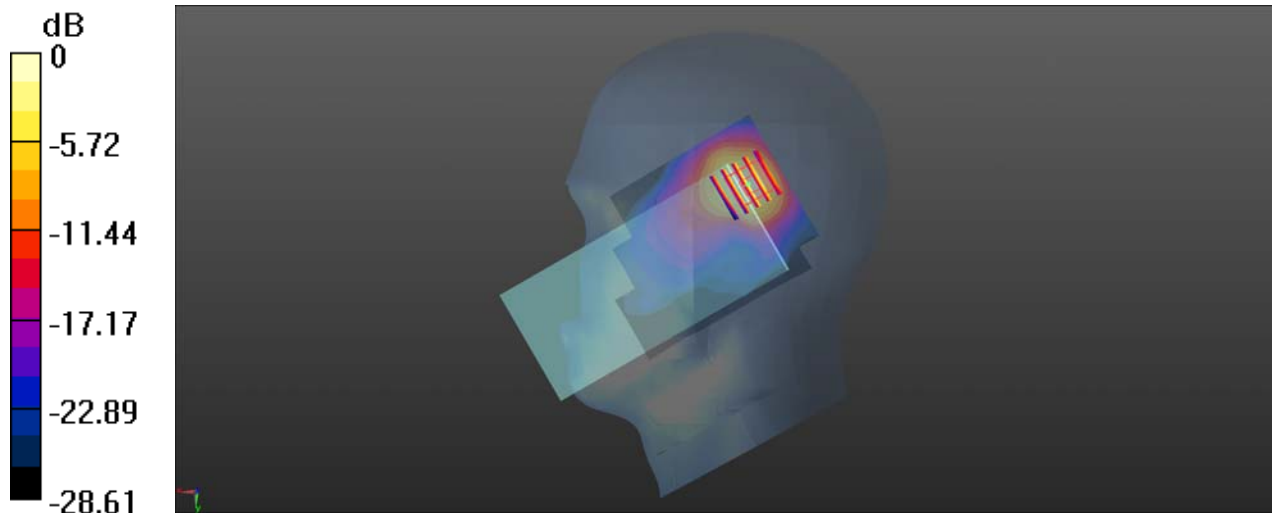

0 dB = 1.19 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

LTE Band 66_20MHz_QPSK_1RB_0Offset_Right Tilt_Ch132322_Ant 1

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1745 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.22 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 1.05 W/kg

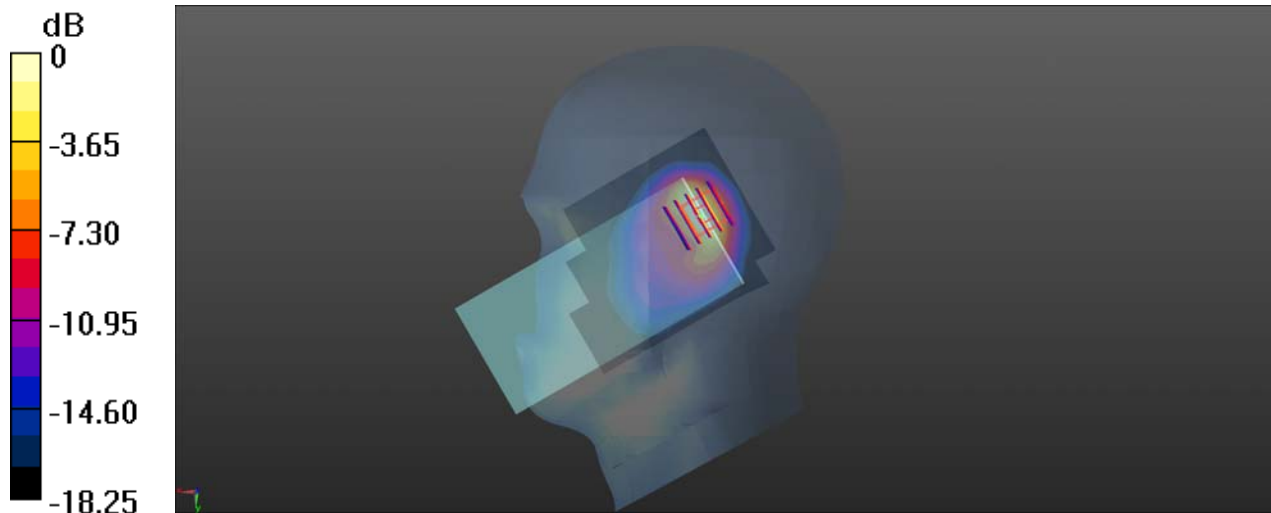

0 dB = 1.05 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/25

WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_Ch1_Ant 2

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.005

Medium: HSL_2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 38.926$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2412 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.752 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.12 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.710 W/kg

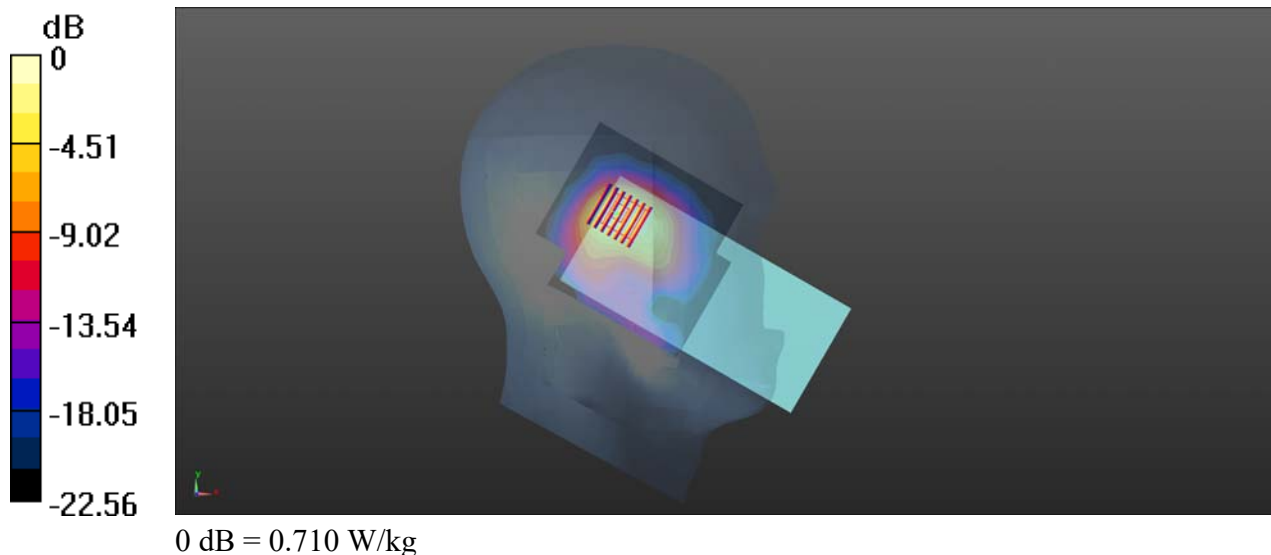

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.2GHz_802.11ac-VHT20 MCS0_Left Tilt_Ch48_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03
Medium: HSL_5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.584$ S/m; $\epsilon_r = 35.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5240 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch48/Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Ch48/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.361 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.01 W/kg

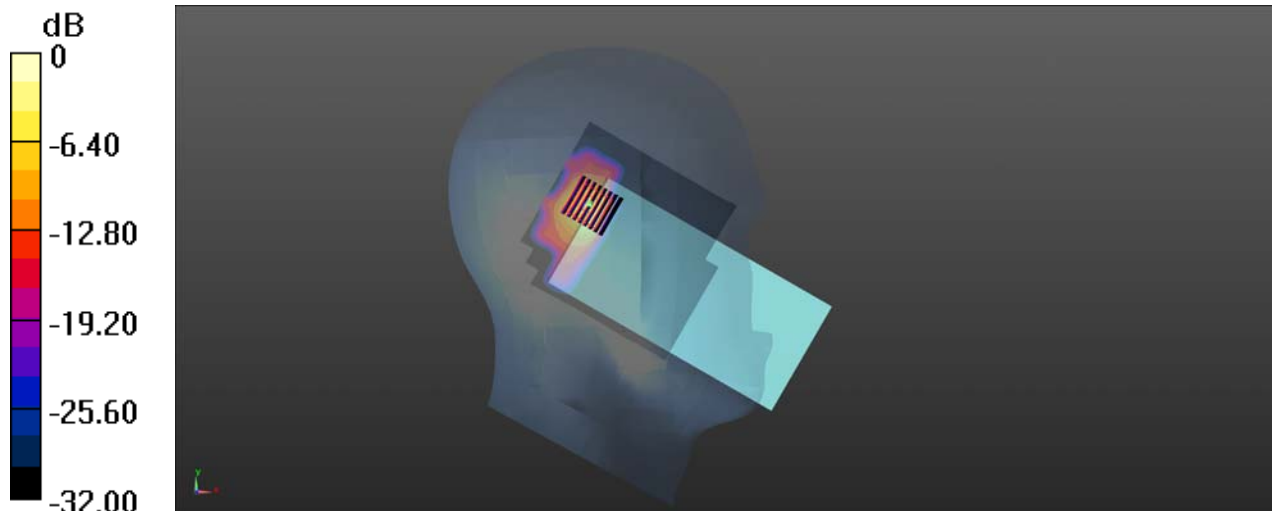

0 dB = 1.01 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.3GHz_802.11n-HT20 MCS0_Left Tilt_Ch60_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.047
Medium: HSL_5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.842$ S/m; $\epsilon_r = 35.218$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5300 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch60/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.201 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.13 W/kg

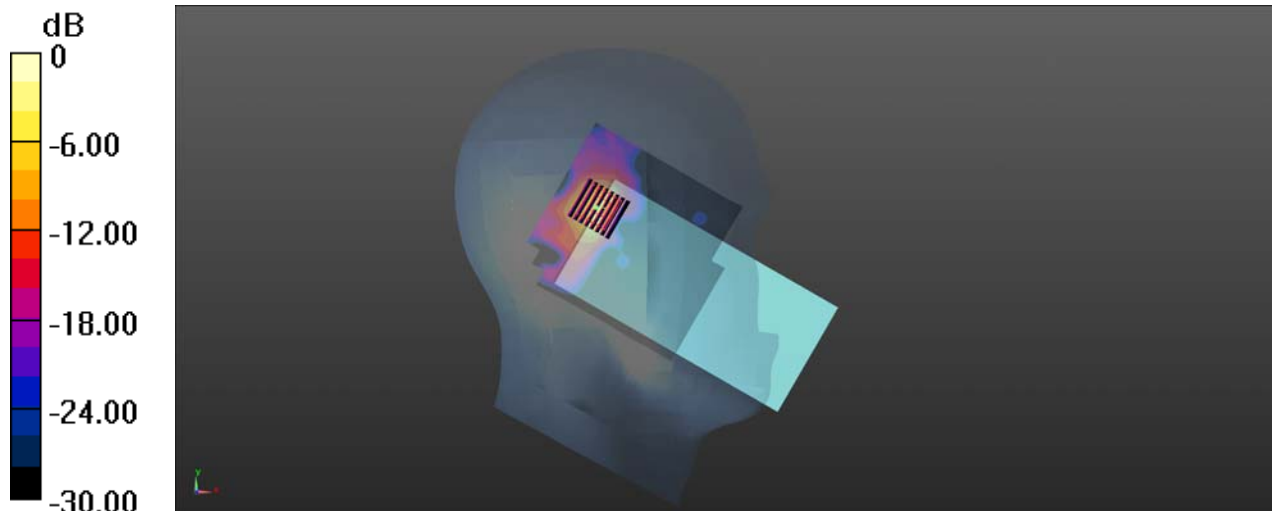

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.5GHz_802.11n-HT20 MCS0_Left Tilt_Ch144_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5720 MHz; Duty Cycle: 1:1.047
Medium: HSL_5750 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 35.923$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5720 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch144/Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Ch144/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.662 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.12 W/kg

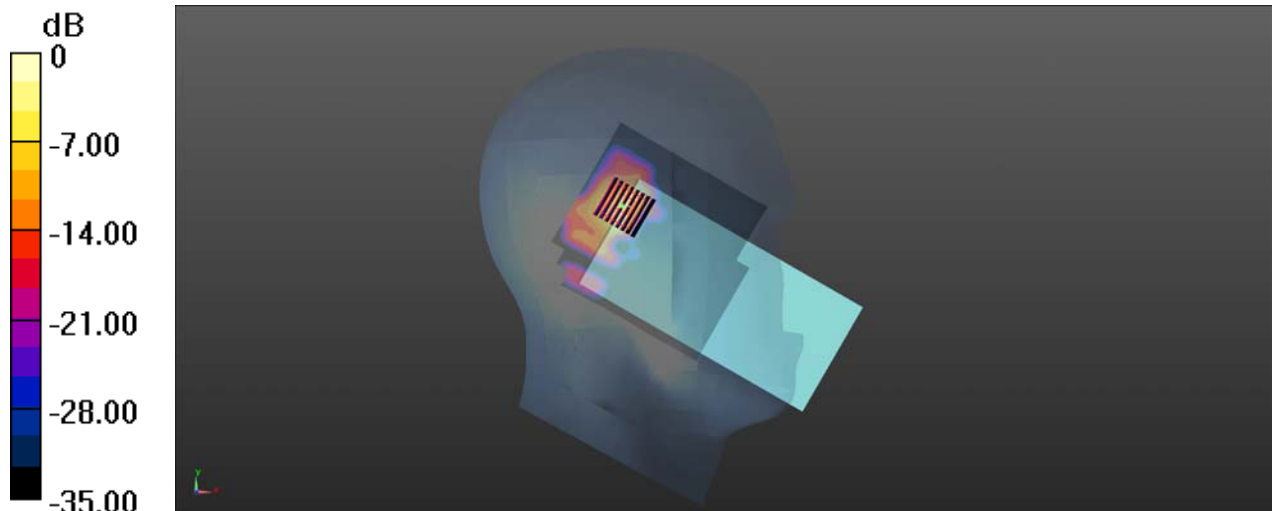

0 dB = 1.12 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.8GHz_802.11n-HT20 MCS0_Left Tilt_Ch157_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.031
Medium: HSL_5750 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5785 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (111x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch157/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.945 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.20 W/kg

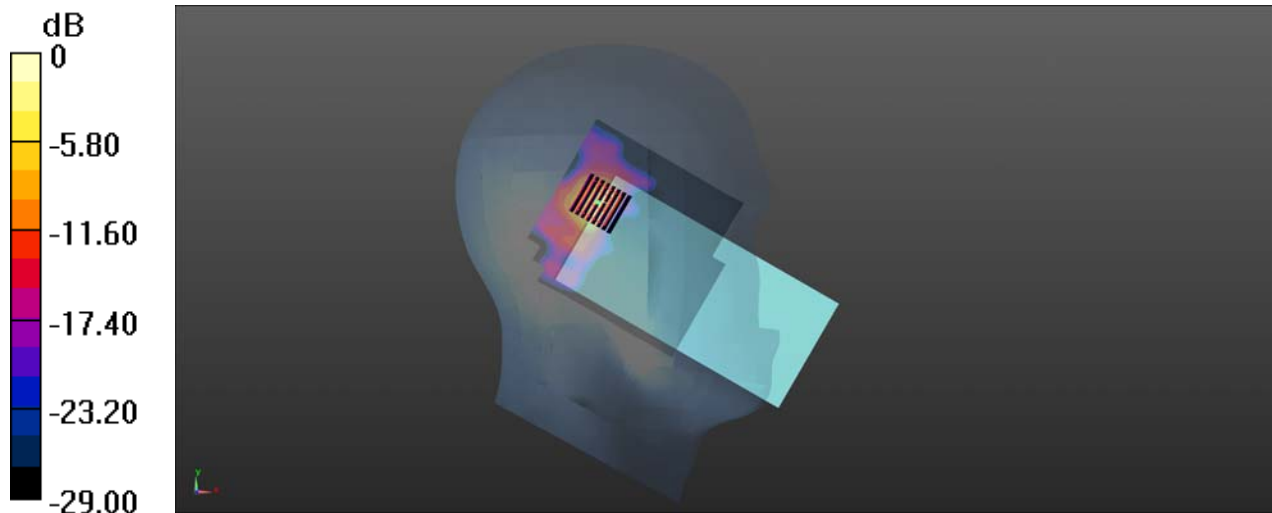

0 dB = 1.20 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/25

Bluetooth_DH5_Left Cheek_Ch78

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.546$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.249 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.475 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 0.212 W/kg

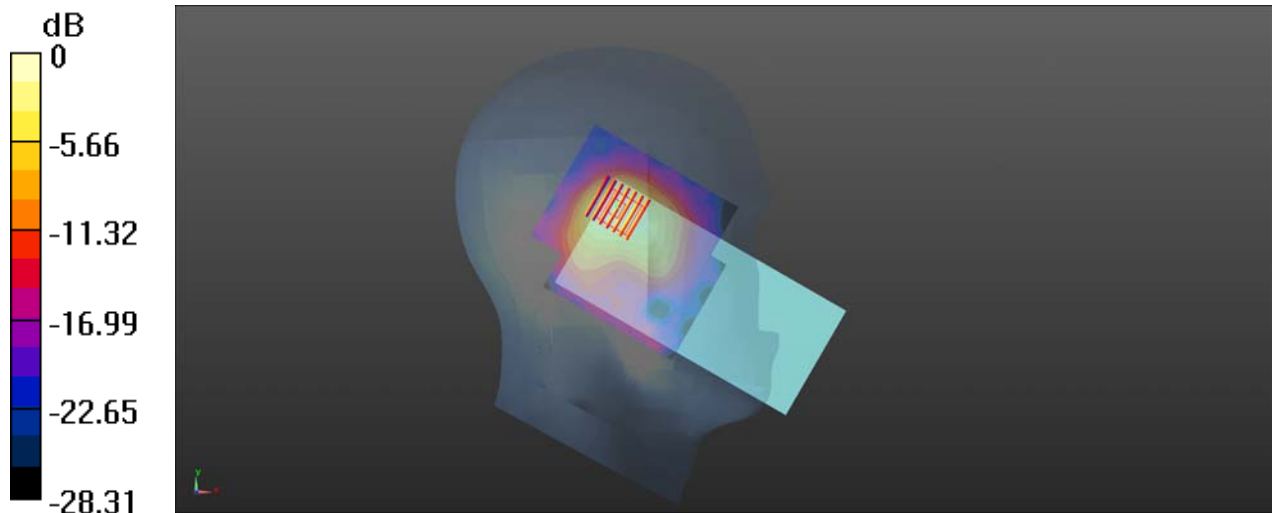

0 dB = 0.212 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/15

GSM850_GPRS(4 TX slots)_Back Side_10mm_Ch189_Ant 1

Communication System: UID 0, GSM850(class 12) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 40.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 836.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.691 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.45 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.656 W/kg

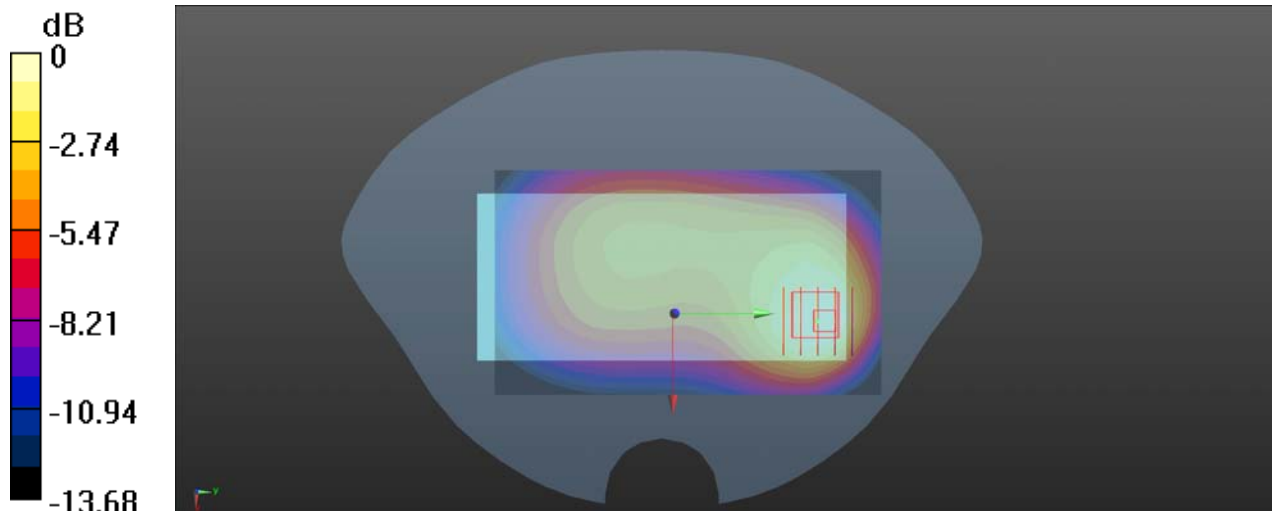

0 dB = 0.656 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

GSM1900_GPRS(4 TX slots)_Back Side_10mm_Ch661_Ant 1

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.324 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.117 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.314 W/kg

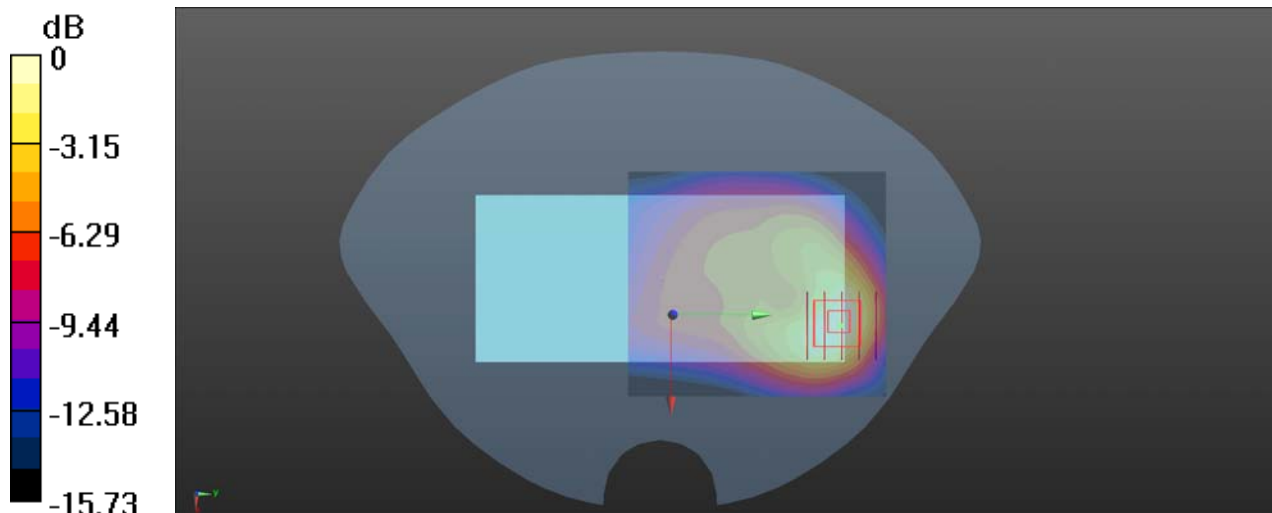

0 dB = 0.314 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

GSM1900_GPRS(4 TX slots)_Top Side_10mm_Ch661_Ant 1

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.590 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.87 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.598 W/kg

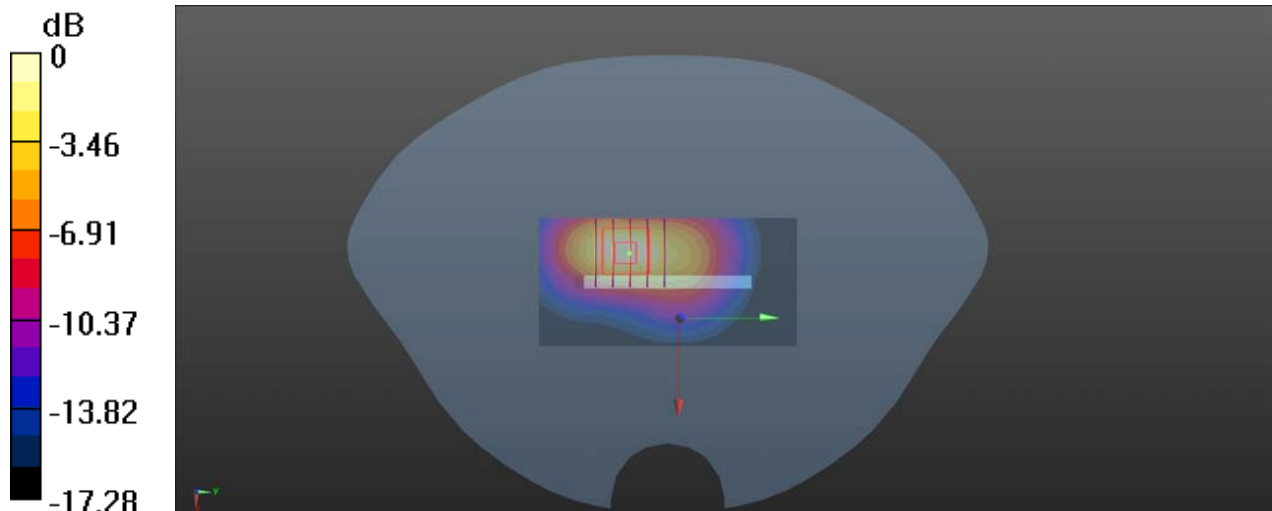

0 dB = 0.598 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/22

WCDMA Band II_RMC 12.2Kbps_Back Side_10mm_Ch9400_Ant 0

Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.542 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.759 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.277 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.511 W/kg

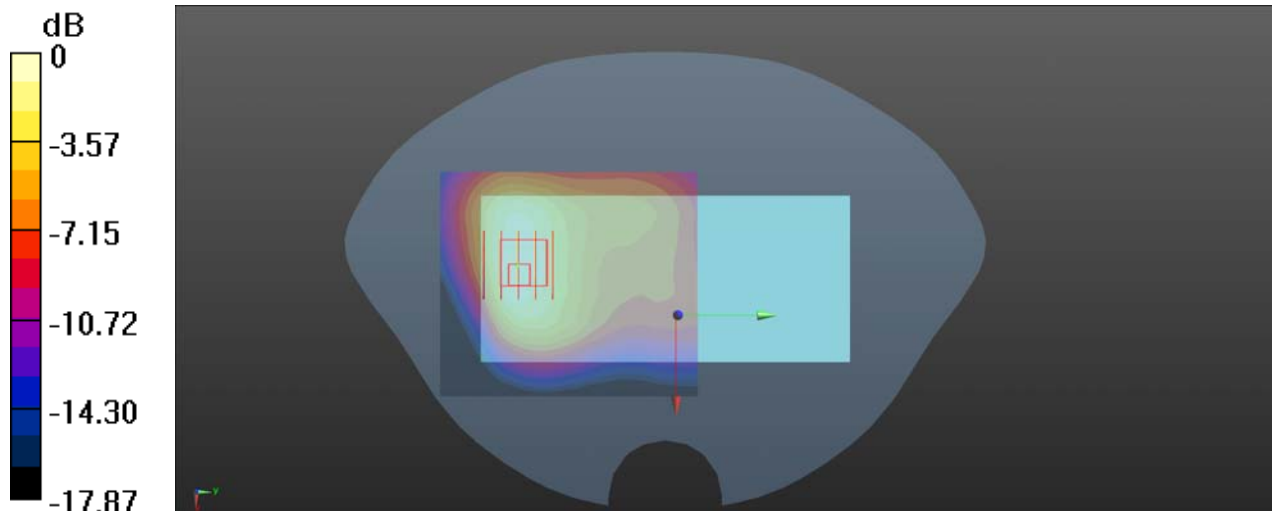

0 dB = 0.511 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

WCDMA Band II_RMC 12.2Kbps_Top Side_10mm_Ch9400_Ant 1

Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.756 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.10 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.765 W/kg

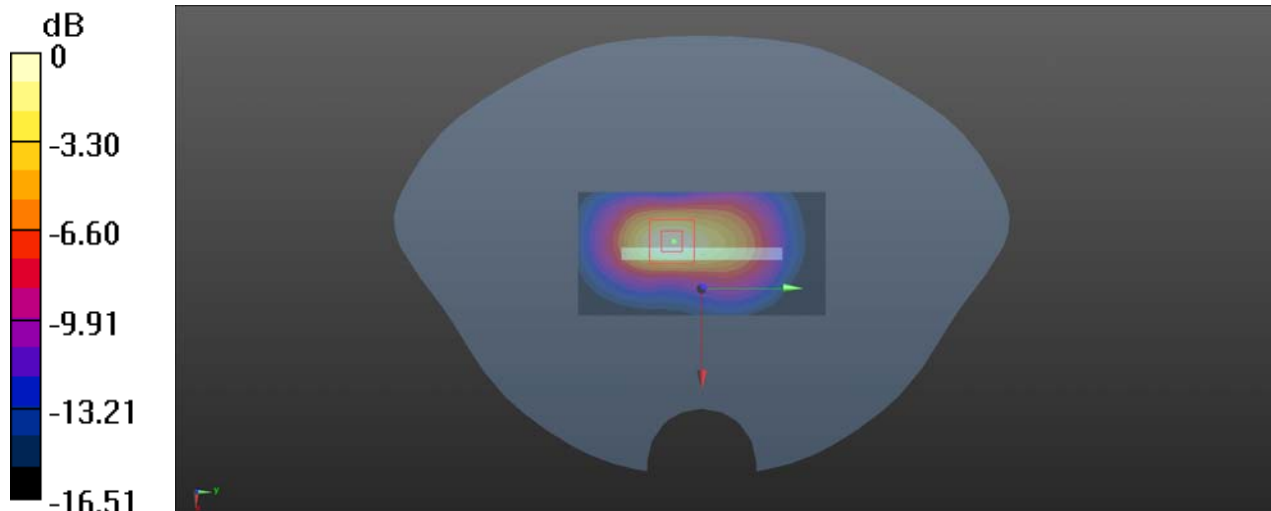

0 dB = 0.765 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

WCDMA Band IV_RMC 12.2Kbps_Back Side_10mm_Ch1413_Ant 0

Communication System: UID 0, UMTS-FDD (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1732.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.911 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.885 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.5%

Maximum value of SAR (measured) = 0.948 W/kg

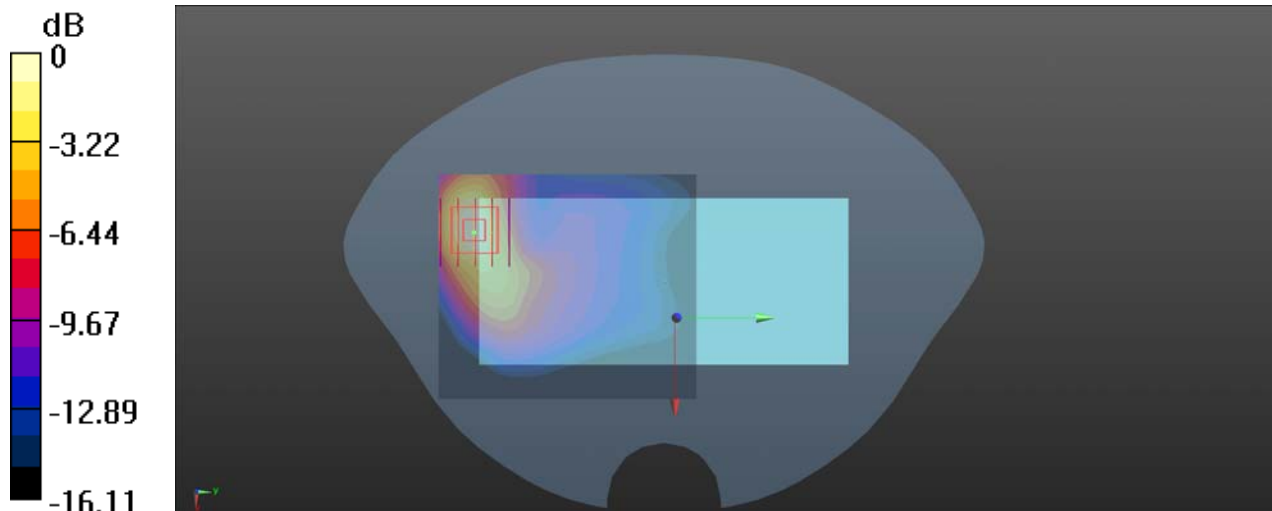

0 dB = 0.948 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

WCDMA Band IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1413_Ant 0

Communication System: UID 0, UMTS-FDD (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1732.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.41 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.581 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 1.22 W/kg

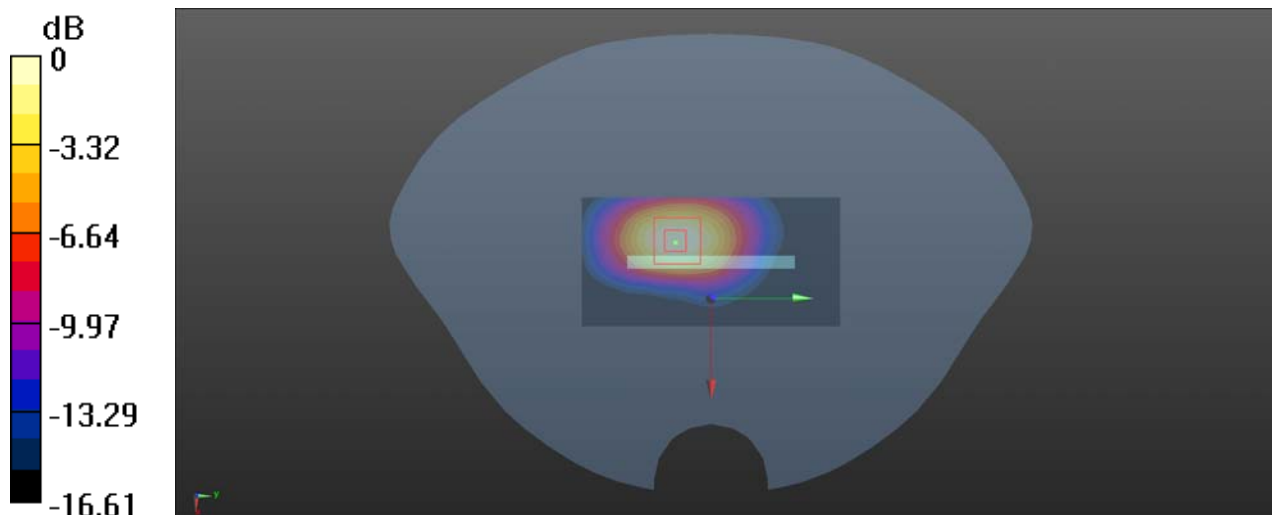

0 dB = 1.22 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/15

WCDMA Band V_RMC 12.2Kbps_Back Side_10mm_Ch4182_Ant 1


Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 40.864$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 836.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.333 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.65 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.474 W/kg
SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.191 W/kg
Smallest distance from peaks to all points 3 dB below = 17 mm
Ratio of SAR at M2 to SAR at M1 = 62.9%
Maximum value of SAR (measured) = 0.315 W/kg

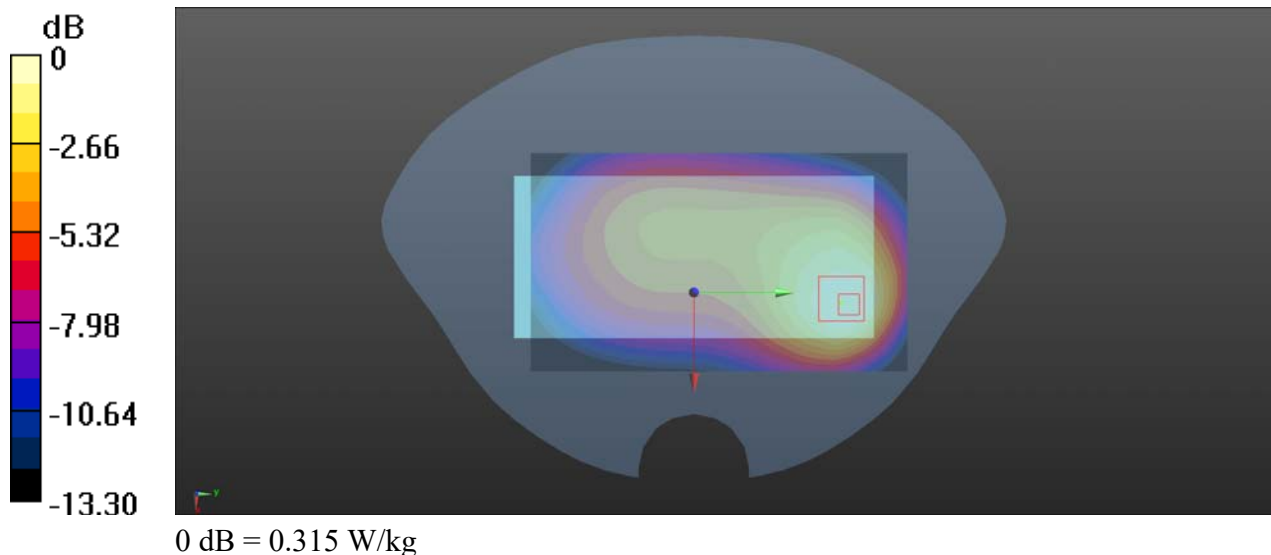

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

LTE Band 2_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch18900_Ant 0

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.747 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.80 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.709 W/kg

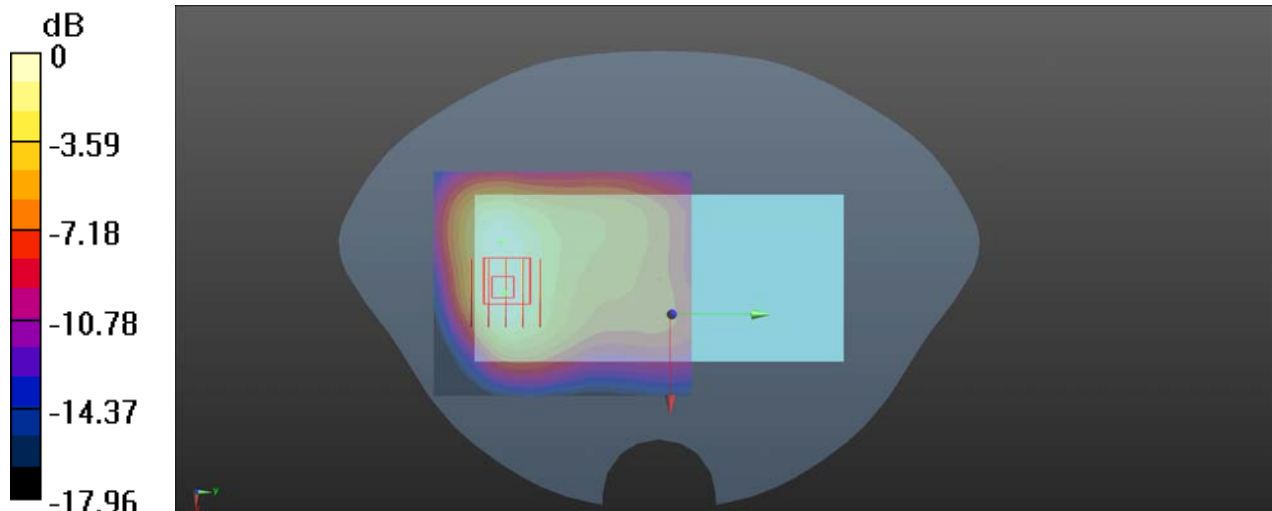

0 dB = 0.709 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

LTE Band 2_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch18700_Ant 0

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.027$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1860 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18700/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.78 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.499 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.941 W/kg

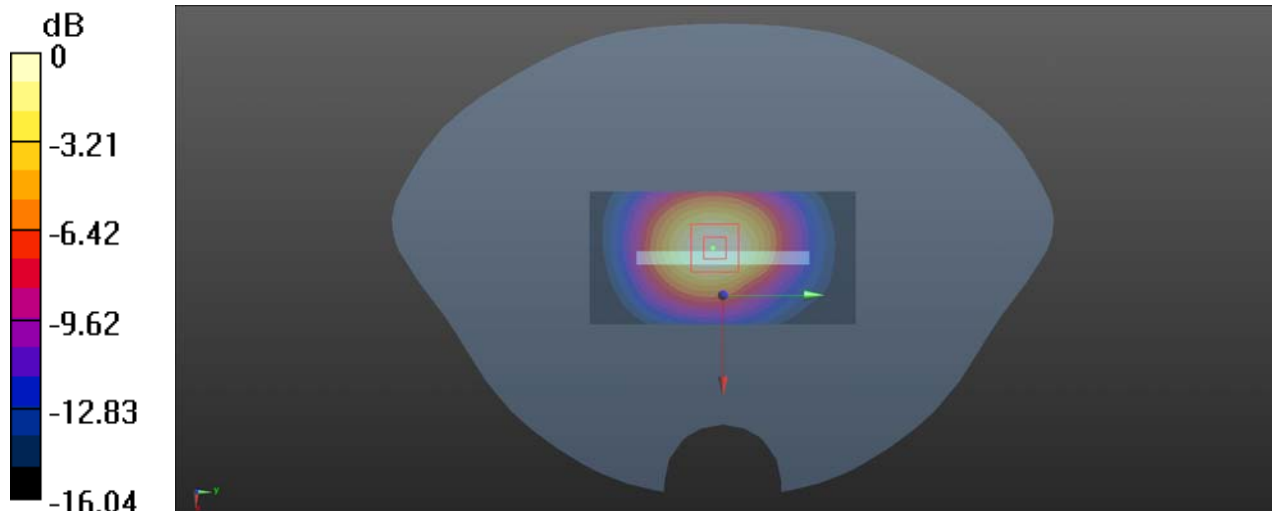

0 dB = 0.941 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/26

LTE Band 7_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch21350_Ant 0

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.489 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.739 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.495 W/kg

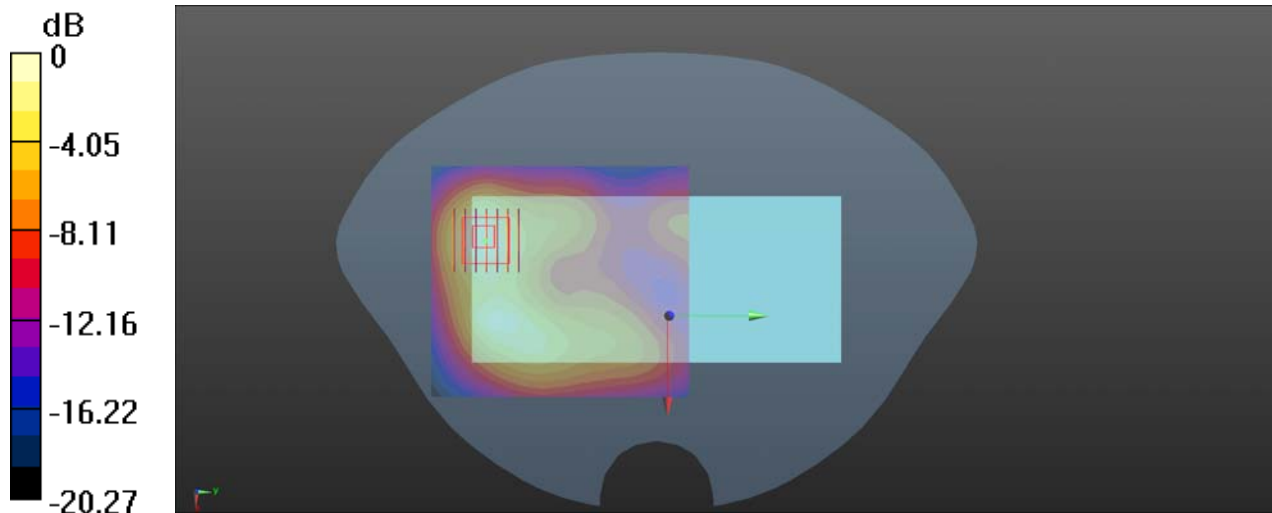

0 dB = 0.495 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/26

LTE Band 7_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch21350_Ant 0

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.688 W/kg

Ch21350/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.76 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.661 W/kg

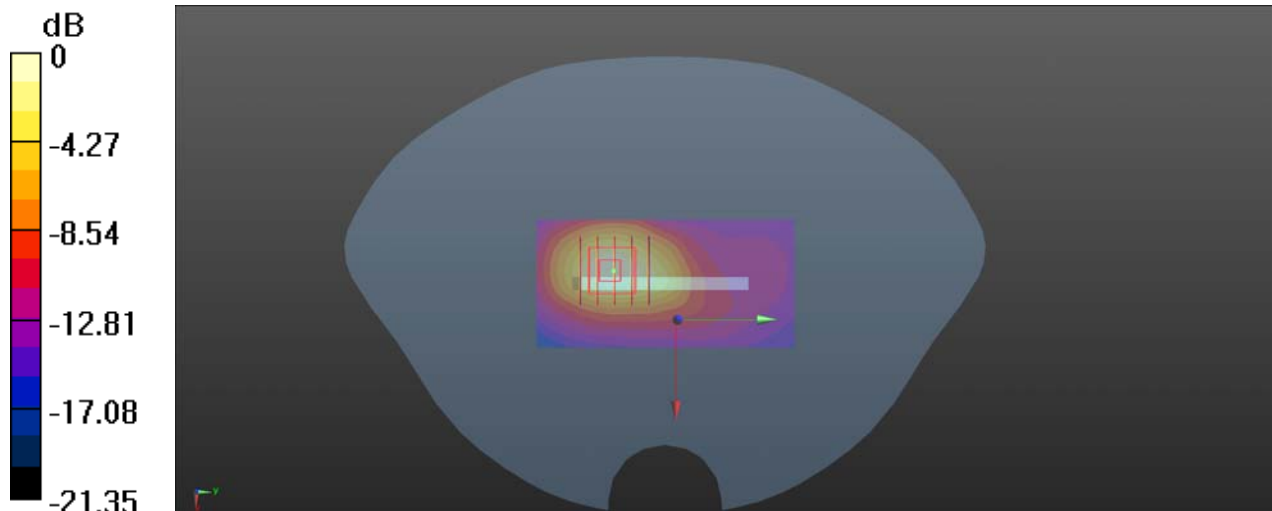

0 dB = 0.661 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/14

LTE Band 13_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch23230_Ant 0

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 41.802$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 782 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.305 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.12 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.310 W/kg

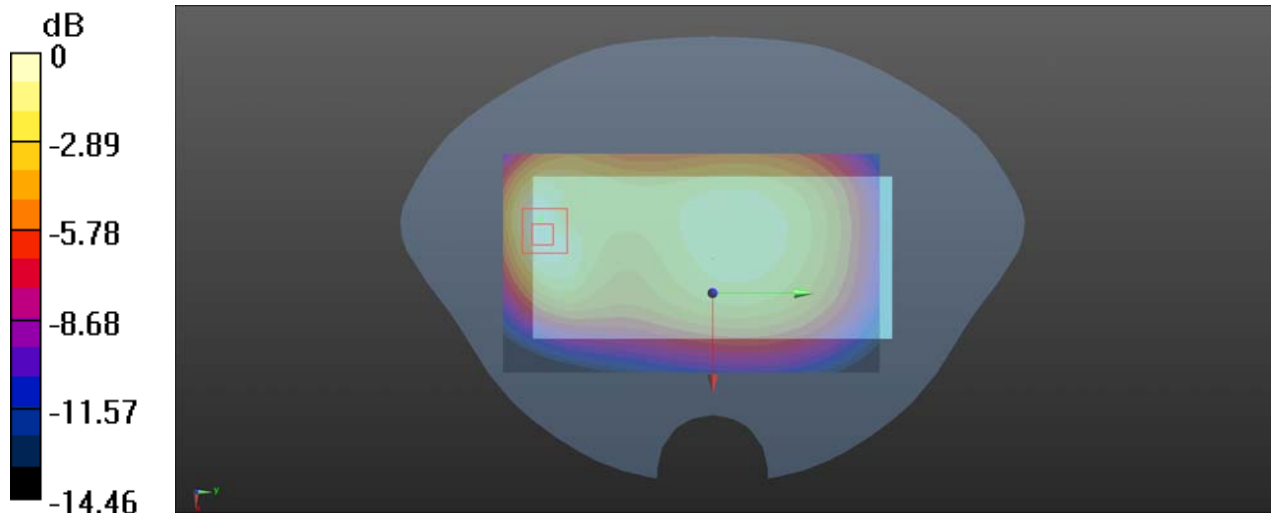

0 dB = 0.310 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/16

LTE Band 26_15MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch26865_Ant 1

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_900 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 40.84$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 831.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 0.264 W/kg

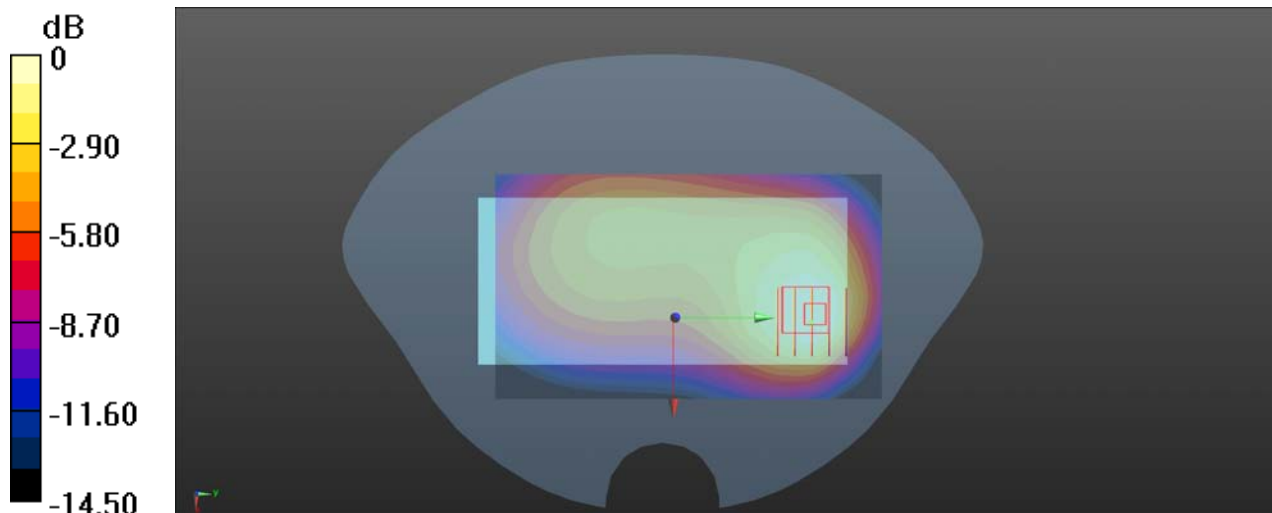

0 dB = 0.264 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/23

LTE Band 40_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch38750_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.732$ S/m; $\epsilon_r = 38.722$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.91, 4.91, 4.91) @ 2310 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38750/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.398 W/kg

Ch38750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9490 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.353 W/kg

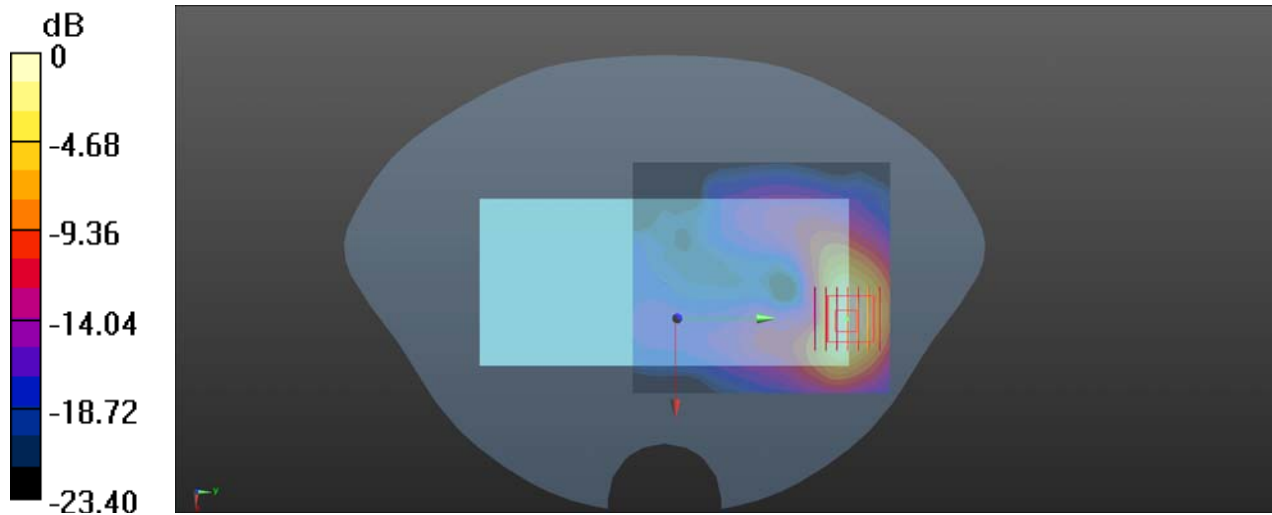

0 dB = 0.353 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/23

LTE Band 40_10MHz_QPSK_1RB_0Offset_Top Side_10mm_Ch38750_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.732$ S/m; $\epsilon_r = 38.722$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.91, 4.91, 4.91) @ 2310 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38750/Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.750 W/kg

Ch38750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.47 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.672 W/kg

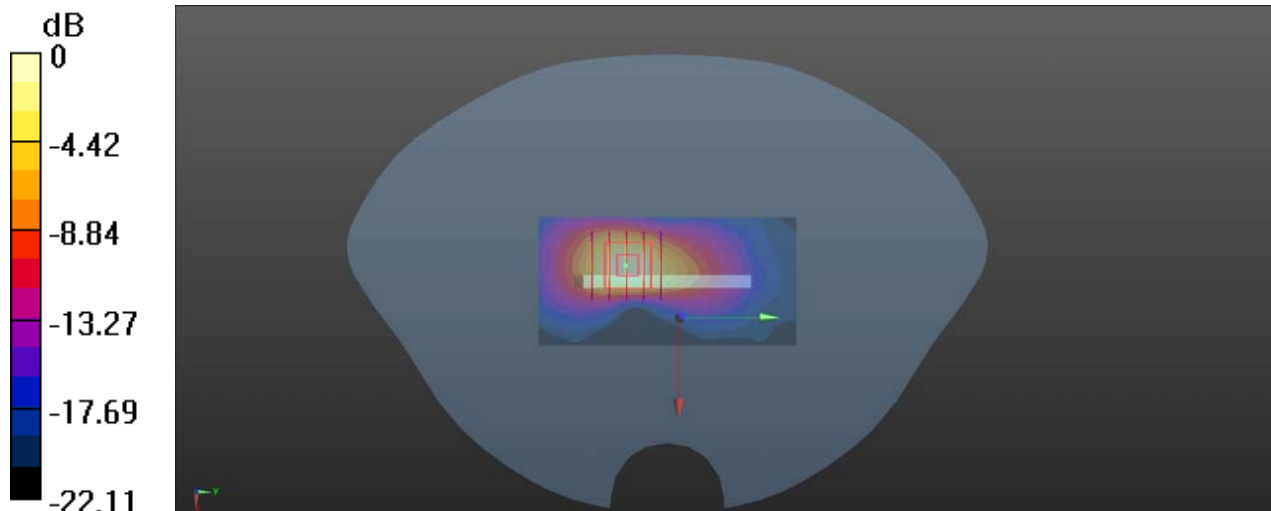

0 dB = 0.672 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/27

LTE Band 41_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch40620_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 39.282$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2593 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.775 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.191 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.803 W/kg

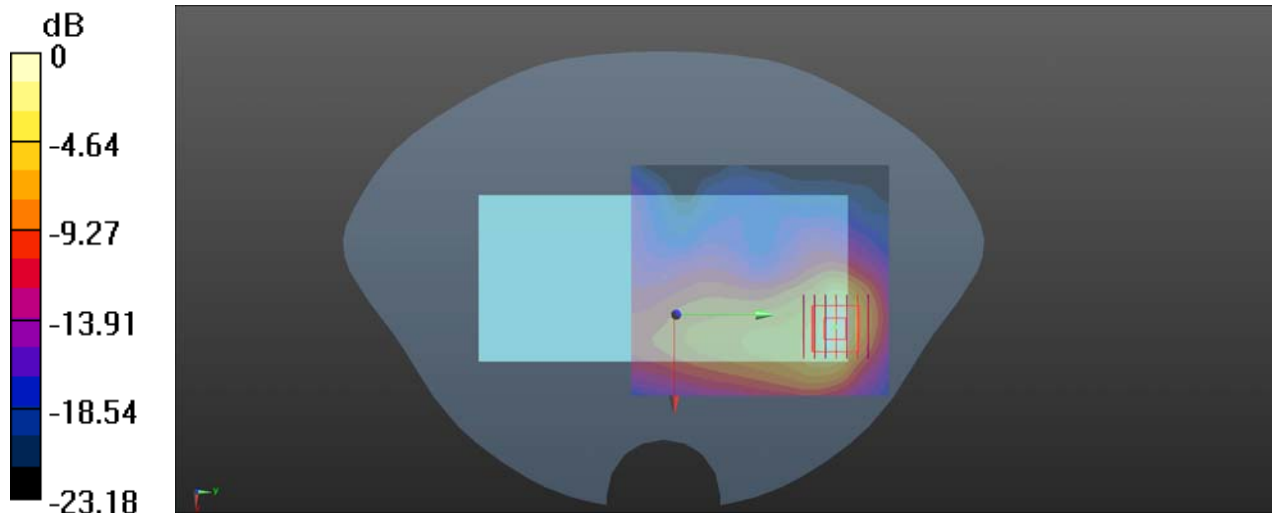

0 dB = 0.803 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/27

LTE Band 41_20MHz_QPSK_1RB_0Offset_Top Side_10mm_Ch40620_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 39.282$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2593 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.744 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.414 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.717 W/kg

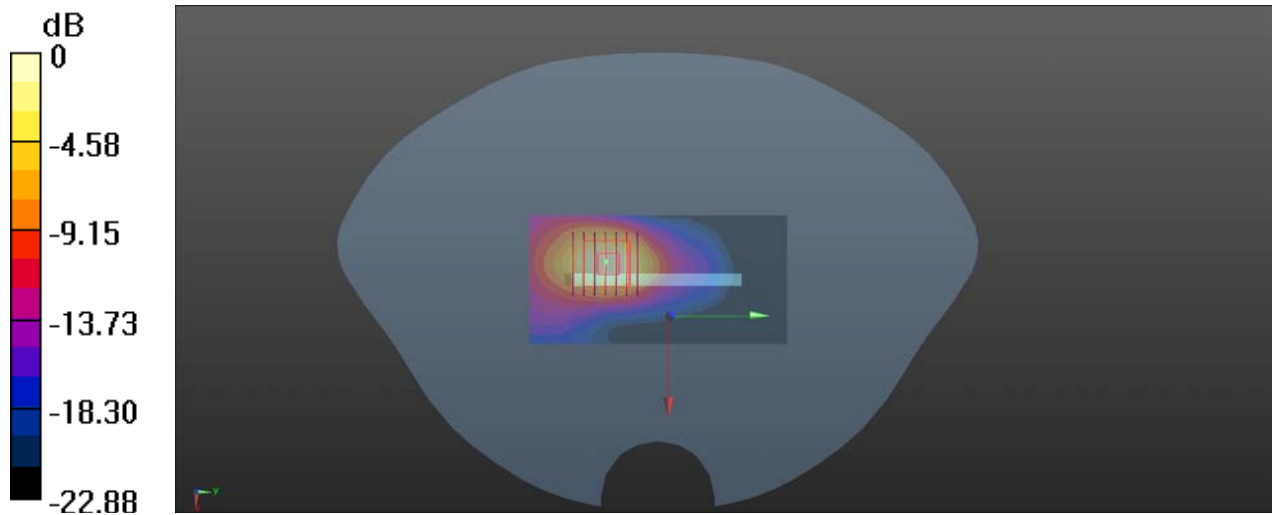

0 dB = 0.717 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

LTE Band 66_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch132322_Ant 0

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1745 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.439 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.585 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 0.445 W/kg

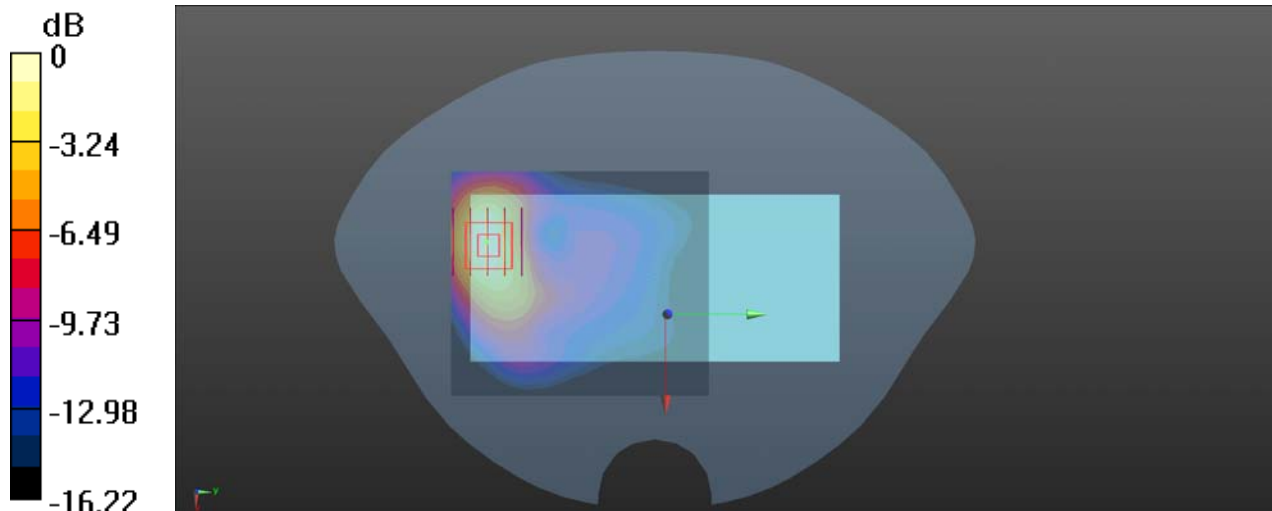

0 dB = 0.445 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

LTE Band 66_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch132072_Ant 0

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.332$ S/m; $\epsilon_r = 39.467$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1720 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132072/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.16 W/kg**Ch132072/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.13 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 1.04 W/kg

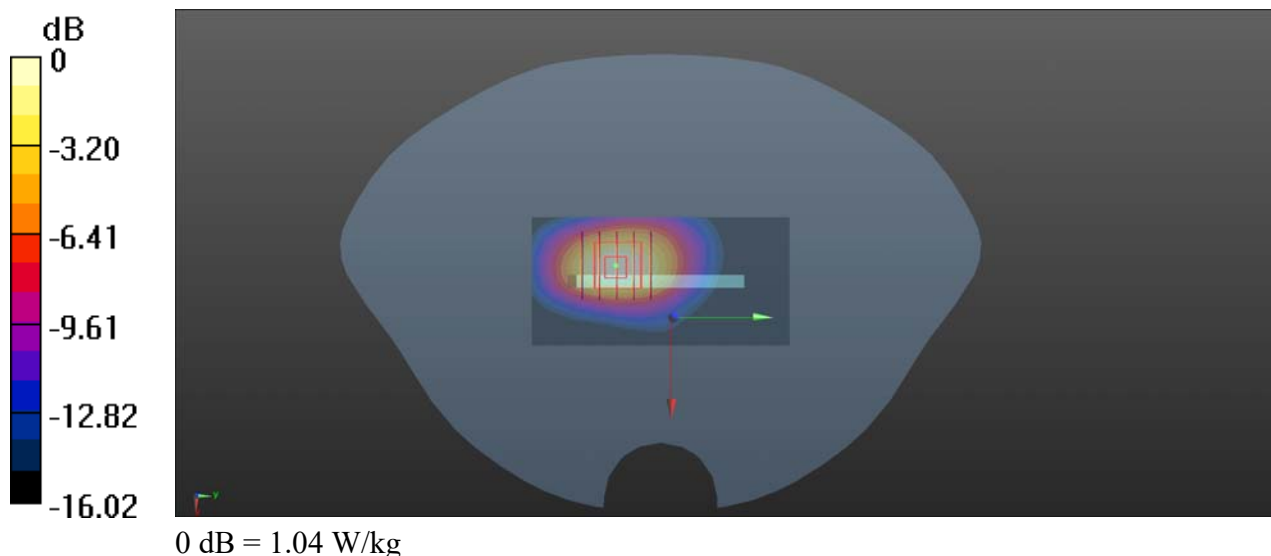

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/25

WLAN 2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch1_Ant 2

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.005

Medium: HSL_2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 38.926$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2412 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.684 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.859 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.642 W/kg

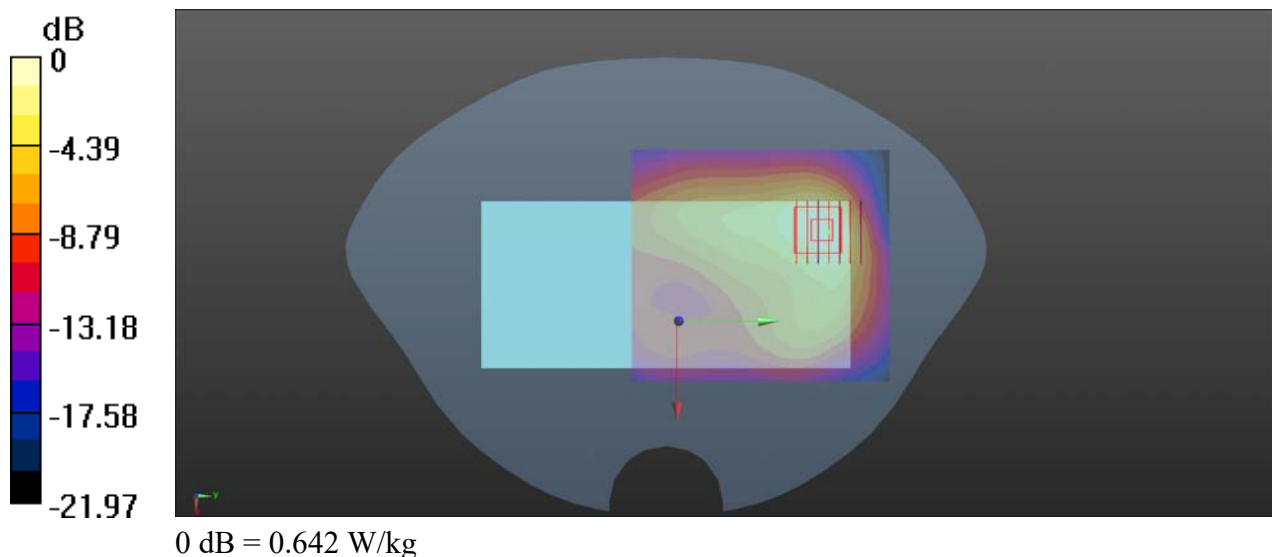

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.2GHz_802.11ac-VHT20 MCS0_Back Side_10mm_Ch48_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03
Medium: HSL_5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.584$ S/m; $\epsilon_r = 35.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5240 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch48/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.700 W/kg

Ch48/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8040 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.670 W/kg

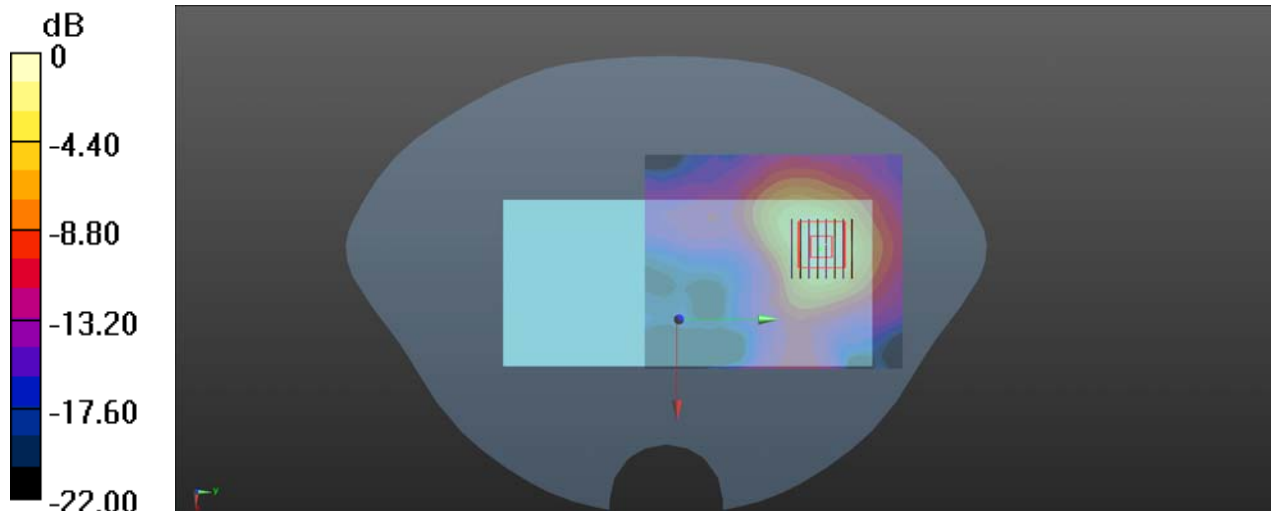

0 dB = 0.670 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.2GHz_802.11ac VHT20 MCS0_Top Side_10mm_Ch48_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03
Medium: HSL_5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.584$ S/m; $\epsilon_r = 35.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5240 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch48/Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Ch48/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.174 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.02 W/kg

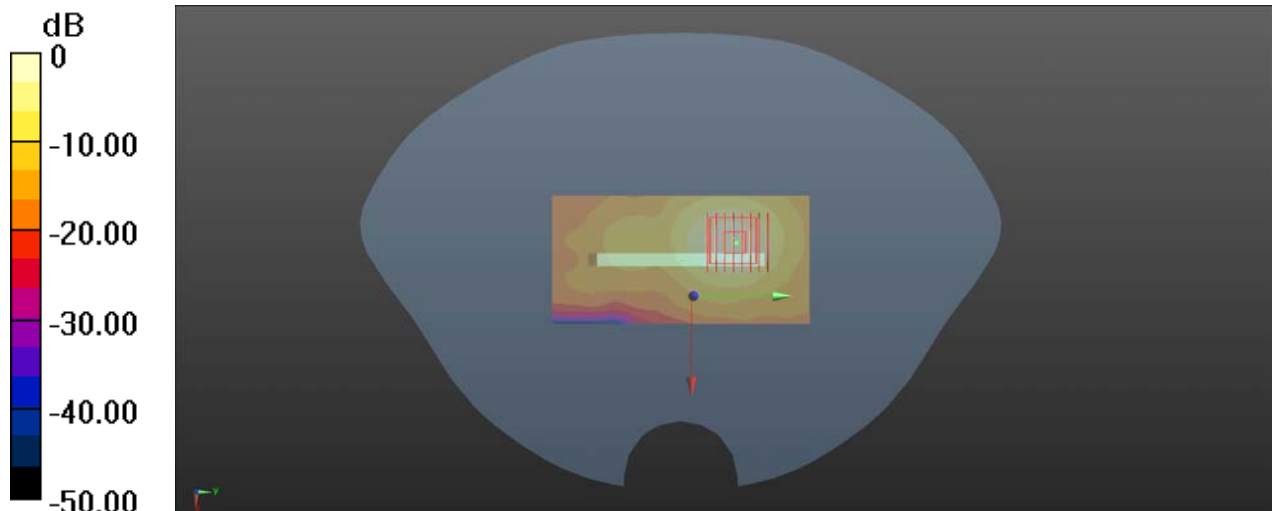

0 dB = 1.02 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.3GHz_802.11n-HT20 MCS0_Back Side_10mm_Ch60_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.047
Medium: HSL_5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.842$ S/m; $\epsilon_r = 35.218$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5300 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Ch60/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.987 W/kg

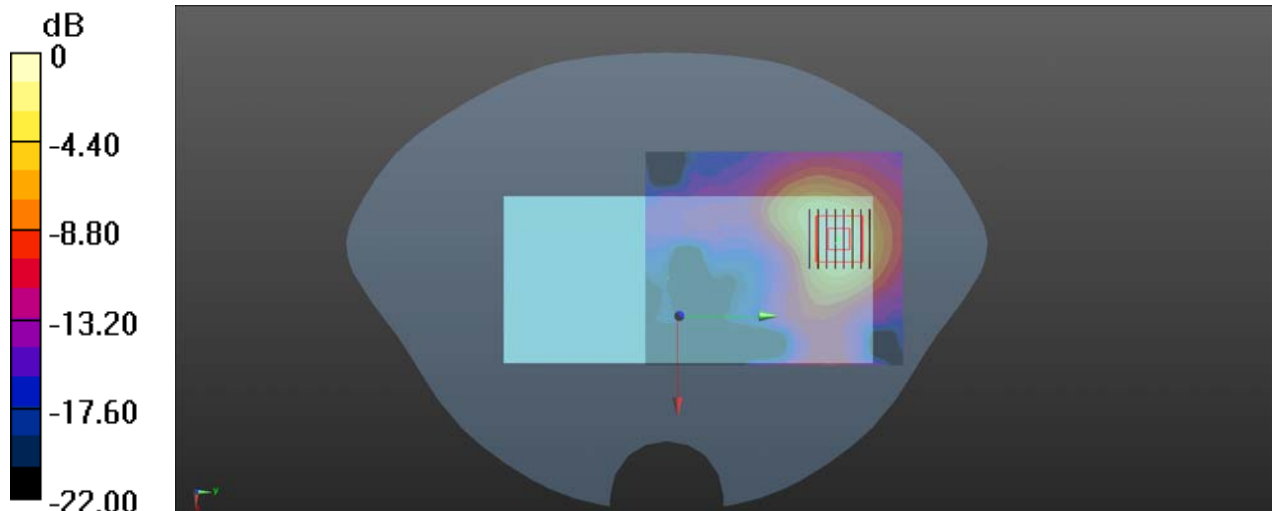

0 dB = 0.987 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.5GHz_802.11n-HT20 MCS0_Back Side_10mm_Ch144_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5720 MHz; Duty Cycle: 1:1.047
Medium: HSL_5750 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 35.923$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5720 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch144/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch144/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.962 W/kg

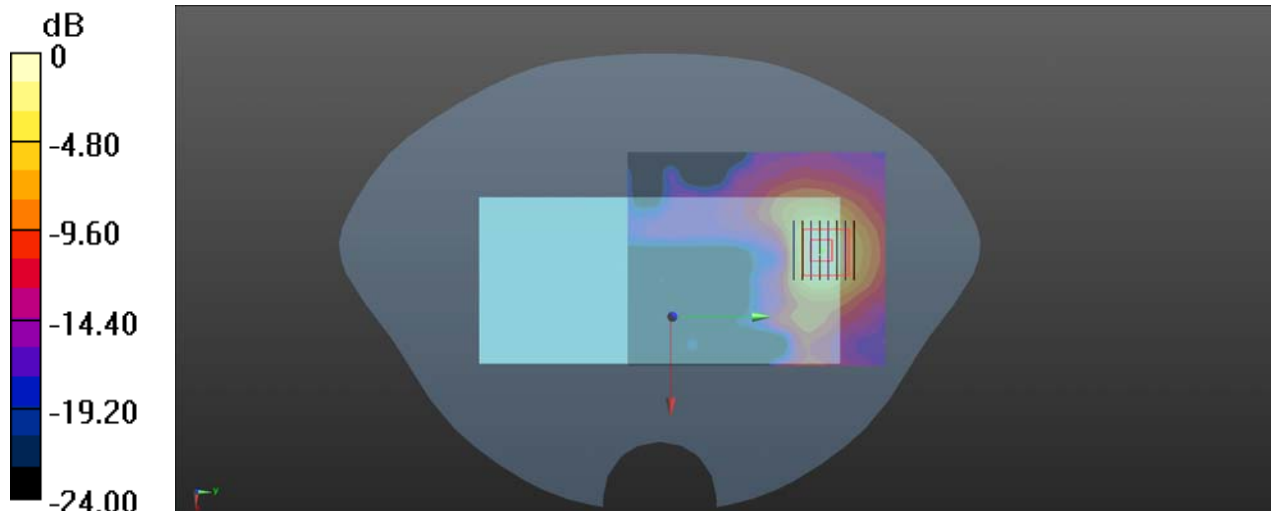

0 dB = 0.962 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.8GHz_802.11n-HT20 MCS0_Back Side_10mm_Ch157_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.031
Medium: HSL_5750 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5785 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.532 W/kg

Ch157/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.528 W/kg

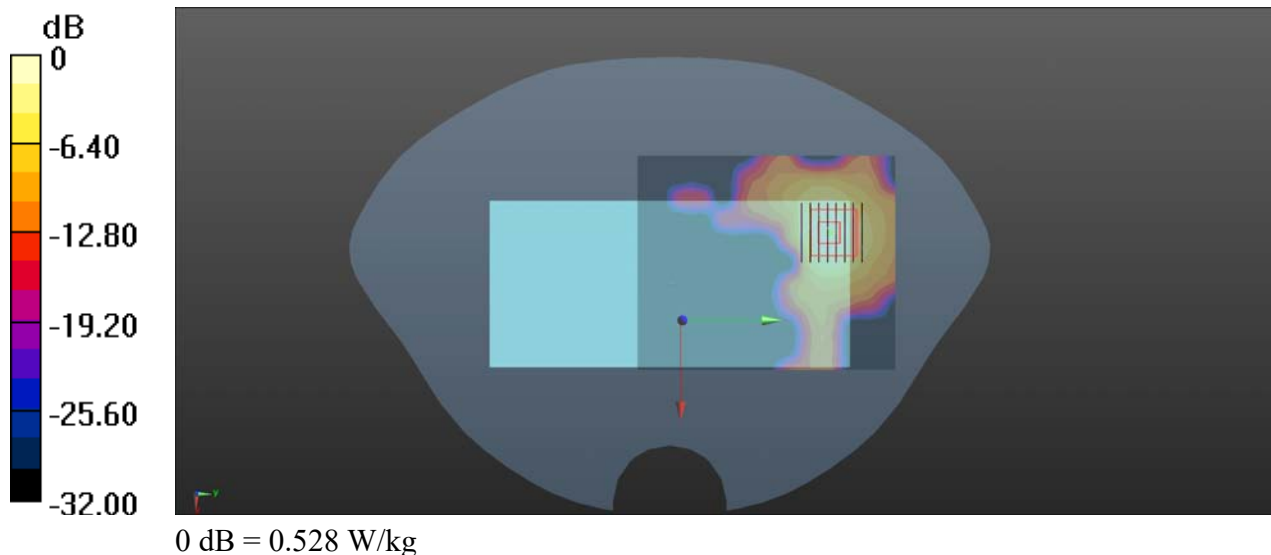

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.8GHz_802.11n-HT20 MCS0_Top Side_10mm_Ch157_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1.031
Medium: HSL_5750 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5785 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.00 W/kg

Ch157/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.221 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.985 W/kg

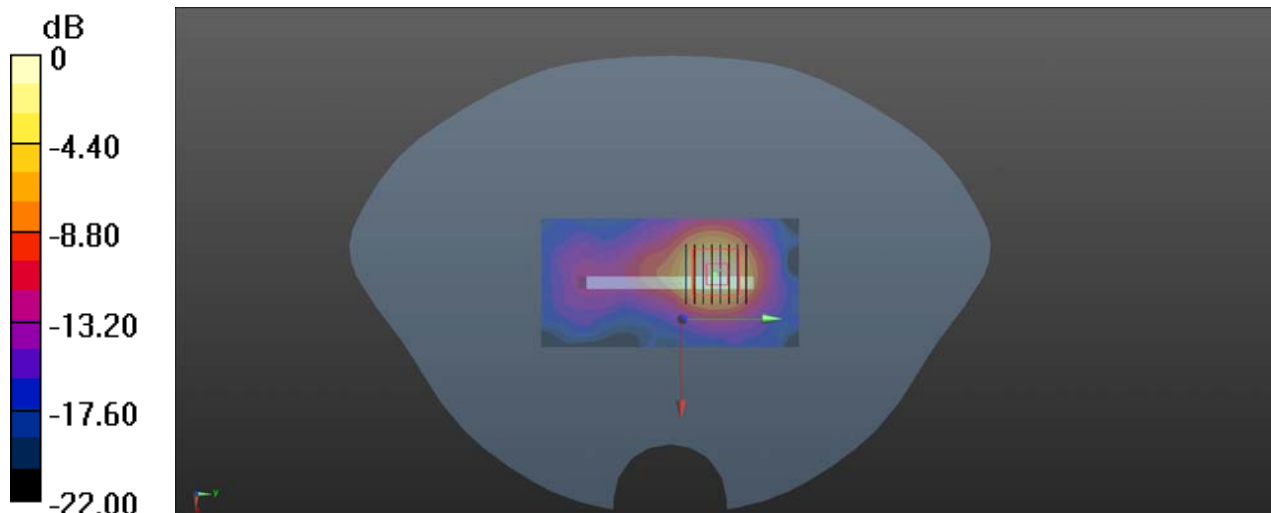

0 dB = 0.985 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/25

Bluetooth_DH5_Back Side_10mm_Ch78

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.083
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.546$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.471 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.108 W/kg

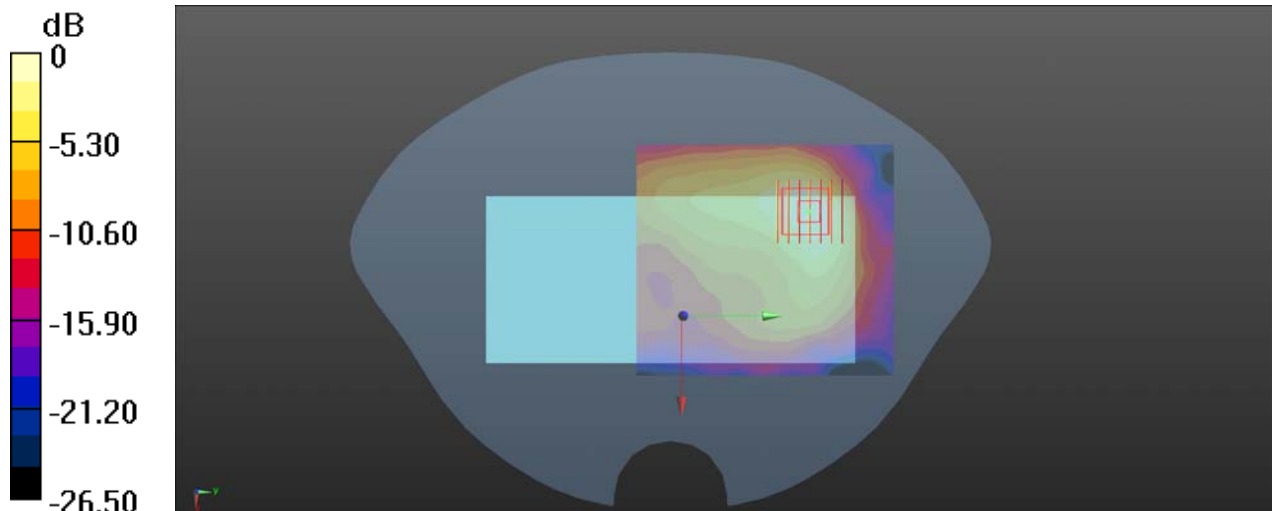

0 dB = 0.108 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

GSM1900_GPRS(4 TX slots)_Front Side_0mm_Ch661_Ant 1

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 1.65 W/kg; SAR(10 g) = 0.749 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.87 W/kg

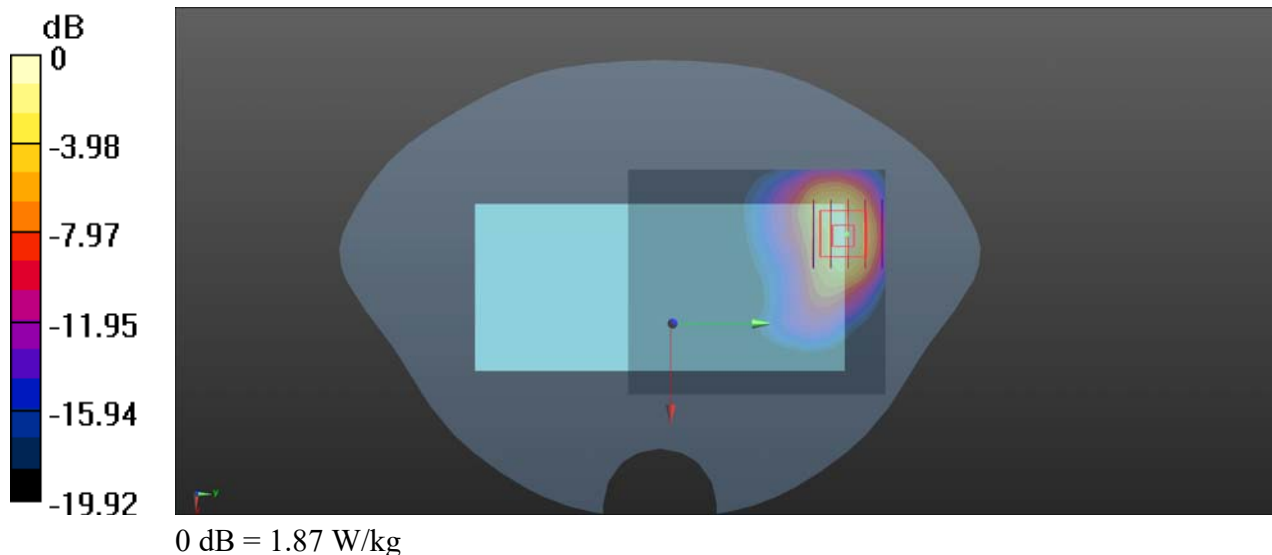

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/22

WCDMA Band II_RMC 12.2Kbps_Top Side_0mm_Ch9538_Ant 1

Communication System: UID 0, UMTS-FDD (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_2000 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.823$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1907.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9538/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.18 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.92 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 5.07 W/kg; SAR(10 g) = 2.03 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 35.4%

Maximum value of SAR (measured) = 6.07 W/kg

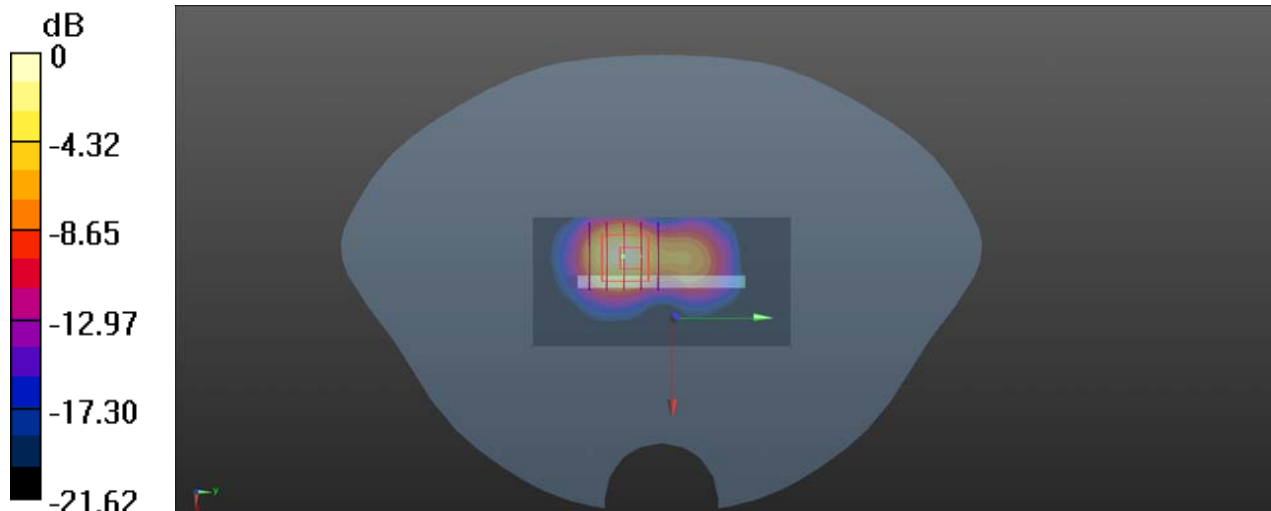

0 dB = 6.07 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/17

LTE Band 2_20MHz_QPSK_1RB_0Offset_Back Side_0mm_Ch18900_Ant 0

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.22 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.751 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 8.74 W/kg

SAR(1 g) = 3.96 W/kg; SAR(10 g) = 2.11 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 4.64 W/kg

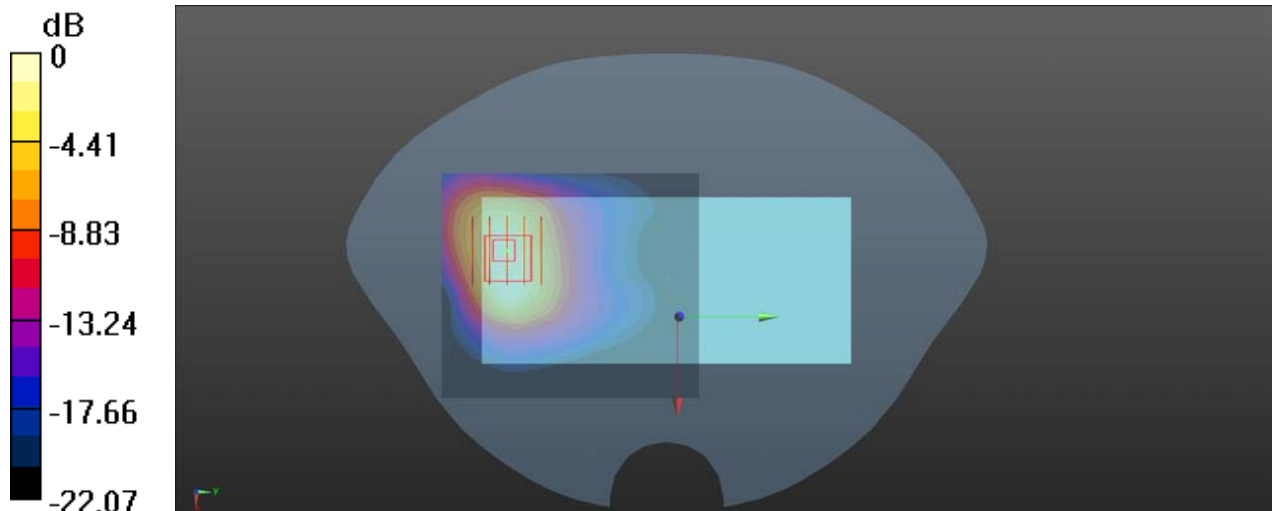

0 dB = 4.64 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/26

LTE Band 7_20MHz_QPSK_1RB_0Offset_Top Side_0mm_Ch21350_Ant 1

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.38 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.019 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 9.99 W/kg

SAR(1 g) = 3.14 W/kg; SAR(10 g) = 1.1 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 3.75 W/kg

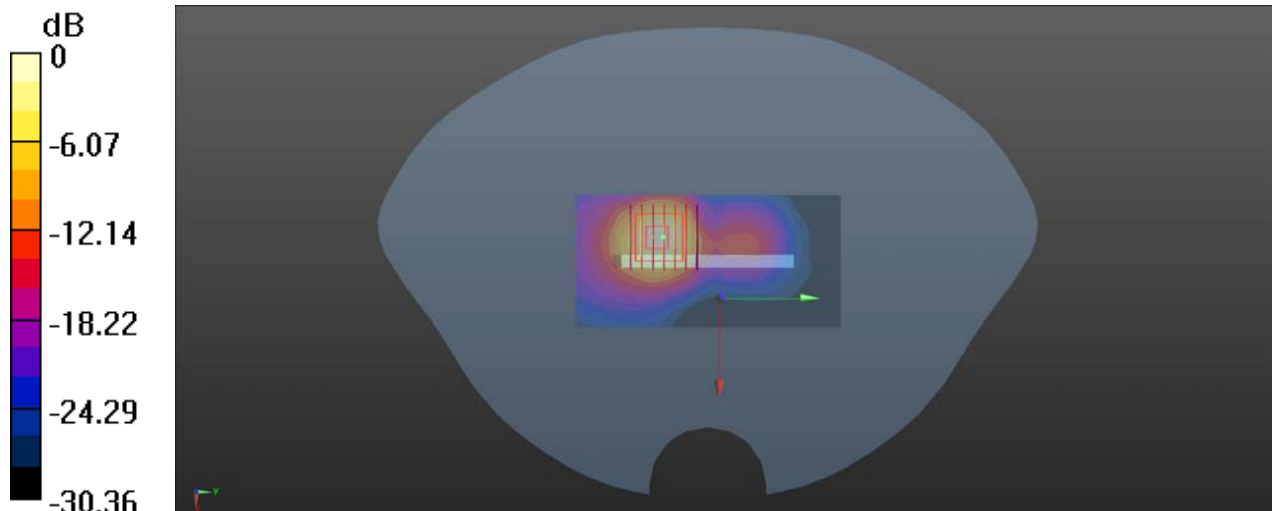

0 dB = 3.75 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/18

LTE Band 66_20MHz_QPSK_1RB_0Offset_Top Side_0mm_Ch132322_Ant 1

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1745 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.07 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 4.31 W/kg; SAR(10 g) = 1.76 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 5.33 W/kg

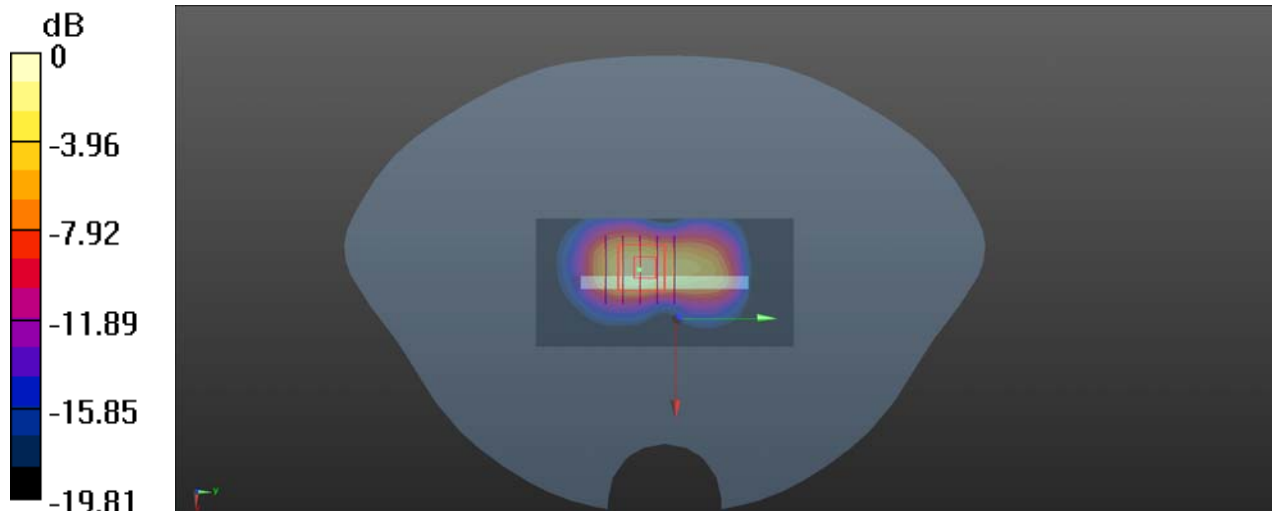

0 dB = 5.33 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/29

WLAN 5.3GHz_802.11n-HT20 MCS0_Front Side_0mm_Ch60_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1.047
Medium: HSL_5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.842$ S/m; $\epsilon_r = 35.218$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.57, 5.62, 5.22) @ 5300 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.40 W/kg

Ch60/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 5.10 W/kg

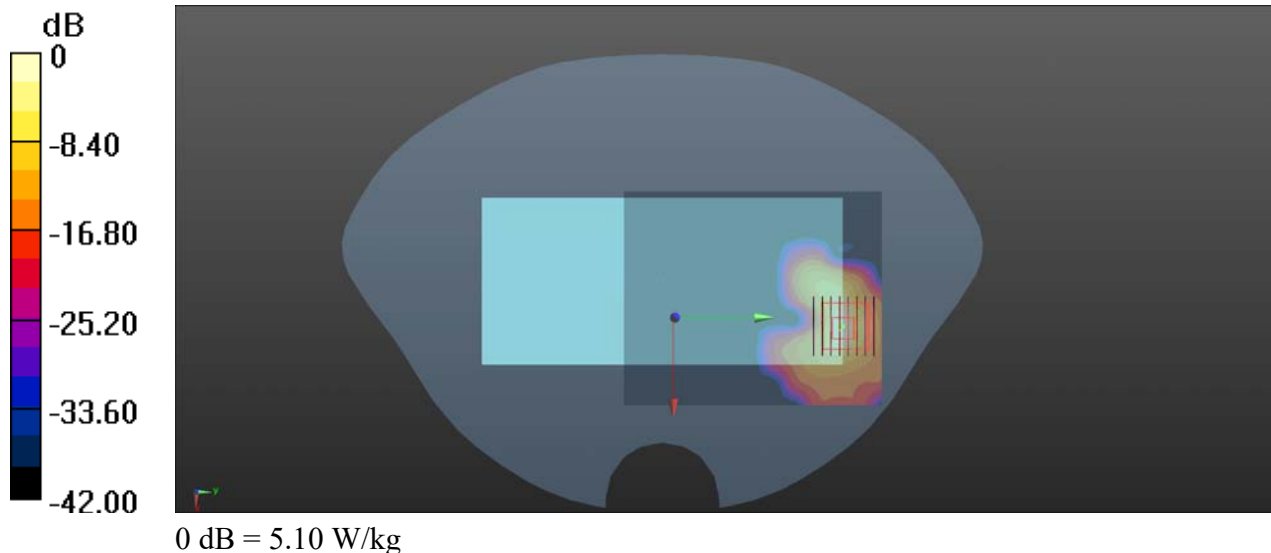

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.5GHz_802.11n-HT20 MCS0_Front Side_0mm_Ch144_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5720 MHz; Duty Cycle: 1:1.047
Medium: HSL_5750 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 35.923$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5720 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch144/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.29 W/kg

Ch144/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 5.01 W/kg

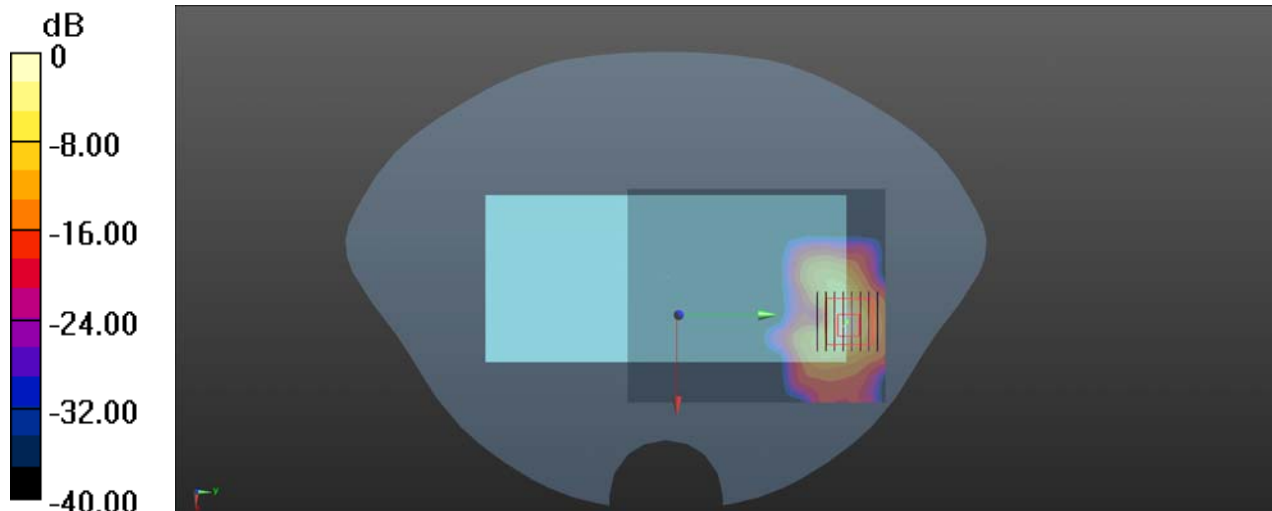

0 dB = 5.01 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/7/30

WLAN 5.8GHz_802.11n-HT20 MCS0_Top Side_0mm_Ch157_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: HSL_5750 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.31, 5.36, 4.97) @ 5785 MHz; Calibrated: 2026/3/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2026/3/16
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.72 W/kg

Ch157/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.73 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 4.27 W/kg; SAR(10 g) = 0.774 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 10.9 W/kg

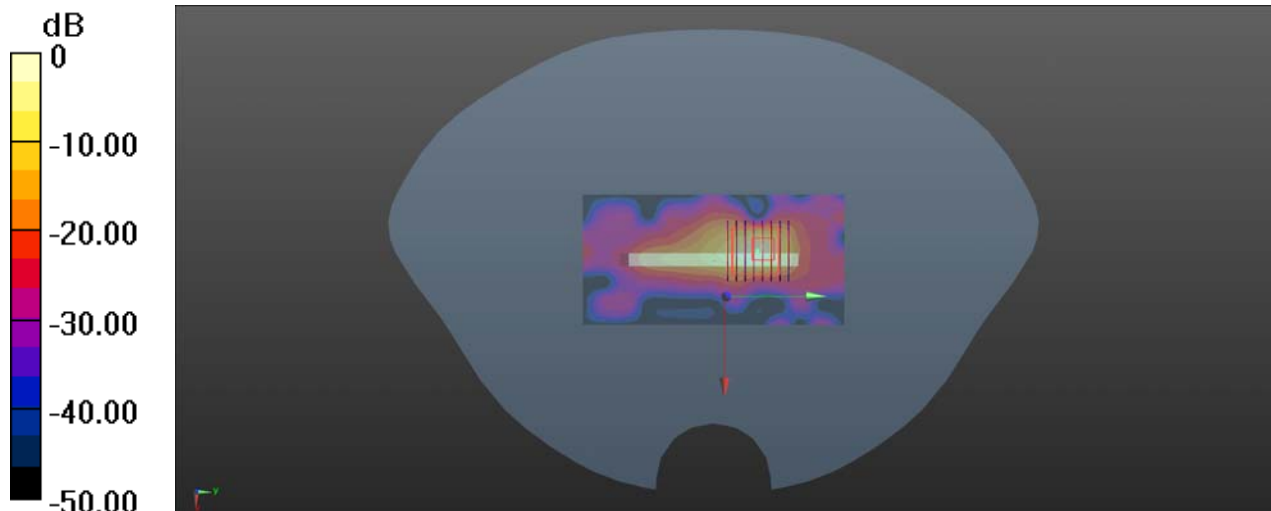

0 dB = 10.9 W/kg