



FCC TEST REPORT

FCC ID: 2BQHT-TAB-T101-4

On Behalf of

DAMASCO TRADING LLC

Tablet PC

Model No.: TAB-T101-4, TAB-T101-*****("*" = 0-9, A-Z, a-z, -, \, / or space)

Prepared for : DAMASCO TRADING LLC
Address : 3847 NE 168TH ST APT 3C NORTH MIAMI BEACH 33160
FLORIDA USA

Prepared By : Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West
Address : Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong,
China

Report Number : psi2509211-C01-R08
Date of Receipt : September 28, 2025
Date of Test : September 28, 2025–October 30, 2025
Date of Report : October 31, 2025
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS.....	8
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	8
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8	ADDITIONAL INSTRUCTIONS	8
2.9	TEST CONDITIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA.....	10
4.1	ANTENNA REQUIREMENT:	10
4.2	CONDUCTED EMISSIONS	11
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	14
4.4	MAXIMUM CONDUCTED OUTPUT POWER.....	67
4.5	POWER SPECTRAL DENSITY	72
4.6	BAND EDGE.....	97
4.7	RADIATED EMISSION	117
4.8	FREQUENCY STABILITY	123
5	PHOTOS OF TEST SETUP.....	125
6	PHOTOS OF EUT.....	125

TEST REPORT DECLARATION

Applicant : DAMASCO TRADING LLC
Address : 3847 NE 168TH ST APT 3C NORTH MIAMI BEACH 33160 FLORIDA USA
Manufacturer : DAMASCO TRADING LLC
Address : 3847 NE 168TH ST APT 3C NORTH MIAMI BEACH 33160 FLORIDA USA
EUT Description : Tablet PC
(A) Model No. : TAB-T101-4, TAB-T101-*****("*" = 0-9, A-Z, a-z, -, \,
/ or space)
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2020

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang

Test Engineer

Jensen Wang

Approved by (name + signature).....:

Simple Guan

Project Manager

Simple Guan

Date of issue.....:

October 31, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 31, 2025	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
Occupied bandwidth	Section 15.407 (e)	PASS
Maximum Conducted Output Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.1 Measurement Uncertainty

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name	: Tablet PC
Model	: TAB-T101-4, TAB-T101-***** (“*” = 0-9, A-Z, a-z, -, \, / or space) The represent different appearance colors, sales regions, sales channels. This change is only for promotional purposes and does not affect the safety and
Diff	: electromagnetic compatibility of the product. All tests are made with the TAB-T101-4 model.
Test Voltage	: DC 3.8V from battery, DC 5V from adapter.

Radio Technology	: 5G WIFI
Operation frequency	: 802.11a/802.11ac20/802.11n(HT20): 5180-5240MHz, 5260-5320MHz, 5745-5825MHz 802.11ac40/802.11n(HT40): 5190-5230MHz, 5270-5310MHz, 5755-5795MHz 802.11ac80: 5210MHz, 5290MHz, 5775MHz
Channel separation	: 20MHz for 802.11a/802.11ac20/802.11n(HT20) 40MHz for 802.11ac40/ 802.11n(HT40) 80MHz for 802.11ac80
Modulation technology:	: IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (64QAM, 16QAM, 256QAM, QPSK, BPSK)
Antenna Type	: Internal antenna , Maximum Gain is 2.05dBi.
PMN	: N/A
HVIN	: N/A
Software version	: N/A
Hardware version	: N/A
FVIN	: N/A
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories 1 : AC Power Adapter
Manufacturer : Shenzhen Huajin Electronics Co.,Ltd
Model : HJ-0502000-US
Rating : Input: 100-240V~50/60Hz 0.3A
 : Output: 5.0V=2.0A 10.0W

Accessories 2 : USB Cable
Manufacturer : N/A
Model : N/A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa


3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835825	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		


4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna, Maximum Gain is 2.05dBi, for 5180-5240MHz, 5260-5320MHz, , 5745-5845MHz	

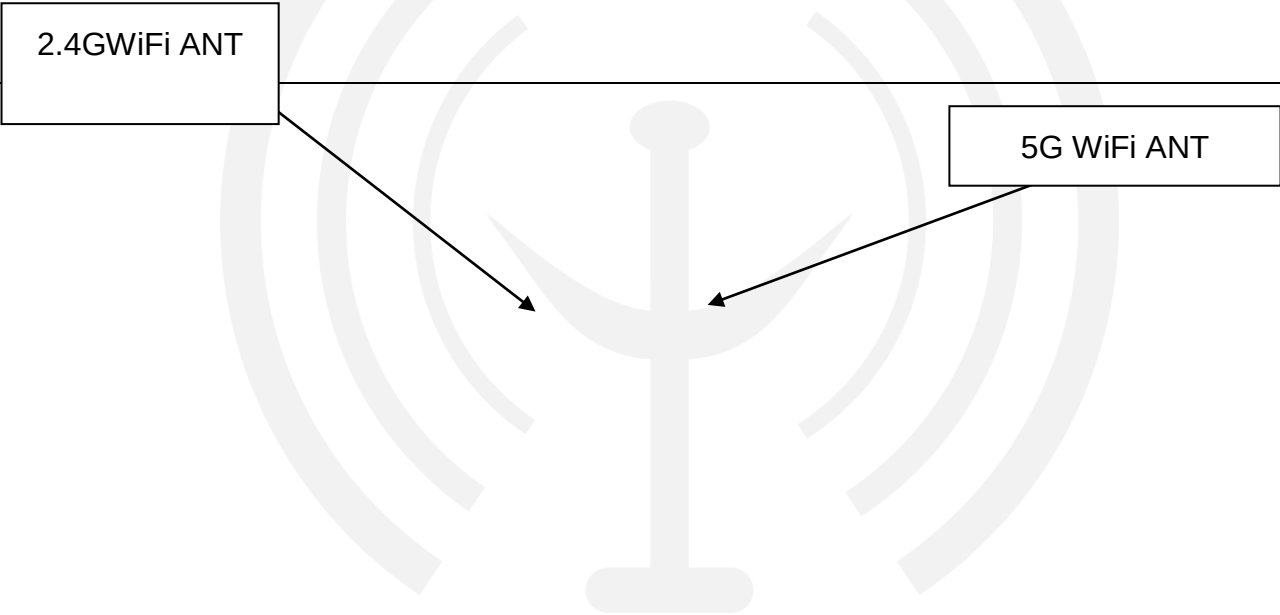


4.2 Conducted Emissions

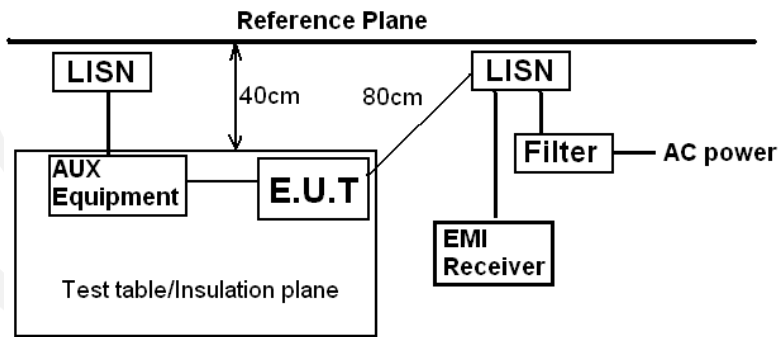Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10:2020		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

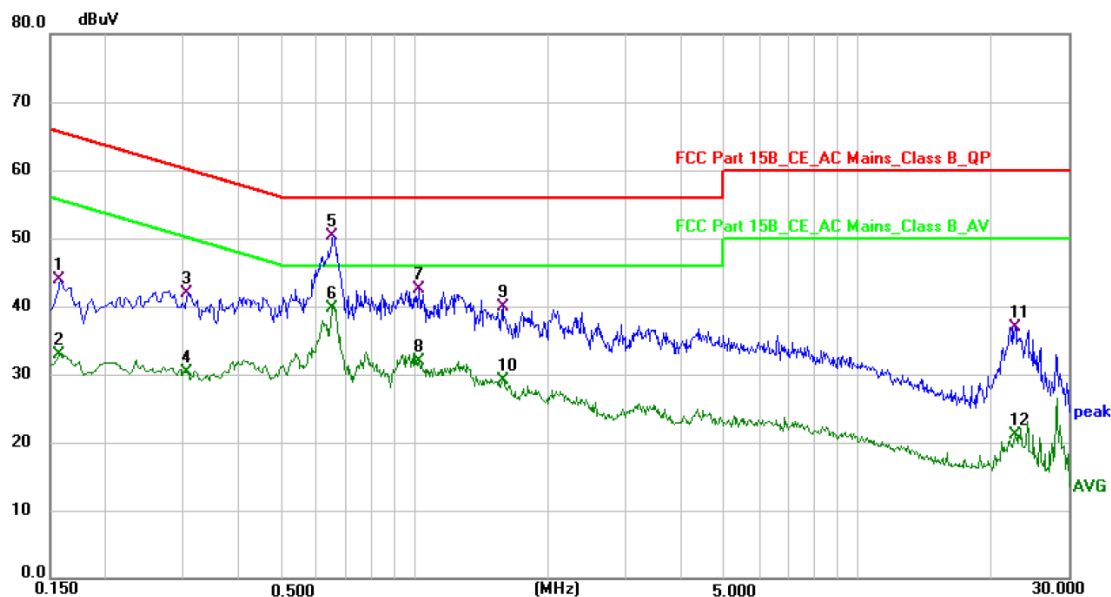

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	33.87	9.94	43.81	65.57	-21.76	QP
2	0.1580	22.99	9.94	32.93	55.57	-22.64	AVG
3	0.3060	31.86	9.97	41.83	60.08	-18.25	QP
4	0.3060	20.30	9.97	30.27	50.08	-19.81	AVG
5 *	0.6540	40.85	9.54	50.39	56.00	-5.61	QP
6	0.6540	30.20	9.54	39.74	46.00	-6.26	AVG
7	1.0260	33.05	9.41	42.46	56.00	-13.54	QP
8	1.0260	22.51	9.41	31.92	46.00	-14.08	AVG
9	1.5780	30.46	9.40	39.86	56.00	-16.14	QP
10	1.5780	19.71	9.40	29.11	46.00	-16.89	AVG
11	22.7139	26.82	10.17	36.99	60.00	-23.01	QP
12	22.7139	10.92	10.17	21.09	50.00	-28.91	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

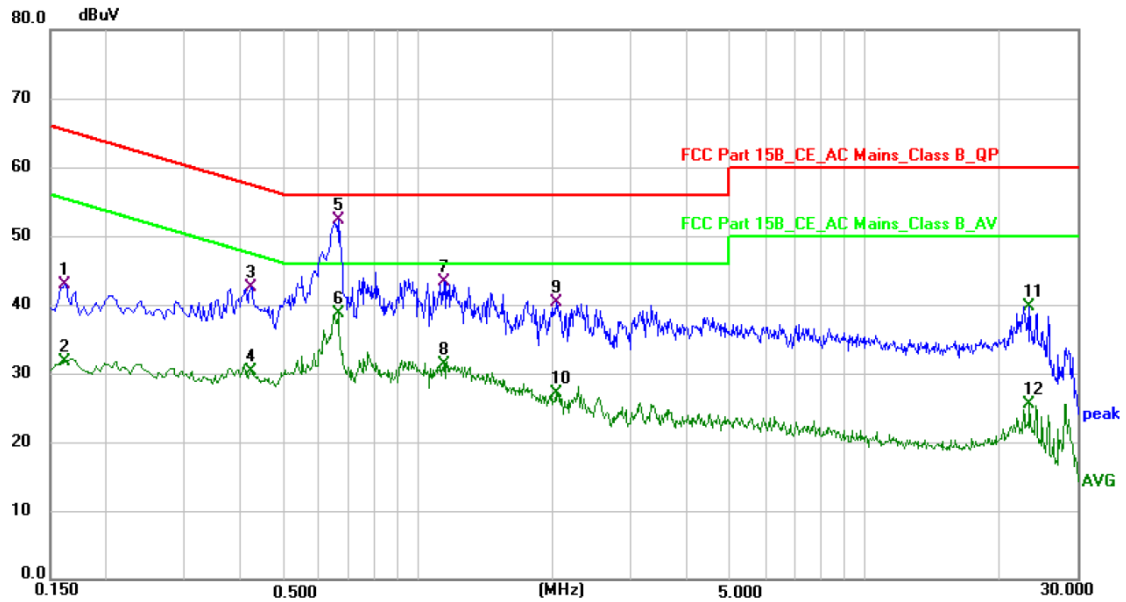
Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	33.12	9.84	42.96	65.36	-22.40	QP
2	0.1620	21.91	9.84	31.75	55.36	-23.61	AVG
3	0.4220	32.92	9.60	42.52	57.41	-14.89	QP
4	0.4220	20.70	9.60	30.30	47.41	-17.11	AVG
5 *	0.6620	42.54	9.78	52.32	56.00	-3.68	QP
6	0.6620	28.93	9.78	38.71	46.00	-7.29	AVG
7	1.1460	33.93	9.47	43.40	56.00	-12.60	QP
8	1.1460	21.74	9.47	31.21	46.00	-14.79	AVG
9	2.0420	30.95	9.27	40.22	56.00	-15.78	QP
10	2.0420	17.86	9.27	27.13	46.00	-18.87	AVG
11	23.4619	29.34	10.44	39.78	50.00	-10.22	AVG
12	23.4619	15.08	10.44	25.52	50.00	-24.48	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.

4.3 Emission Bandwidth and 99% Occupied Bandwidth

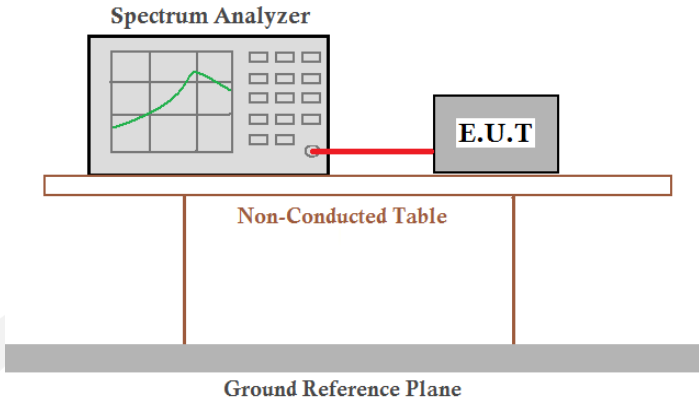
Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane. The Spectrum Analyzer screen shows a frequency spectrum with a peak.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Note: Note: Both antennas have been tested and only the worst data of antenna 1 is shown.

Measurement Data:


Band 1 (5150-5250 MHz):

Condition	Antenna	Modulation	Frequency(MHz)	26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	19.93	16.42
NVNT	ANT1	802.11a	5200.00	19.93	16.39
NVNT	ANT1	802.11a	5240.00	20.08	16.40
NVNT	ANT1	802.11n(HT20)	5180.00	20.50	17.56
NVNT	ANT1	802.11n(HT20)	5200.00	20.18	17.58
NVNT	ANT1	802.11n(HT20)	5240.00	20.30	17.58
NVNT	ANT1	802.11ac(VHT20)	5180.00	20.22	17.56
NVNT	ANT1	802.11ac(VHT20)	5200.00	19.99	17.61
NVNT	ANT1	802.11ac(VHT20)	5240.00	20.12	17.59
NVNT	ANT1	802.11n(HT40)	5190.00	68.24	36.12
NVNT	ANT1	802.11n(HT40)	5230.00	41.66	36.01
NVNT	ANT1	802.11ac(VHT40)	5190.00	40.61	36.06
NVNT	ANT1	802.11ac(VHT40)	5230.00	40.68	36.00
NVNT	ANT1	802.11ac(VHT80)	5210.00	80.82	75.37

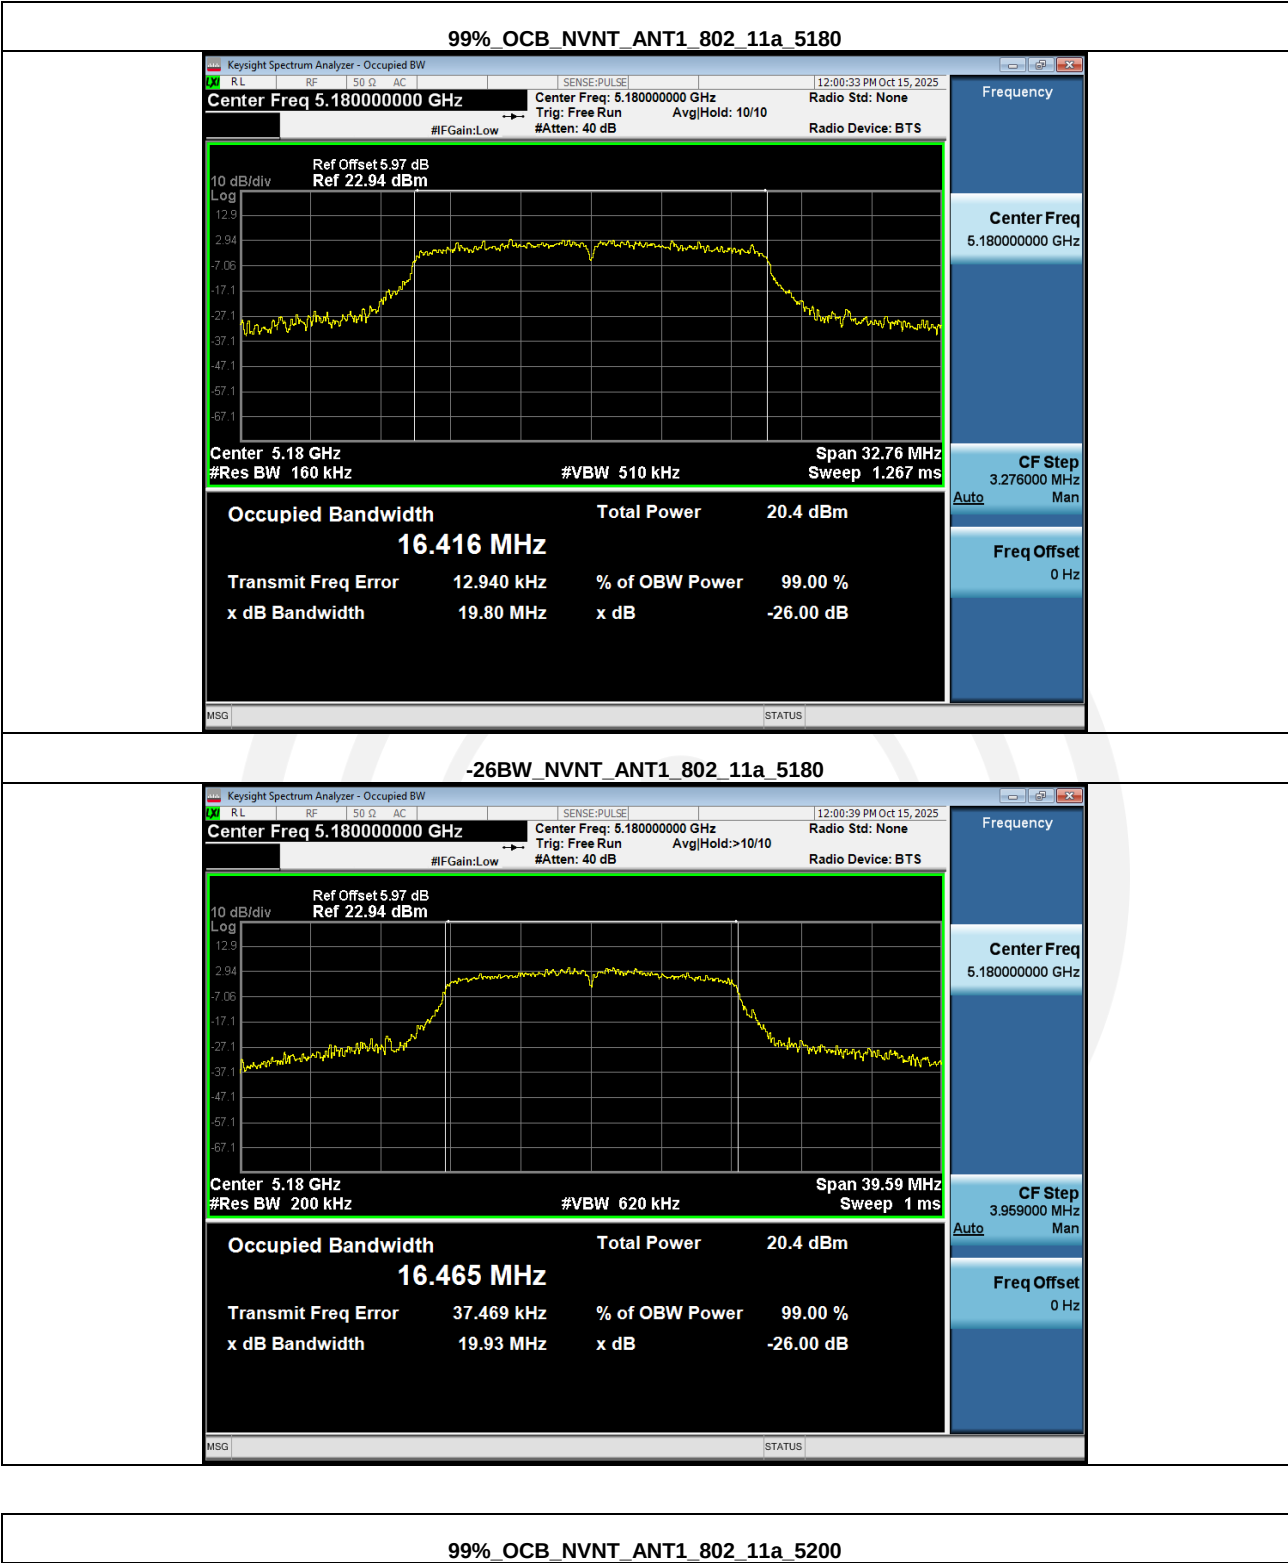




-26BW_NVNT_ANT1_802_11a_5200

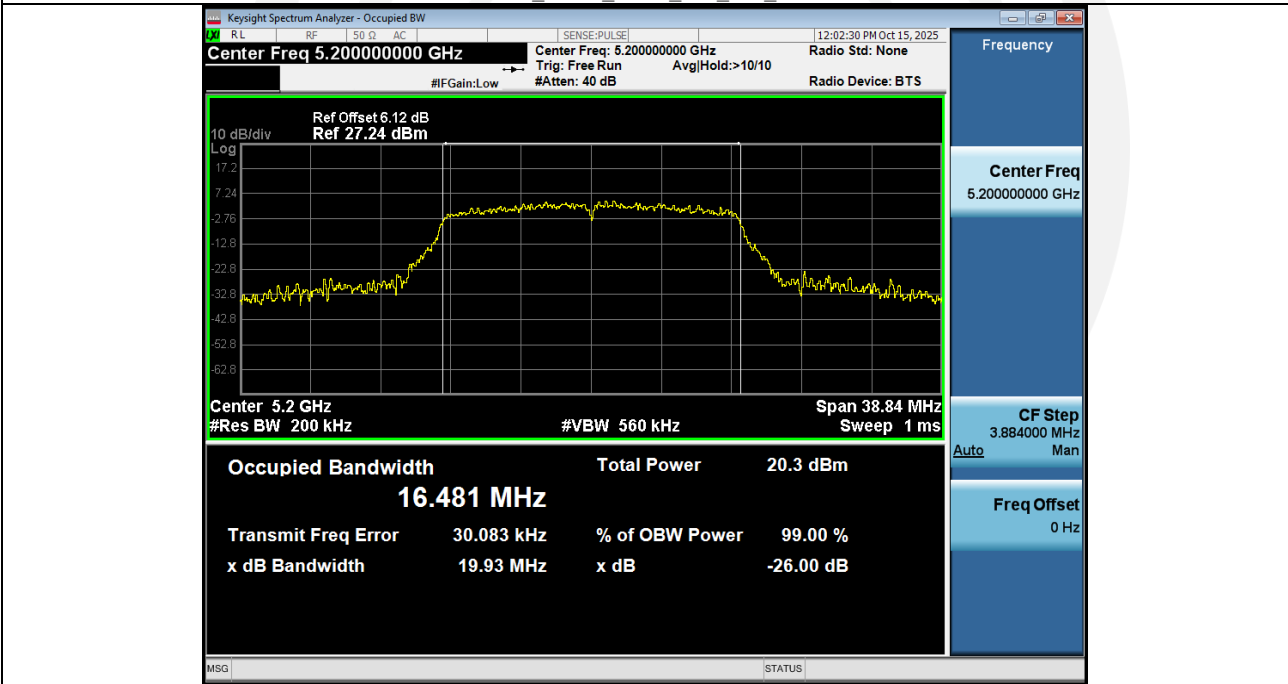

99%_OCB_NVNT_ANT1_802_11a_5240




-26BW_NVNT_ANT1_802_11a_5240

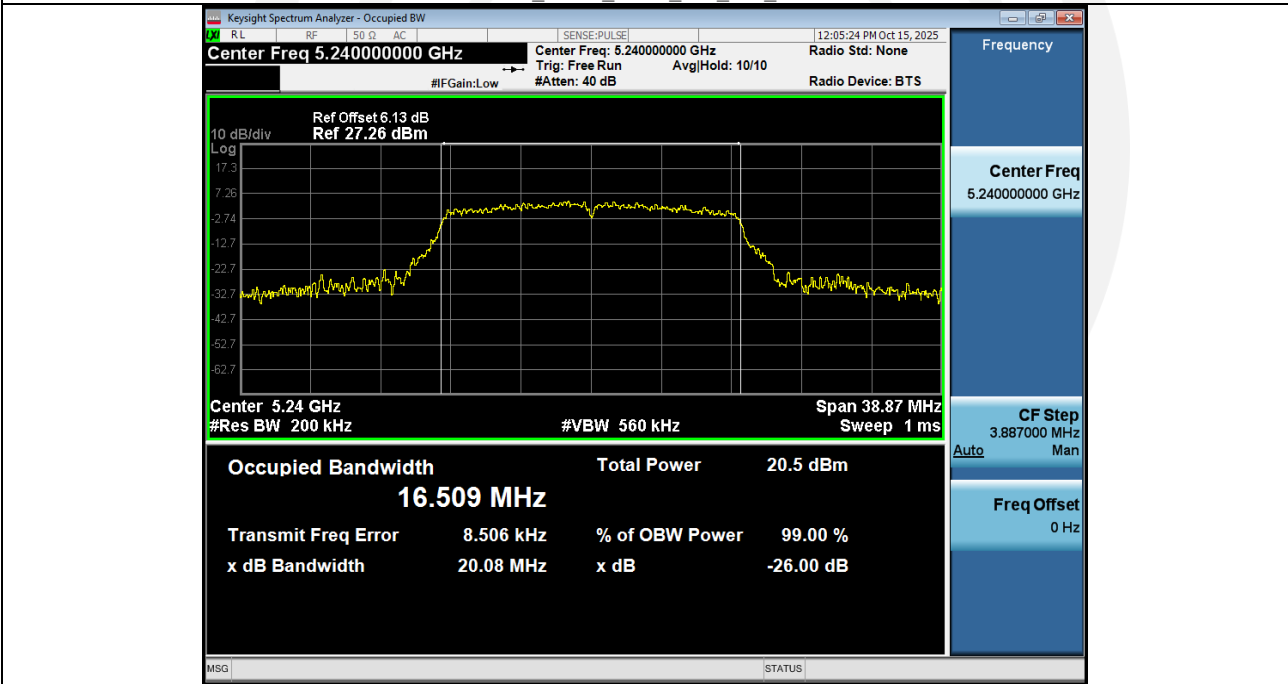


99%_OCB_NVNT_ANT1_802_11n(HT20)_5180




-26BW_NVNT_ANT1_802_11n(HT20)_5180

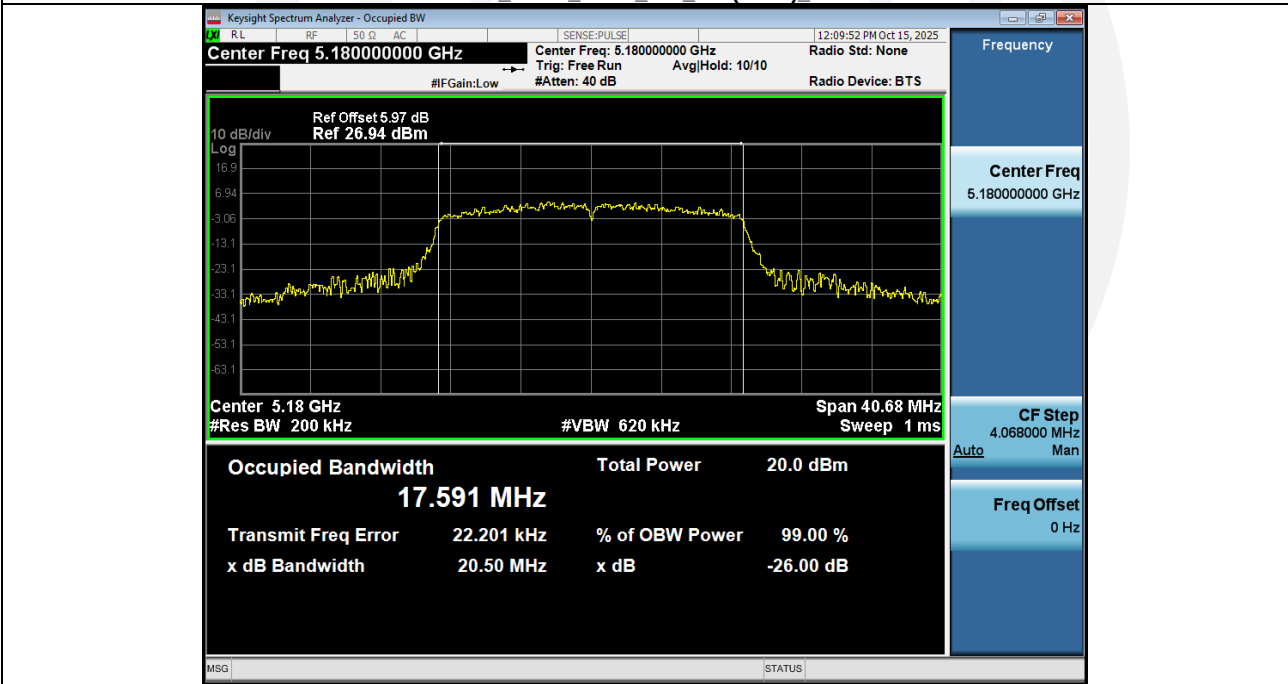


99%_OCB_NVNT_ANT1_802_11n(HT20)_5200

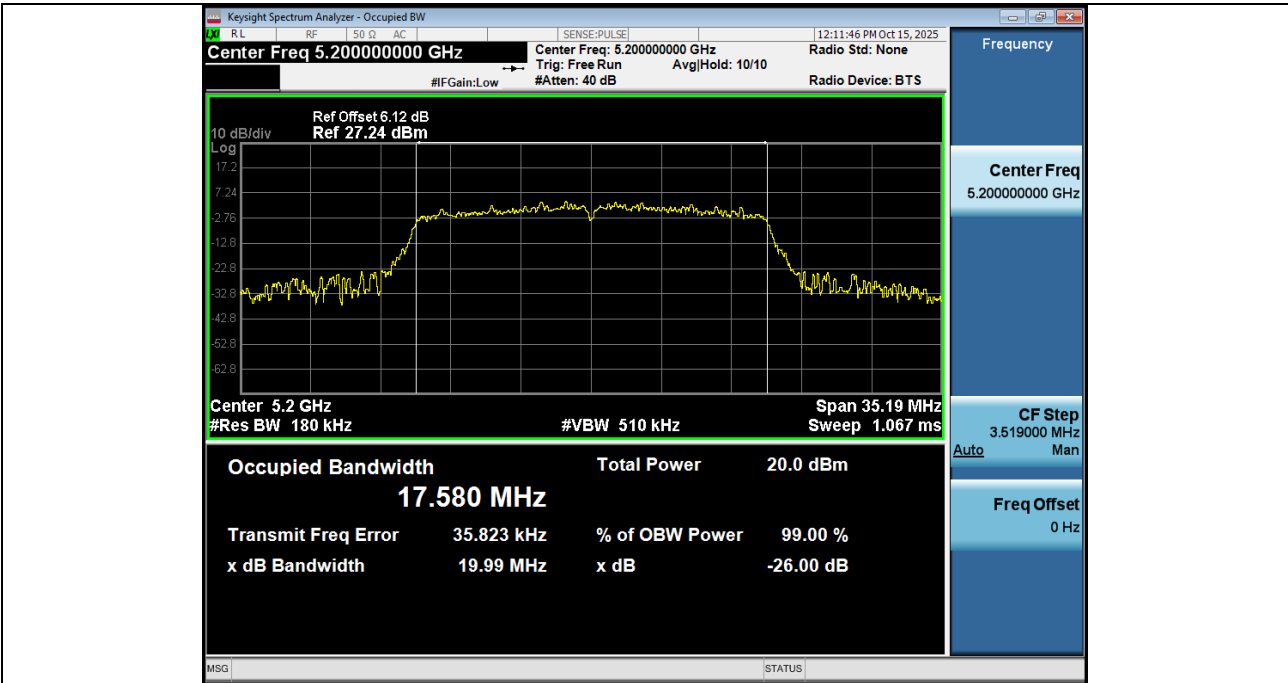


-26BW_NVNT_ANT1_802_11n(HT20)_5200

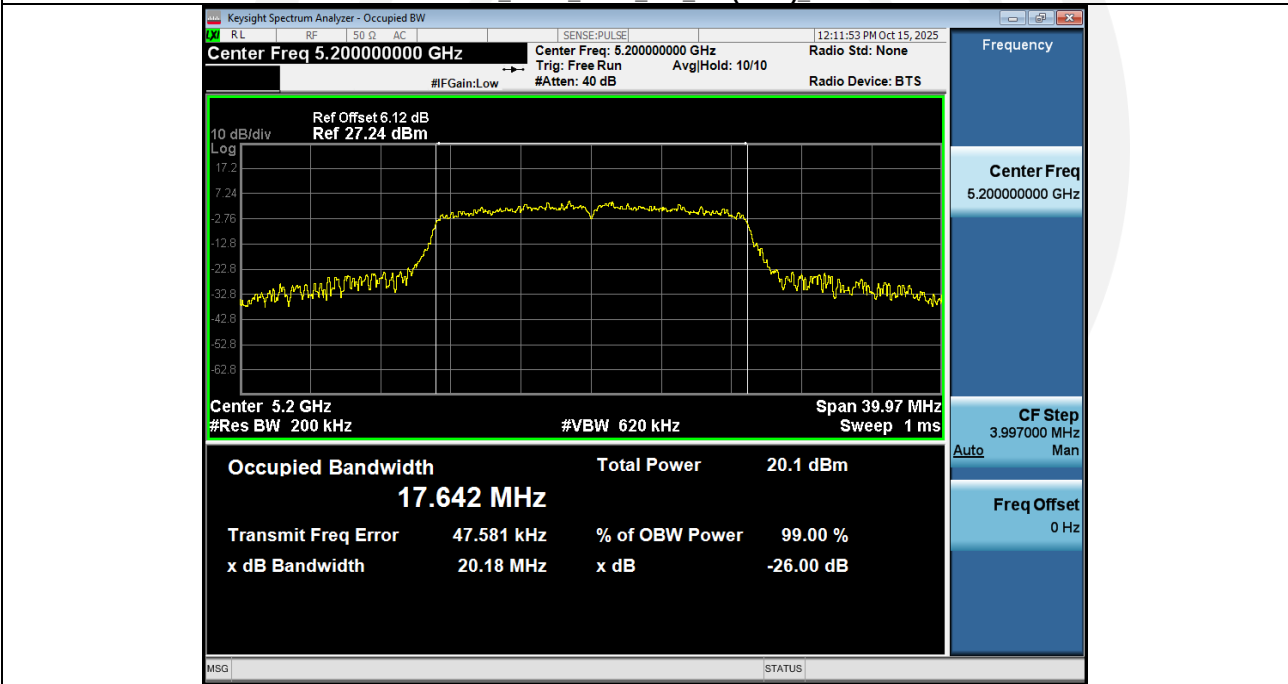


99%_OCB_NVNT_ANT1_802_11n(HT20)_5240

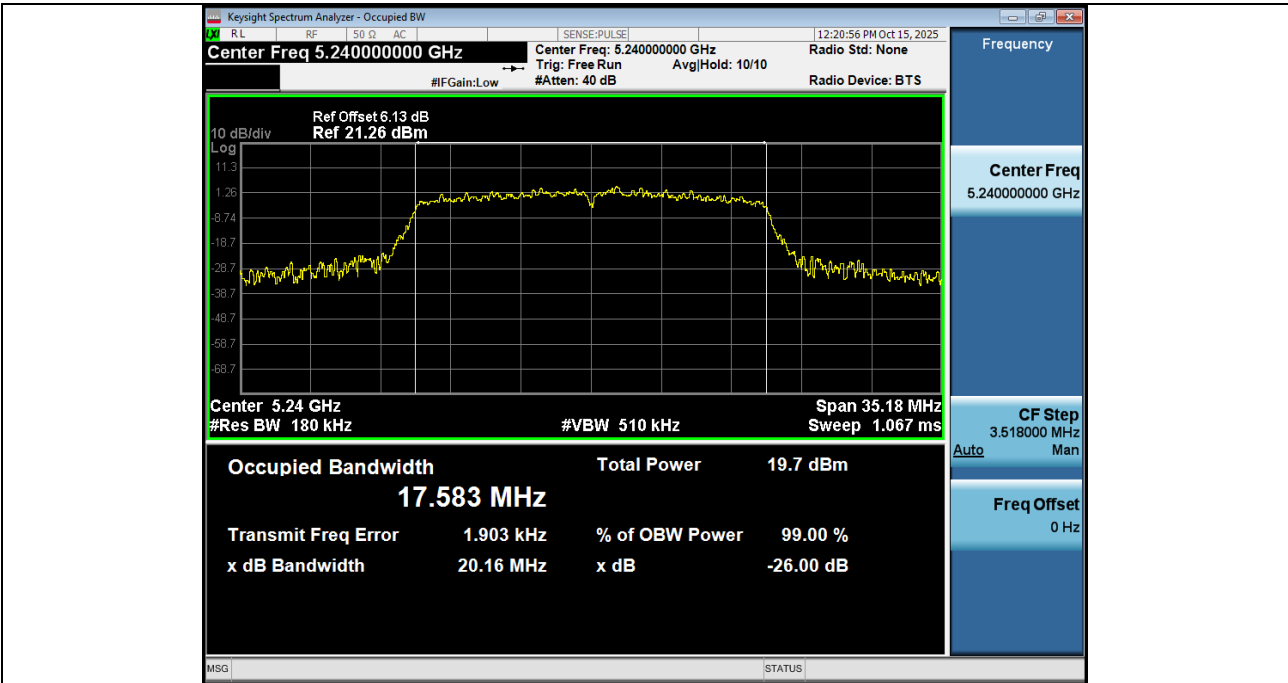


-26BW_NVNT_ANT1_802_11n(HT20)_5240

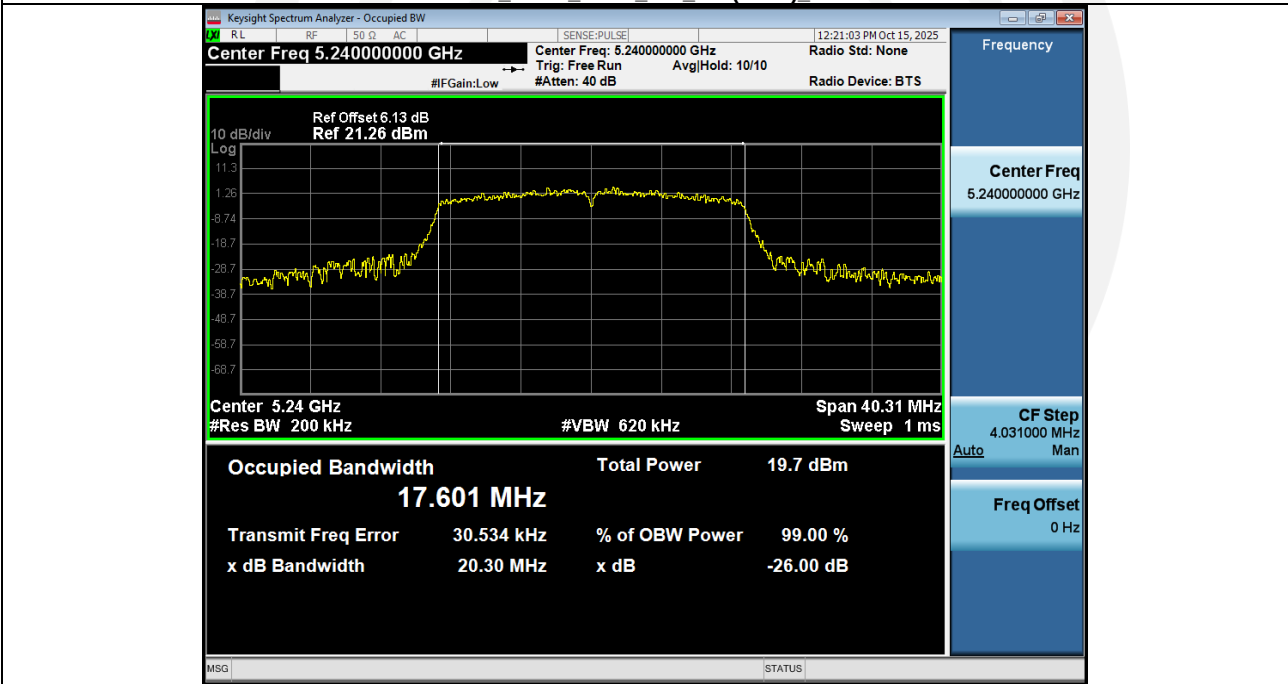

99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5180

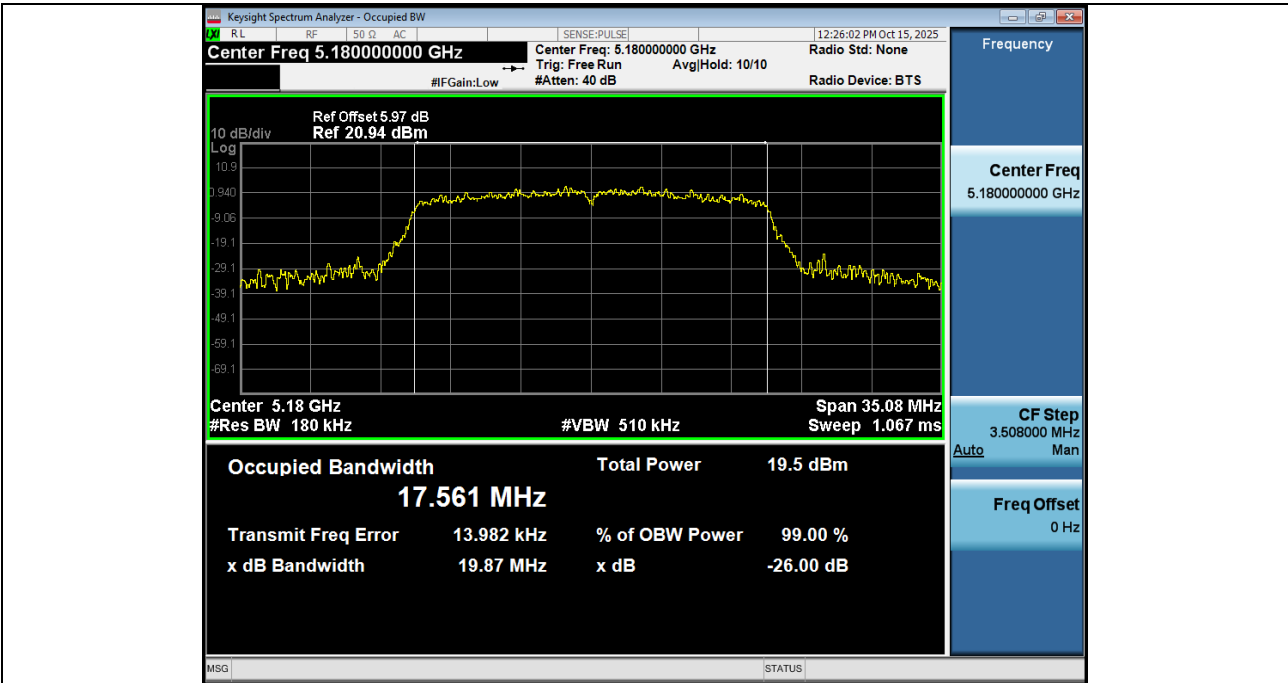


-26BW_NVNT_ANT1_802_11ac(VHT20)_5180

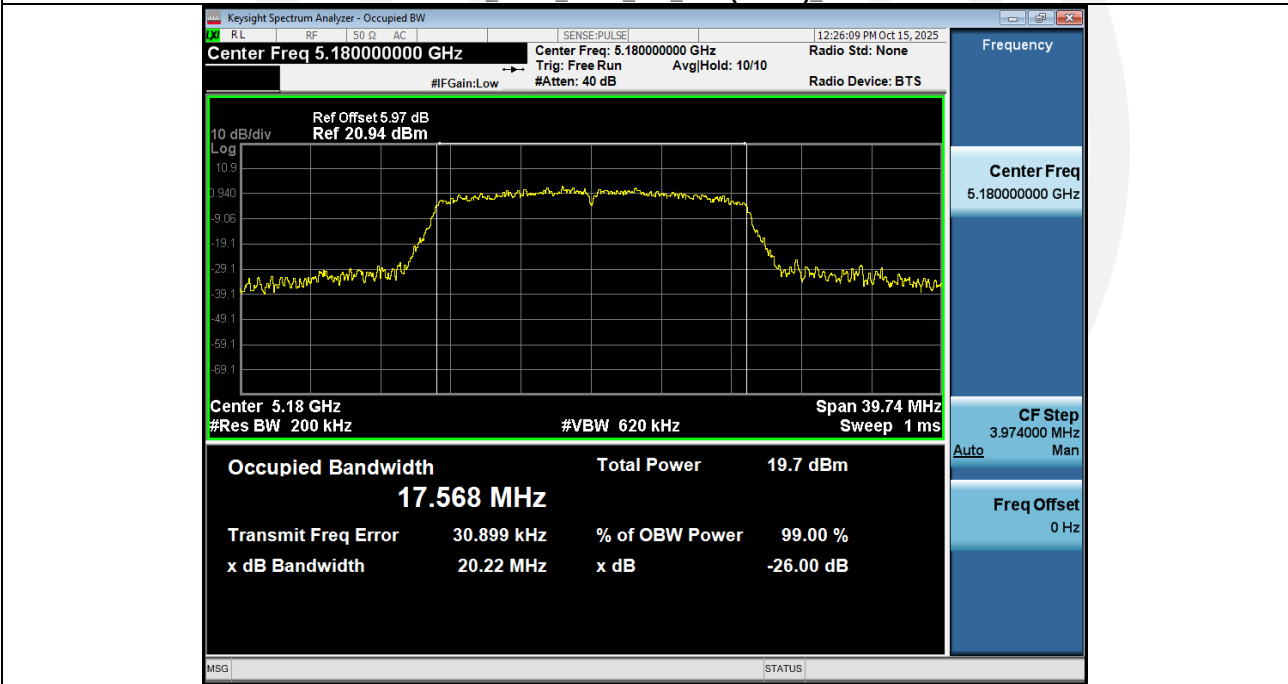


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5200




-26BW_NVNT_ANT1_802_11ac(VHT20)_5200

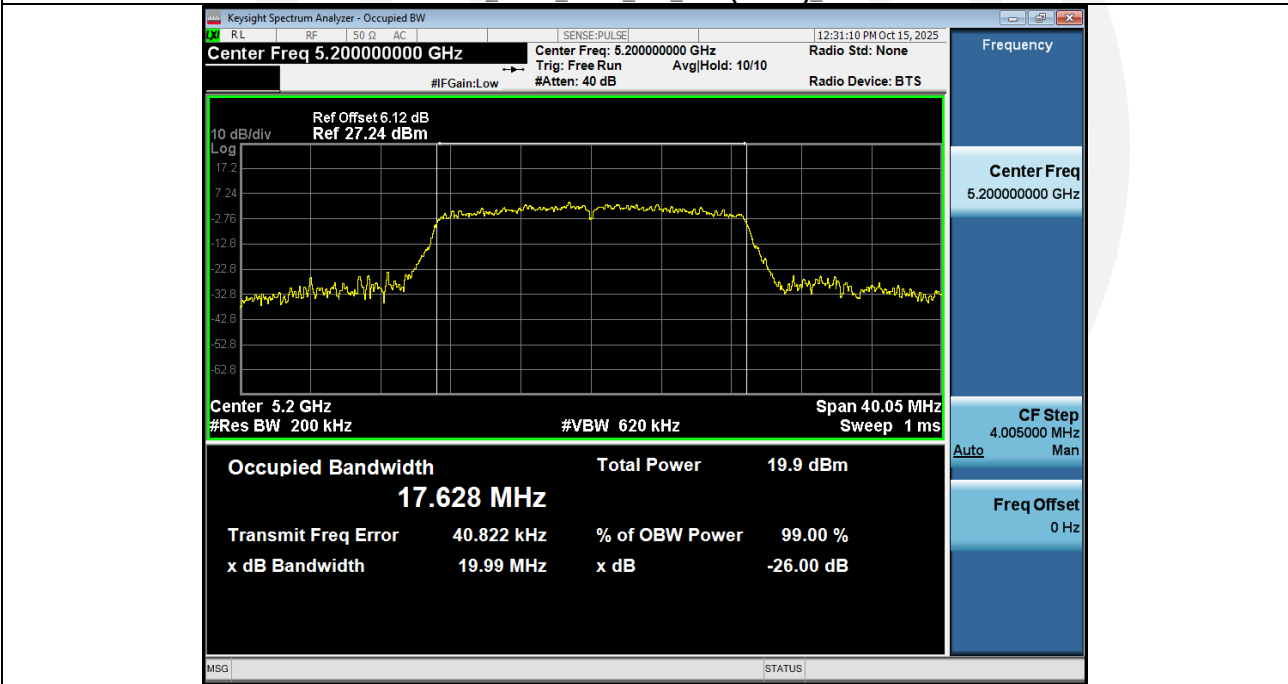


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5240

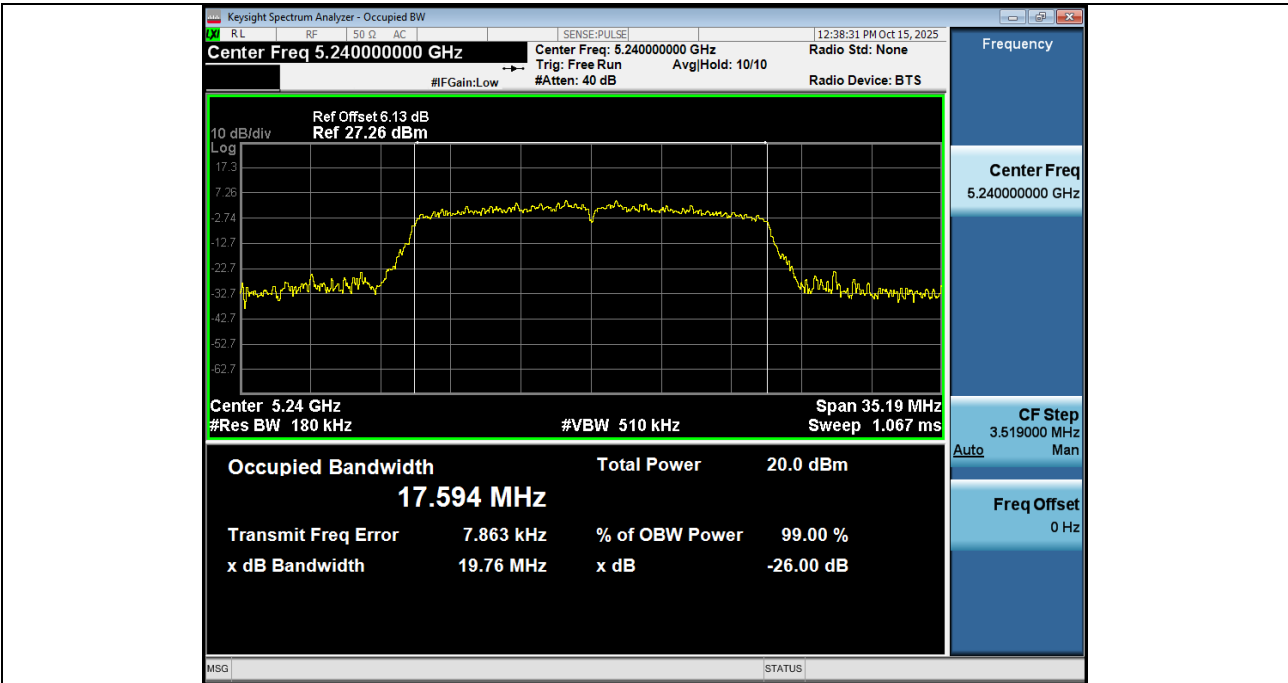

-26BW_NVNT_ANT1_802_11ac(VHT20)_5240

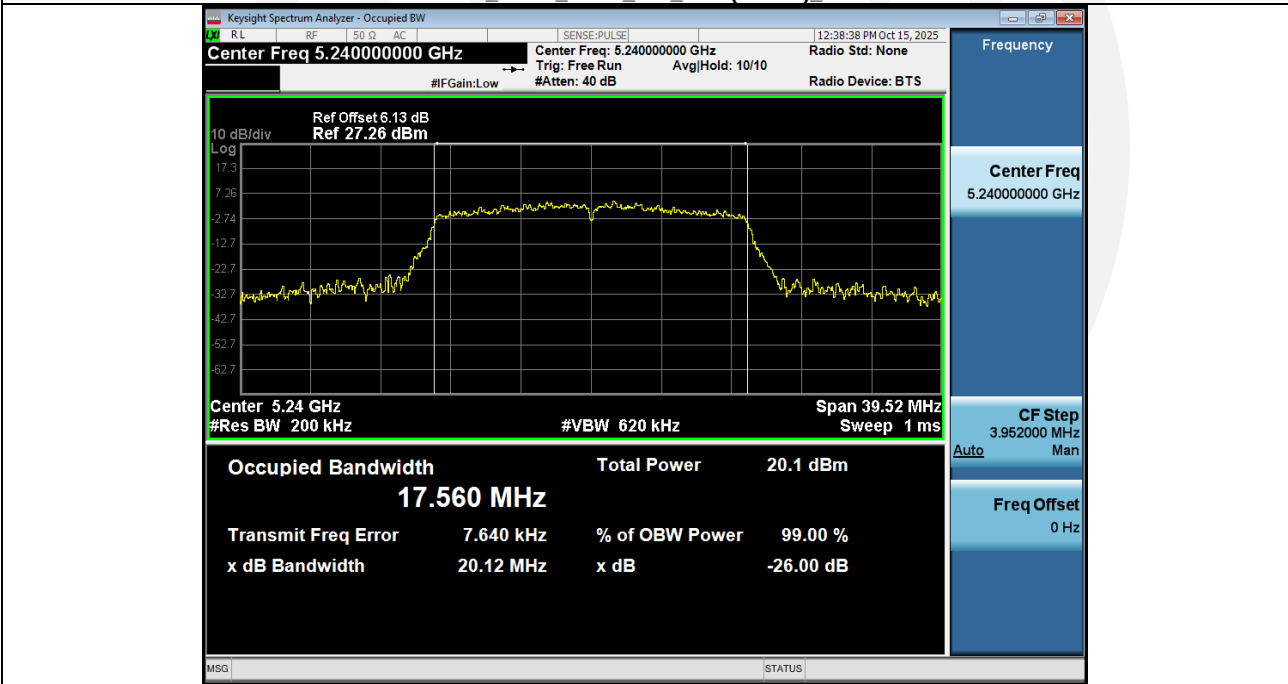


99%_OCB_NVNT_ANT1_802_11n(HT40)_5190

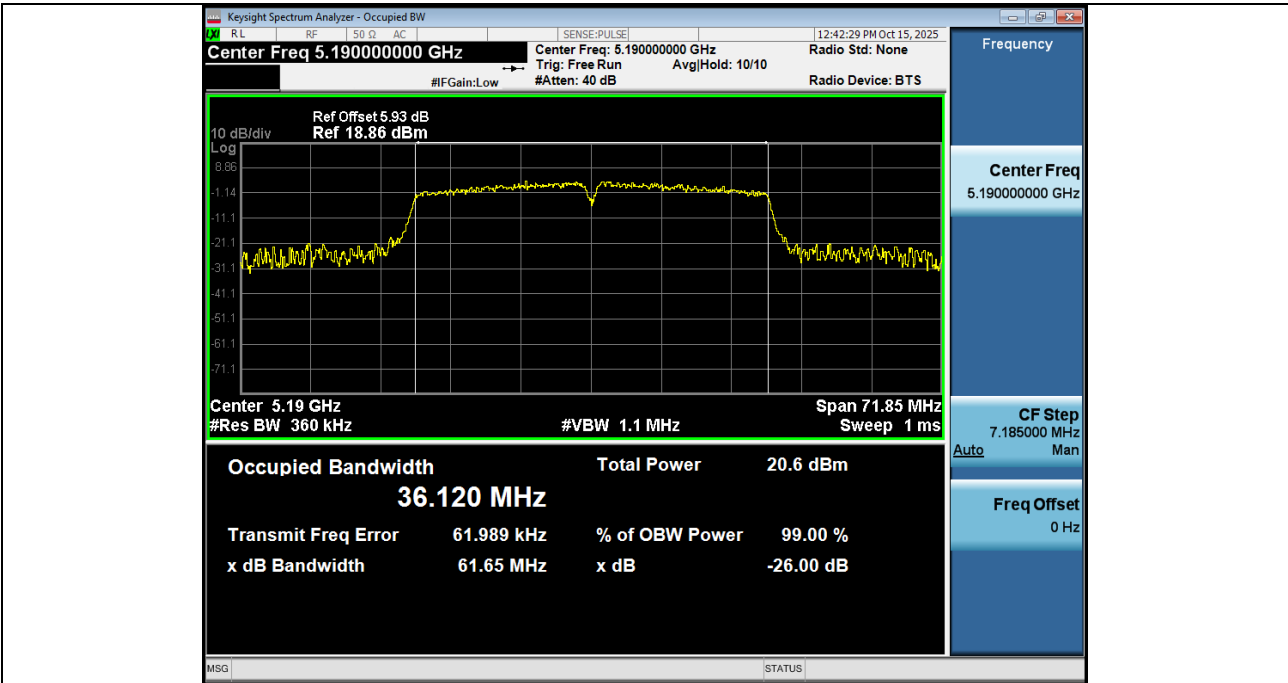


-26BW_NVNT_ANT1_802_11n(HT40)_5190




99%_OCB_NVNT_ANT1_802_11n(HT40)_5230

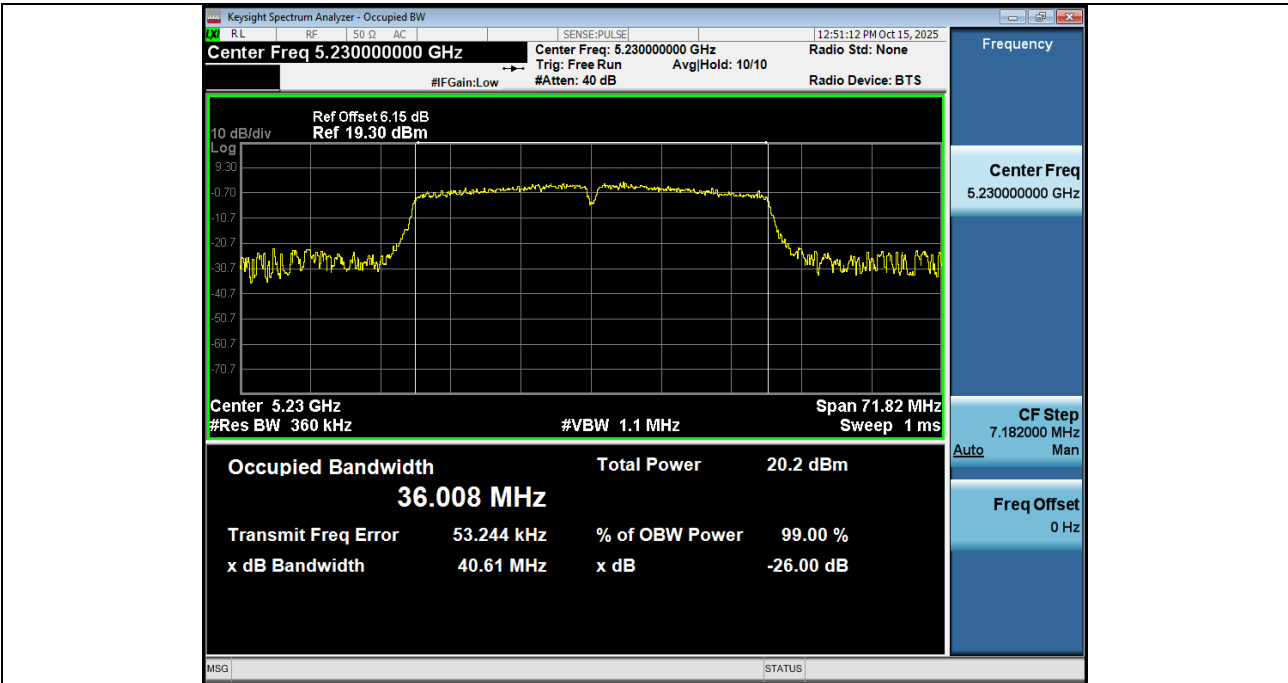


-26BW_NVNT_ANT1_802_11n(HT40)_5230

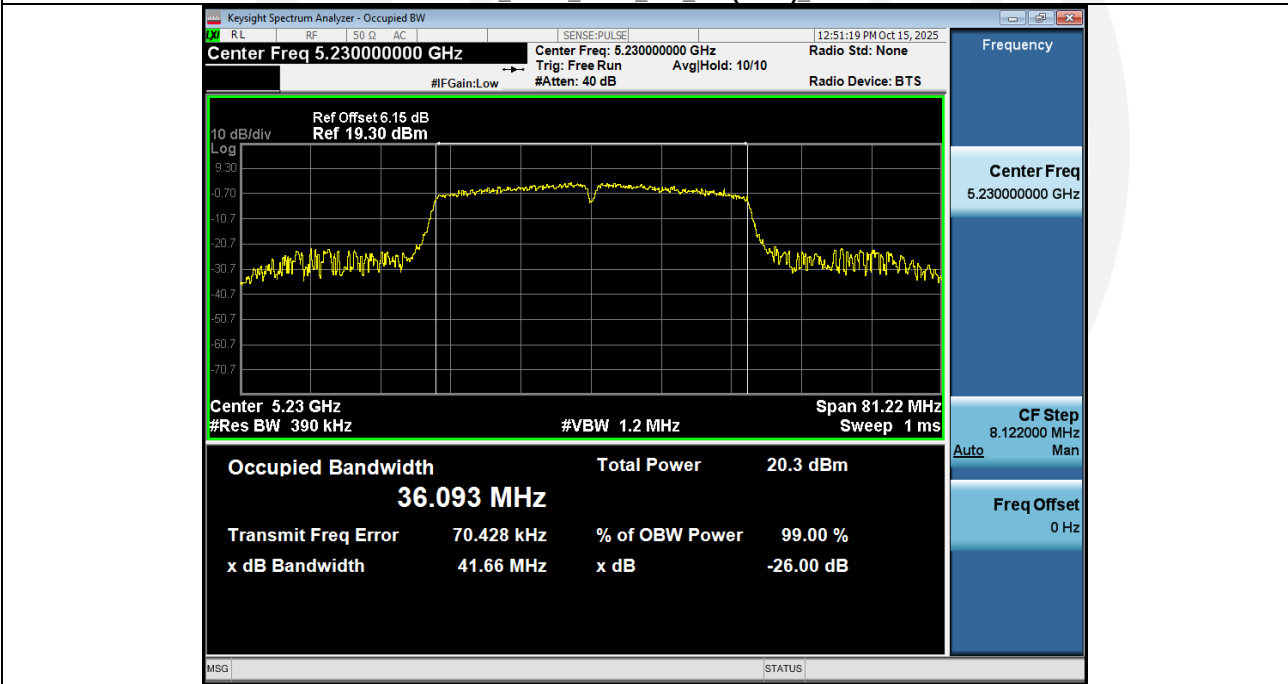


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5190

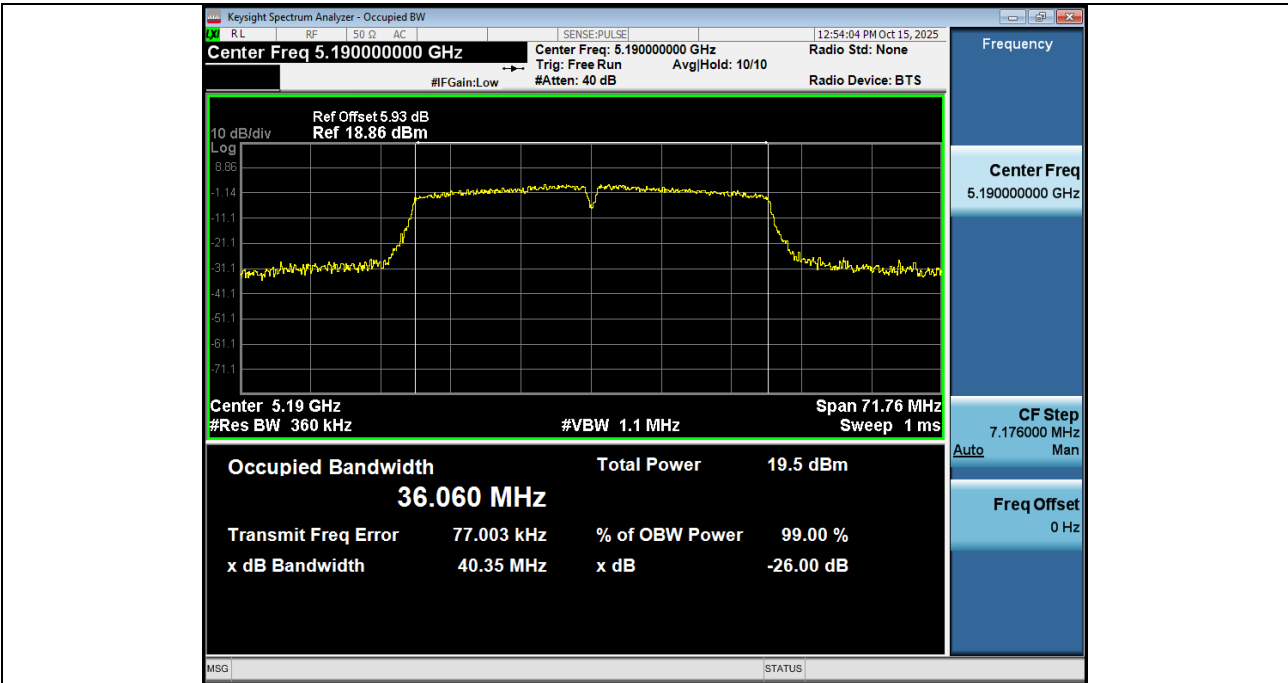


-26BW_NVNT_ANT1_802_11ac(VHT40)_5190

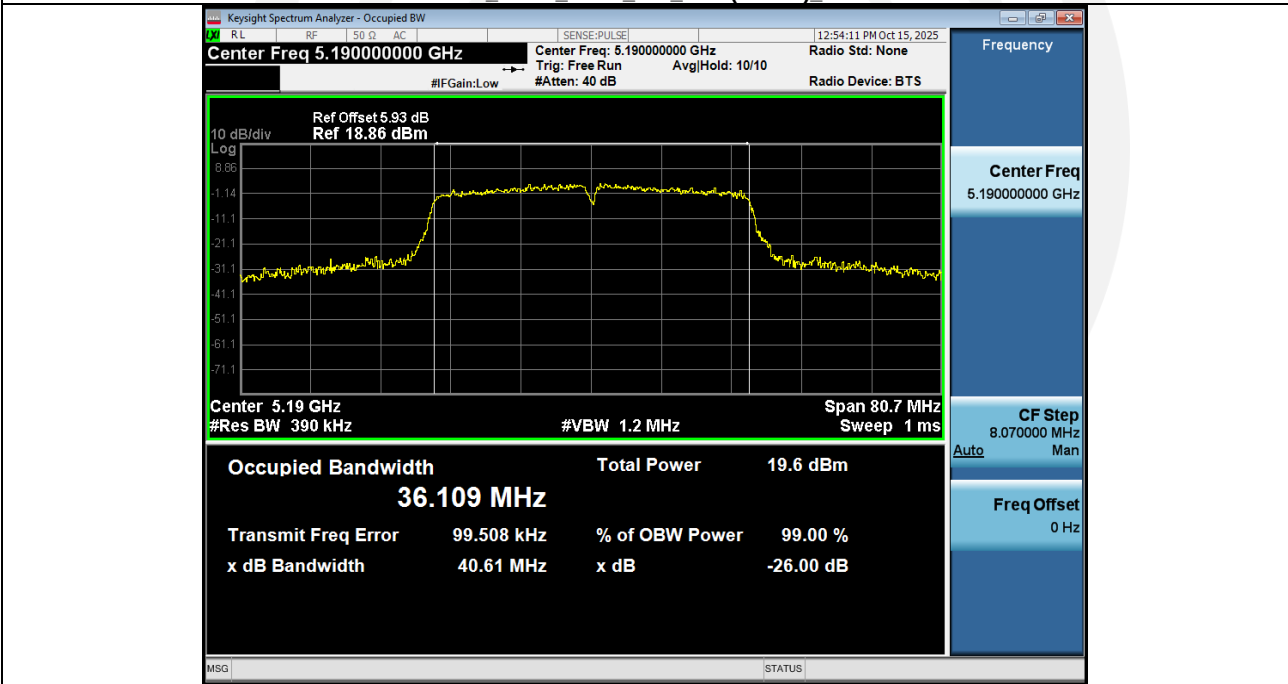


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5230

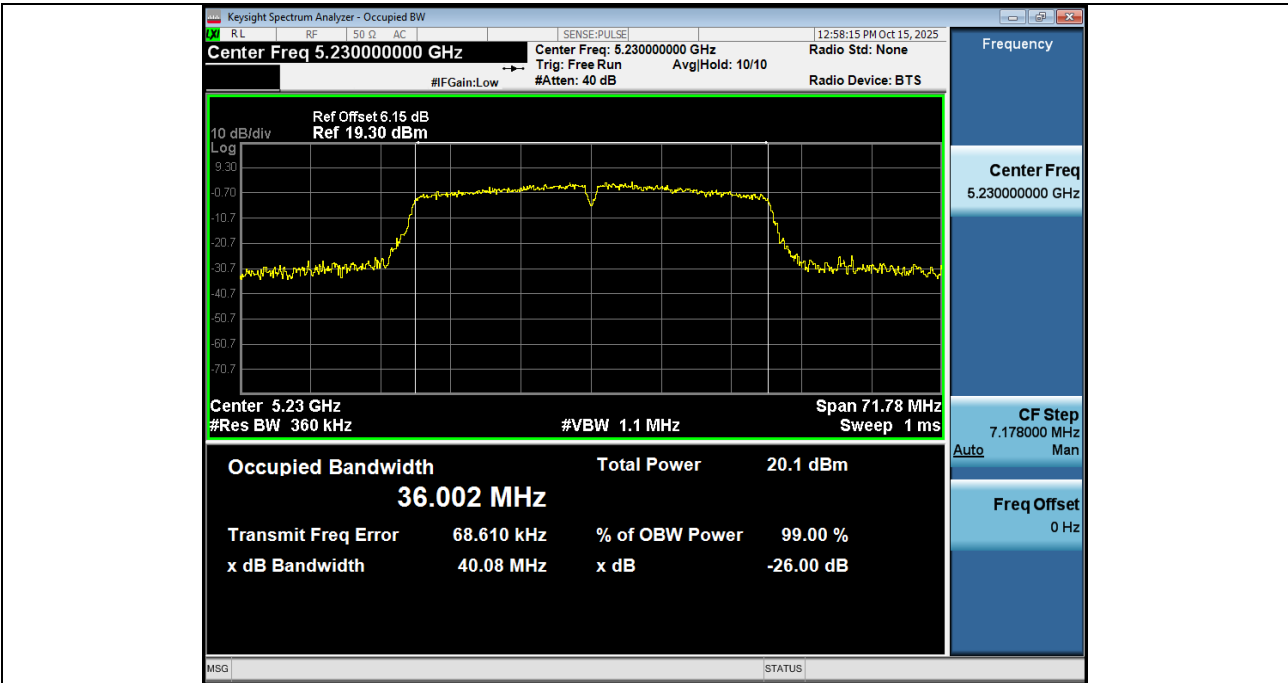

-26BW_NVNT_ANT1_802_11ac(VHT40)_5230

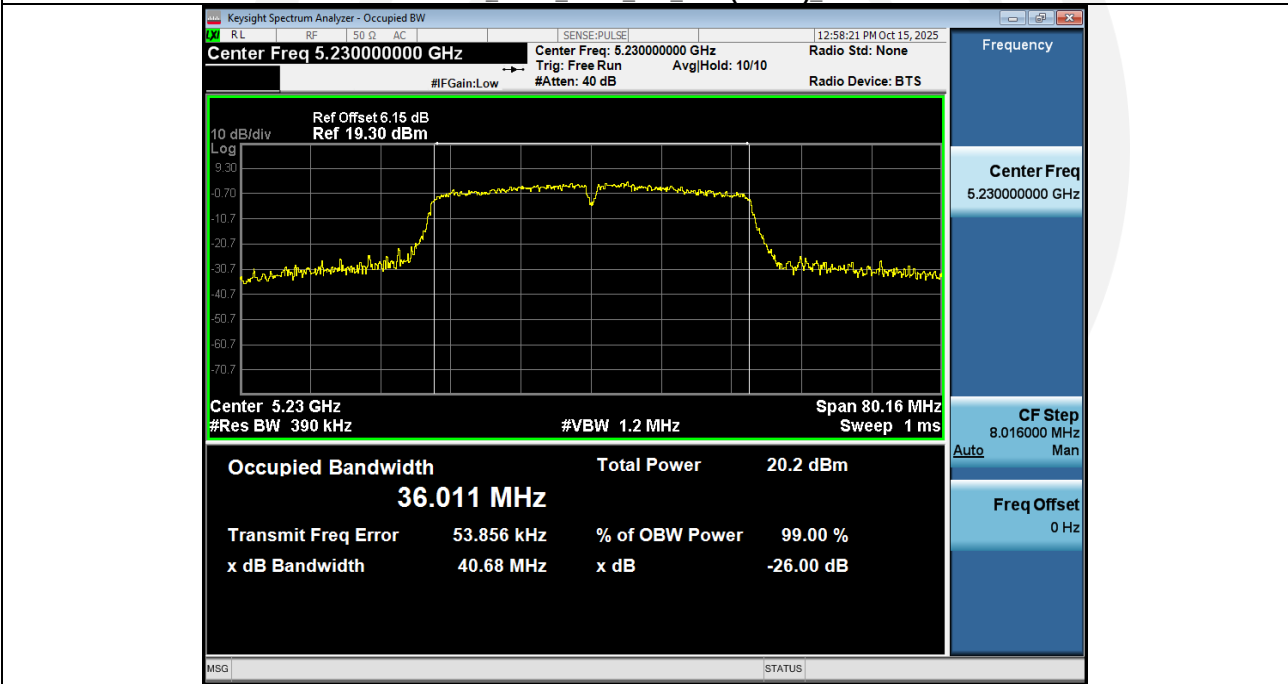

99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5210

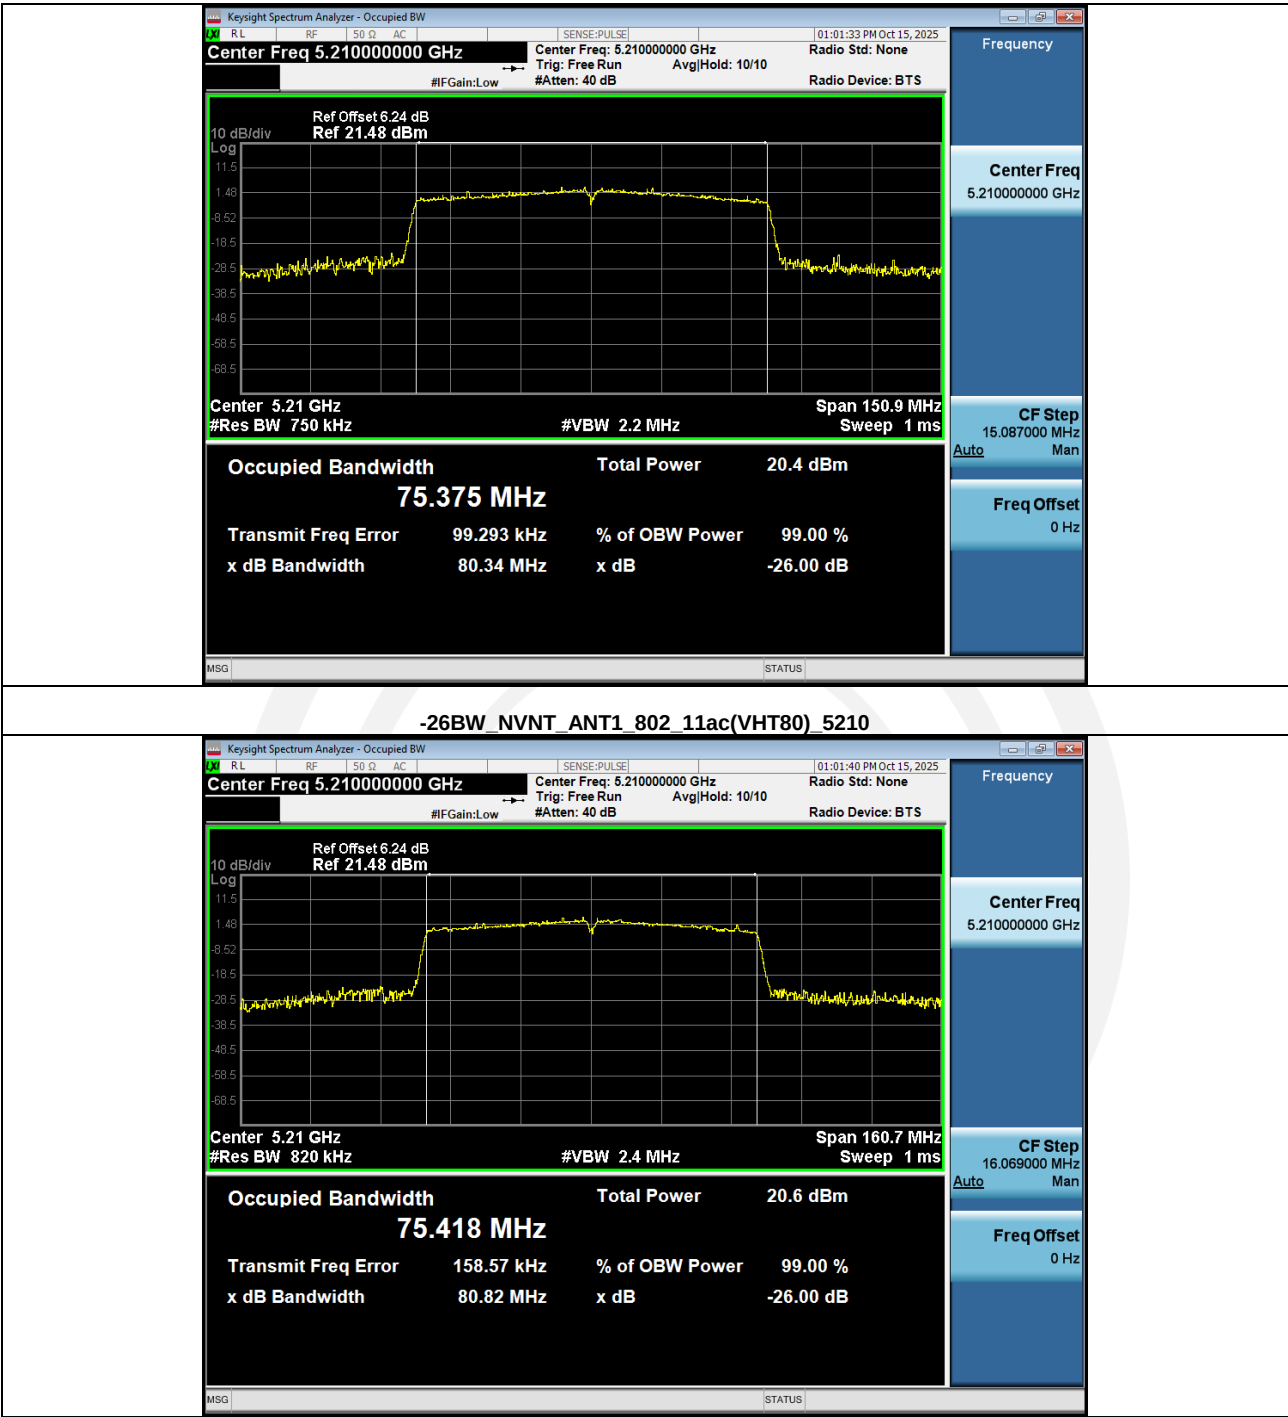


Band 2 (5260-5320 MHz):


Condition	Antenna	Modulation	Frequency(MHz)	26dB Emission Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5260.00	19.97	16.44
NVNT	ANT1	802.11a	5300.00	19.80	16.41
NVNT	ANT1	802.11a	5320.00	19.91	16.37
NVNT	ANT1	802.11n(HT20)	5260.00	22.55	17.60
NVNT	ANT1	802.11n(HT20)	5300.00	20.50	17.58
NVNT	ANT1	802.11n(HT20)	5320.00	20.14	17.59
NVNT	ANT1	802.11ac(VHT20)	5260.00	20.32	17.60
NVNT	ANT1	802.11ac(VHT20)	5300.00	20.14	17.55
NVNT	ANT1	802.11ac(VHT20)	5320.00	20.19	17.55
NVNT	ANT1	802.11n(HT40)	5270.00	49.71	36.03
NVNT	ANT1	802.11n(HT40)	5310.00	53.43	36.03
NVNT	ANT1	802.11ac(VHT40)	5270.00	40.26	35.98
NVNT	ANT1	802.11ac(VHT40)	5310.00	40.57	36.00
NVNT	ANT1	802.11ac(VHT80)	5290.00	81.07	75.35




99%_OCB_NVNT_ANT1_802_11a_5260

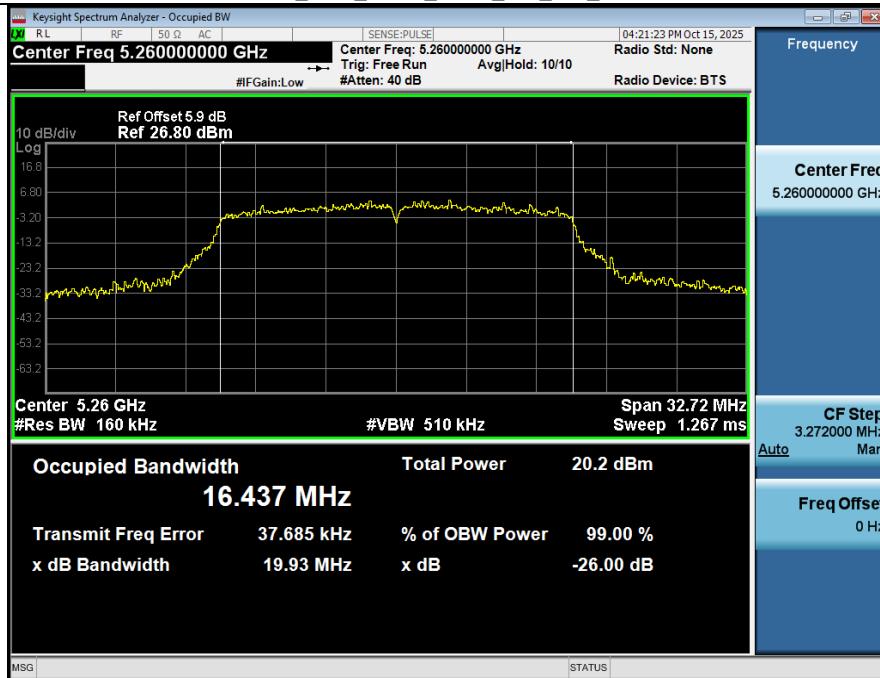


-26BW_NVNT_ANT1_802_11a_5260

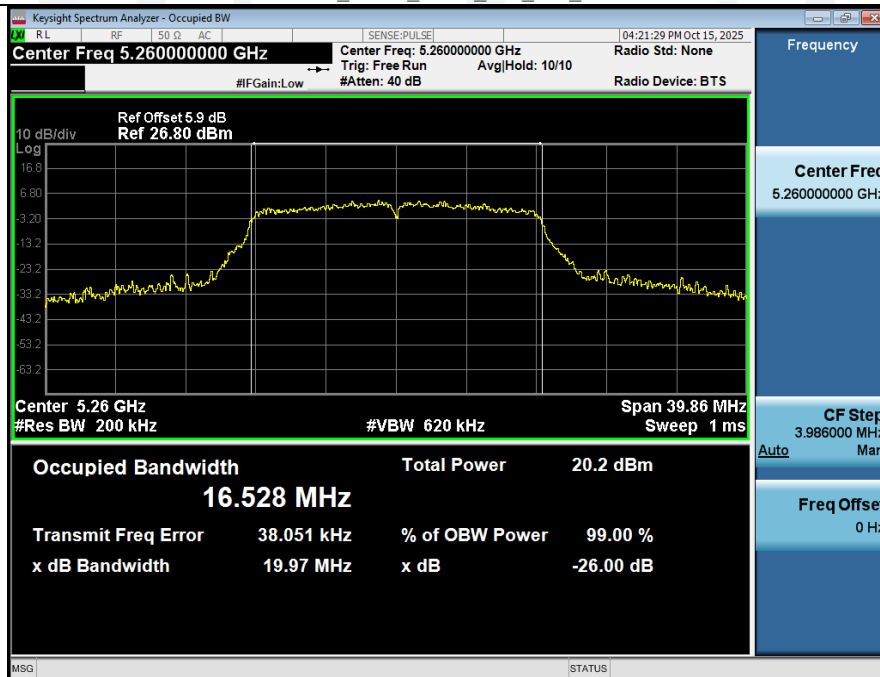


99%_OCB_NVNT_ANT1_802_11a_5300

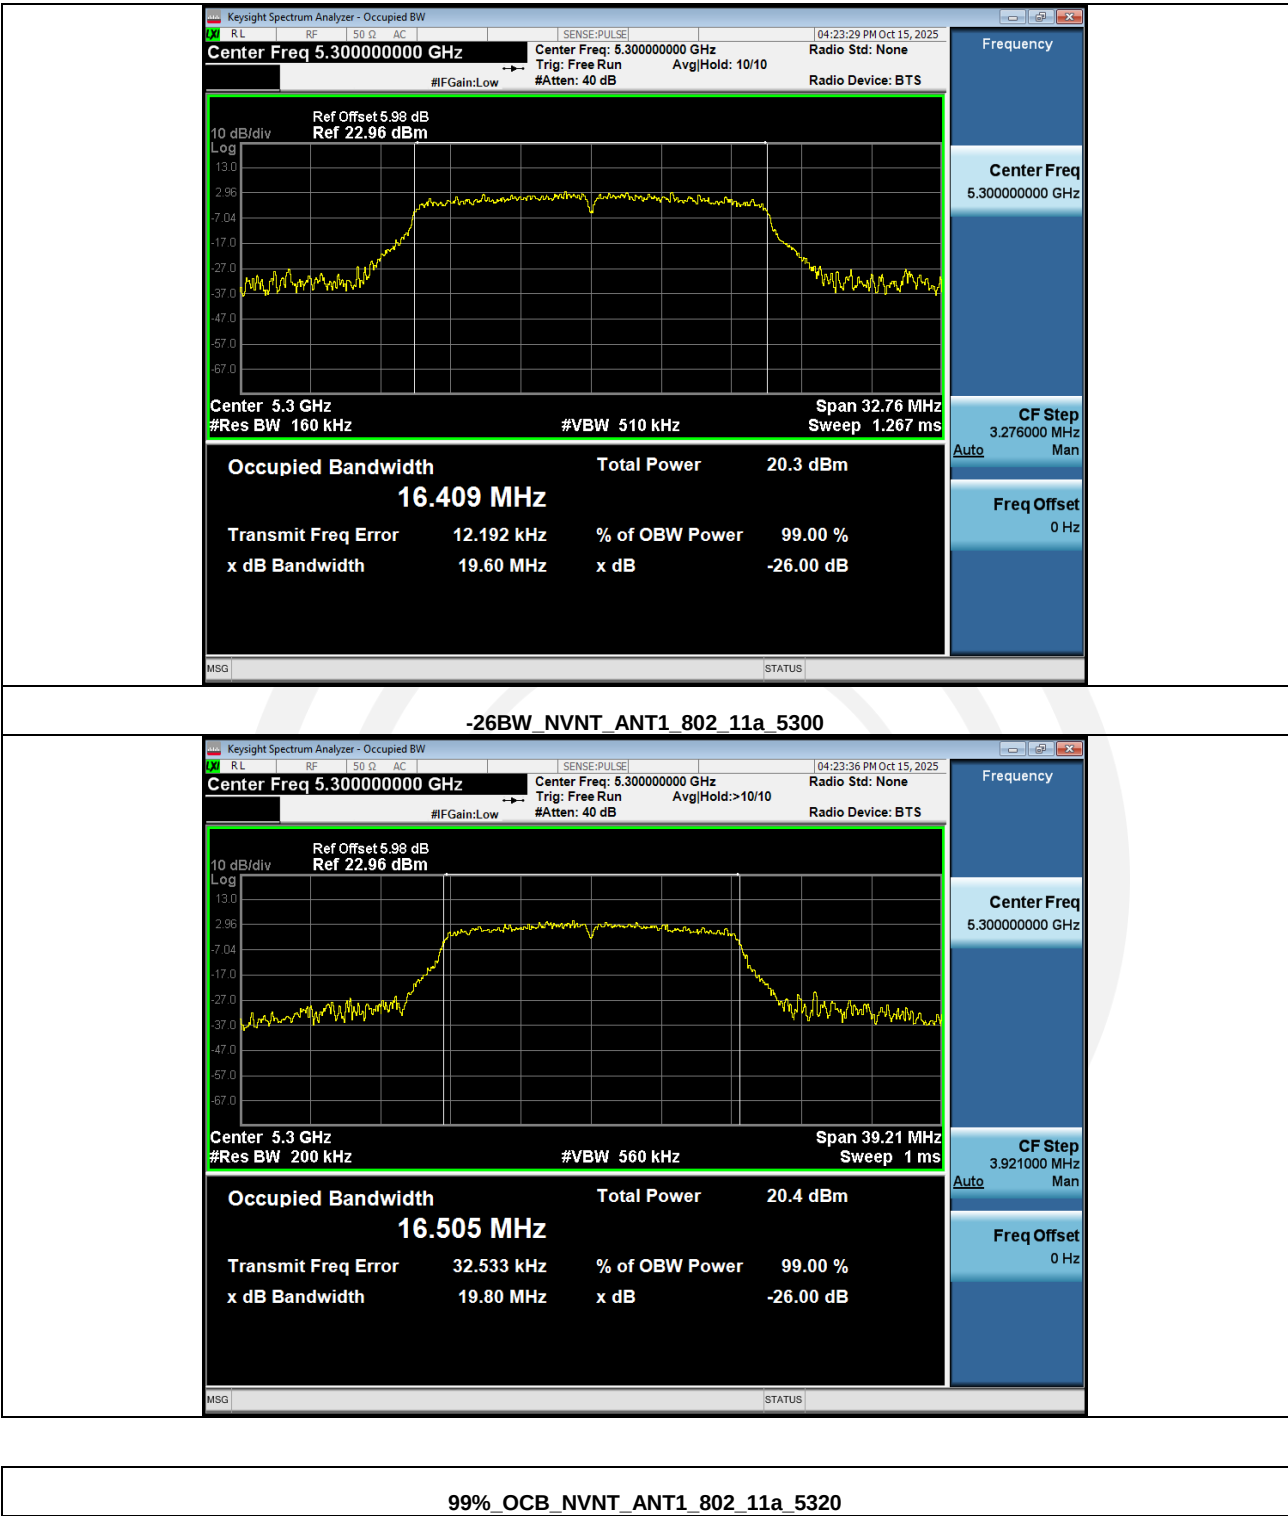

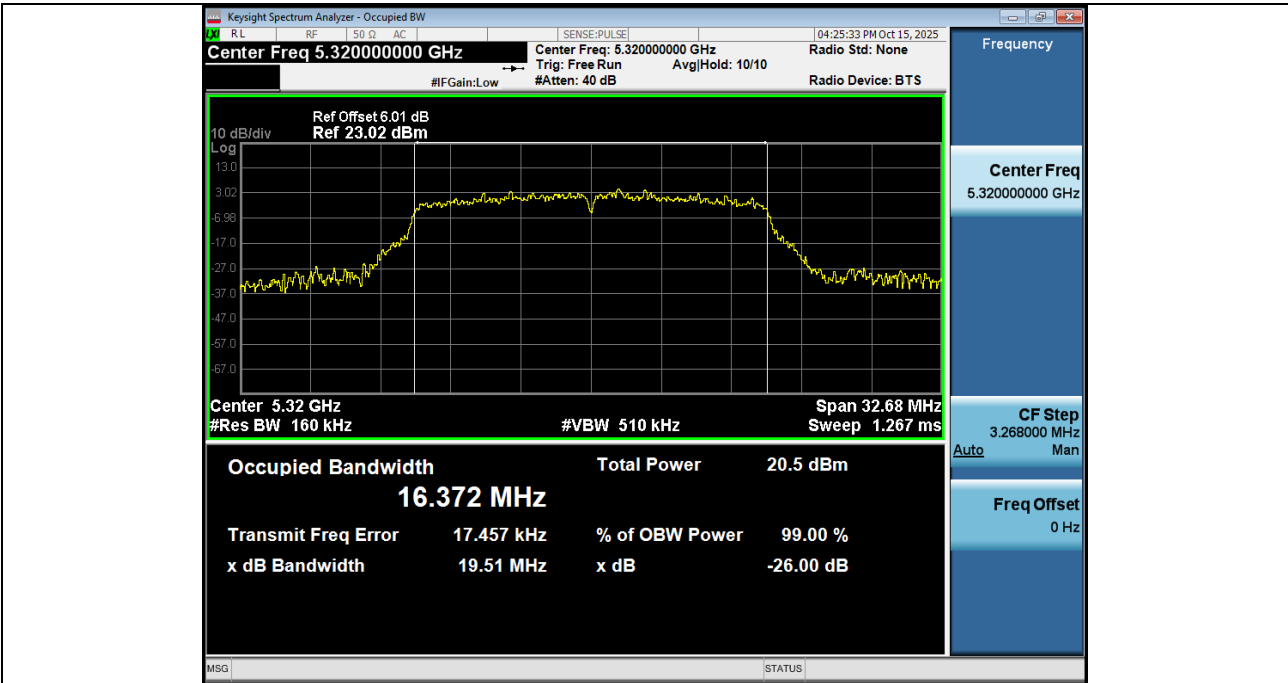


-26BW_NVNT_ANT1_802_11a_5320

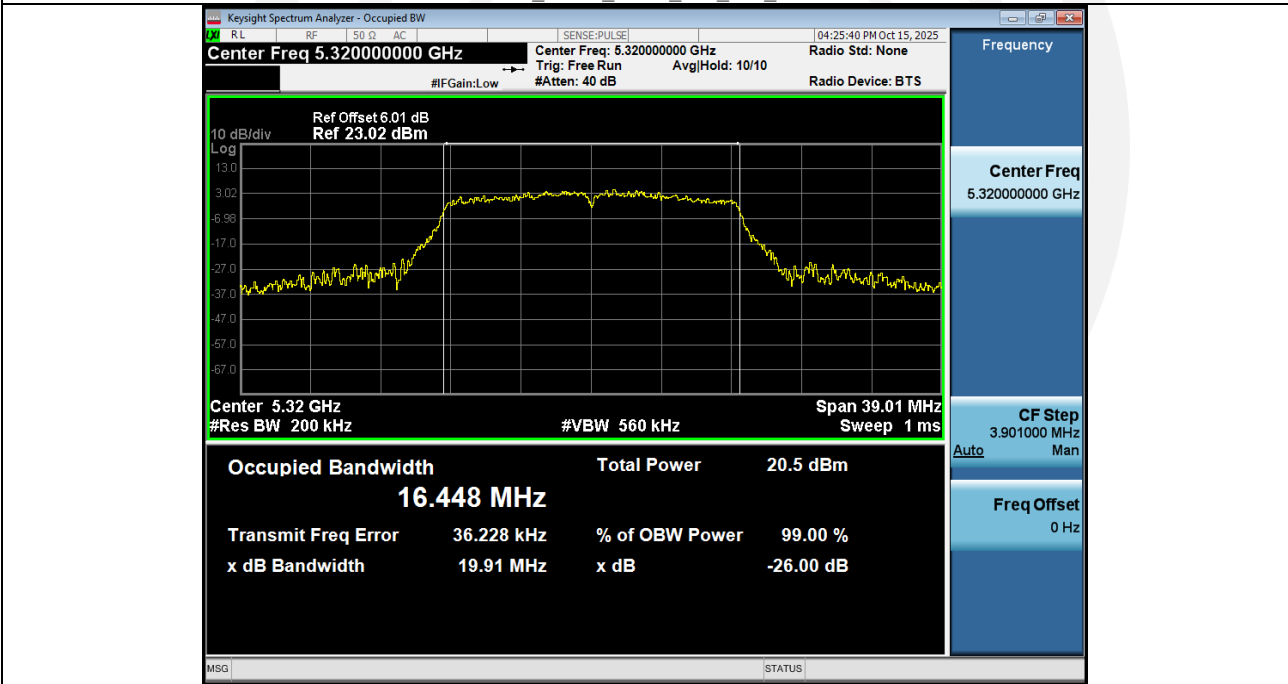


99%_OCB_NVNT_ANT1_802_11n(HT20)_5260




-26BW_NVNT_ANT1_802_11n(HT20)_5260

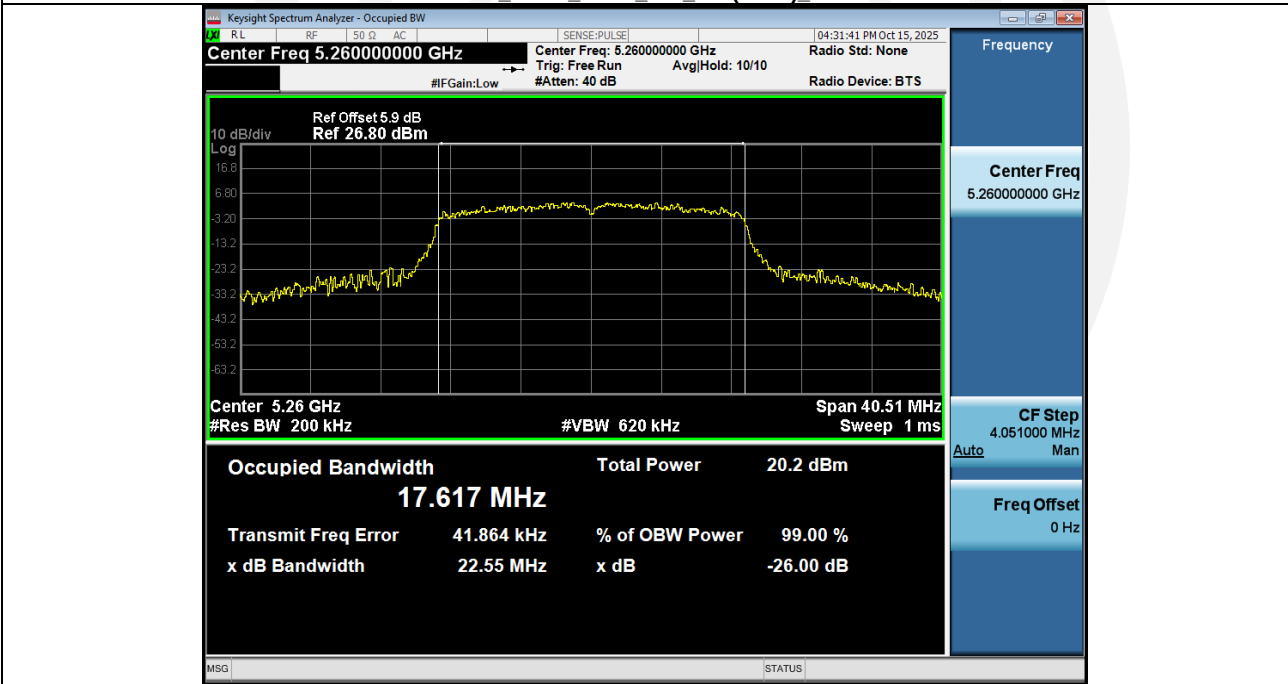


99%_OCB_NVNT_ANT1_802_11n(HT20)_5300

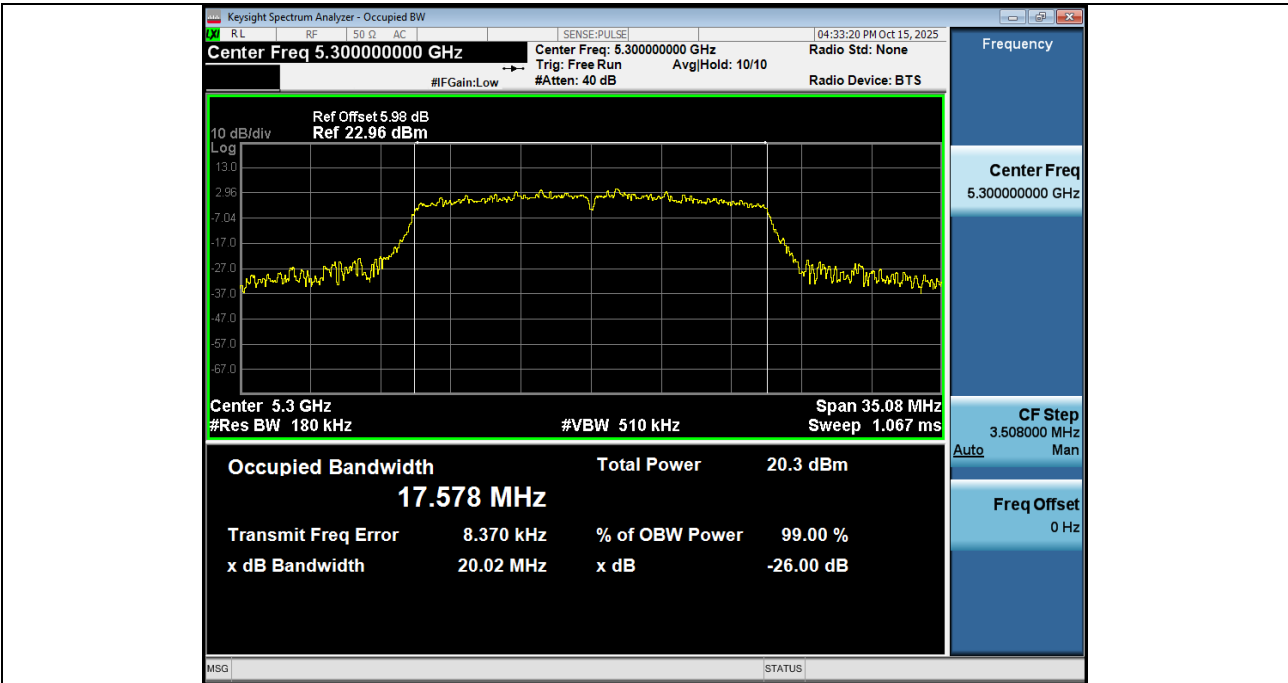


-26BW_NVNT_ANT1_802_11n(HT20)_5300

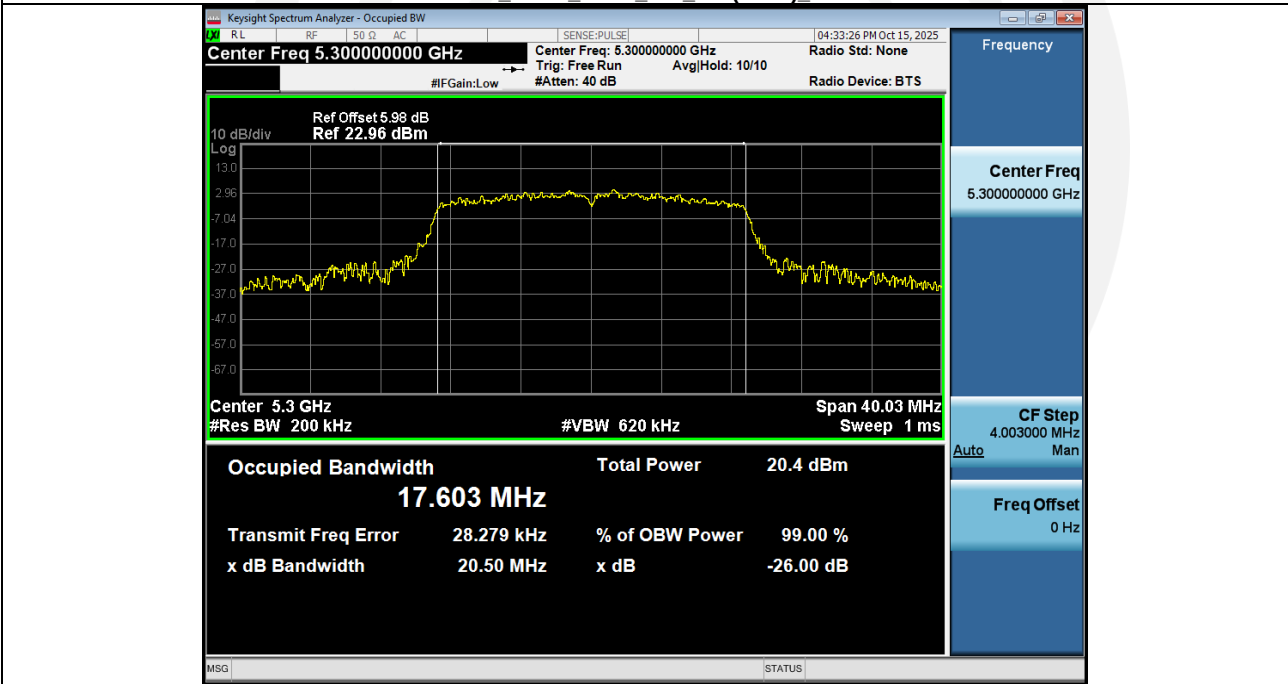


99%_OCB_NVNT_ANT1_802_11n(HT20)_5320

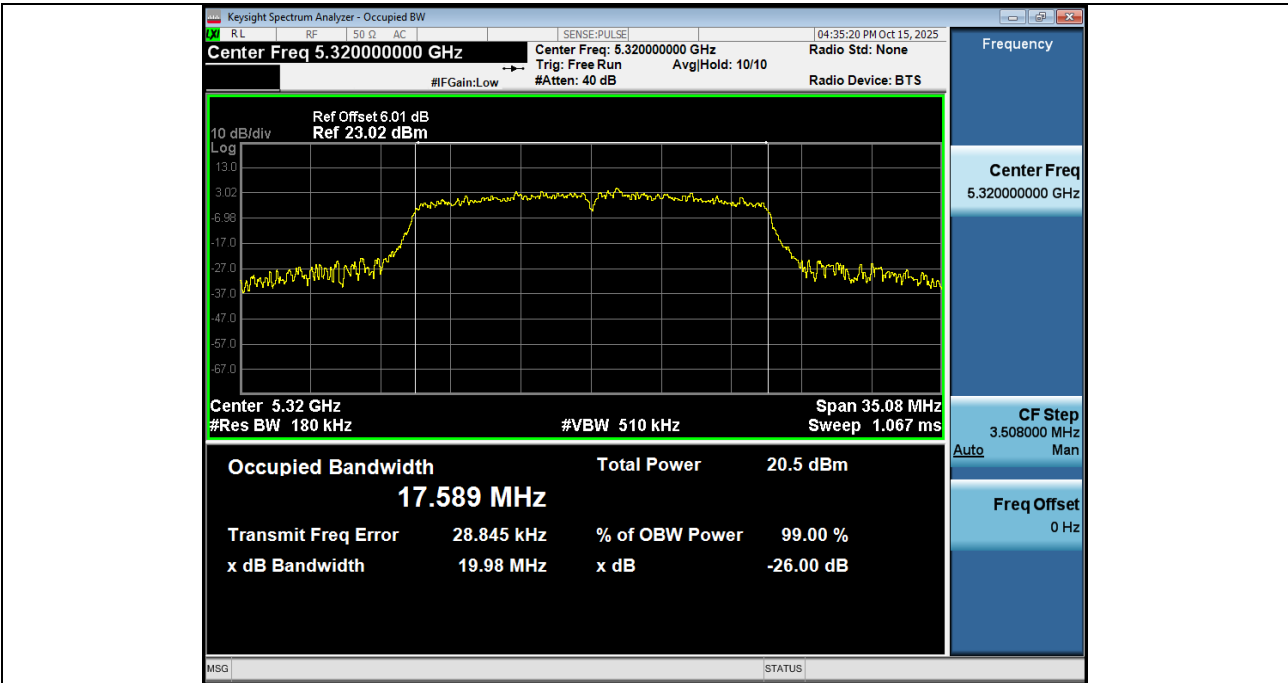


-26BW_NVNT_ANT1_802_11n(HT20)_5320

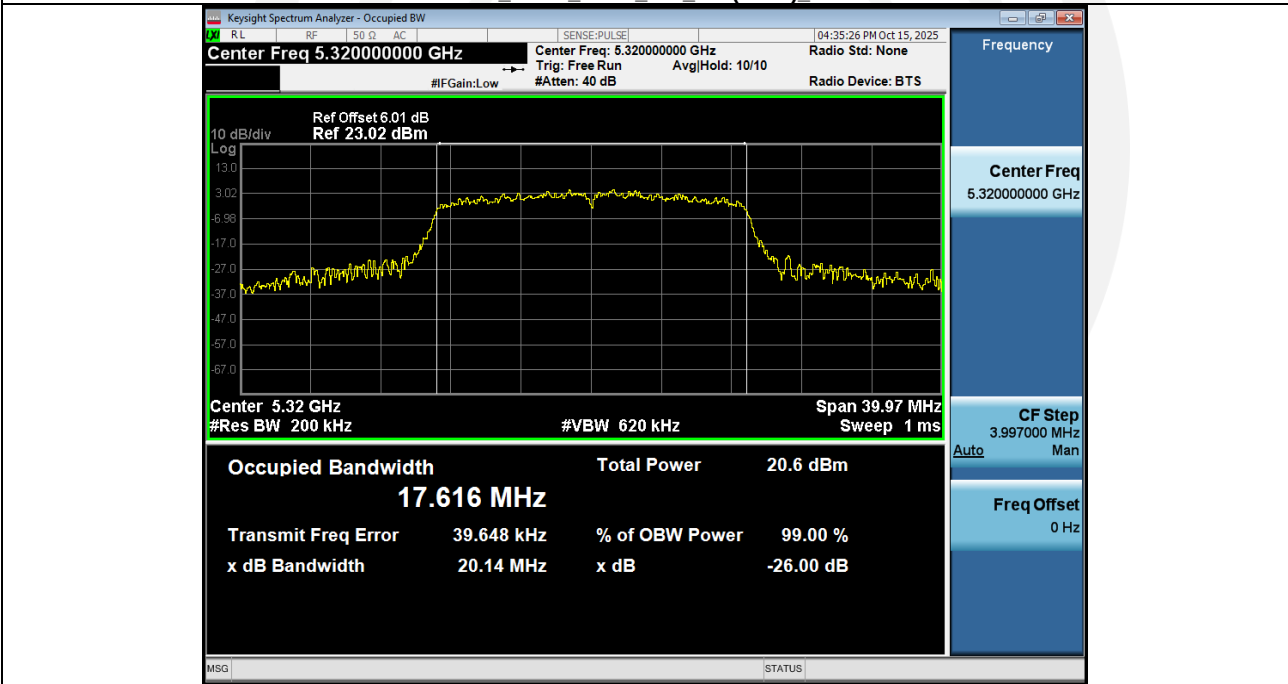


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5260

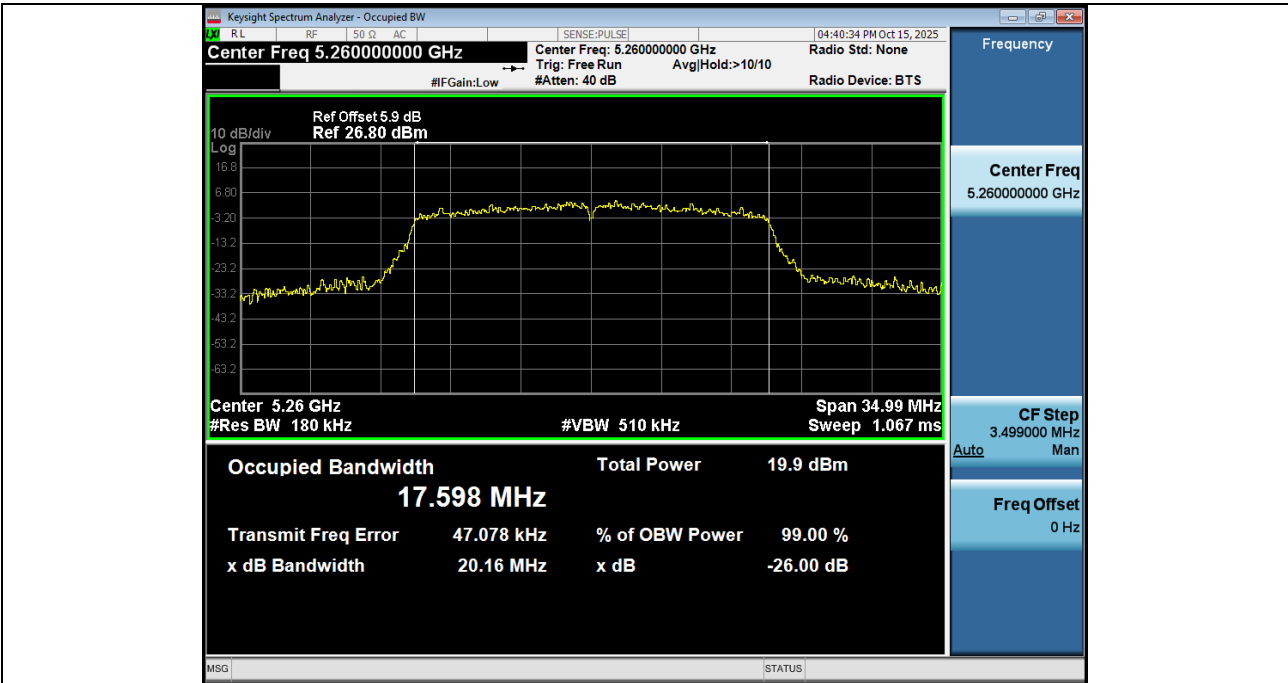


-26BW_NVNT_ANT1_802_11ac(VHT20)_5260

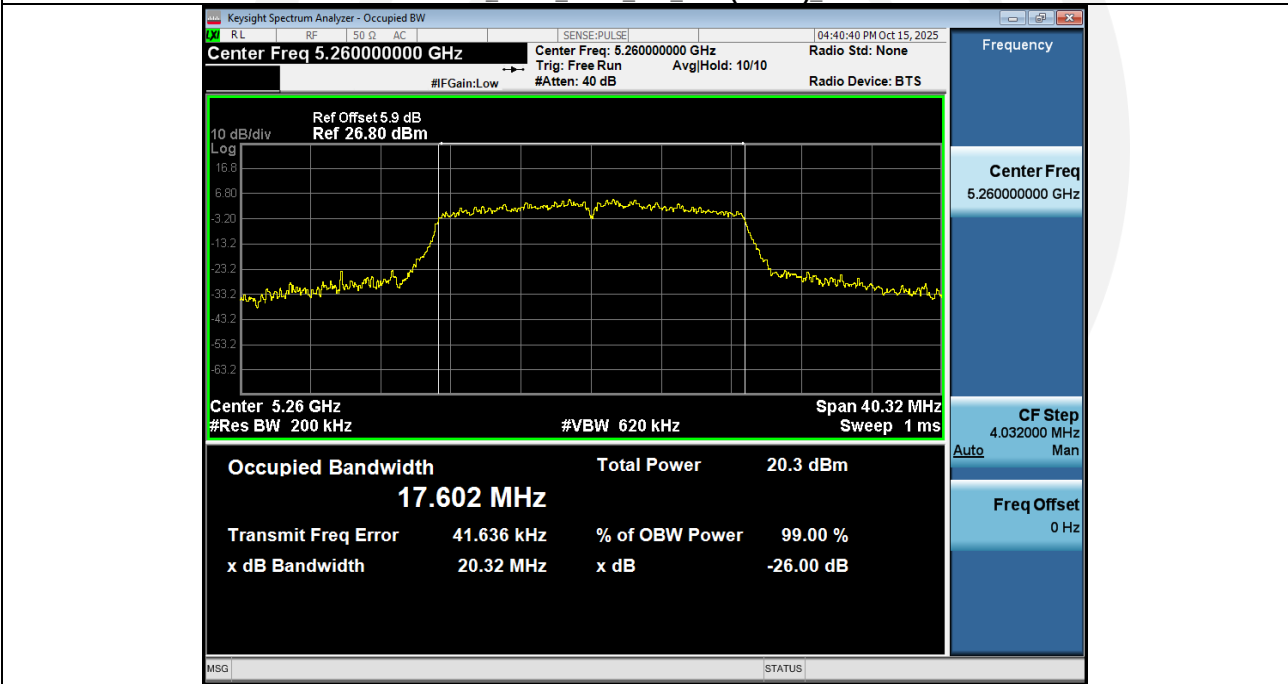


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5300

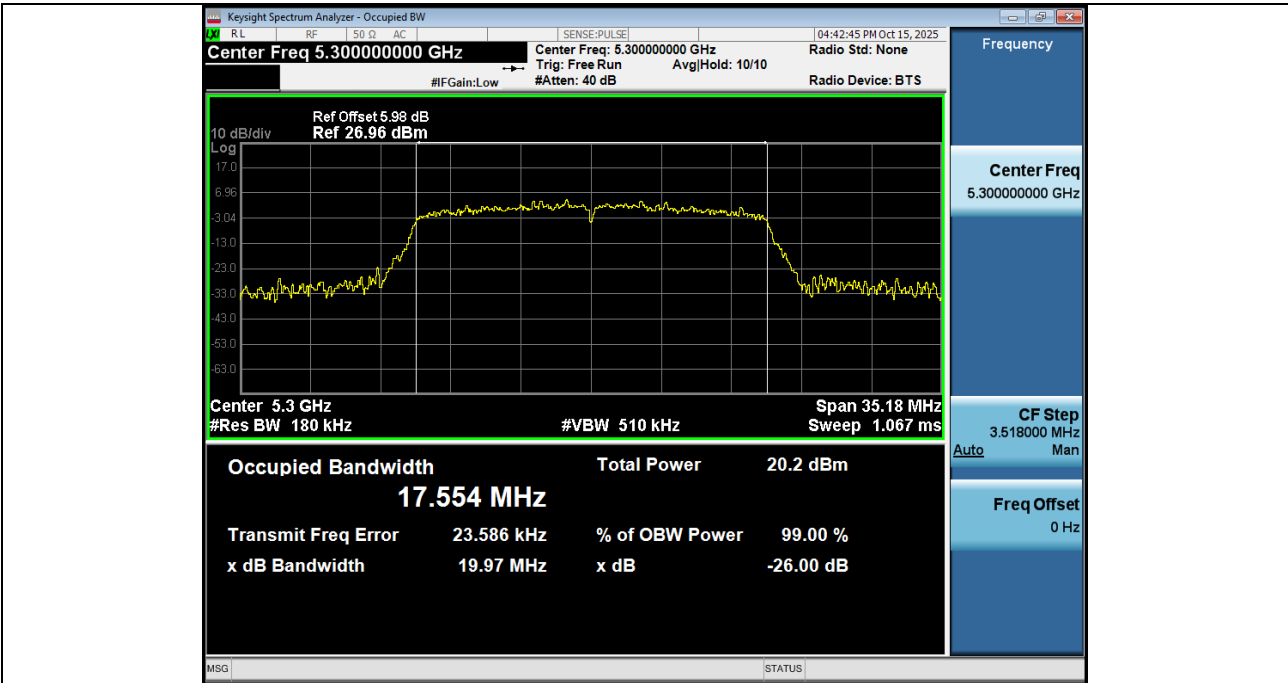


-26BW_NVNT_ANT1_802_11ac(VHT20)_5300

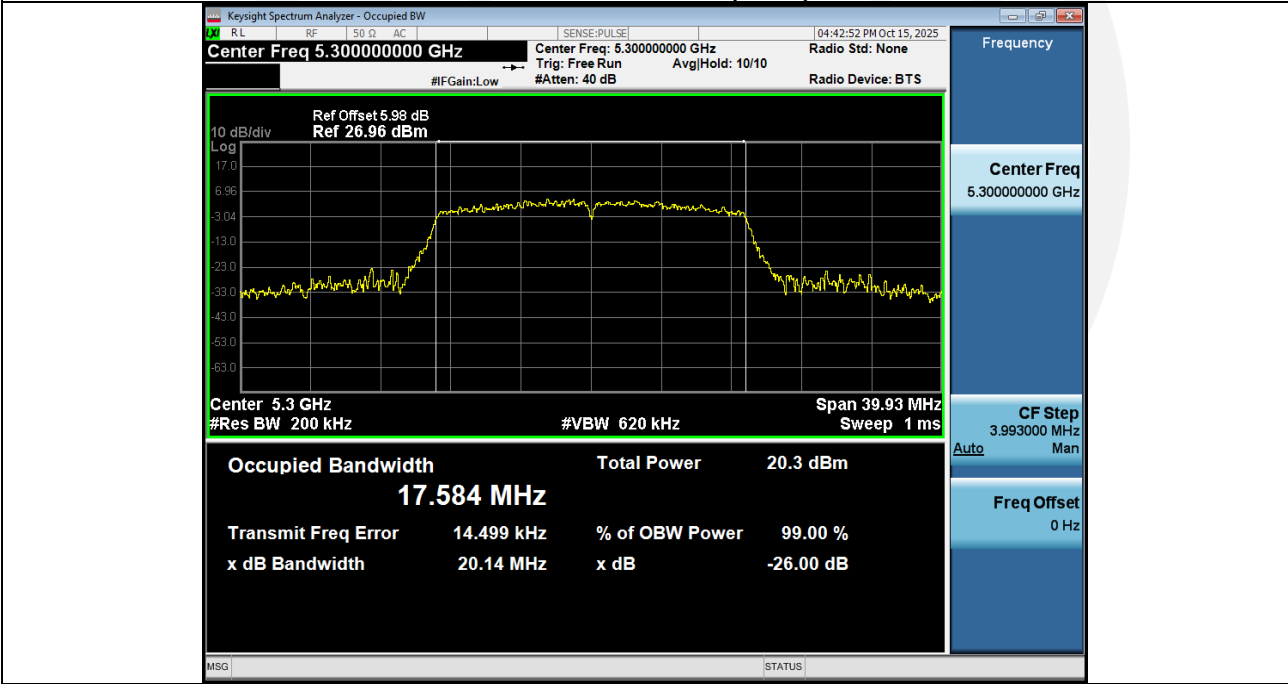


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5320

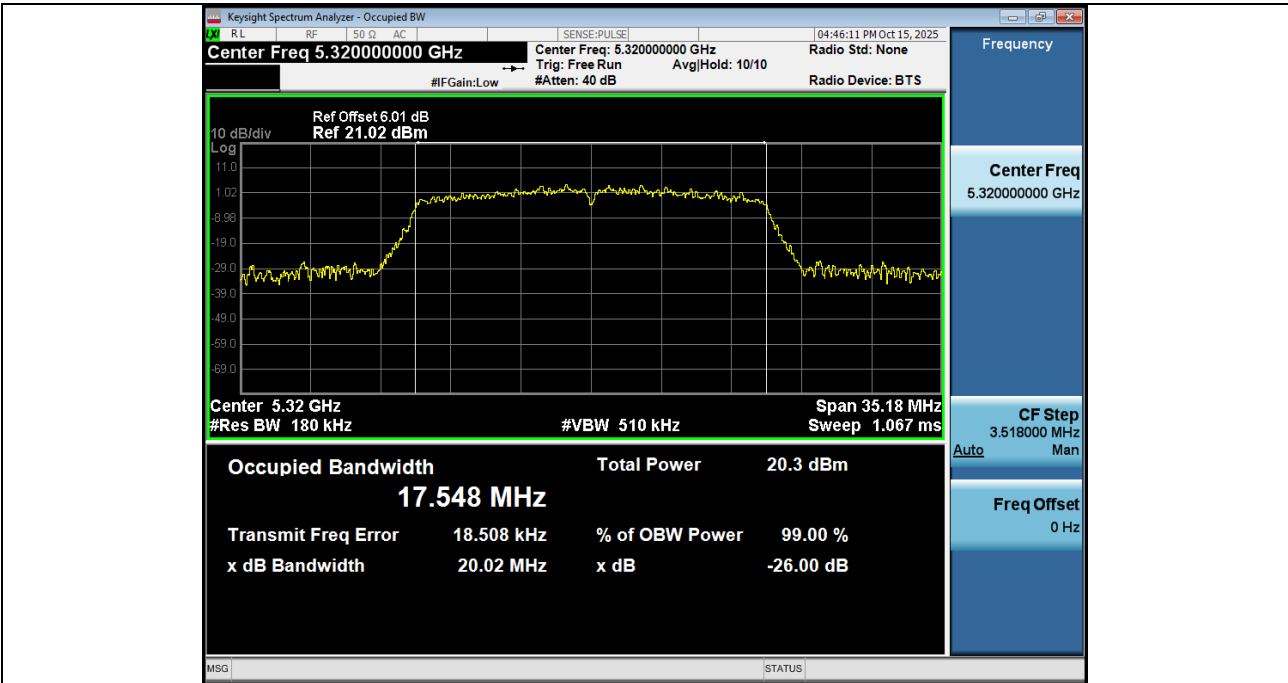


-26BW_NVNT_ANT1_802_11ac(VHT20)_5320

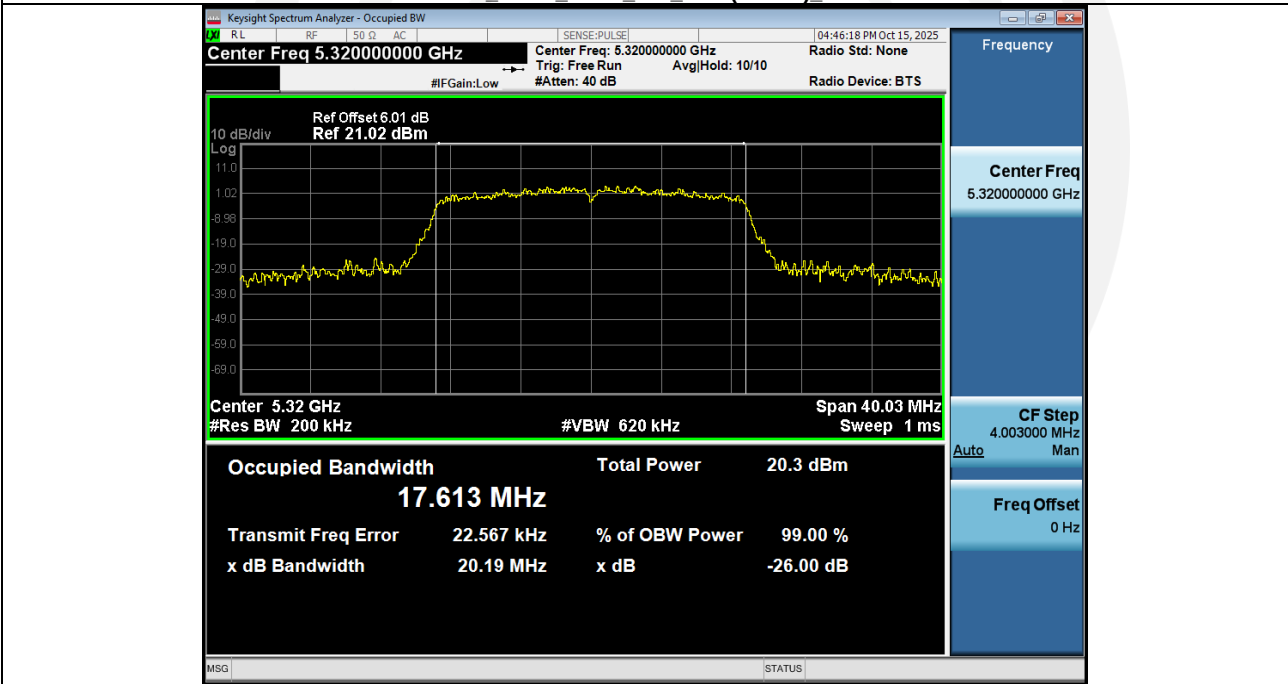


99%_OCB_NVNT_ANT1_802_11n(HT40)_5270

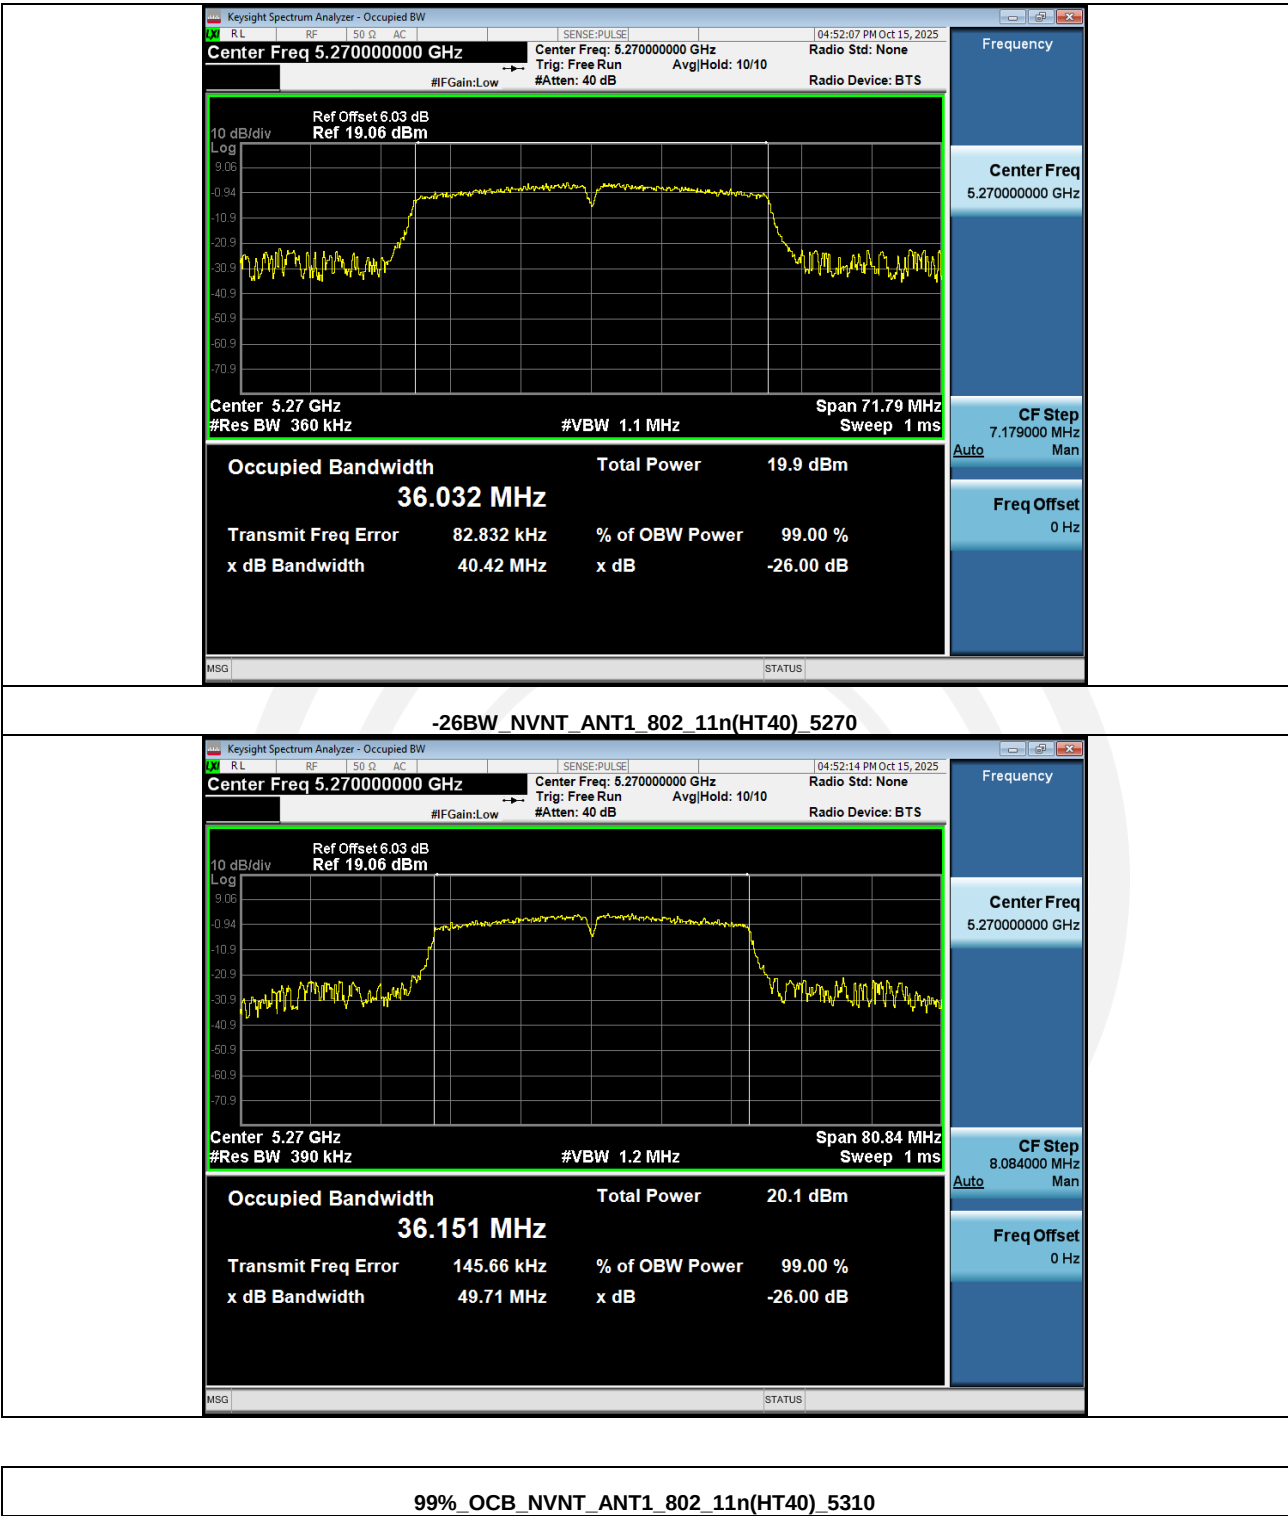


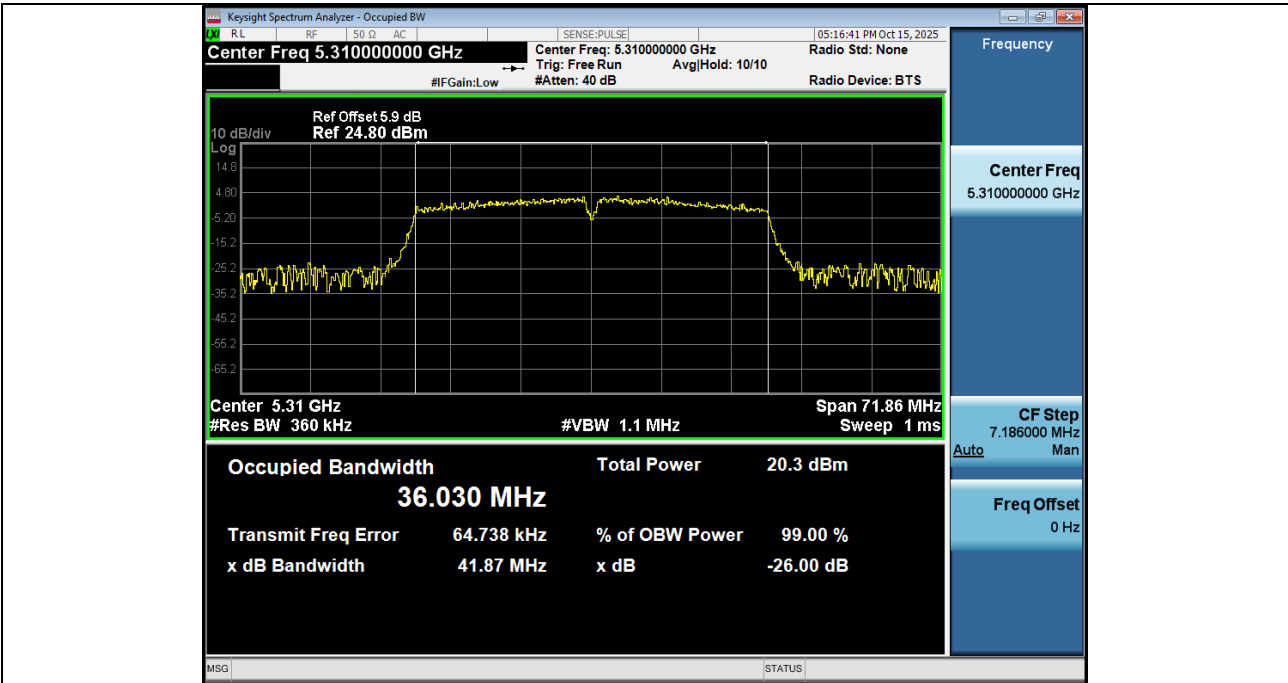


-26BW_NVNT_ANT1_802_11n(HT40)_5310

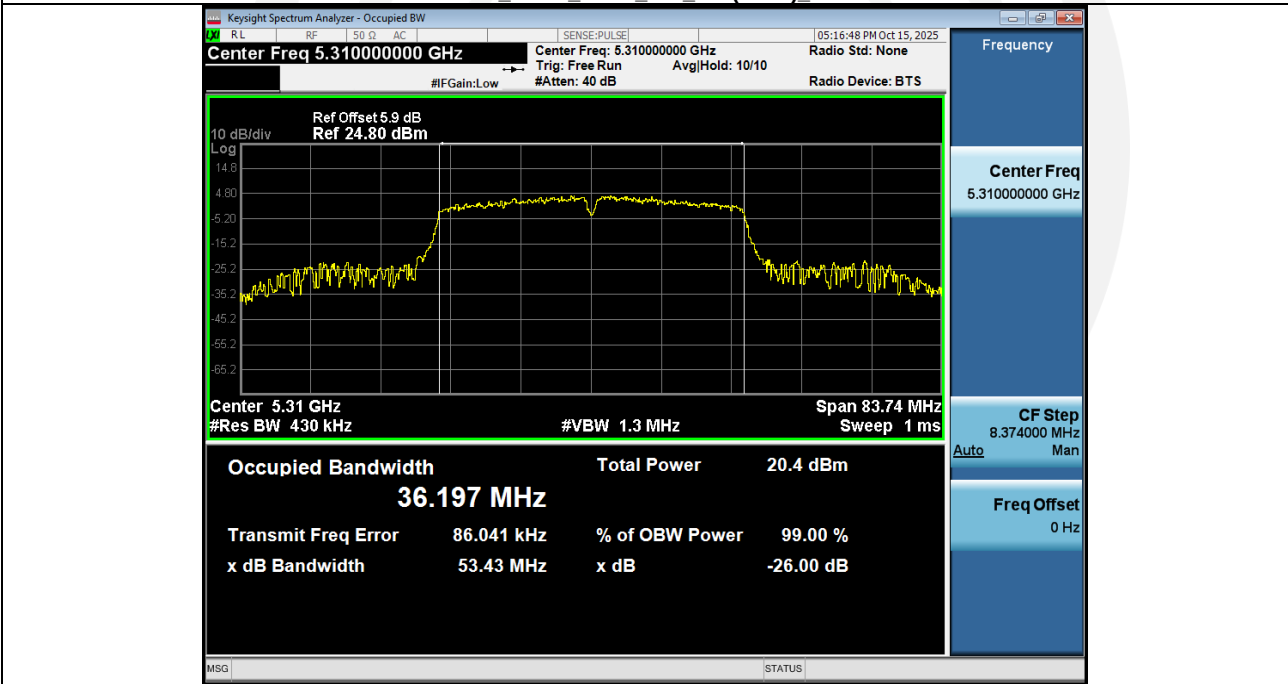


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5270

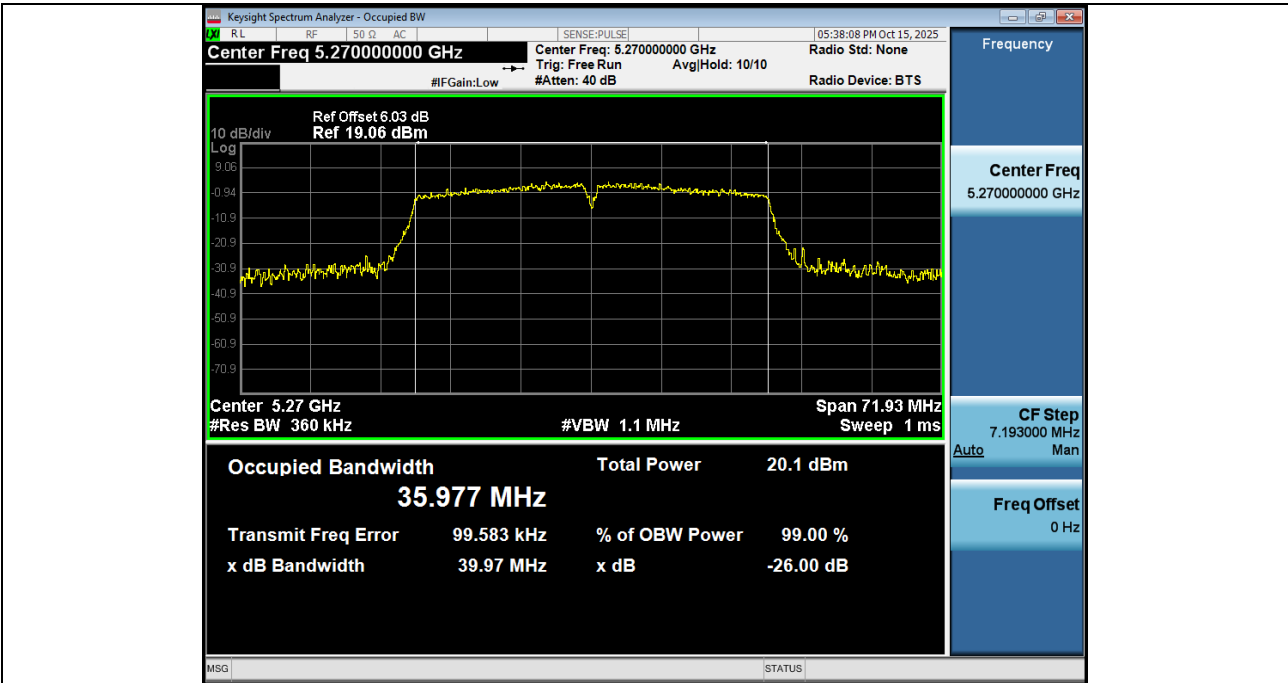


-26BW_NVNT_ANT1_802_11ac(VHT40)_5270

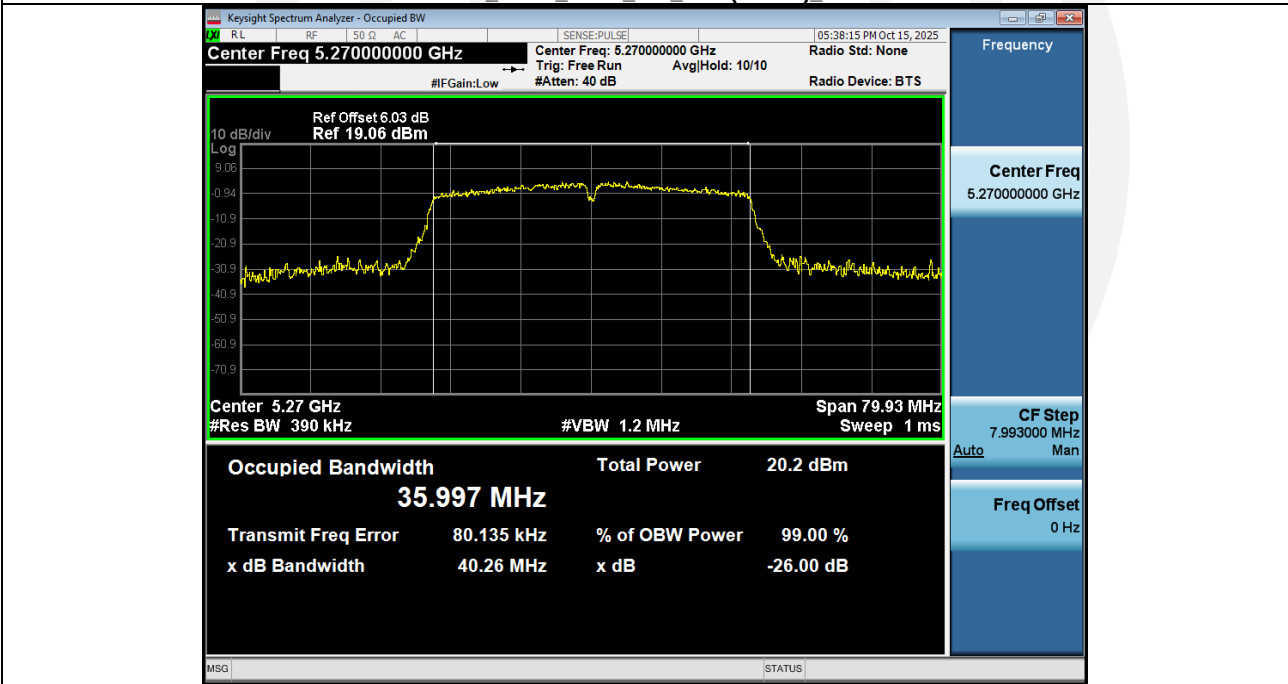


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5310

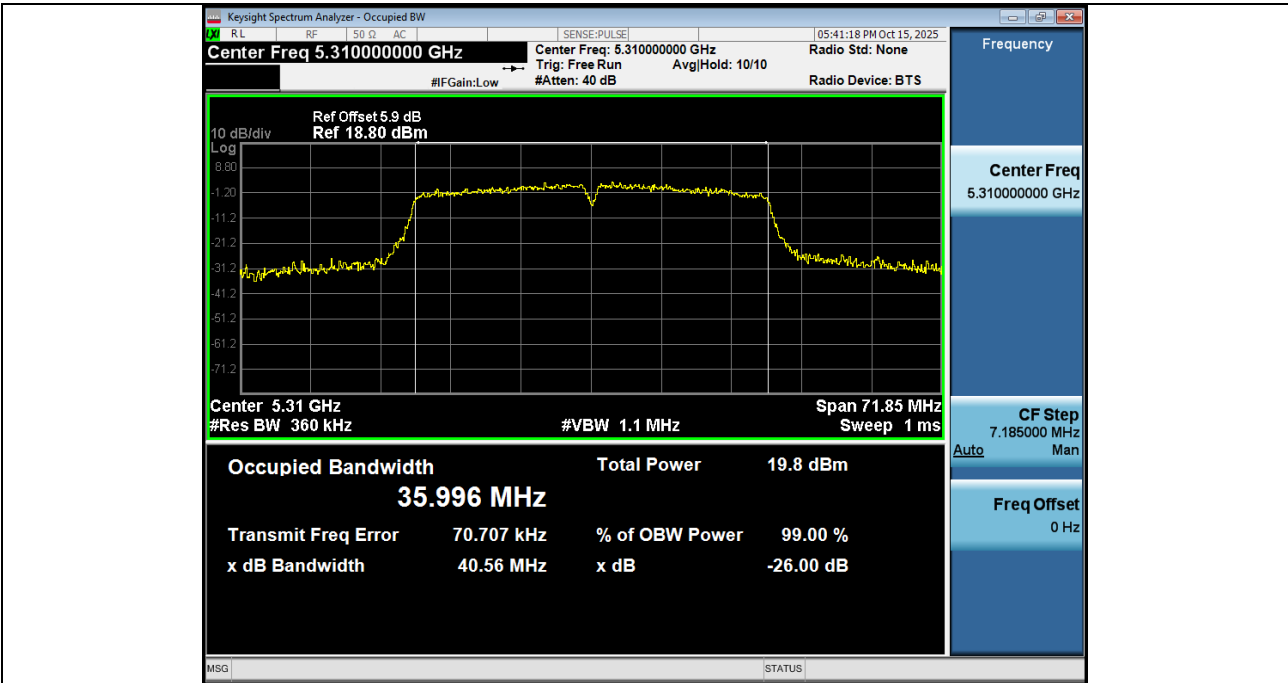

-26BW_NVNT_ANT1_802_11ac(VHT40)_5310

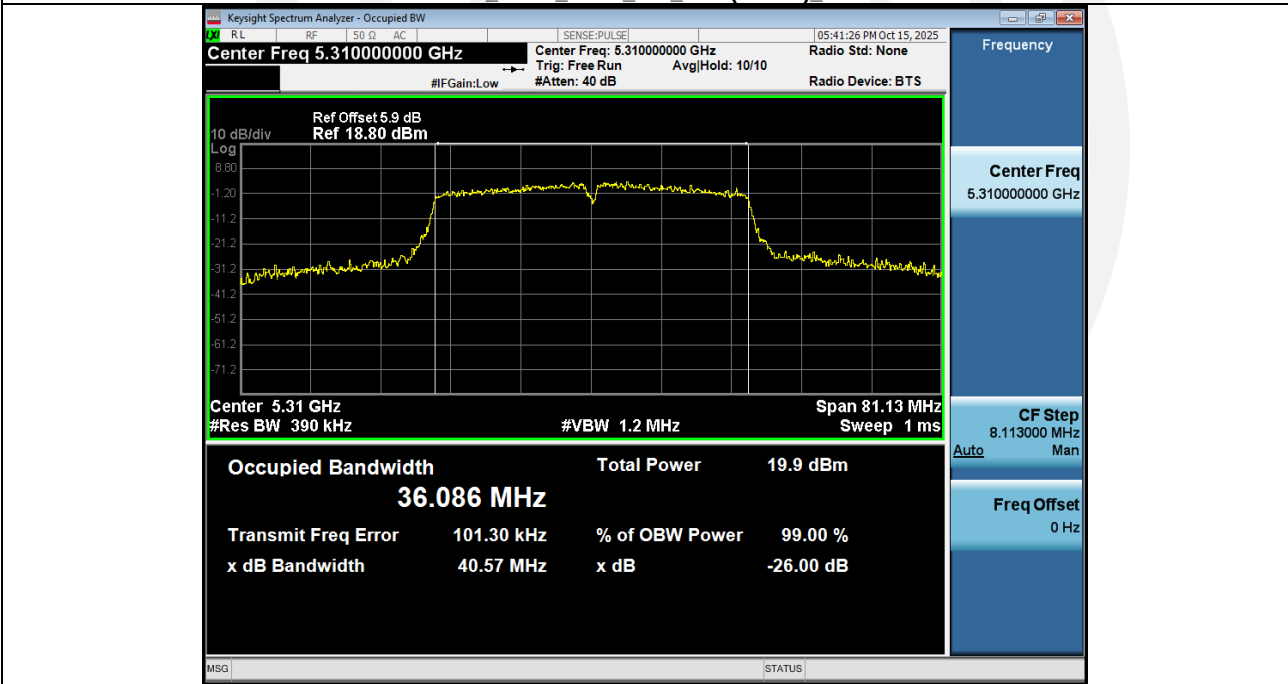



99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5290

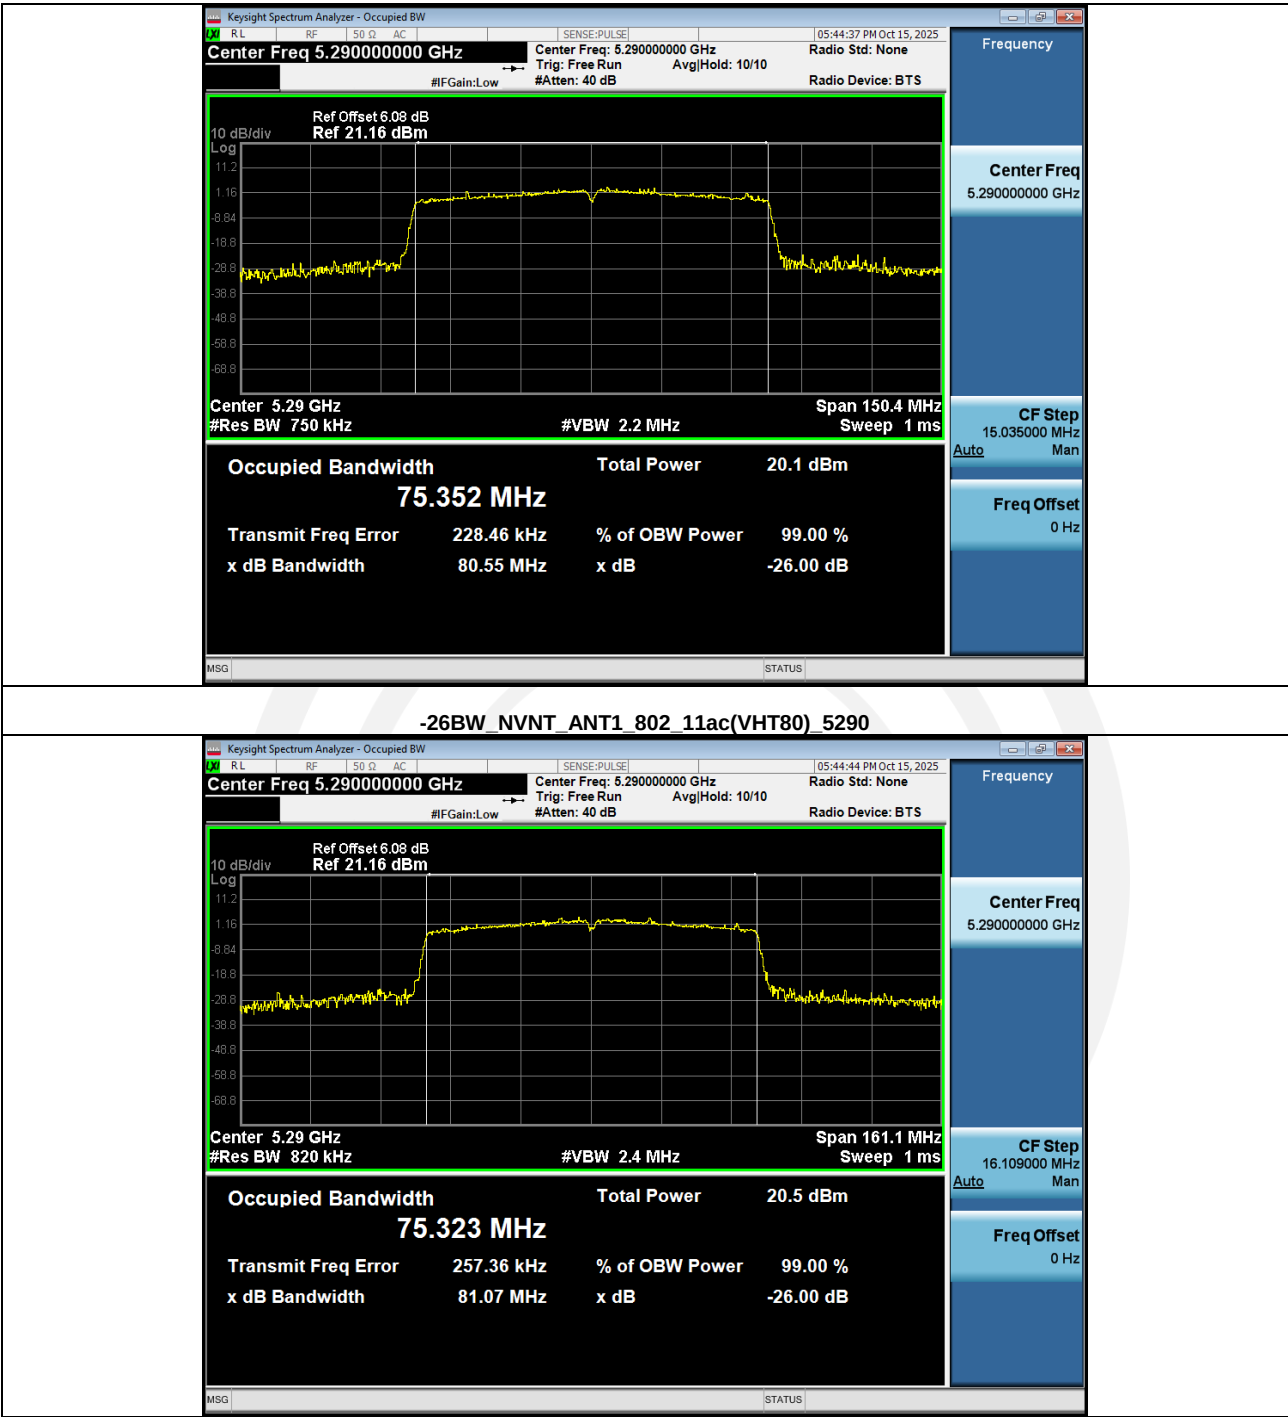



Band 4 (5725-5850 MHz):



Condition	Antenna	Mode	Frequency(MHz)	6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	15.097	0.500	Pass
NVNT	ANT1	802.11a	5785.00	15.129	0.500	Pass
NVNT	ANT1	802.11a	5825.00	15.807	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	15.050	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	14.711	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	13.848	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	15.074	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	15.464	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	15.117	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.075	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.122	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	33.893	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	33.875	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.237	0.500	Pass



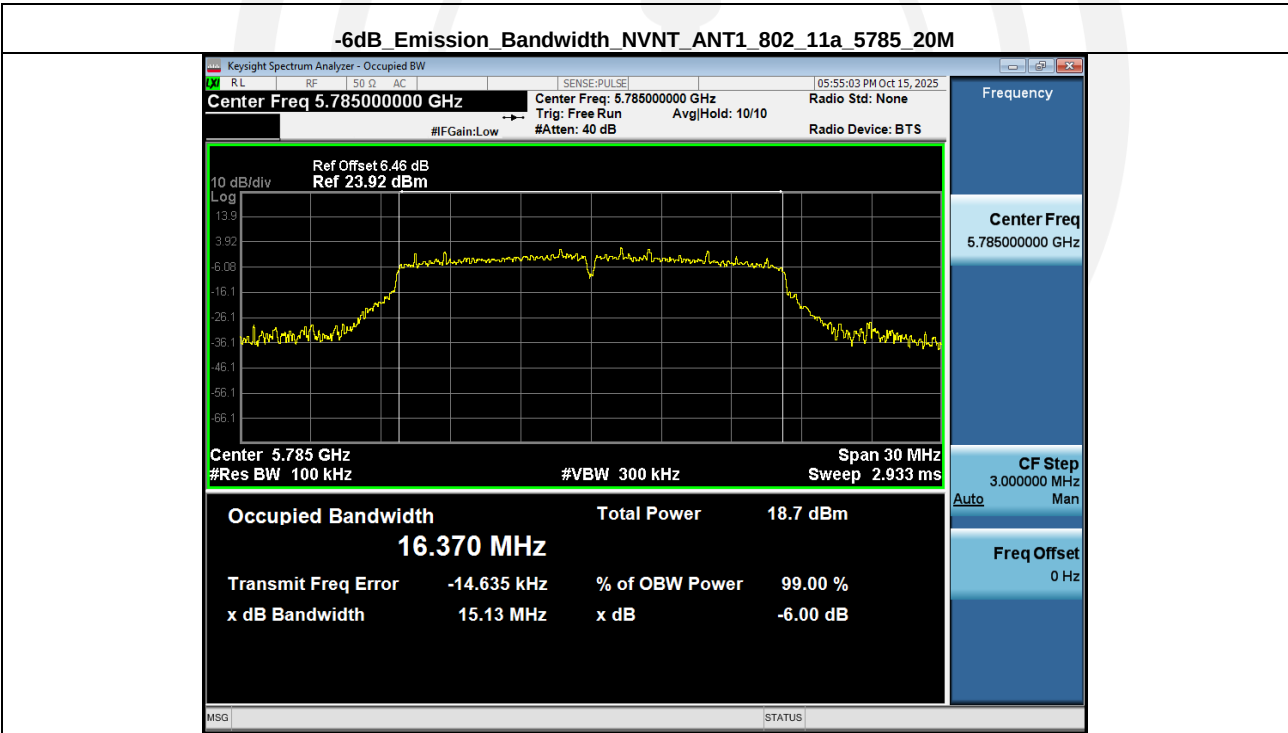
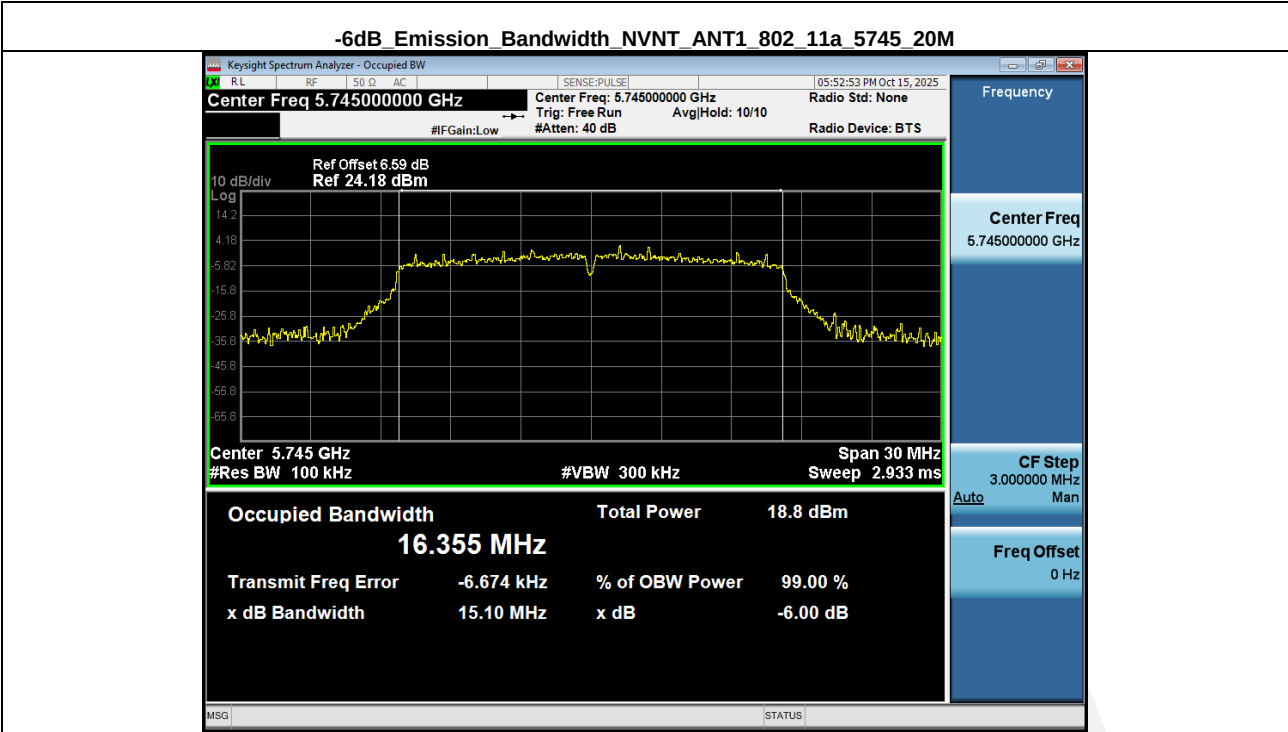


-6dB Emission Bandwidth_NVNT_ANT1_802_11a_5825_20M

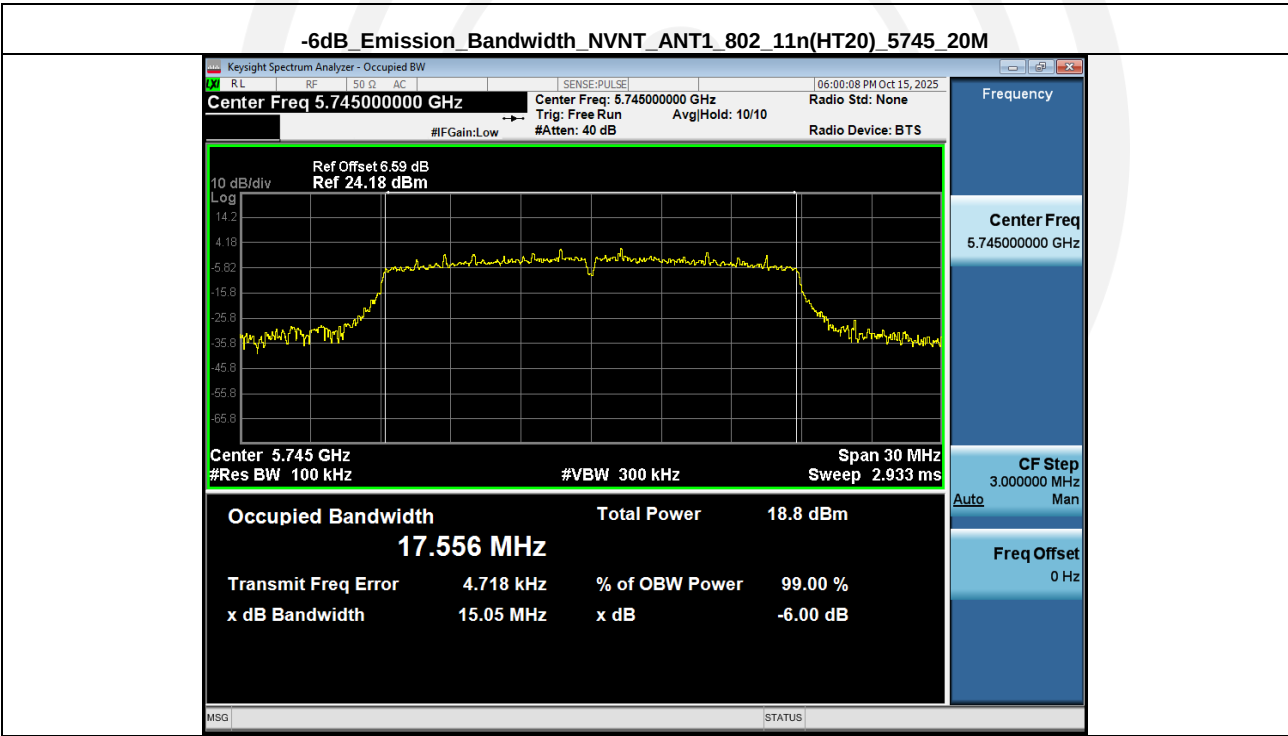
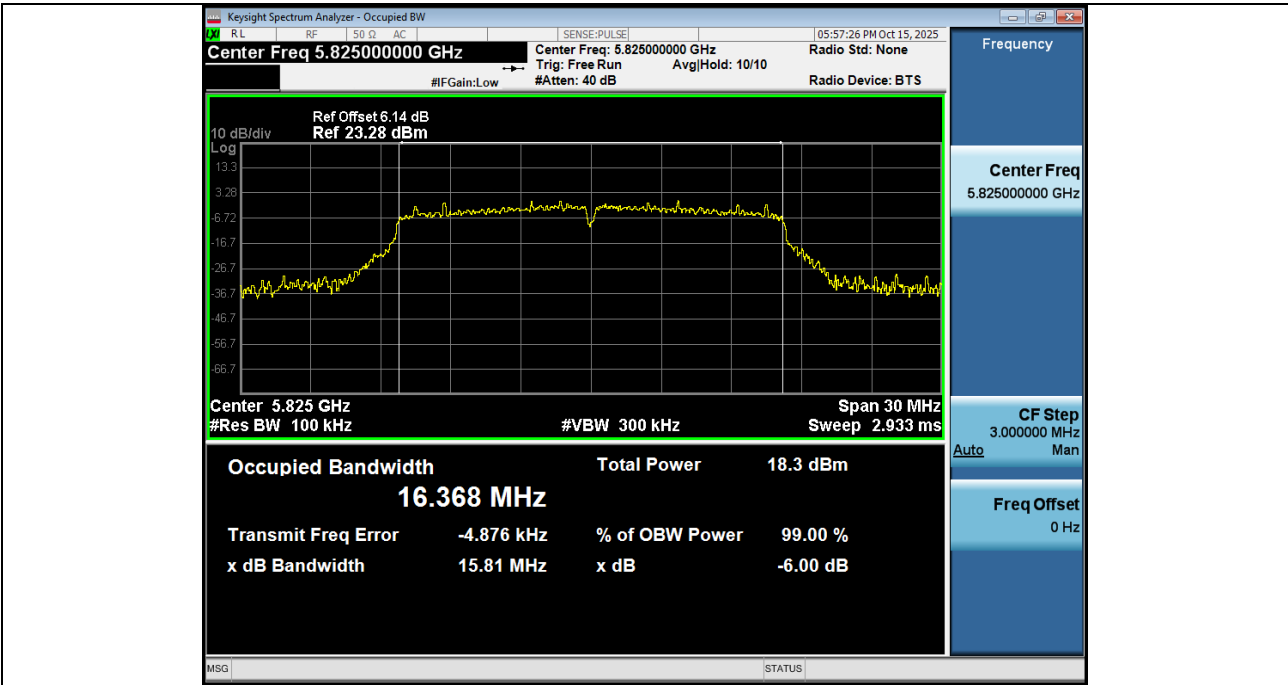


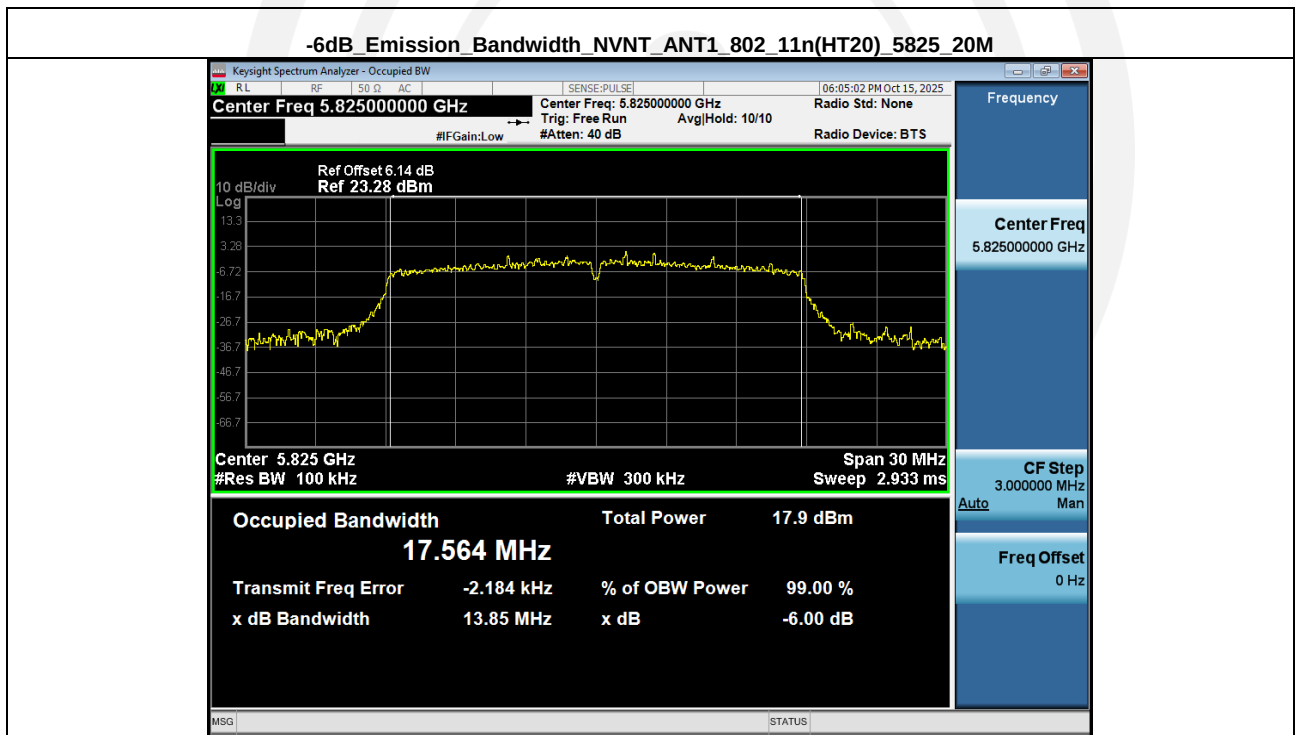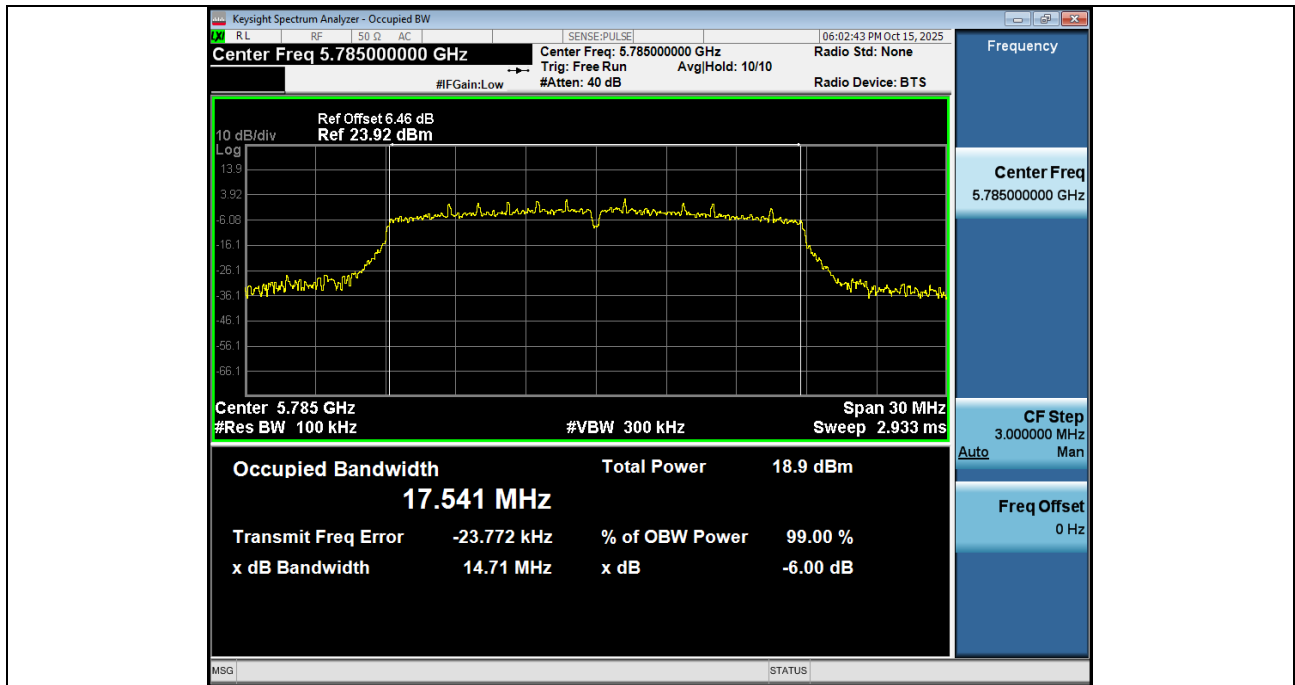



-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5745_20M

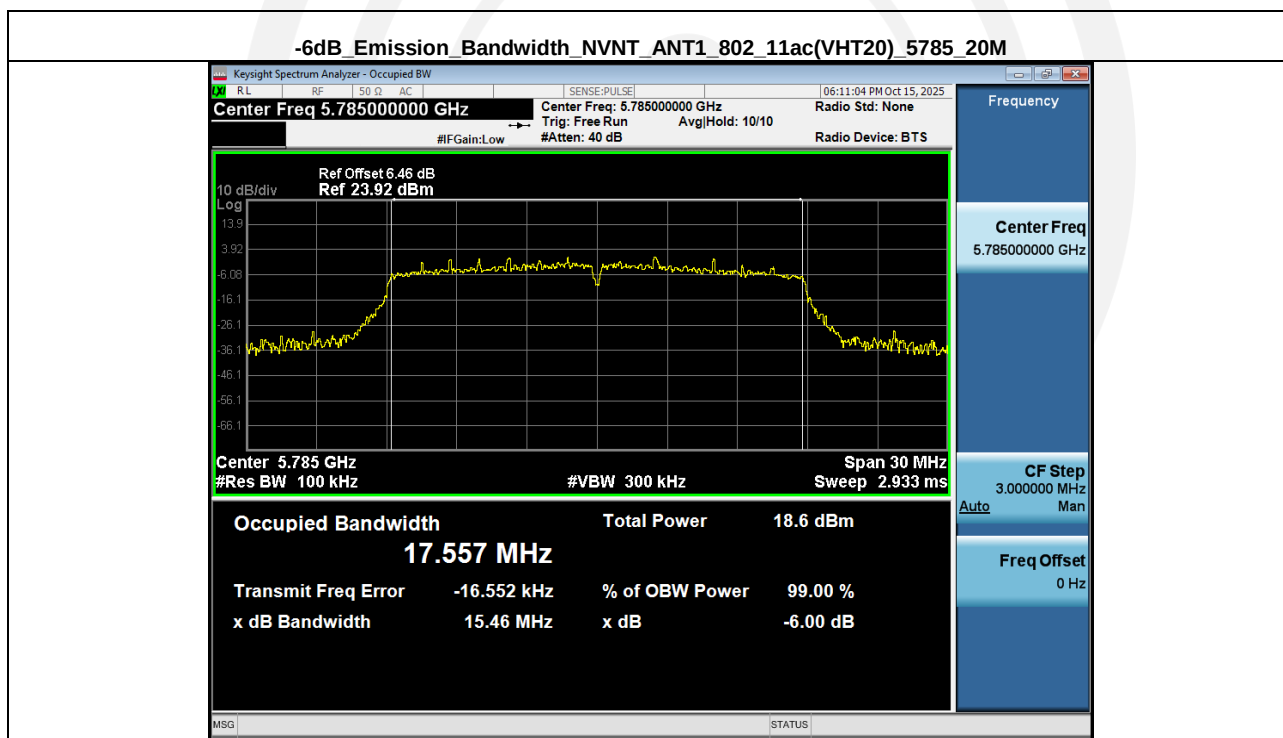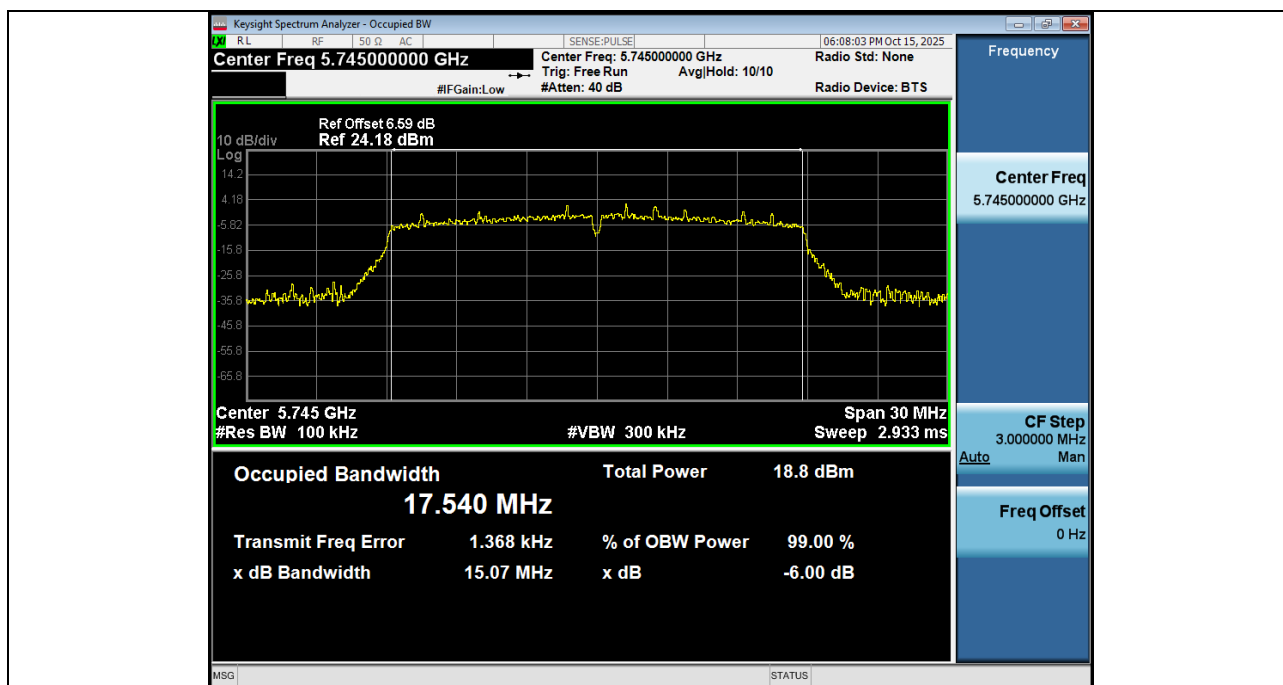



-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5825_20M

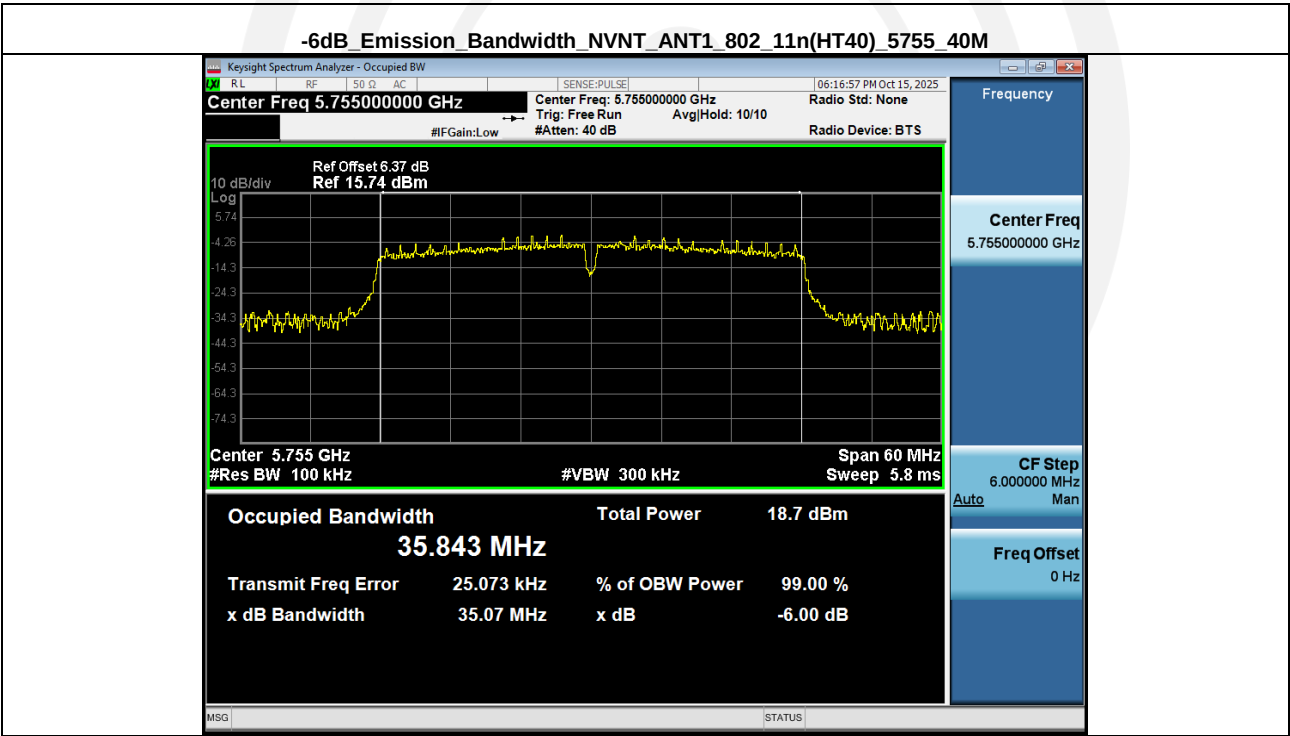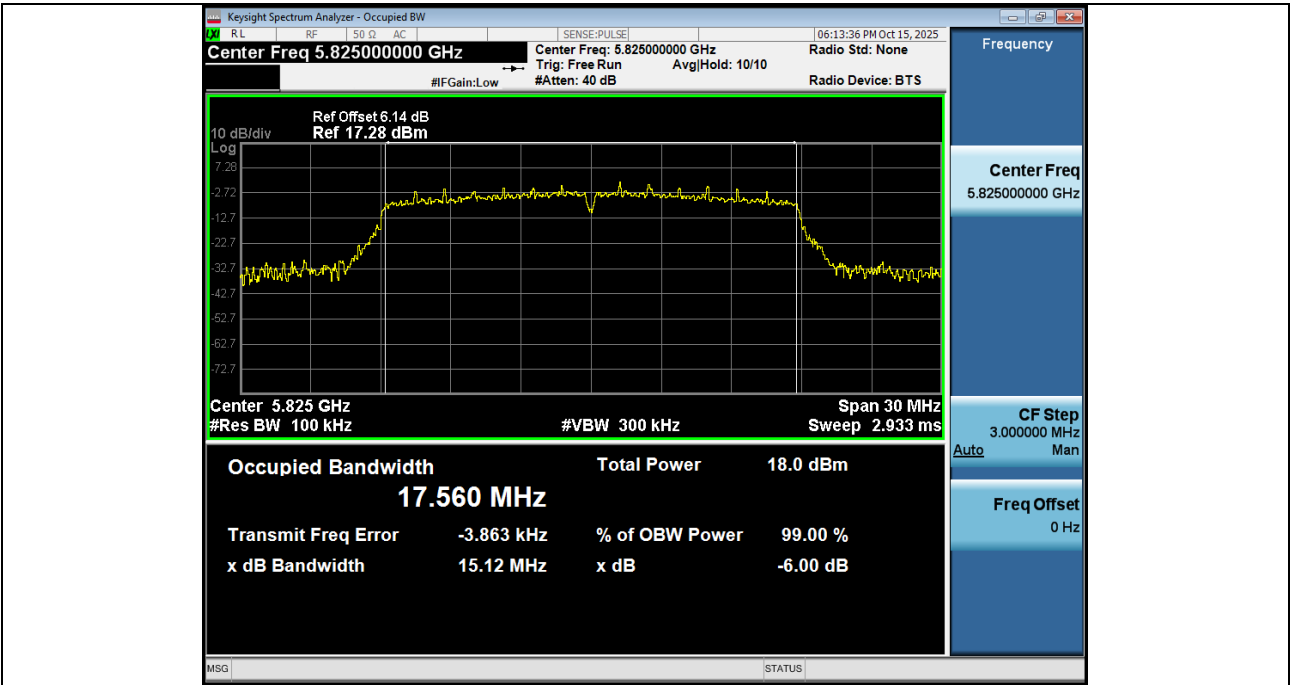

-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT40)_5795_40M

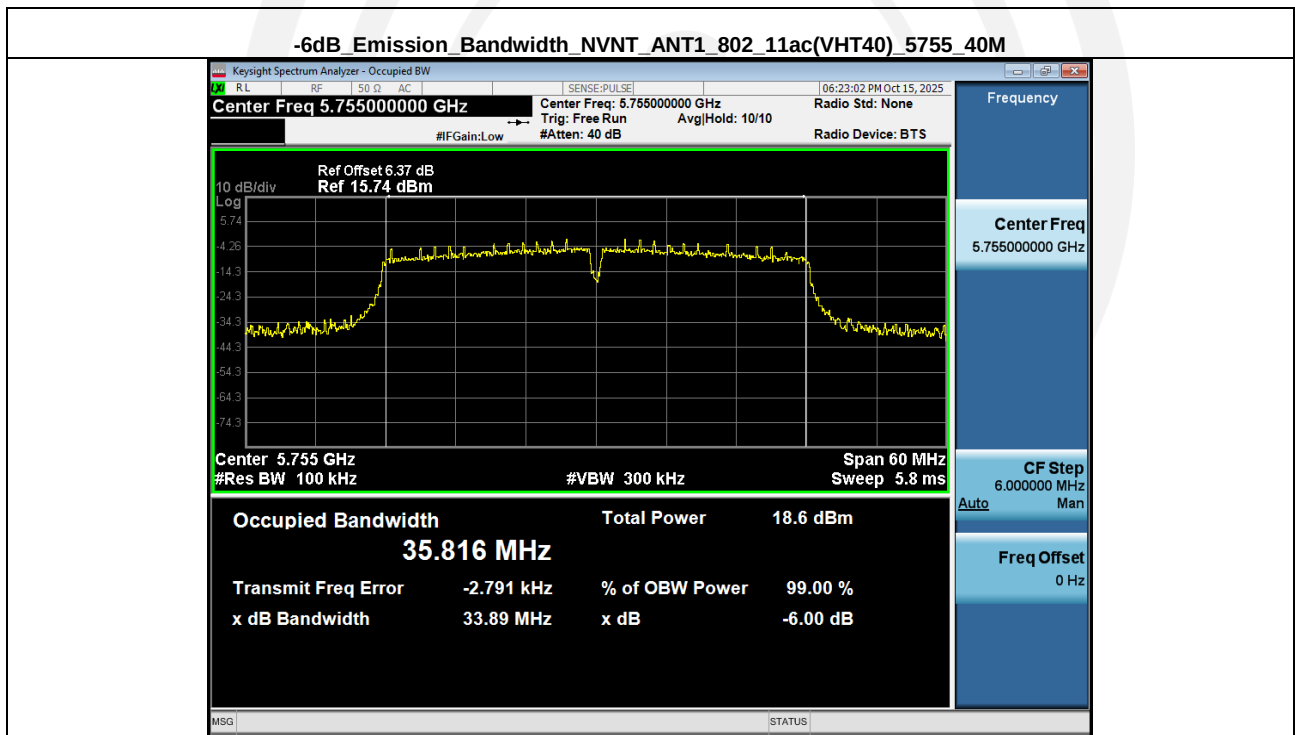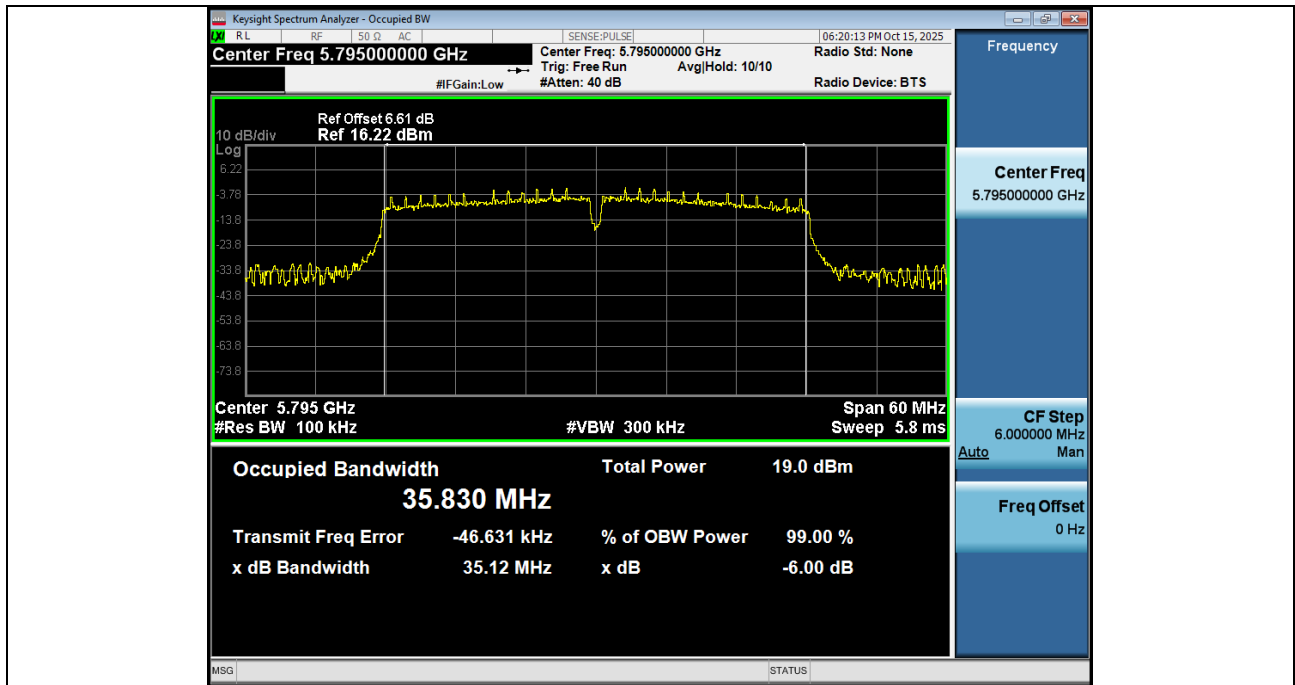



-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5795_40M

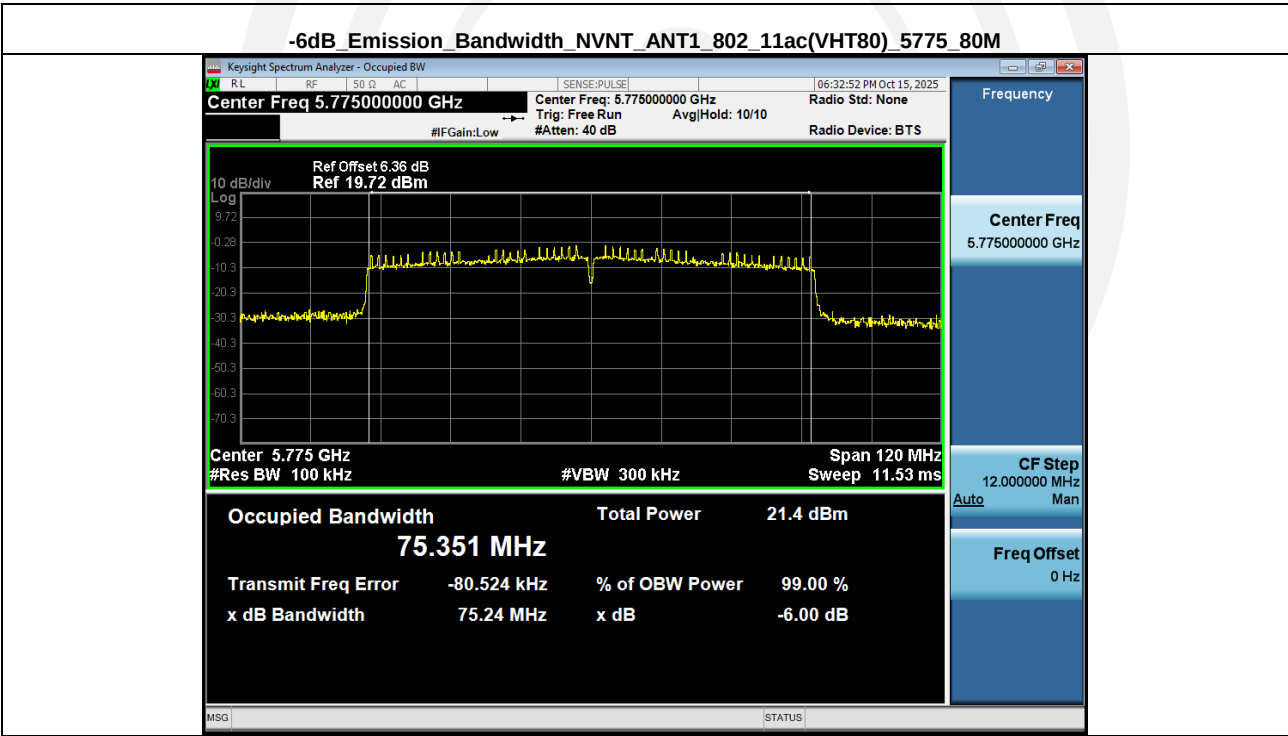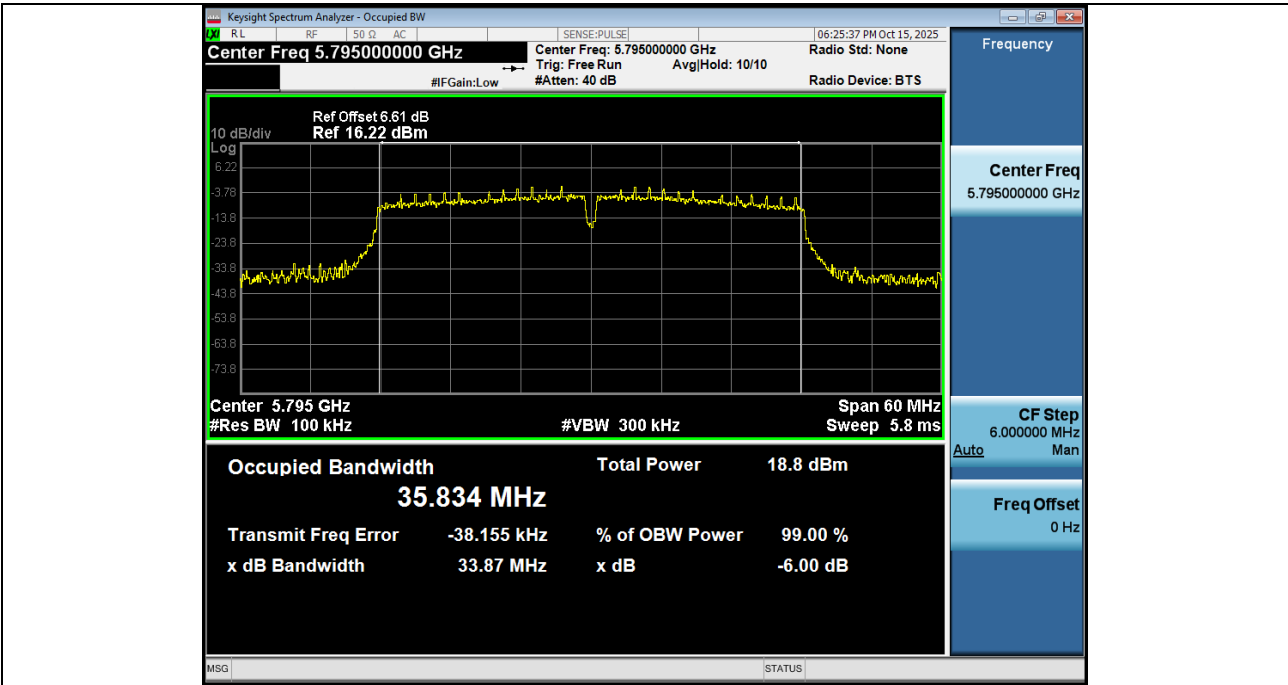


Condition	Antenna	Modulation	Frequency(MHz)	26dB Emission Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	20.01	16.67
NVNT	ANT1	802.11a	5785.00	19.90	16.72
NVNT	ANT1	802.11a	5825.00	20.30	16.76
NVNT	ANT1	802.11n(HT20)	5745.00	22.57	17.81
NVNT	ANT1	802.11n(HT20)	5785.00	22.94	17.88
NVNT	ANT1	802.11n(HT20)	5825.00	24.23	17.84
NVNT	ANT1	802.11ac(VHT20)	5745.00	20.09	17.80
NVNT	ANT1	802.11ac(VHT20)	5785.00	20.25	17.85
NVNT	ANT1	802.11ac(VHT20)	5825.00	20.38	17.80
NVNT	ANT1	802.11n(HT40)	5755.00	56.71	36.46
NVNT	ANT1	802.11n(HT40)	5795.00	64.41	36.47
NVNT	ANT1	802.11ac(VHT40)	5755.00	44.95	36.37
NVNT	ANT1	802.11ac(VHT40)	5795.00	46.16	36.29
NVNT	ANT1	802.11ac(VHT80)	5775.00	136.31	76.11



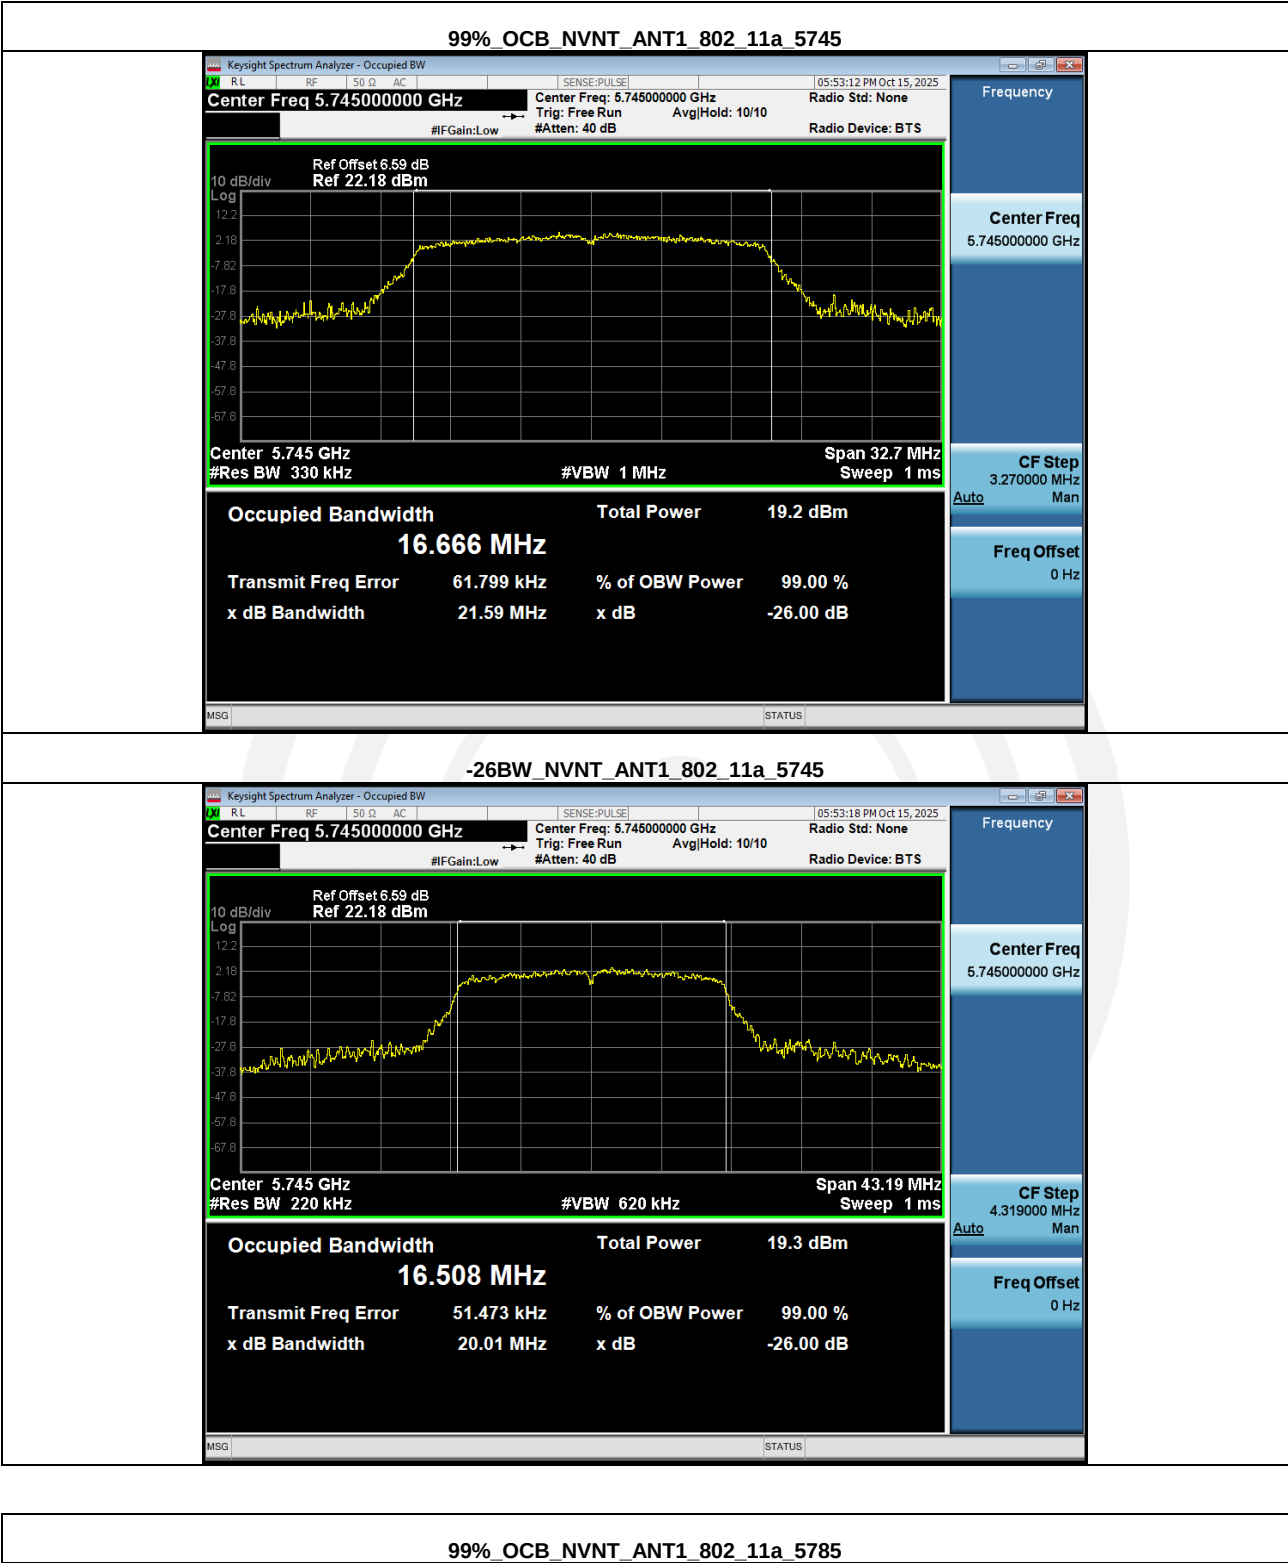


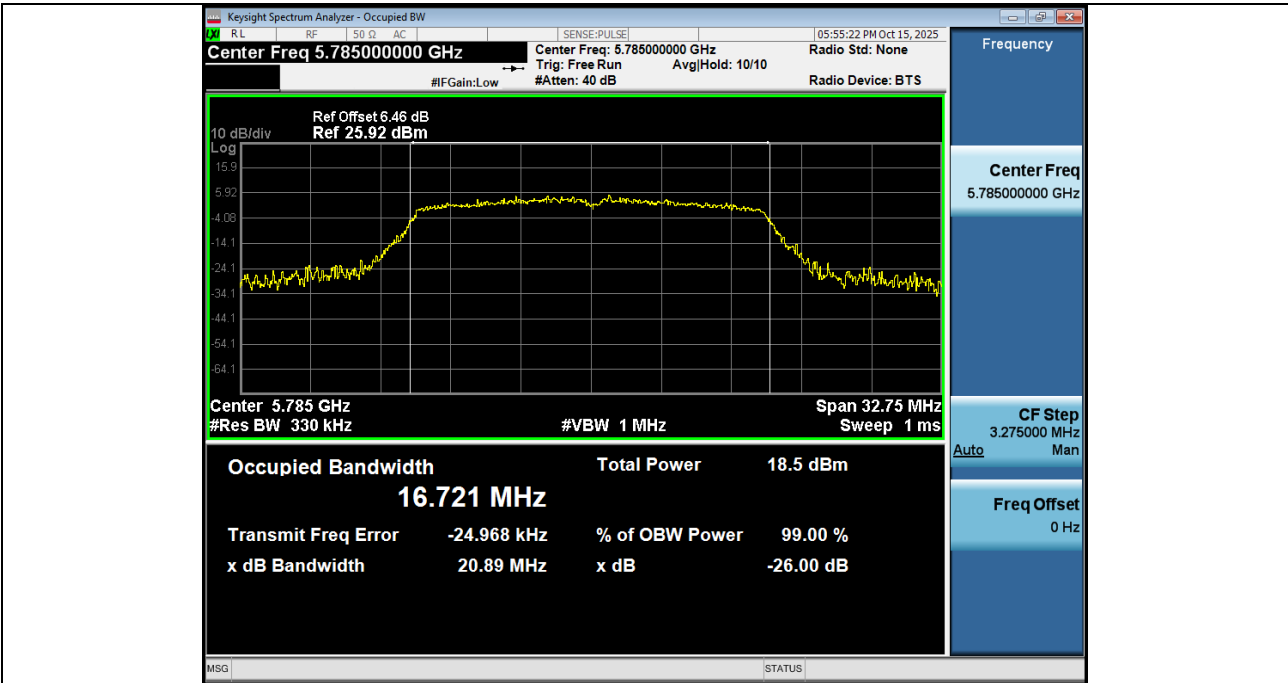


-26BW_NVNT_ANT1_802_11a_5785

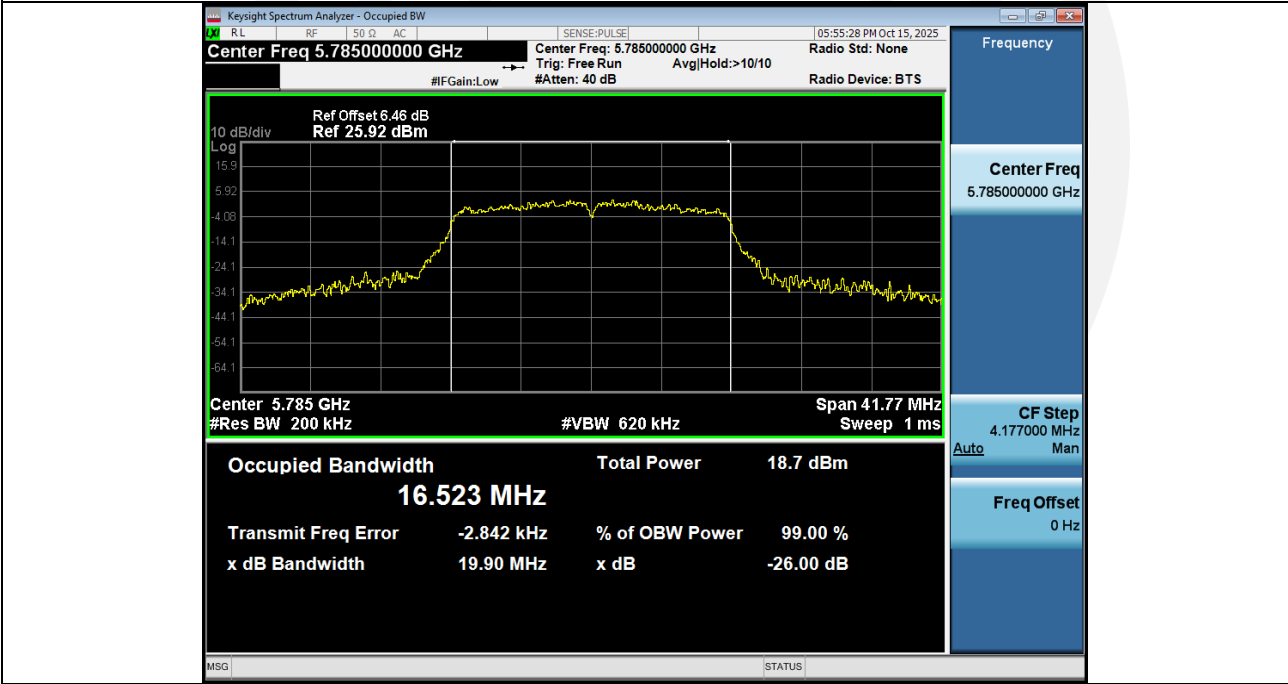


99%_OCB_NVNT_ANT1_802_11a_5825

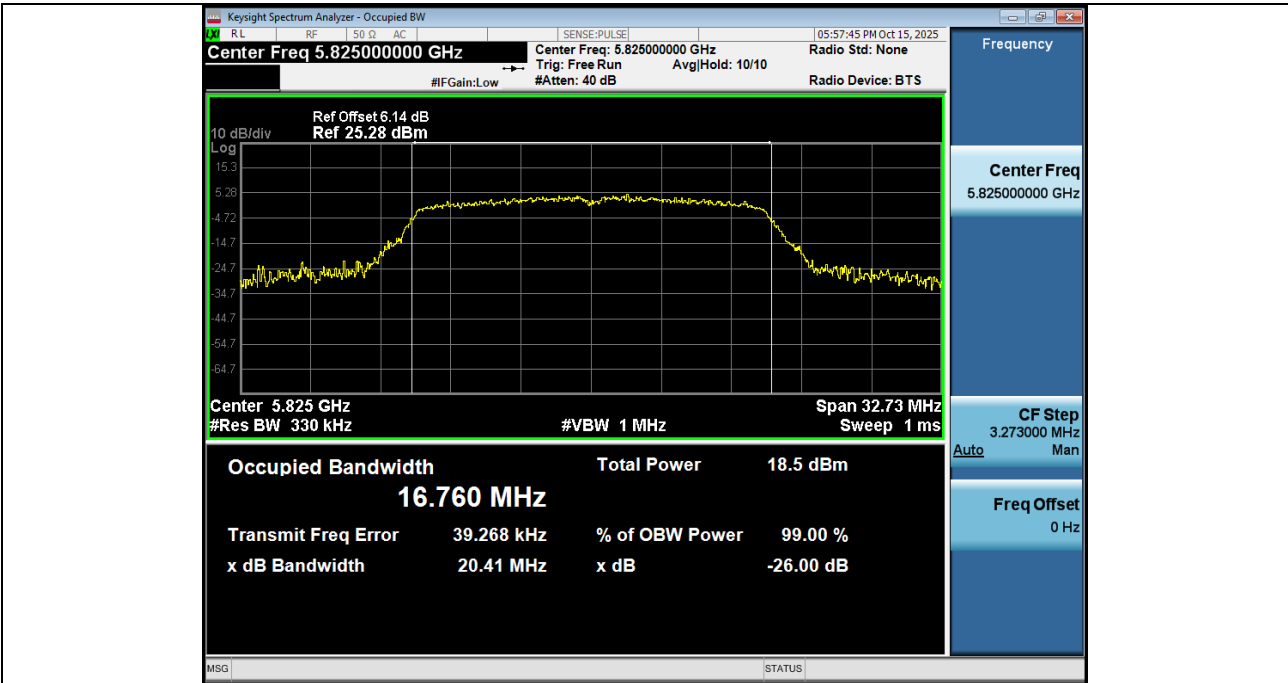


-26BW_NVNT_ANT1_802_11a_5825

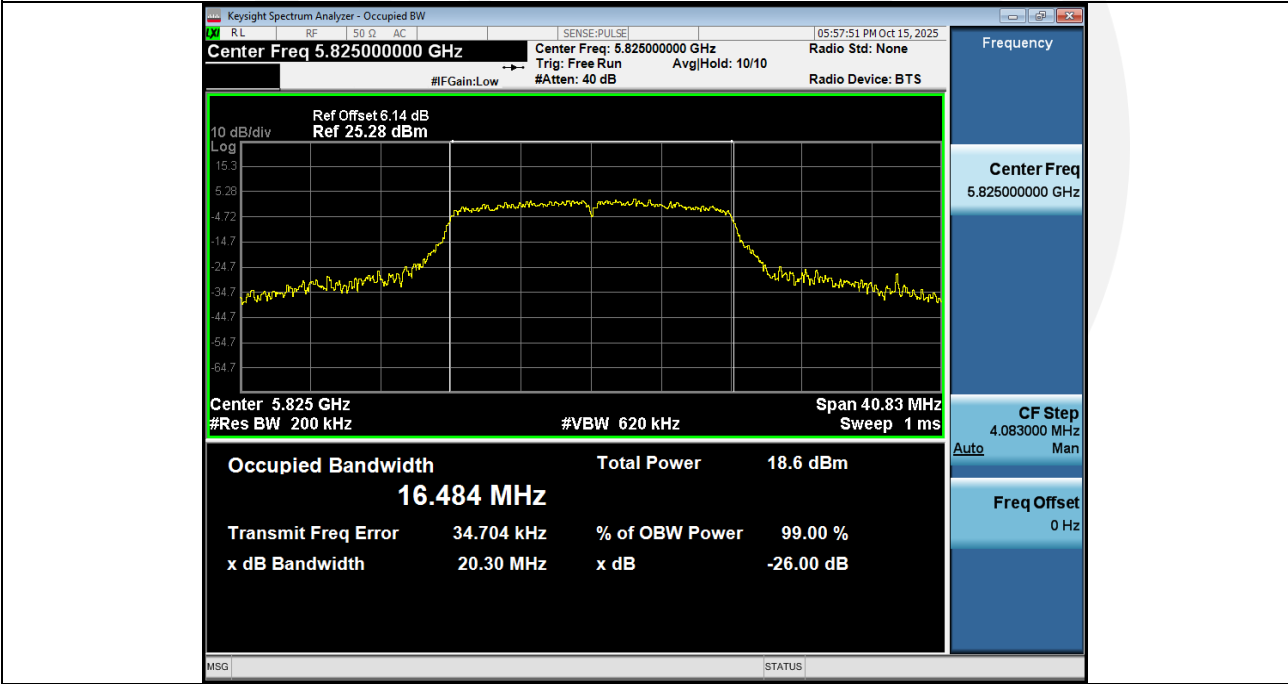


99%_OCB_NVNT_ANT1_802_11n(HT20)_5745

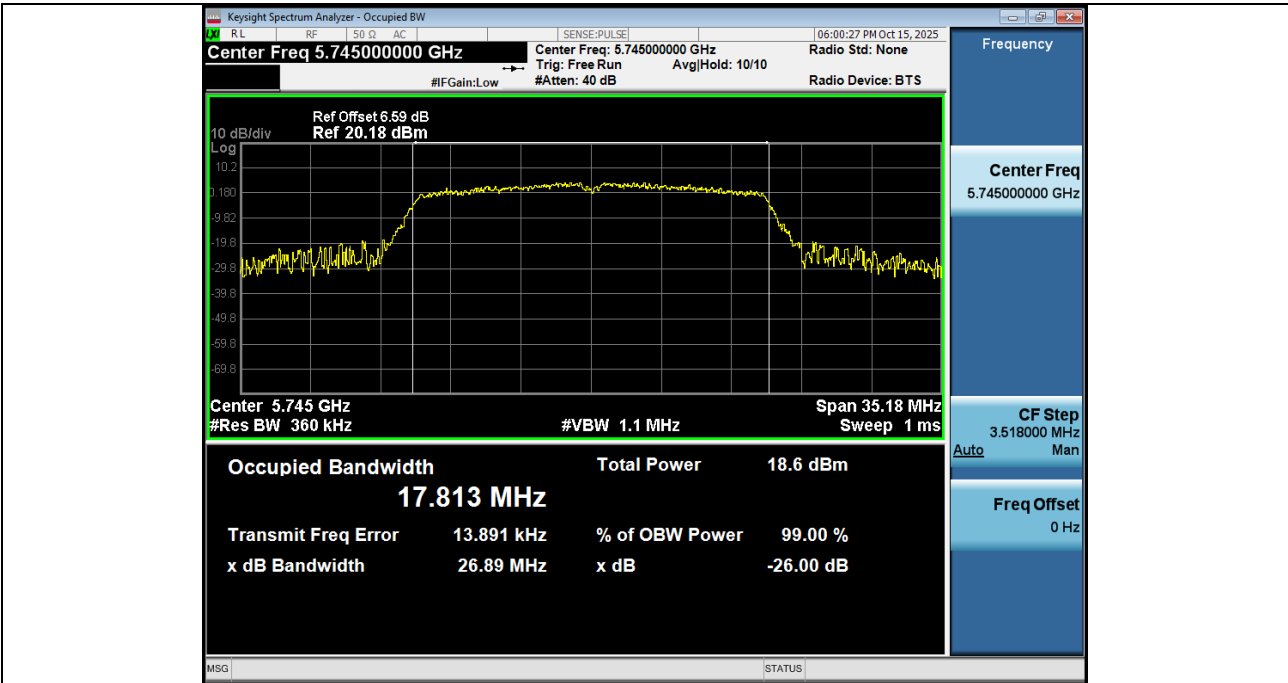


-26BW_NVNT_ANT1_802_11n(HT20)_5745

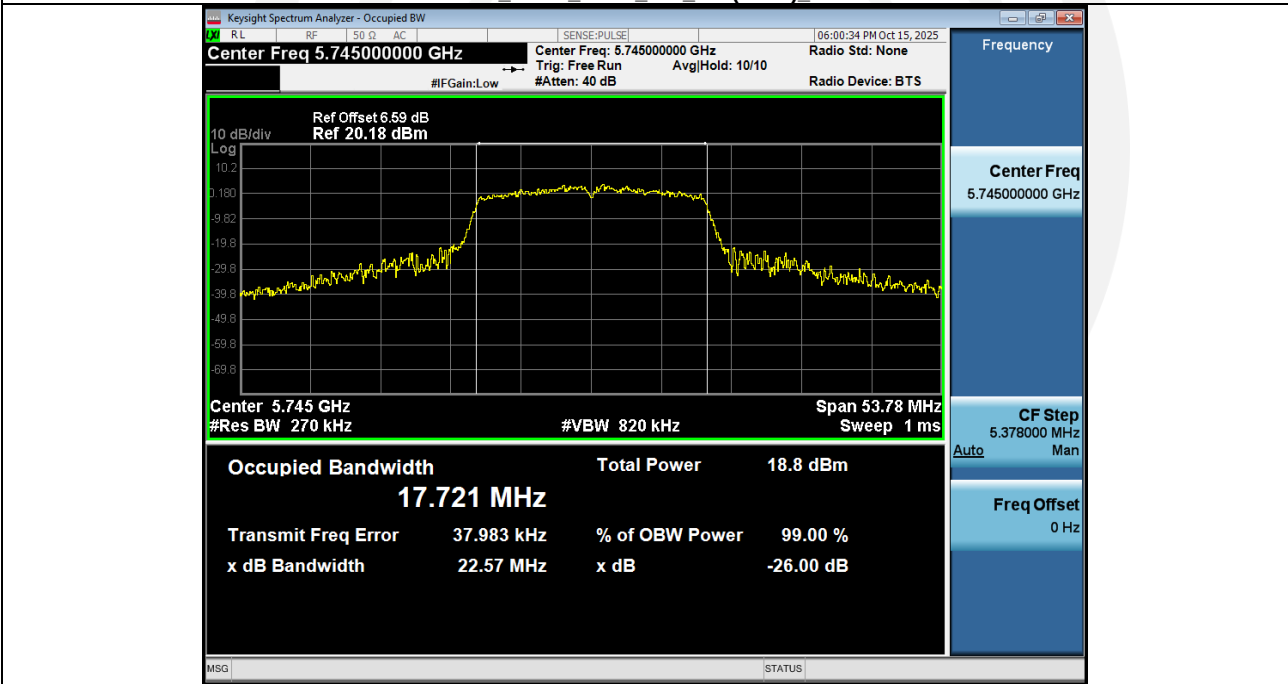


99%_OCB_NVNT_ANT1_802_11n(HT20)_5785

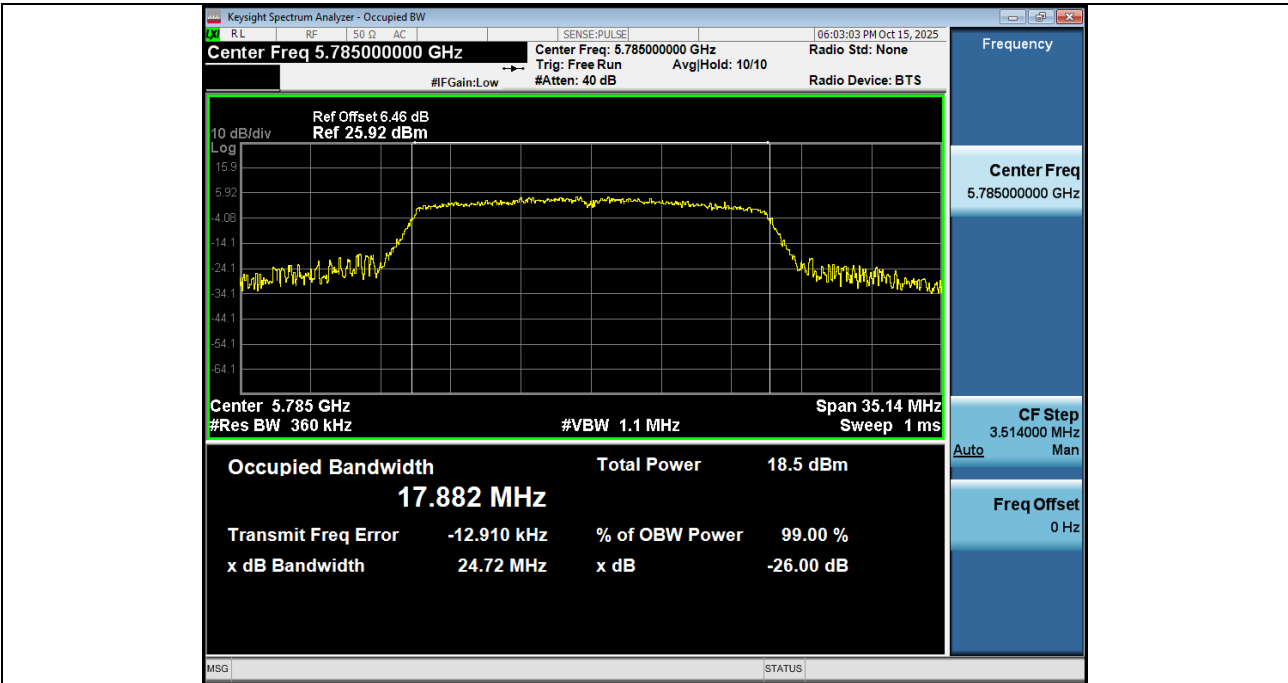


-26BW_NVNT_ANT1_802_11n(HT20)_5785

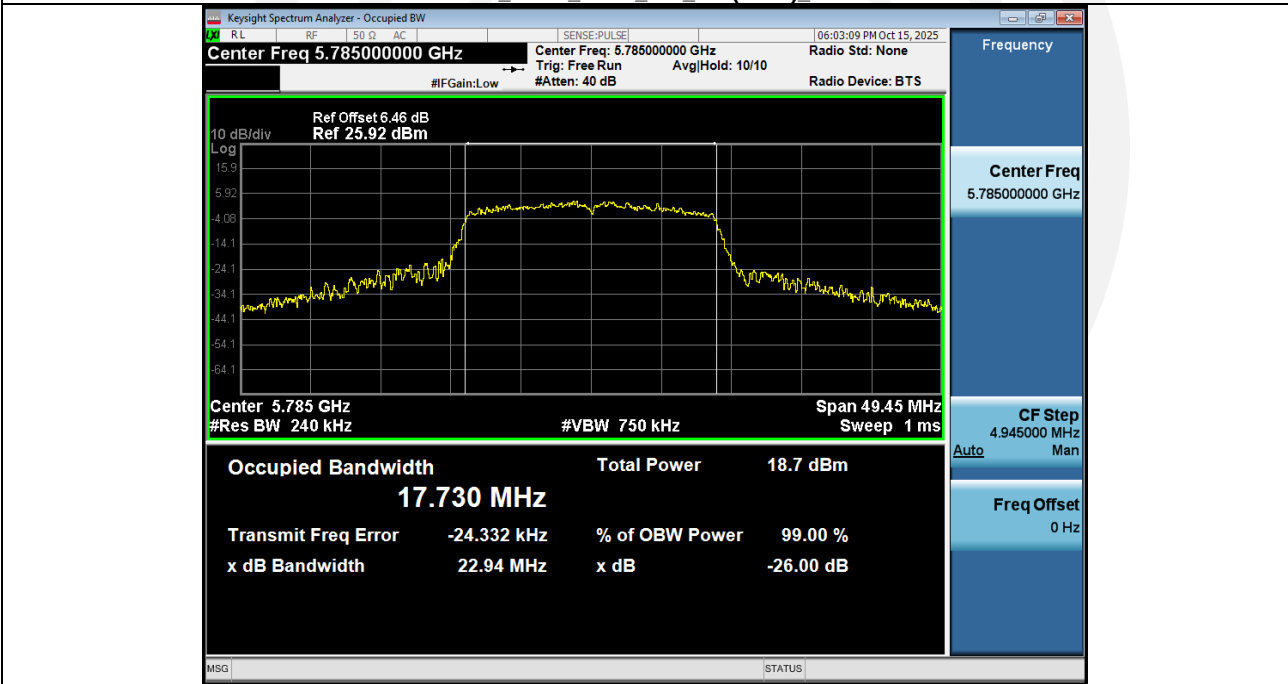


99%_OCB_NVNT_ANT1_802_11n(HT20)_5825

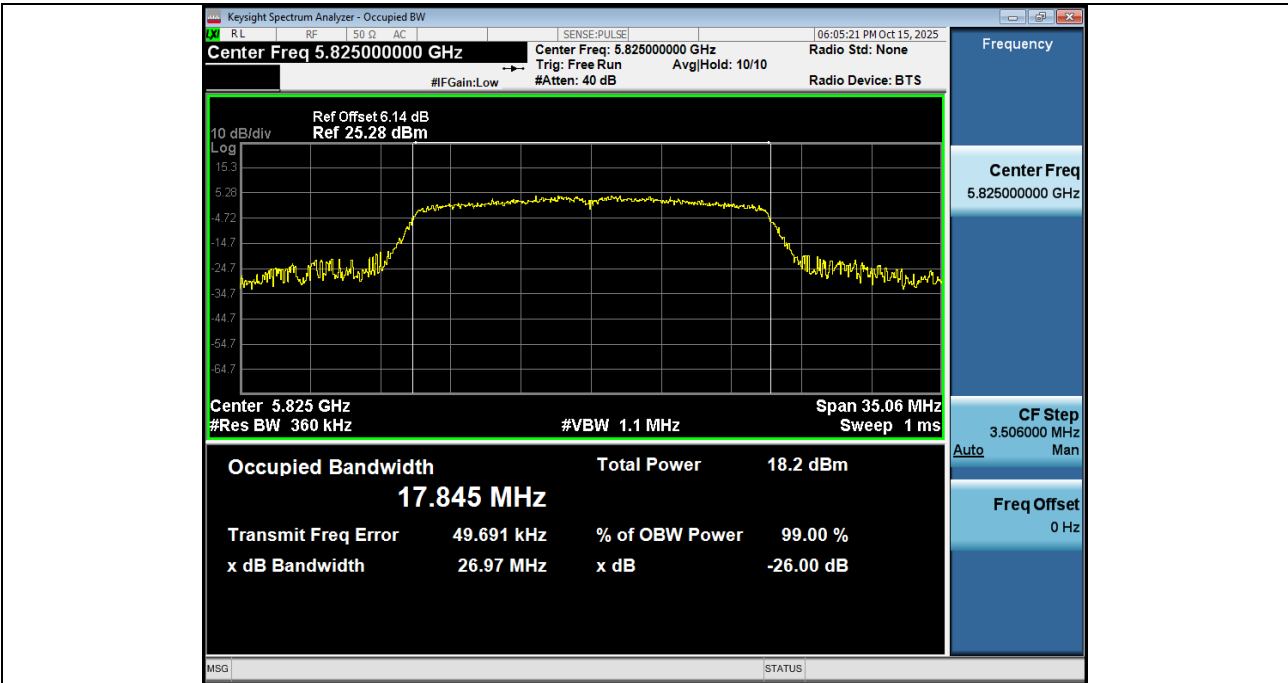


-26BW_NVNT_ANT1_802_11n(HT20)_5825

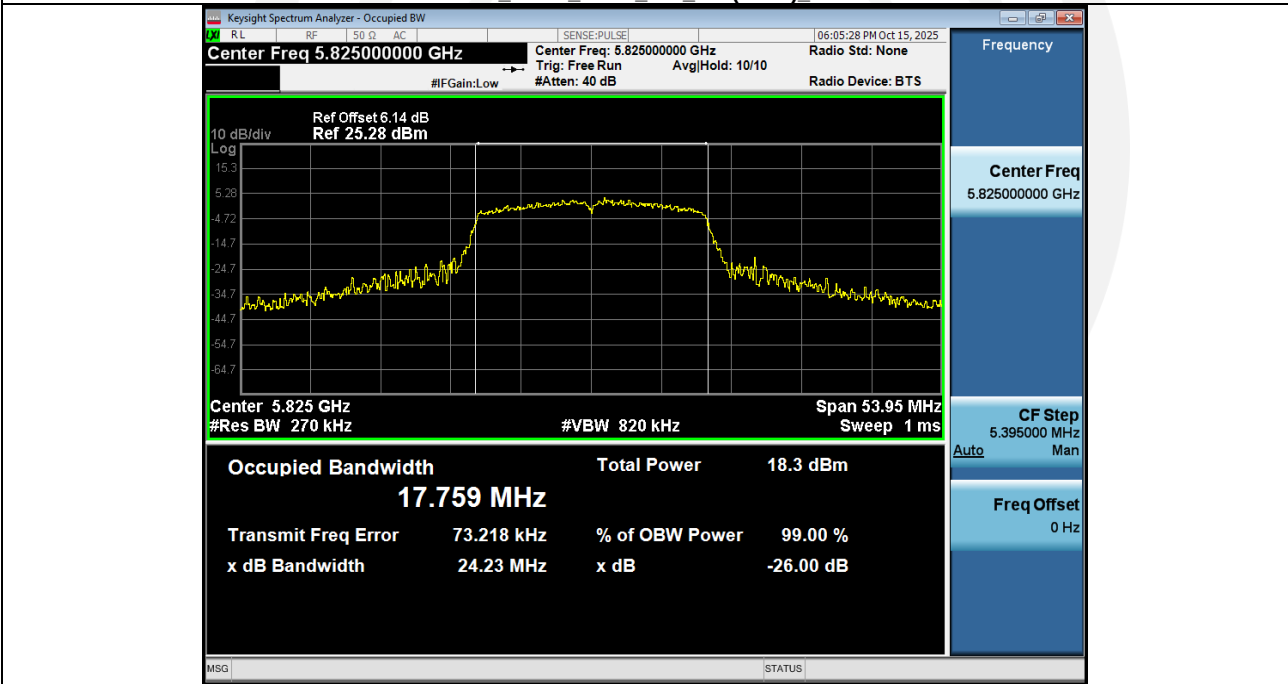


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5745

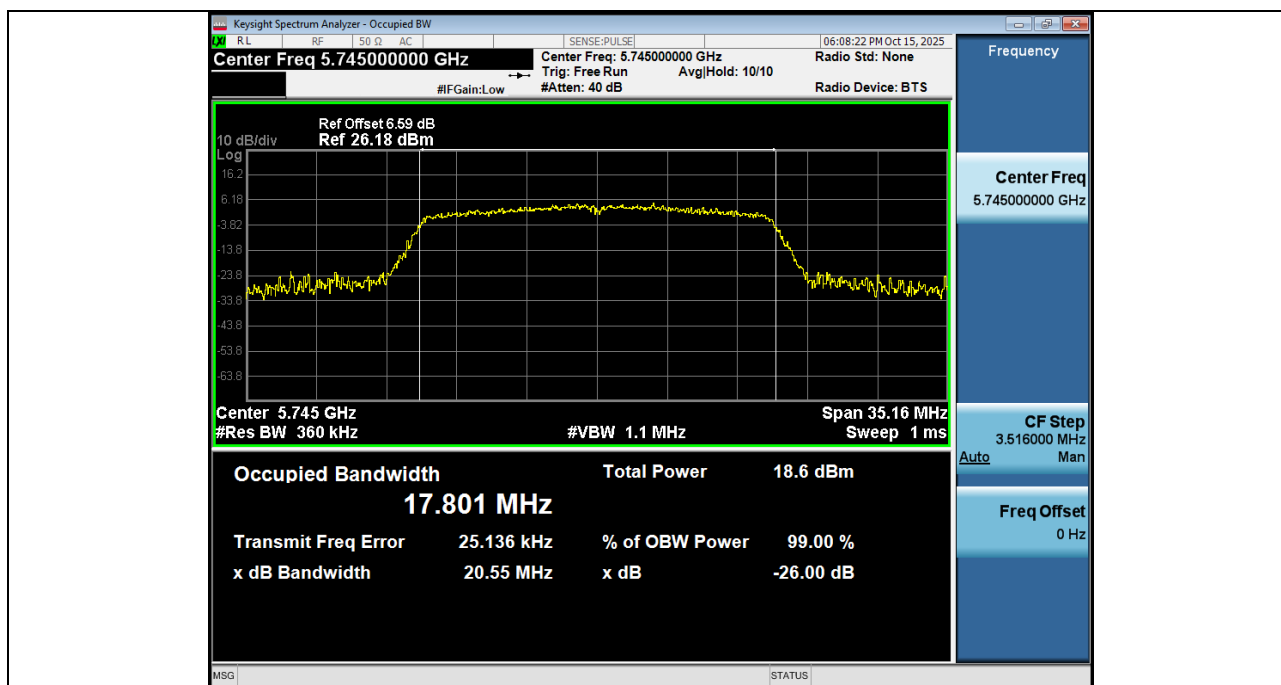


-26BW NVNT ANT1 802 11ac(VHT20) 5745

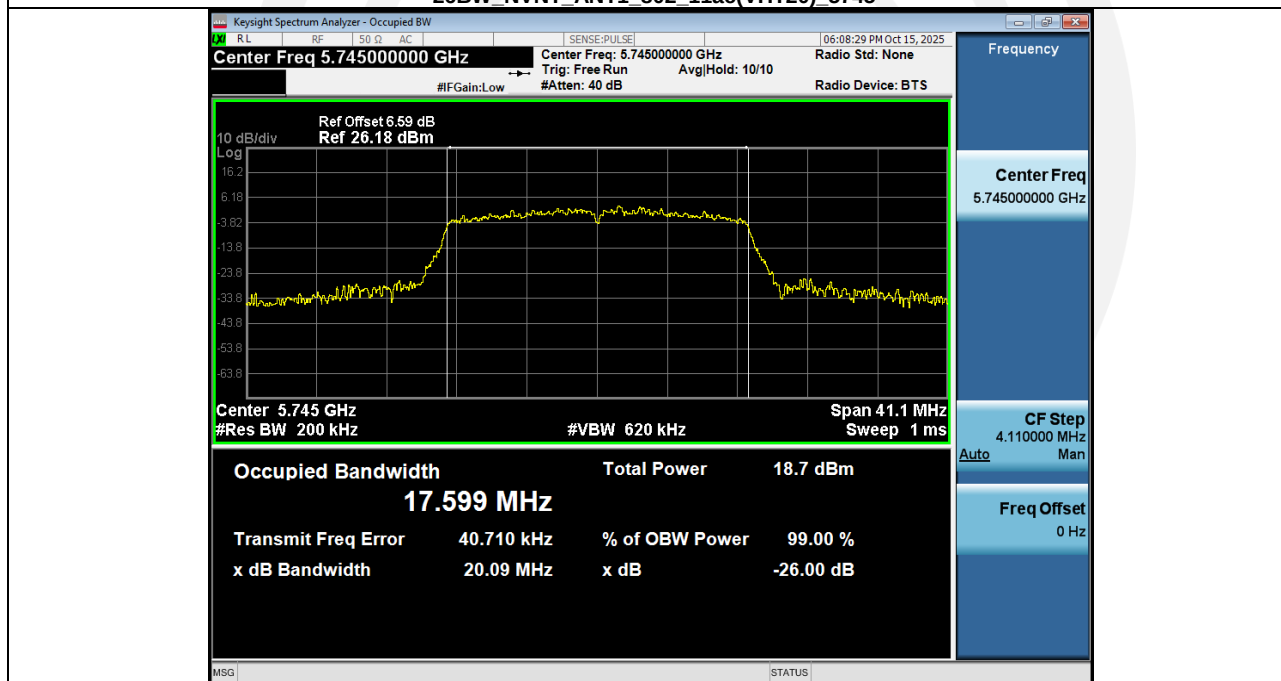


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5785

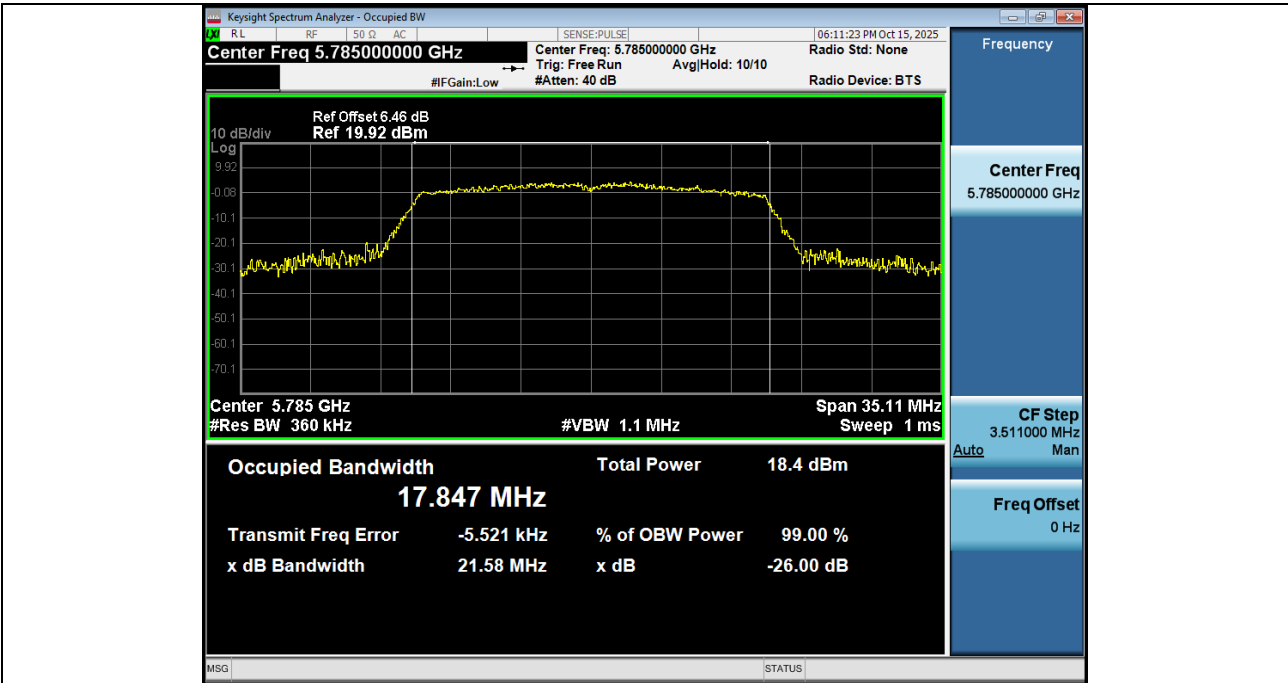


-26BW_NVNT_ANT1_802_11ac(VHT20)_5785

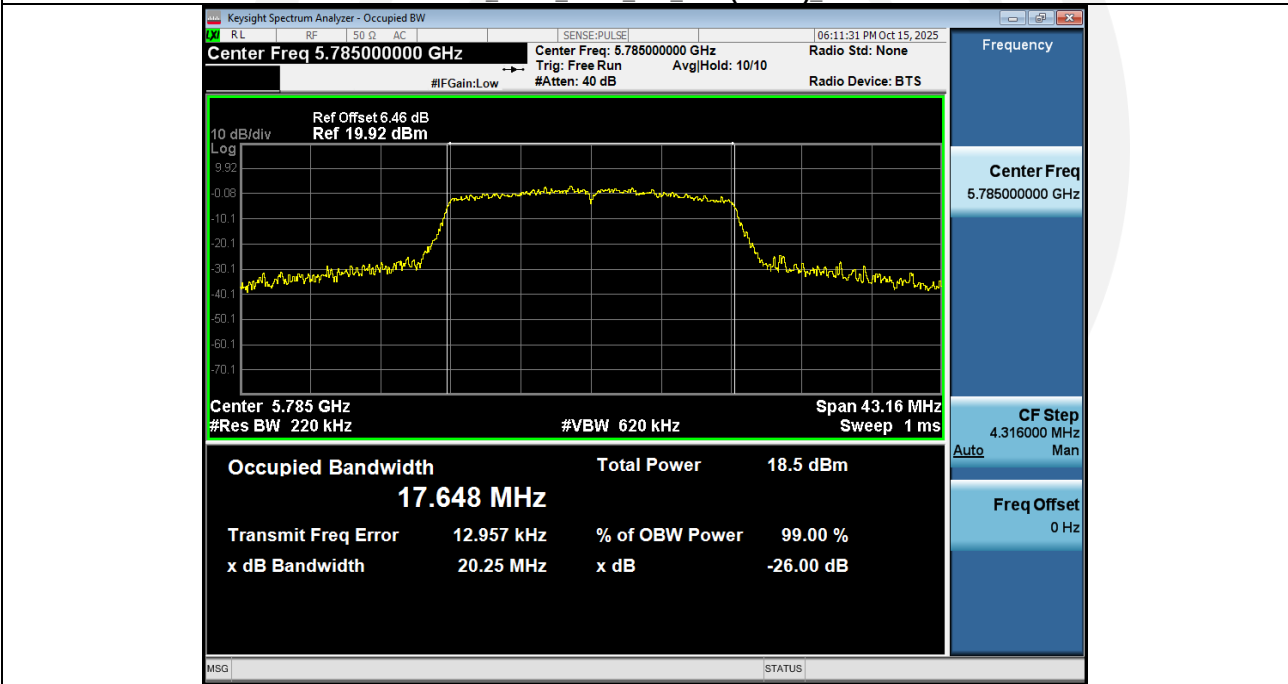


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5825

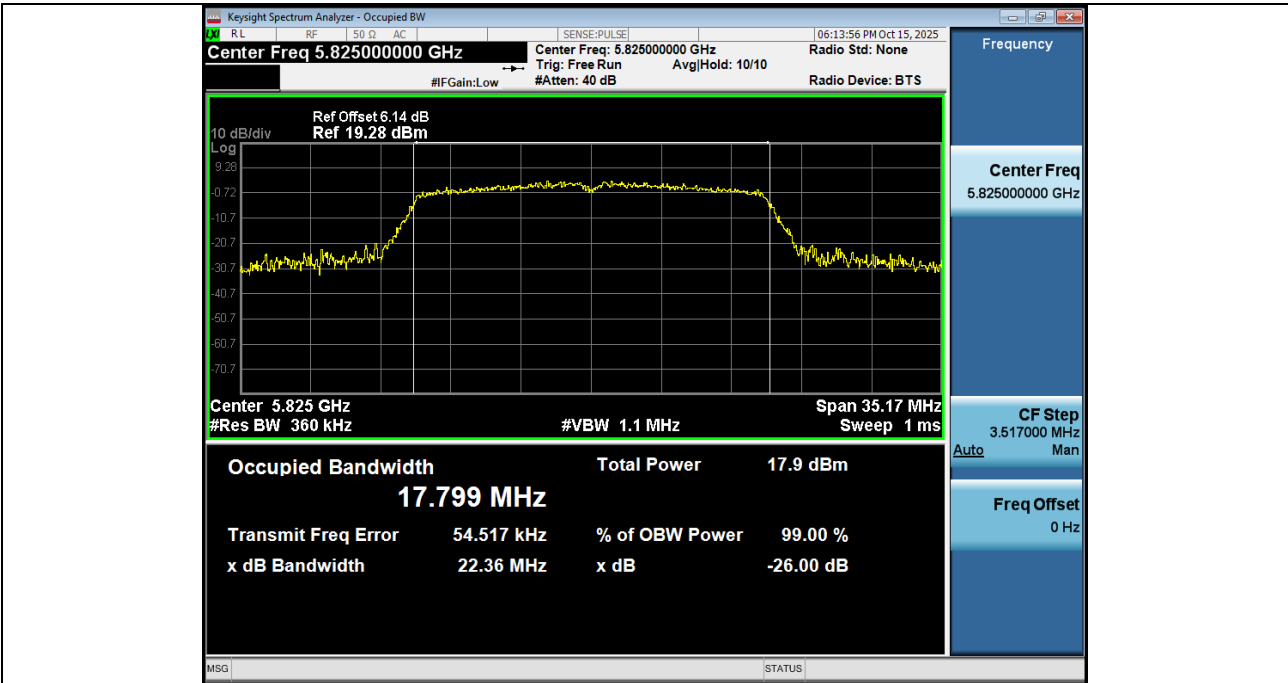


-26BW_NVNT_ANT1_802_11ac(VHT20)_5825

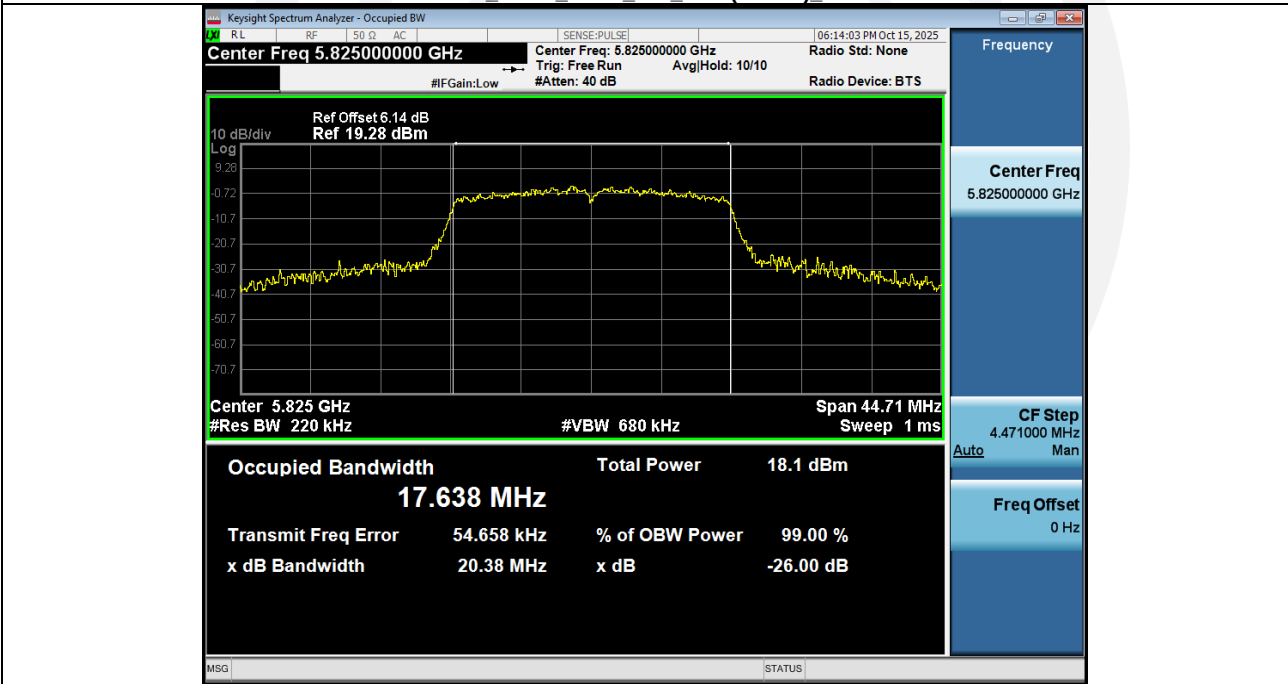


99%_OCB_NVNT_ANT1_802_11n(HT40)_5755

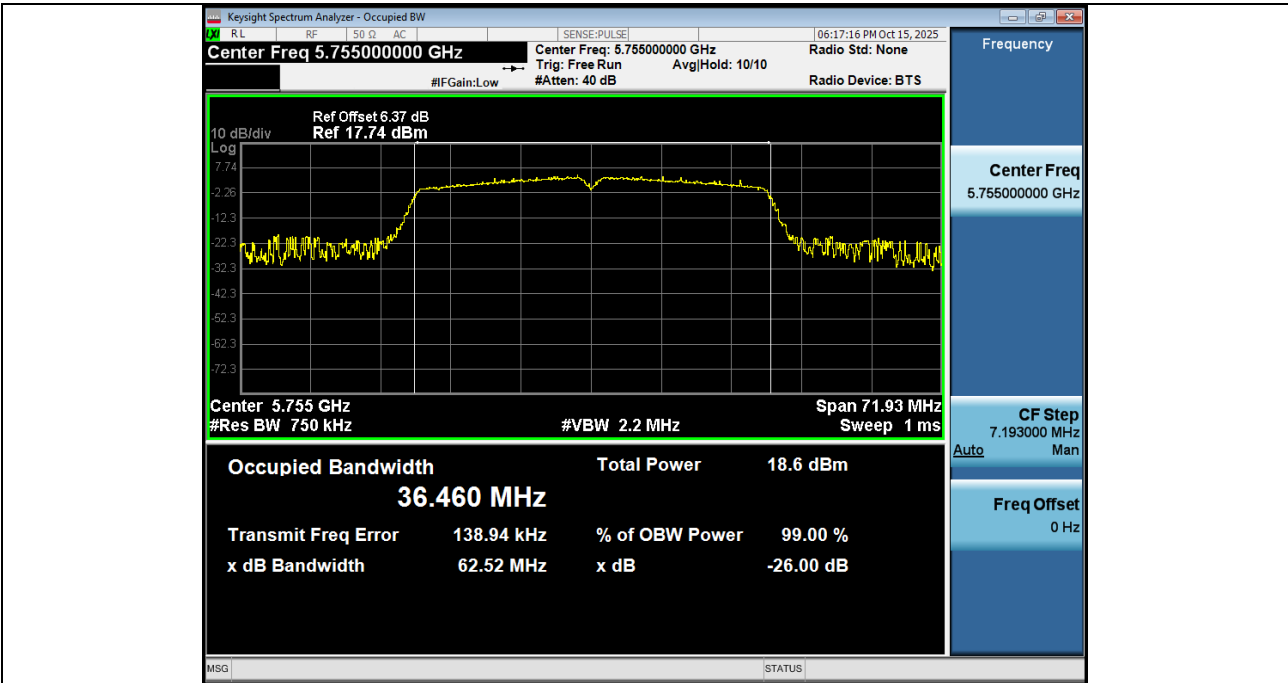


-26BW_NVNT_ANT1_802_11n(HT40)_5755

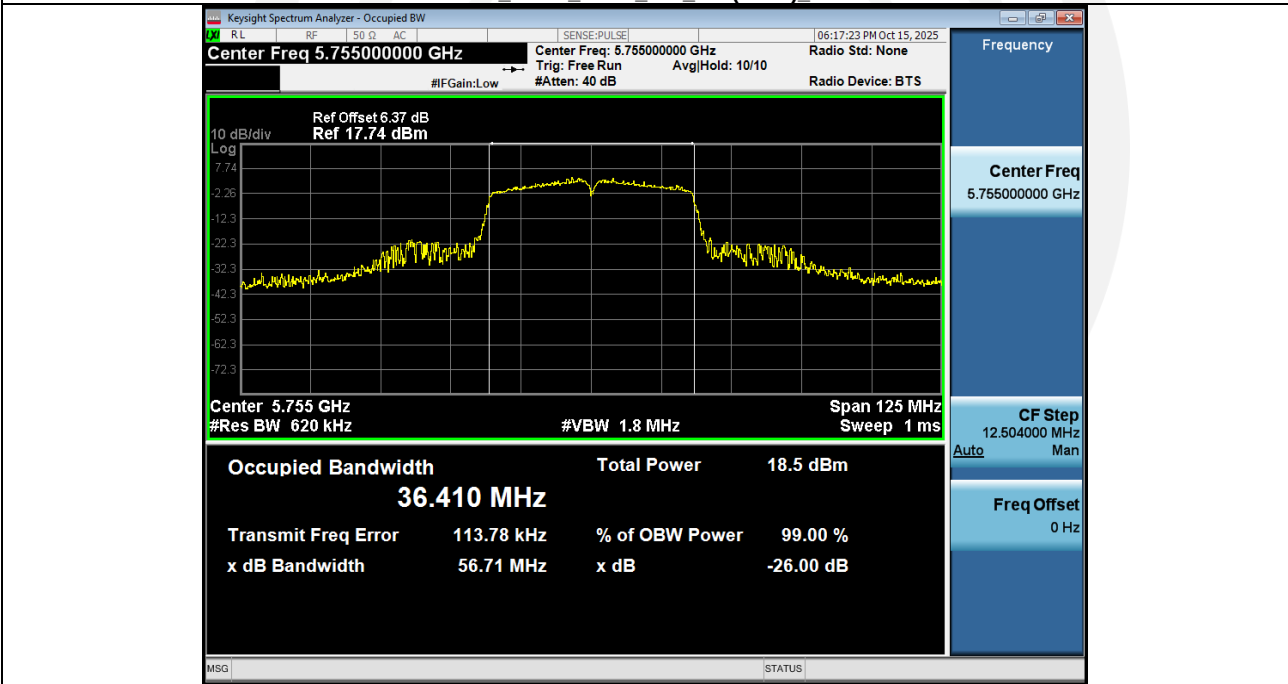


99%_OCB_NVNT_ANT1_802_11n(HT40)_5795

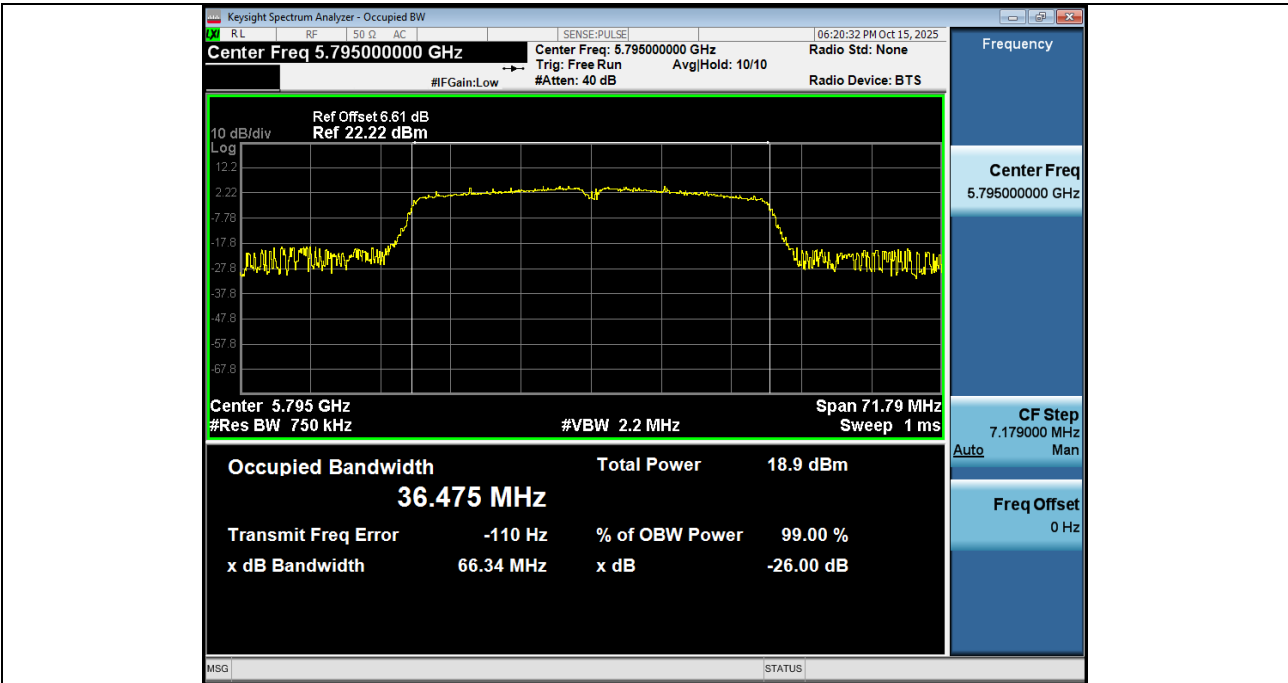


-26BW_NVNT_ANT1_802_11n(HT40)_5795

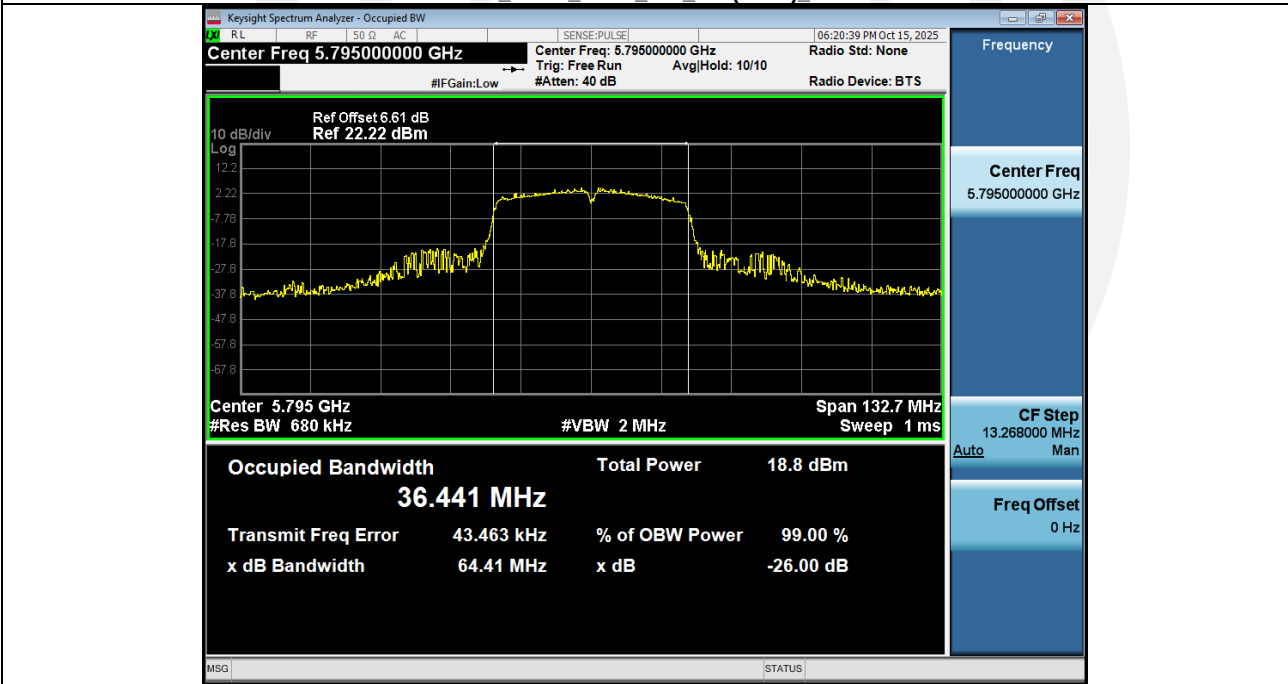


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5755

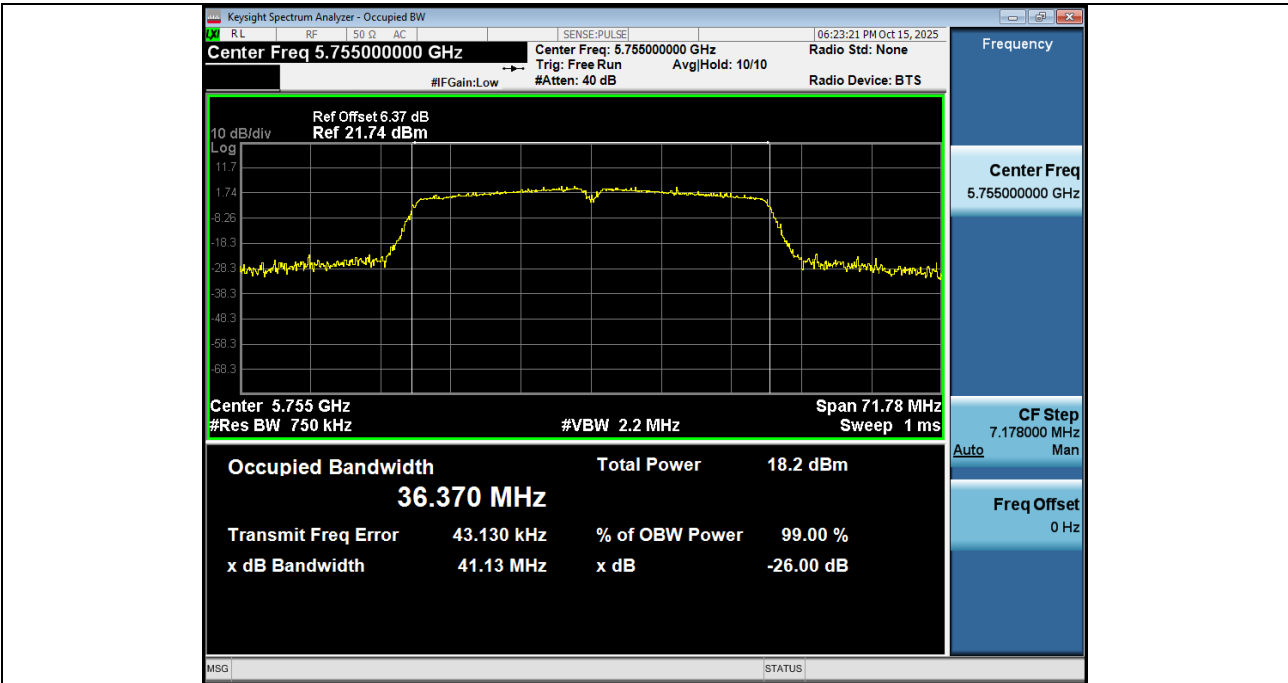


-26BW_NVNT_ANT1_802_11ac(VHT40)_5755

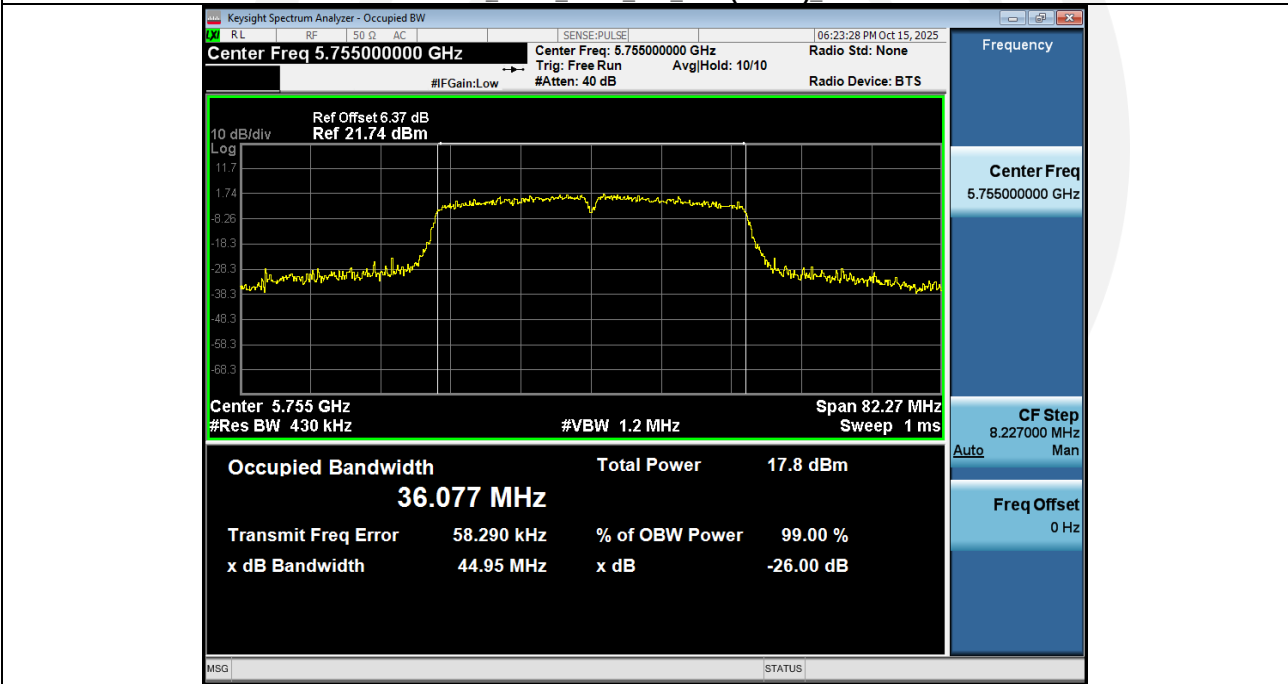


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5795

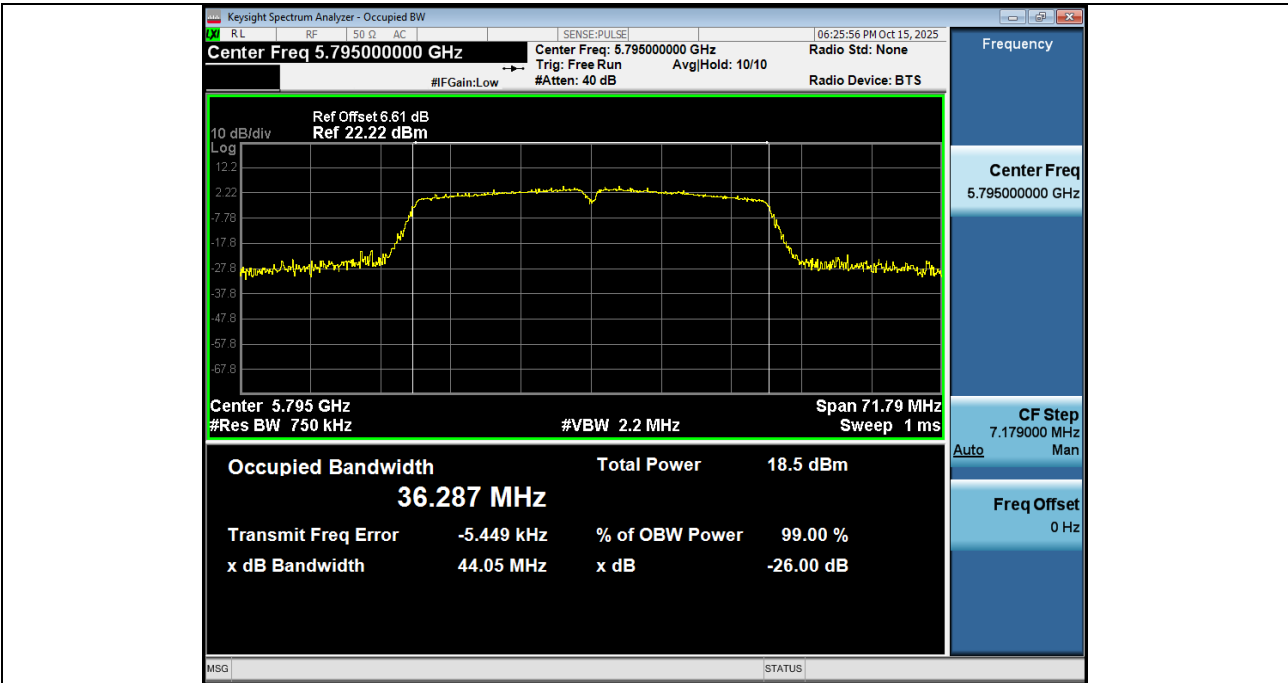


-26BW_NVNT_ANT1_802_11ac(VHT40)_5795

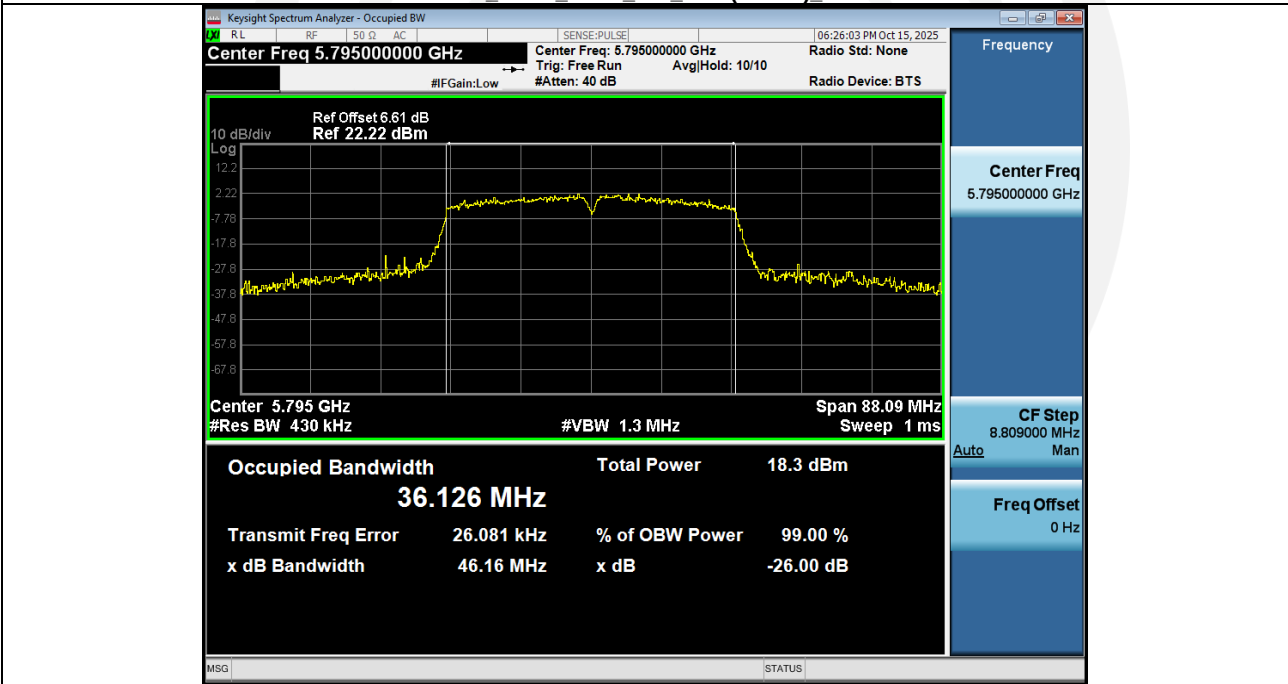

99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5775

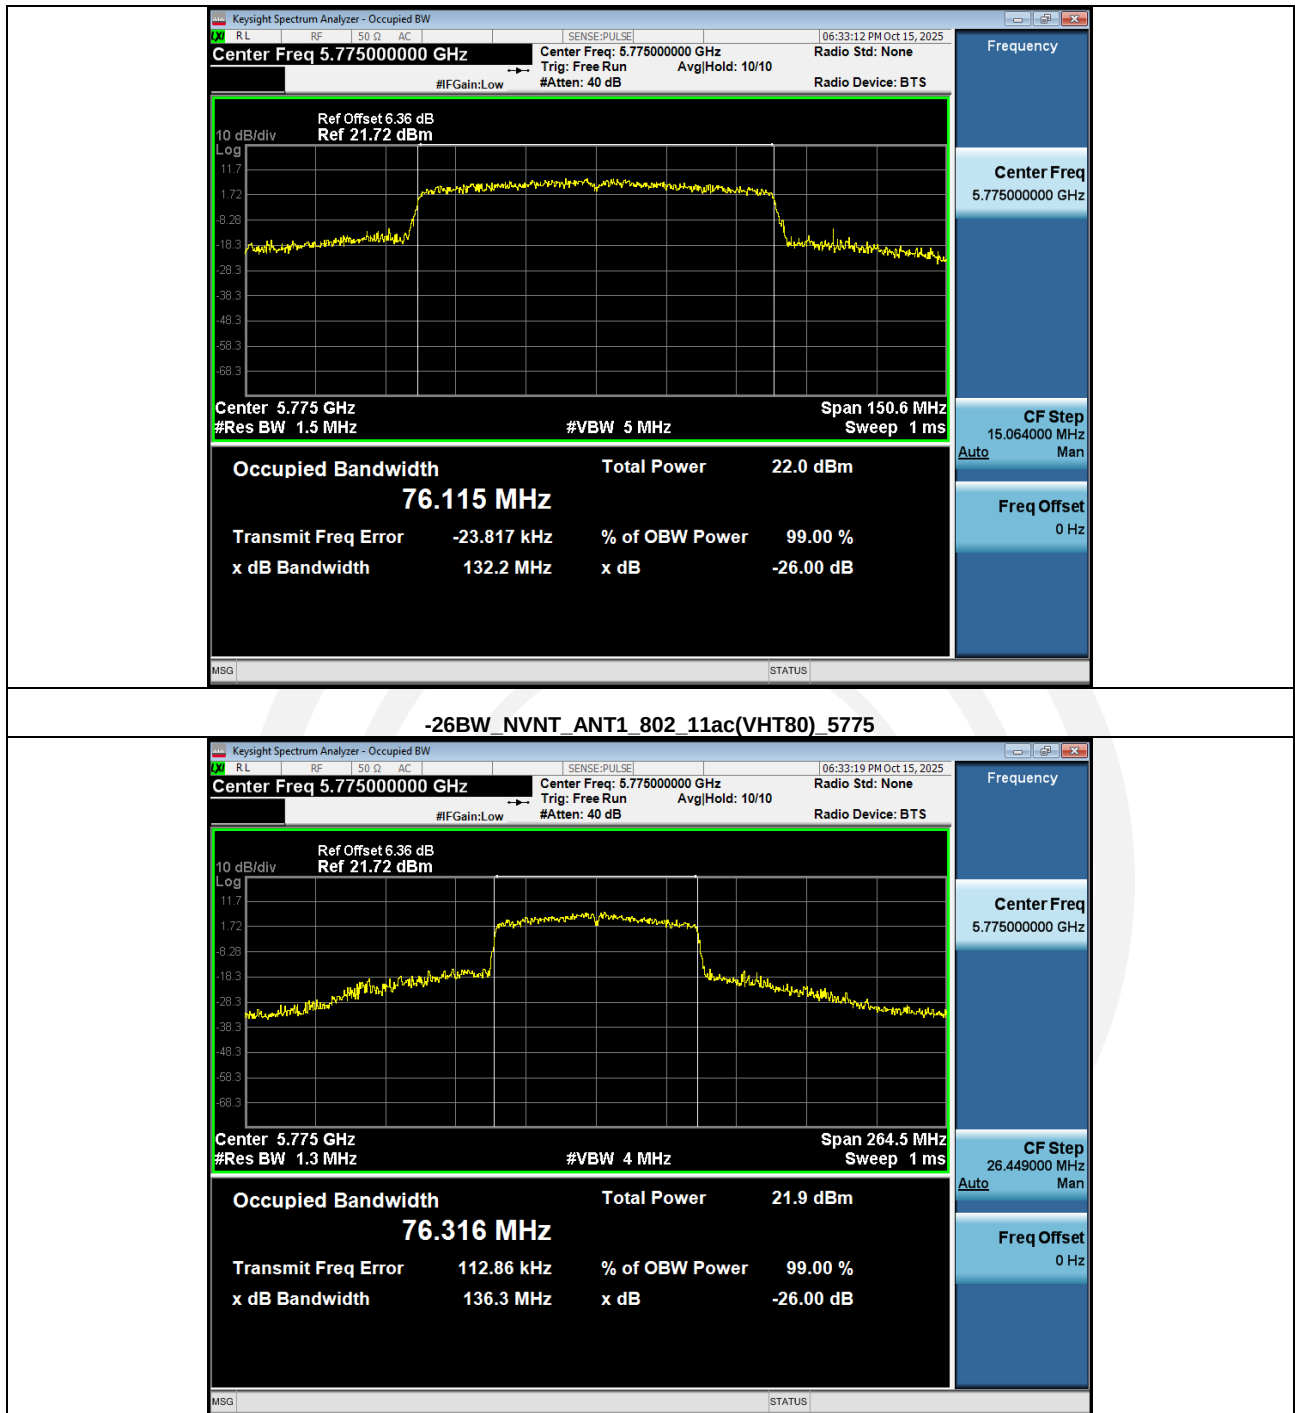

4.4 Maximum Conducted Output Power

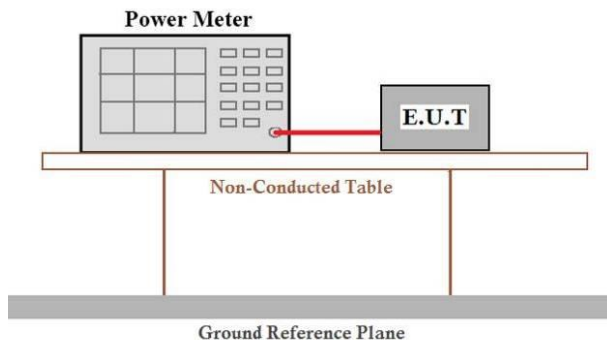Test Requirement:	FCC Part15 E Section 15.407, RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W. IC: For the 5.15–5.25 GHz band, For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. For the 5.25–5.35 GHz band, Other than devices installed in vehicles, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. A Power Meter is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the

	conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz) SISO:**

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	12.23	0.12	12.35	24	Pass
NVNT	ANT1	802.11a	5200.00	12.04	0.18	12.22	24	Pass
NVNT	ANT1	802.11a	5240.00	12.57	0.12	12.69	24	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	12.05	0.20	12.25	24	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	12.25	0.13	12.38	24	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	12.08	0.13	12.21	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	11.74	0.20	11.94	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	12.51	0.13	12.64	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	11.60	0.13	11.73	24	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	7.38	0.39	7.77	24	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	12.04	0.26	12.30	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	10.84	0.26	11.10	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	11.95	0.26	12.21	24	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	11.21	0.75	11.96	24	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5180.00	97.22	0.12
NVNT	ANT1	802.11a	5200.00	95.83	0.18
NVNT	ANT1	802.11a	5240.00	97.22	0.12
NVNT	ANT1	802.11n(HT20)	5180.00	95.59	0.20
NVNT	ANT1	802.11n(HT20)	5200.00	97.01	0.13
NVNT	ANT1	802.11n(HT20)	5240.00	97.01	0.13
NVNT	ANT1	802.11ac(VHT20)	5180.00	95.59	0.20
NVNT	ANT1	802.11ac(VHT20)	5200.00	97.06	0.13
NVNT	ANT1	802.11ac(VHT20)	5240.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	5190.00	91.43	0.39
NVNT	ANT1	802.11n(HT40)	5230.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT40)	5190.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT40)	5230.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT80)	5210.00	84.21	0.75

Band 2 (5260-5320 MHz) SISO:

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5260.00	11.66	0.12	11.78	24	Pass
NVNT	ANT1	802.11a	5300.00	12.27	0.12	12.39	24	Pass
NVNT	ANT1	802.11a	5320.00	12.79	0.18	12.97	24	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	12.07	0.13	12.20	24	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	11.93	0.13	12.06	24	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	12.26	0.20	12.46	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	12.28	0.20	12.48	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	11.84	0.13	11.97	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	11.82	0.13	11.95	24	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	12.16	0.26	12.42	24	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	12.07	0.26	12.33	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	11.77	0.26	12.03	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5310.00	11.58	0.39	11.97	24	Pass
NVNT	ANT1	802.11ac(VHT80)	5290.00	11.63	0.48	12.11	24	Pass

Condition	Antenna	Modulation	Frequency(MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5260.00	97.22	0.12
NVNT	ANT1	802.11a	5300.00	97.22	0.12
NVNT	ANT1	802.11a	5320.00	95.83	0.18
NVNT	ANT1	802.11n(HT20)	5260.00	97.01	0.13
NVNT	ANT1	802.11n(HT20)	5300.00	97.01	0.13
NVNT	ANT1	802.11n(HT20)	5320.00	95.59	0.20
NVNT	ANT1	802.11ac(VHT20)	5260.00	95.59	0.20
NVNT	ANT1	802.11ac(VHT20)	5300.00	97.06	0.13
NVNT	ANT1	802.11ac(VHT20)	5320.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	5270.00	94.29	0.26
NVNT	ANT1	802.11n(HT40)	5310.00	94.12	0.26
NVNT	ANT1	802.11ac(VHT40)	5270.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT40)	5310.00	91.43	0.39
NVNT	ANT1	802.11ac(VHT80)	5290.00	89.47	0.48

Band 4 (5725 – 5850 MHz) SISO:

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	10.35	0.18	10.53	30	Pass
NVNT	ANT1	802.11a	5785.00	10.98	0.12	11.10	30	Pass
NVNT	ANT1	802.11a	5825.00	9.74	0.12	9.86	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	10.13	0.13	10.26	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	10.94	0.13	11.07	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	10.34	0.20	10.54	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	10.45	0.13	10.58	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	10.17	0.13	10.30	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	9.22	0.13	9.35	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	9.85	0.39	10.24	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	9.74	0.26	10.00	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	10.00	0.26	10.26	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	10.03	0.26	10.29	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	11.09	0.51	11.60	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	95.83	0.18
NVNT	ANT1	802.11a	5785.00	97.22	0.12
NVNT	ANT1	802.11a	5825.00	97.18	0.12
NVNT	ANT1	802.11n(HT20)	5745.00	97.01	0.13
NVNT	ANT1	802.11n(HT20)	5785.00	97.01	0.13
NVNT	ANT1	802.11n(HT20)	5825.00	95.59	0.20
NVNT	ANT1	802.11ac(VHT20)	5745.00	97.01	0.13
NVNT	ANT1	802.11ac(VHT20)	5785.00	97.06	0.13
NVNT	ANT1	802.11ac(VHT20)	5825.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	5755.00	91.43	0.39
NVNT	ANT1	802.11n(HT40)	5795.00	94.12	0.26
NVNT	ANT1	802.11ac(VHT40)	5755.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT40)	5795.00	94.12	0.26
NVNT	ANT1	802.11ac(VHT80)	5775.00	88.89	0.51

Note: The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.