


新声助听器HR039项目天线报告

Passive S11 parameter


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

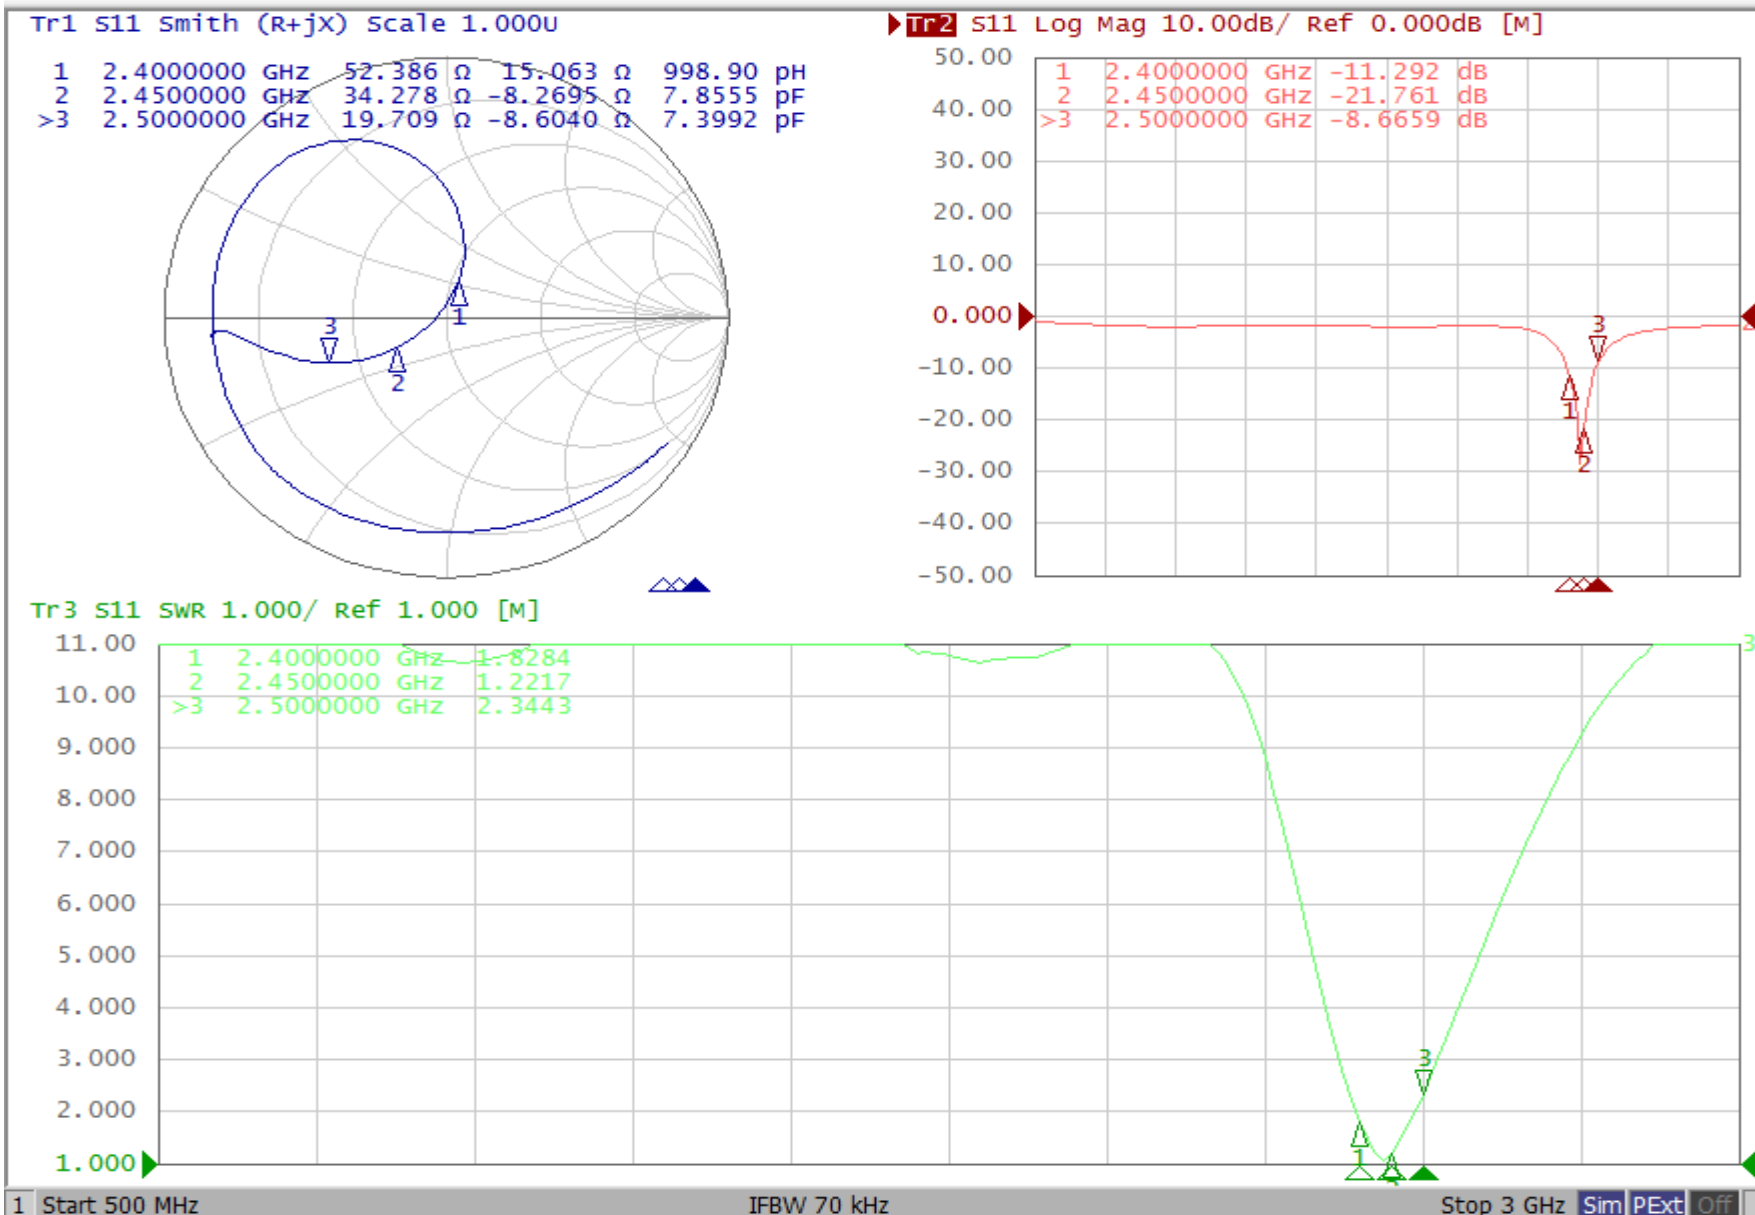


Antenna Efficiency&Gain

Frequency	Efficiency	Efficiency .	Gain . dB
2400	20%	-6.93	-2.14
2410	21%	-6.71	-2.17
2420	23%	-6.45	-1.99
2430	23%	-6.39	-2.02
2440	23%	-6.47	-2.36
2450	23%	-6.38	-2.45
2460	23%	-6.35	-2.60
2470	25%	-6.07	-2.12
2480	24%	-6.18	-2.78
2490	24%	-6.23	-3.12
2500	24%	-6.27	-2.95


•XOZ

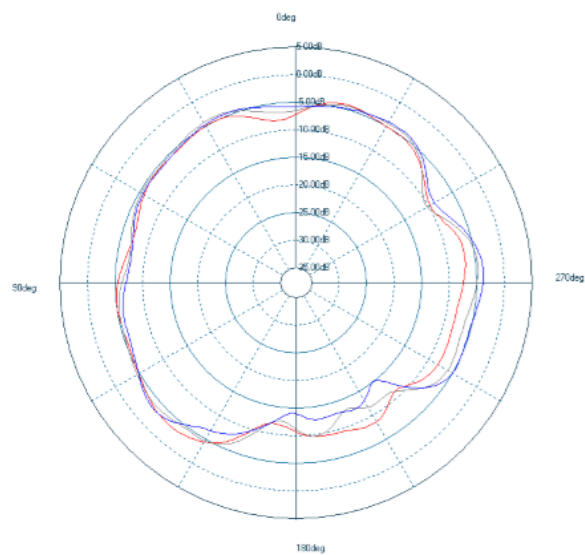

•YOZ

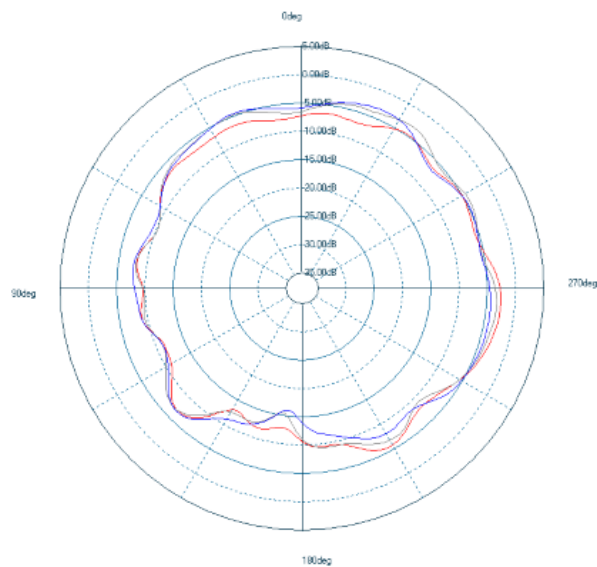

•XOY

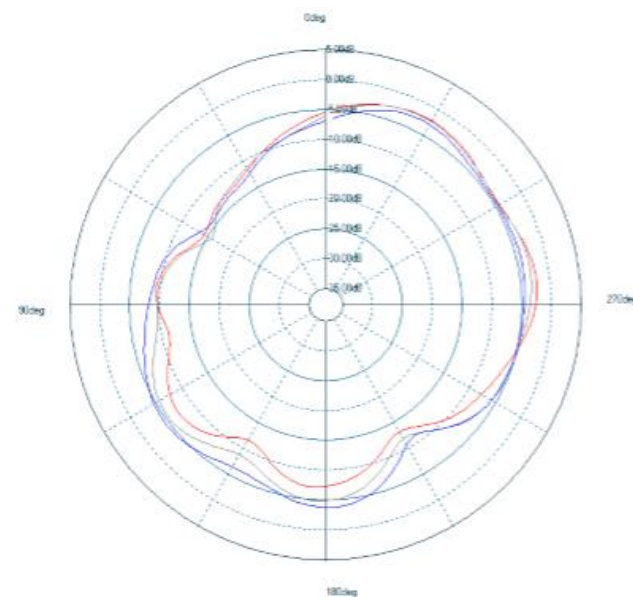



— 2400MHz
— 2450MHz
— 2500MHz

Active test data

	TRP	TIS
0	-6.65	-82.45
39	-6.11	-83.14
78	-5.82	-83.57

Matching Circuit

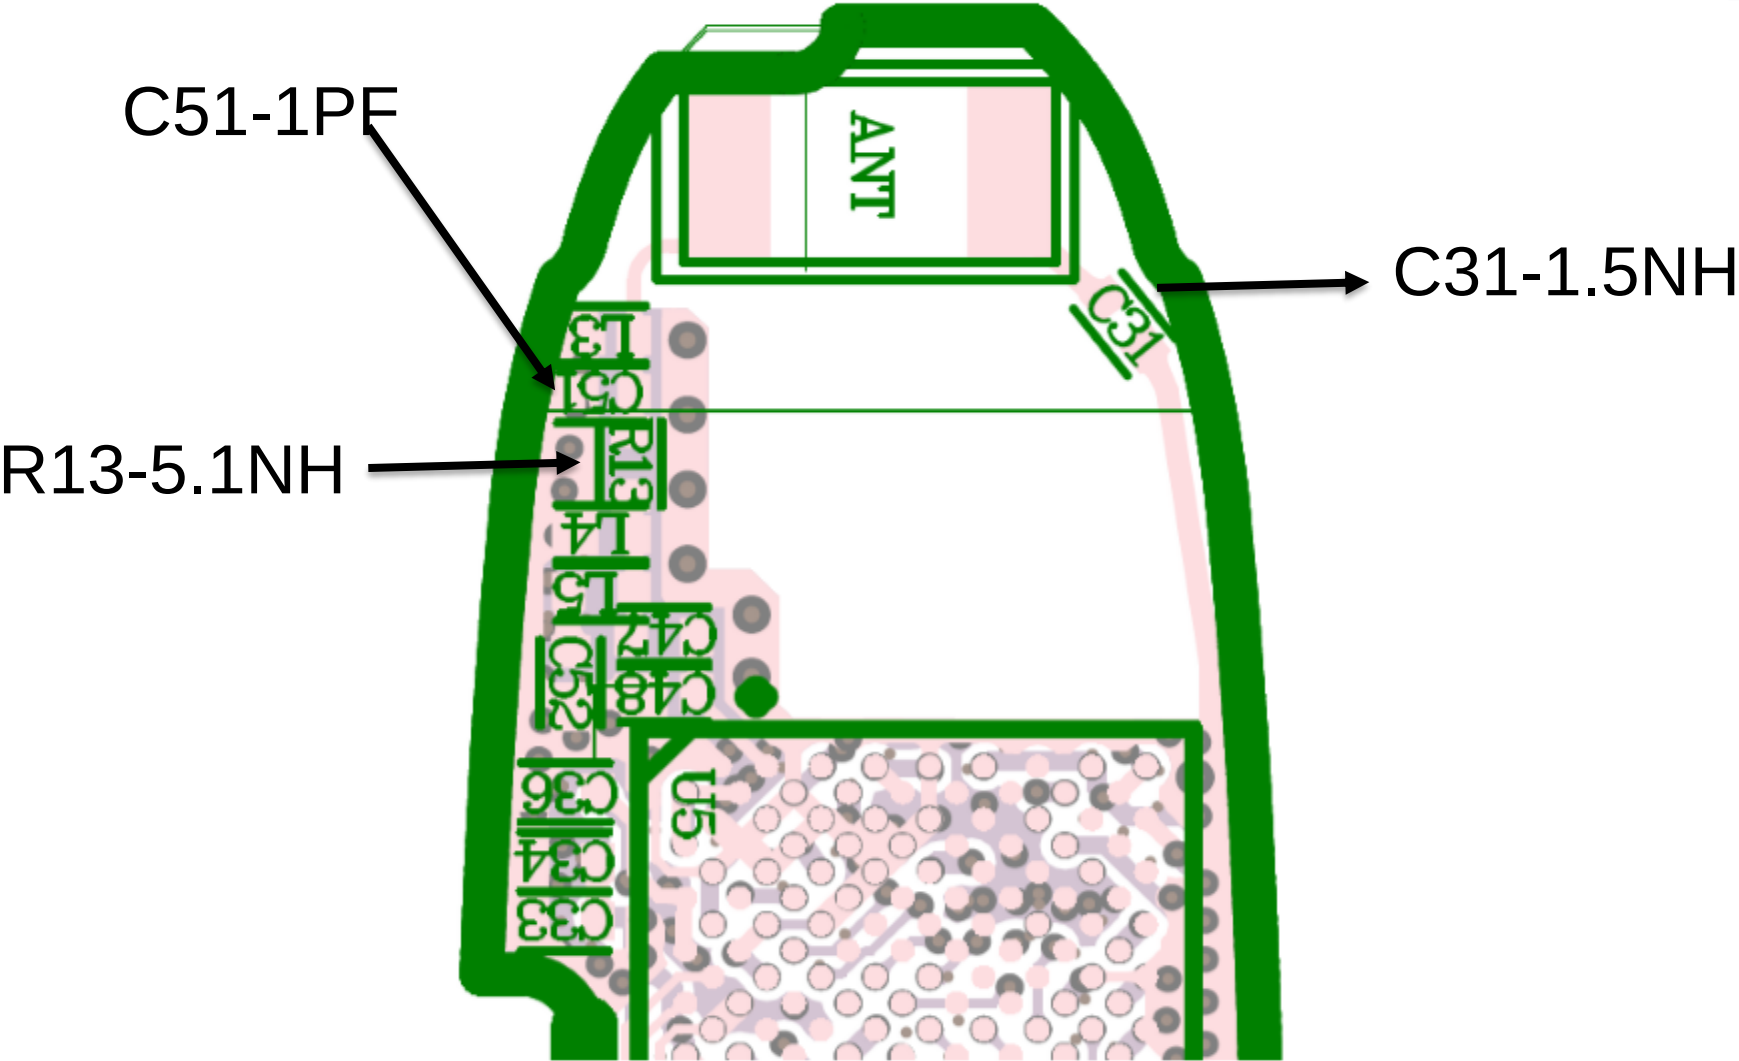

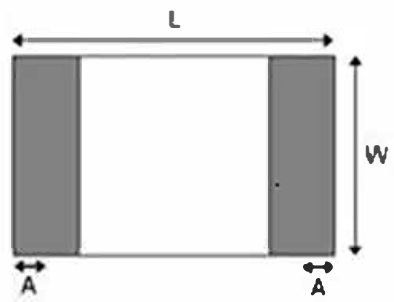

L	W	A	H
3.10 ± 0.10	1.55 ± 0.10	0.40 ± 0.20	0.50 ± 0.10

Unit: mm

Thank You

