




LASER APERTURES
AVOID EXPOSURE-LASER RADIATION
IS EMITTED FROM THESE APERTURES
VISIBLE AND INVISIBLE LASER RADIATION



DANGER: LASER RADIATION
AVOID DIRECT
EXPOSURE TO BEAM LRF
CLASS IIIB
VIS NIR
WAVELENGTH (nm): 650-1050
840-870
OUTPUT POWER: 200uW <50mW <150mW

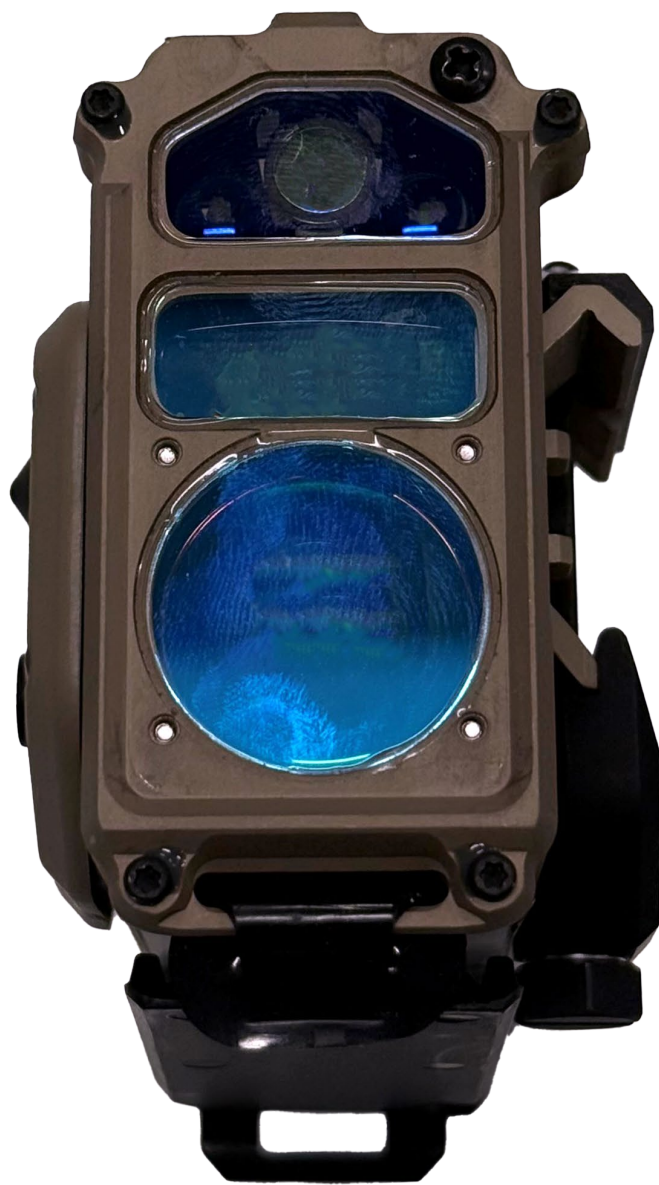







MFR: 8EDV1

PIN: MAR-0010-ASM

S: 001978



EMVISION TECHNOLOGY LLC

7 PENNINGTON ROAD

MANCHESTER, NH 03103

0.5 MOA/0.15 mrad PER ADJUSTER CLICK
TORQUE 25in-lbs