



Inverted F Antenna Specification

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	>-4
VSWR	<3.2
Impedance (Ω)	50 Ω
Antenna Typ	Plannar Inverted F Antenna on board
Polarization	Linear
Manufacture	ZHUHAI JIELI TECHNOLOGY CO., LTD
Manufacturer's address	333 Kexing Rd., Nanping Town, Xiangzhou Dist., Zhuhai City, Guangdong Province, China

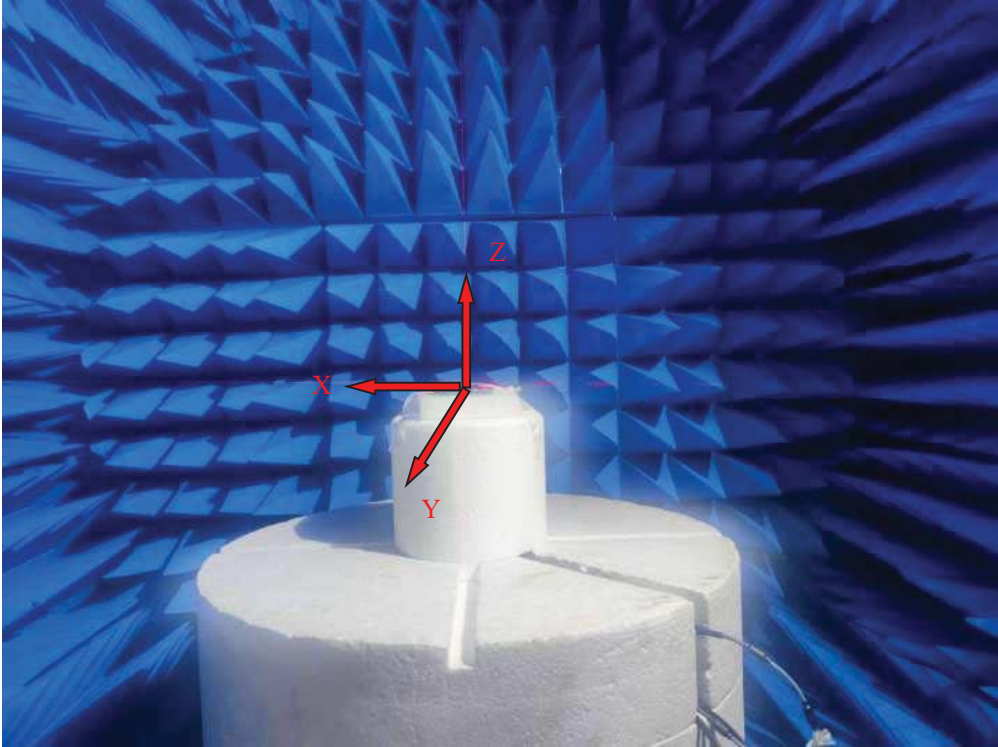

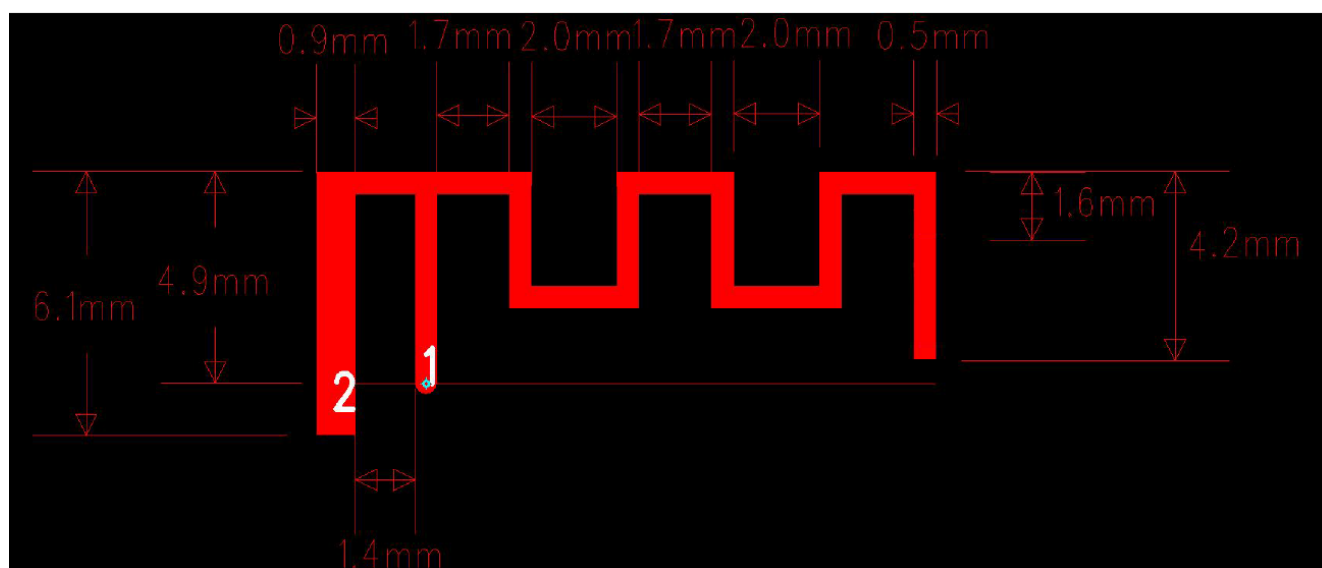


:

(VSWR)、(Return Loss)




Frequency (MHz)	Gain (dBi)	Effciency (%)	Efficiency (dB)
2400	1.433	59.329%	-2.267
2410	0.927	51.861%	-2.852
2420	0.829	52.112%	-2.831
2430	0.881	49.299%	-3.072
2440	1.192	50.672%	-2.952
2450	1.688	53.067%	-2.752
2460	2.194	59.423%	-2.260
2470	2.118	56.680%	-2.466
2480	2.499	61.727%	-2.095


2440MHz 2D-Theta Pattern

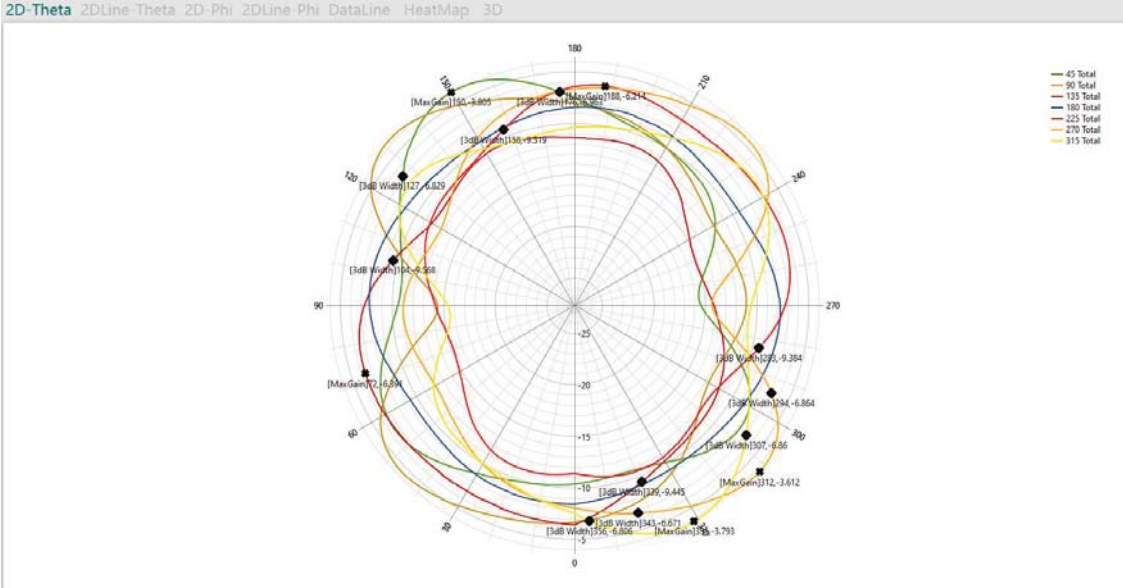


2440MHz 2D-Phi Pattern

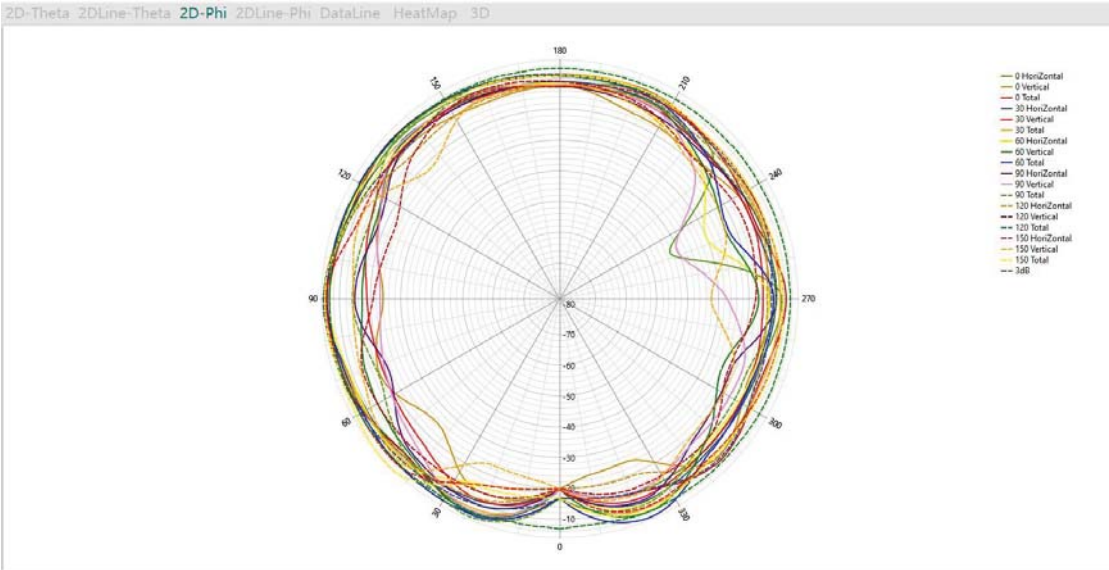

2440MHz 3D-Horizontal Pattern

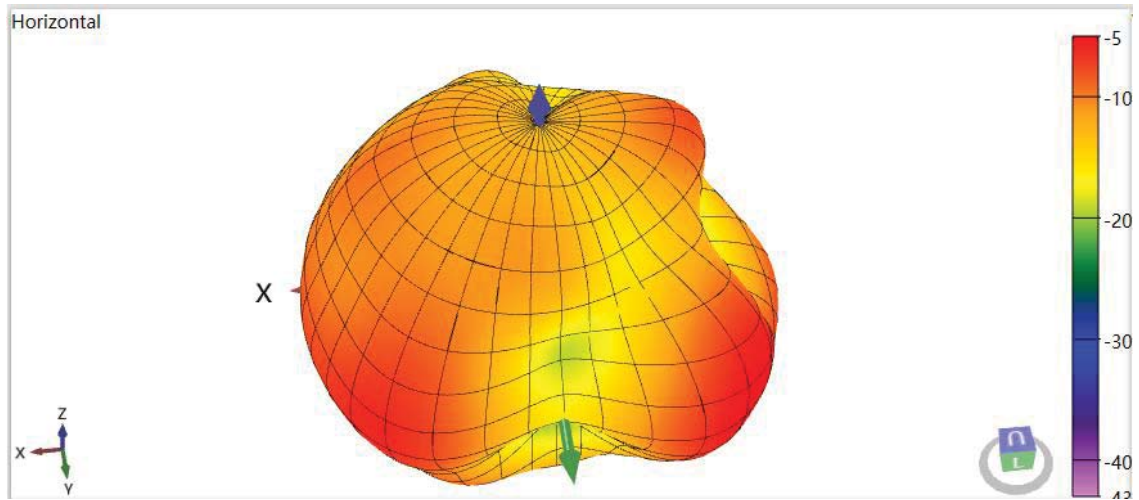

2440MHz 3D-Vertical Pattern

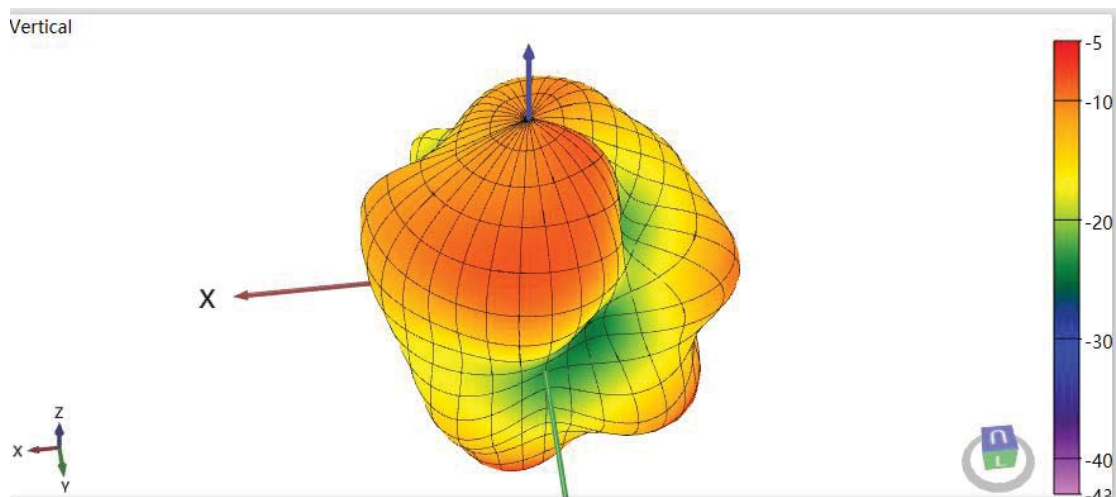

2440MHz 3D-Total Pattern

