FCC PART 15C
Measurement and Test Report
For
Faytech Tech.Co., Ltd.

FCC ID:2BQK4FT215MITXH610A

FCC Rule(s)/Methods:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2020
Product Description:	Capacitive Touch PC
Trademark	/
Model/Type reference.:	FT215MITXH610ACAPOB
Report No.:	MAX25080502750034F-1
Date of receipt of test item:	Dec. 22, 2025
Date of sampling :	Dec. 22, 2025
Tested Date:	Dec. 22, 2025 to Dec. 31, 2025
Issued Date:	Dec. 31, 2025
Tested By:	Lris Yao/ Engineer
Reviewed By:	Levi Xiao/ EMC Manager
Approved & Authorized By:	Salon Ouyang / PSQ Manager

MAXLAB Testing Co., Ltd.
1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People’s Republic of China
Tel: 400-882-9628 Fax: 86- 755-26508703

Table of Contents

Page

1. VERSION 4
2. TEST SUMMARY 5
2.1 TEST FACILITY 6
2.2 MEASUREMENT UNCERTAINTY 6
3. GENERAL INFORMATION 7
3.1 GENERAL DESCRIPTION OF EUT 7
3.2 Test Setup Configuration 8
3.3 Support Equipment 9
3.4 Test Mode 10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 11
4. EMC EMISSION TEST 13
4.1 Conducted emissions 13
4.1.1 POWER LINE CONDUCTED EMISSION Limits 13
4.1.2 TEST PROCEDURE 13
4.1.3 DEVIATION FROM TEST STANDARD 13
4.1.4 TEST SETUP 14
4.1.5 EUT OPERATING CONDITIONS 14
4.1.6 Test Result（Worst case GFSK 2402MHz） 15
4.2 Radiated emissions 17
4.2.1 Radiated Emission Limits 17
4.2.2 TEST PROCEDURE 17
4.2.3 DEVIATION FROM TEST STANDARD 18
4.2.4 TEST SETUP 18
4.2.5 EUT OPERATING CONDITIONS 19
4.2.6 TEST RESULTS 20
5. RADIATED BAND EMISSION MEASUREMENT 29
5.1 Test Requirement: 29
5.2 TEST PROCEDURE 29
5.3 DEVIATION FROM TEST STANDARD 30
5.4 TEST SETUP 30
5.5 EUT OPERATING CONDITIONS 30
5.6 TEST RESULT 31
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION 33
6.1 Limit 33
6.2 Test Setup 33
6.3 Test procedure 33
6.4 DEVIATION FROM STANDARD 33
6.5 Test Result 34
7. 20dB&99% Bandwidth 55
7.1 Test Setup 55
7.2 Limit 55
7.3 Test procedure 55
7.4 DEVIATION FROM STANDARD 55

7.5 Test Result 55
8. MAXIMUM PEAK OUTPUT POWER 61
8.1 Block Diagram Of Test Setup 61
8.2 Limit 61
8.3 Test procedure 61
8.4 DEVIATION FROM STANDARD 61
8.5 Test Result 61
9. HOPPING CHANNEL SEPARATION 62
9.1 Test Setup 62
9.2 Test procedure 62
9.3 DEVIATION FROM STANDARD 62
9.4 Test Result 63
10.NUMBER OF HOPPING FREQUENCY 68
10.1 Test Setup 68
10.2 Test procedure 68
10.3 DEVIATION FROM STANDARD 68
10.4 Test Result 69
11. DWELL TIME 71
11.1 Test Setup 71
11.2 Test procedure 71
11.3 DEVIATION FROM STANDARD 71
11.4 Test Result 72
12. ANTENNA REQUIREMENT 82
13. TEST SETUP PHOTO 83
14. EUT CONSTRUCTIONAL DETAILS 83

1. VERSION

Report No.	Version	Description	Approved
MAX25080502750034F-1	Rev.01	Initial issue of report	Dec. 31, 2025

2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KDB558074 D01 15.247 Meas Guidance v05r02			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

MAXLAB Testing Co., Ltd.
Add. : 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Shiyan Stree Bao'an District, Shenzhen, Guangdong, 518052, People’s Republic of China

FCC Test Firm Registration Number: 562200
Designation Number: CN1338
IC Registered No.: 11093A
Designation Number: CN0019

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U，where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2，providing a level of confidence of approximately 95 %。

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power conducted	±0.16dB
3	Spurious emissions conducted	±0.21dB
4	All emissions radiated(<1G)	±4.68dB
5	All emissions radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Applicant:	Faytech Tech.Co., Ltd.
Address of applicant:	Room 202A, 202B, 2F, Building 8, Yunli Intelligent Park, Bantian Street, Longgang District, Shenzhen
Manufacturer:	Faytech Tech.Co.,Ltd.
Address of manufacturer:	Room 202A and 202B, 2/F, Building 8, Yunli intelligent Park No.7 Changta Road. Yangmei Community. Bantian Street. Longgano District, Shenzhen City,Guangdong Province, P.R. China
Product Name:	Capacitive Touch PC
Model No.:	FT215MITXH610ACAPOB
Model Different.:	N/A
Hardware version	V1.0
Software version	V1.0
Sample ID	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	79
Operation Frequency:	2402MHz~2480MHz
Modulation technology:	GFSK, π/4-DQPSK, 8DPSK
Antenna Type:	External antenna
Antenna gain:	ANT 1: 2.36dBi
Power supply:	24V⎓9200mA Max
Adapter:	Input:100-240V~, 50/60Hz, 1.5A Max Output:24V⎓9200mA Max

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz

14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.
Example of a 79 hopping sequence in data mode:
35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 53, 42
Each Frequency used equally on the average by each transmitter

Note:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

Note:This EUT supports DH1/DH3/DH5/2DH1/2DH3/2DH5, Only DH5/2DH5 record in this report

3.2 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:
(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in『Length』column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	Test Tool
Power level setup	<7dBm

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	BSL252	2025-10-26	2026-10-25
EMI Test Receiver	R&S	ESCI 7	BSL552	2025-10-26	2026-10-25
Coaxial Switch	ANRITSU CORP	MP59B	BSL225	2025-10-26	2026-10-25
ENV216 2-L-V-NETZNACH B.DE	ROHDE&SCHWARZ	ENV216	BSL226	2025-10-26	2026-10-25
Coaxial Cable	BSL	N/A	BSL227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	BSL233	2025-10-26	2026-10-25
Absorbing clamp	Elektronik-Feinmechanik	MDS21	BSL229	2025-10-26	2026-10-25
LISN	R&S	ENV216	308	2025-10-26	2026-10-25
LISN	R&S	ENV216	314	2025-10-26	2026-10-25

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi-Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)*6.4(H)	BSL250	2025-10-26	2026-10-25
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	BSL251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	BSL203	2025-10-26	2026-10-25
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	BSL214	2025-10-26	2026-10-25
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	BSL208	2025-10-26	2026-10-25
Horn Antenna	ETS-LINDGREN	3160	BSL217	2025-10-26	2026-10-25
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	BSL	N/A	BSL213	2025-10-26	2026-10-25
Coaxial Cable	BSL	N/A	BSL211	2025-10-26	2026-10-25
Coaxial cable	BSL	N/A	BSL210	2025-10-26	2026-10-25
Coaxial Cable	BSL	N/A	BSL212	2025-10-26	2026-10-25
Amplifier(100kHz-3GHz)	HP	8347A	BSL204	2025-10-26	2026-10-25
Amplifier(2GHz-20GHz)	HP	84722A	BSL206	2025-10-26	2026-10-25
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002650-30-8P-44	BSL218	2025-10-26	2026-10-25
Band filter	Amindeon	82346	BSL219	2025-10-26	2026-10-25
Power Meter	Anritsu	ML2495A	BSL540	2025-10-26	2026-10-25
Power Sensor	Anritsu	MA2411B	BSL541	2025-10-26	2026-10-25
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	BSL575	2025-10-26	2026-10-25
Splitter	Agilent	11636B	BSL237	2025-10-26	2026-10-25
Loop Antenna	ZHINAN	ZN30900A	BSL534	2025-10-26	2026-10-25

Breitband hornantenne	SCHWARZBECK	BBHA 9170	BSL579	2025-10-26	2026-10-25
Amplifier	TDK	PA-02-02	BSL574	2025-10-26	2026-10-25
Amplifier	TDK	PA-02-03	BSL576	2025-10-26	2026-10-25
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP40	BSL578	2025-10-26	2026-10-25

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	BSL566	2025-10-26	2026-10-25
EMI Test Receiver	R&S	ESCI 7	BSL552	2025-10-26	2026-10-25
Spectrum Analyzer	Agilent	E4440A	BSL533	2025-10-26	2026-10-25
MXG vector Signal Generator	Agilent	N5182A	BSL567	2025-10-26	2026-10-25
ESG Analog Signal Generator	Agilent	E4428C	BSL568	2025-10-26	2026-10-25
USB RF Power Sensor	DARE	RPR3006W	BSL569	2025-10-26	2026-10-25
RF Switch Box	Shongyi	RFSW3003328	BSL571	2025-10-26	2026-10-25
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-80	BSL572	2025-10-26	2026-10-25

4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

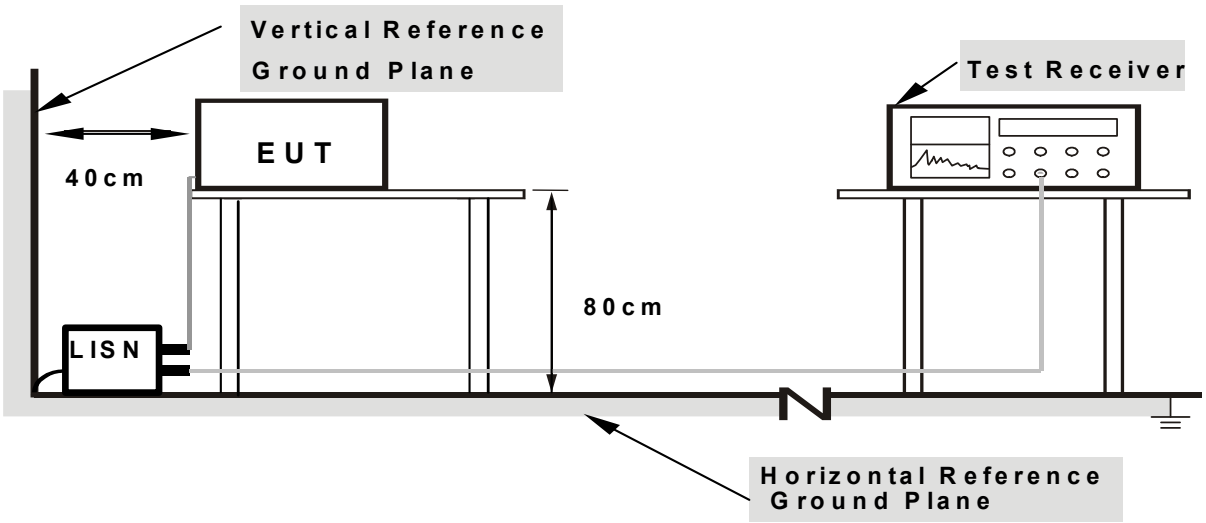

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V/60Hz, AC 240V/60Hz, the worst voltage was AC 120V and the data recording in the report.

4.1.6 Test Result（Worst case GFSK 2402MHz）

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

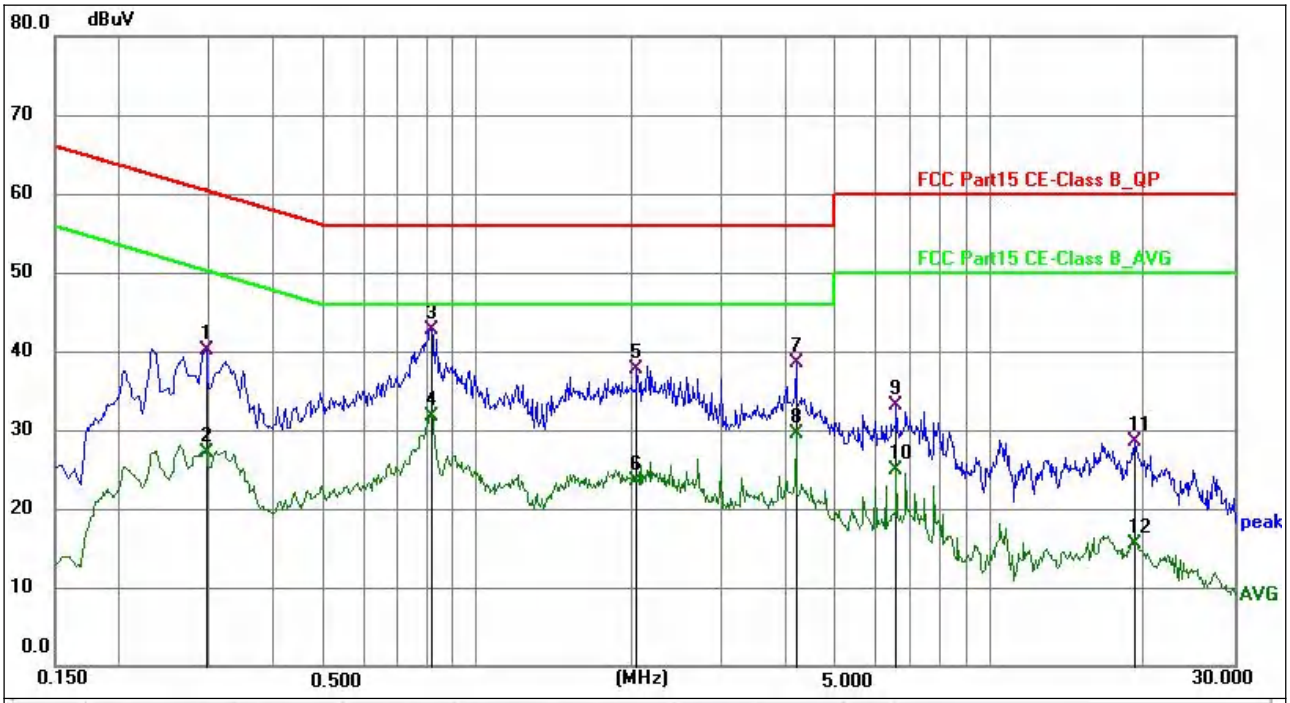

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2939	30.25	9.78	40.03	60.41	-20.38	QP	P	
2	0.2939	17.26	9.78	27.04	50.41	-23.37	AVG	P	
3 *	0.8158	32.94	9.76	42.70	56.00	-13.30	QP	P	
4	0.8158	21.91	9.76	31.67	46.00	-14.33	AVG	P	
5	2.0445	28.04	9.76	37.80	56.00	-18.20	QP	P	
6	2.0445	13.83	9.76	23.59	46.00	-22.41	AVG	P	
7	4.1864	28.74	9.81	38.55	56.00	-17.45	QP	P	
8	4.1864	19.72	9.81	29.53	46.00	-16.47	AVG	P	
9	6.5804	23.36	9.80	33.16	60.00	-26.84	QP	P	
10	6.5804	15.04	9.80	24.84	50.00	-25.16	AVG	P	
11	19.2029	18.75	9.82	28.57	60.00	-31.43	QP	P	
12	19.2029	5.71	9.82	15.53	50.00	-34.47	AVG	P	

Notes:
1.An initial pre-scan was performed on the line and neutral lines with peak detector.
2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3.Mesurement Level = Reading level + Correct Factor

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

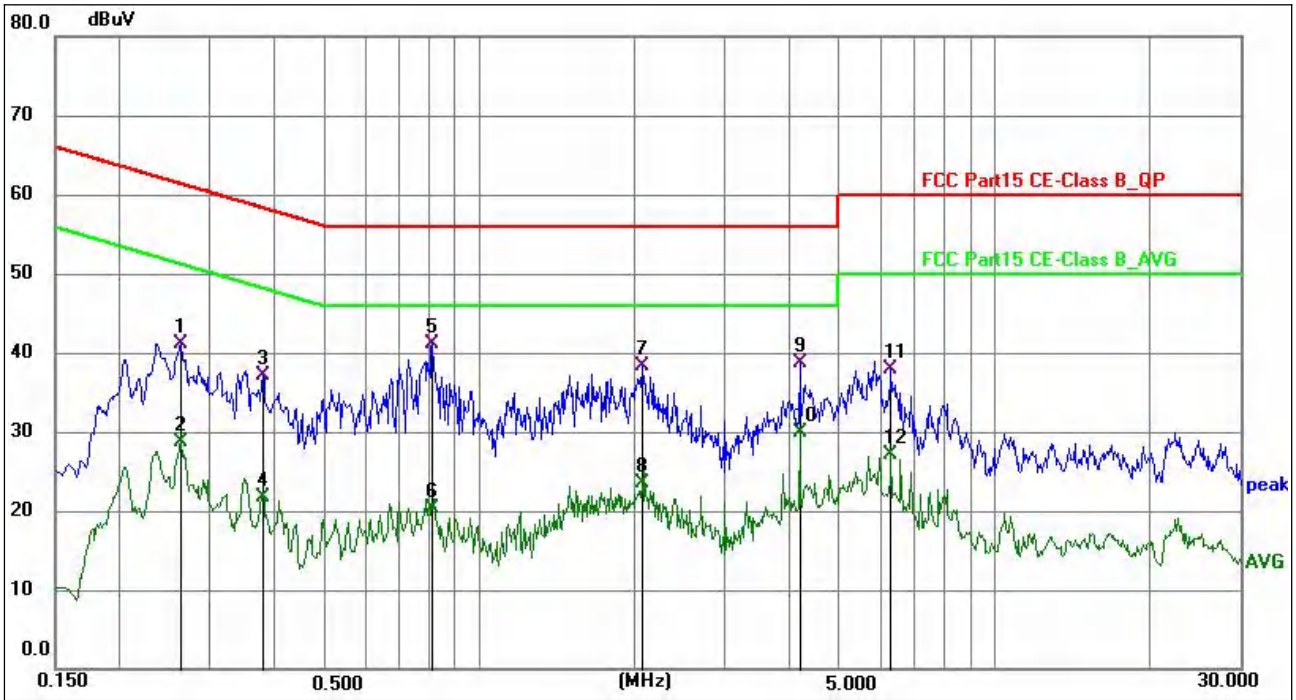

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2625	31.34	9.71	41.05	61.35	-20.30	QP	P	
2	0.2625	19.00	9.71	28.71	51.35	-22.64	AVG	P	
3	0.3790	27.44	9.70	37.14	58.30	-21.16	QP	P	
4	0.3790	12.10	9.70	21.80	48.30	-26.50	AVG	P	
5 *	0.8114	31.50	9.69	41.19	56.00	-14.81	QP	P	
6	0.8114	10.56	9.69	20.25	46.00	-25.75	AVG	P	
7	2.0670	28.68	9.69	38.37	56.00	-17.63	QP	P	
8	2.0670	13.82	9.69	23.51	46.00	-22.49	AVG	P	
9	4.1955	28.89	9.73	38.62	56.00	-17.38	QP	P	
10	4.1955	20.11	9.73	29.84	46.00	-16.16	AVG	P	
11	6.2880	28.10	9.71	37.81	60.00	-22.19	QP	P	
12	6.2880	17.40	9.71	27.11	50.00	-22.89	AVG	P	

Notes:
1.An initial pre-scan was performed on the line and neutral lines with peak detector.
2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3.Mesurement Level = Reading level + Correct Factor

4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2020
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

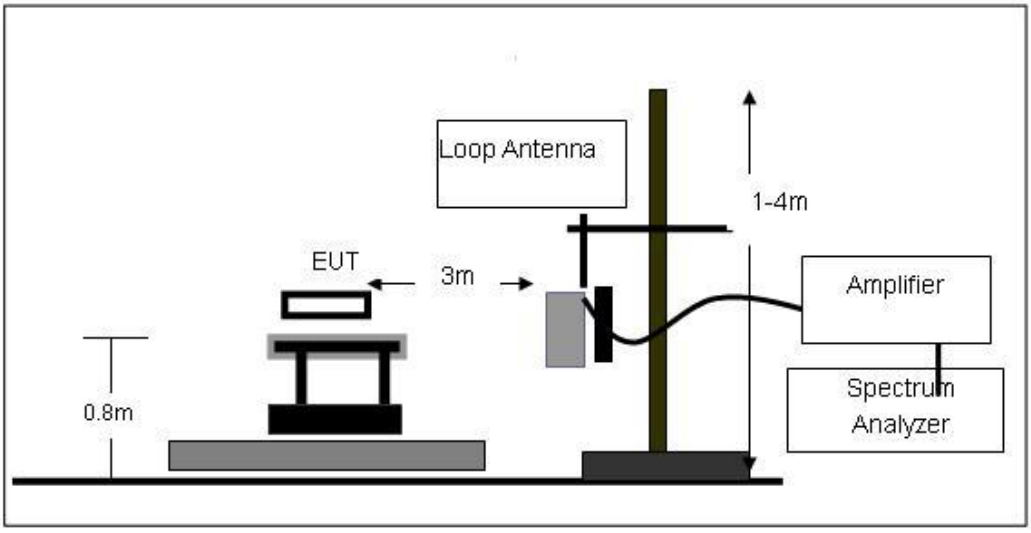

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

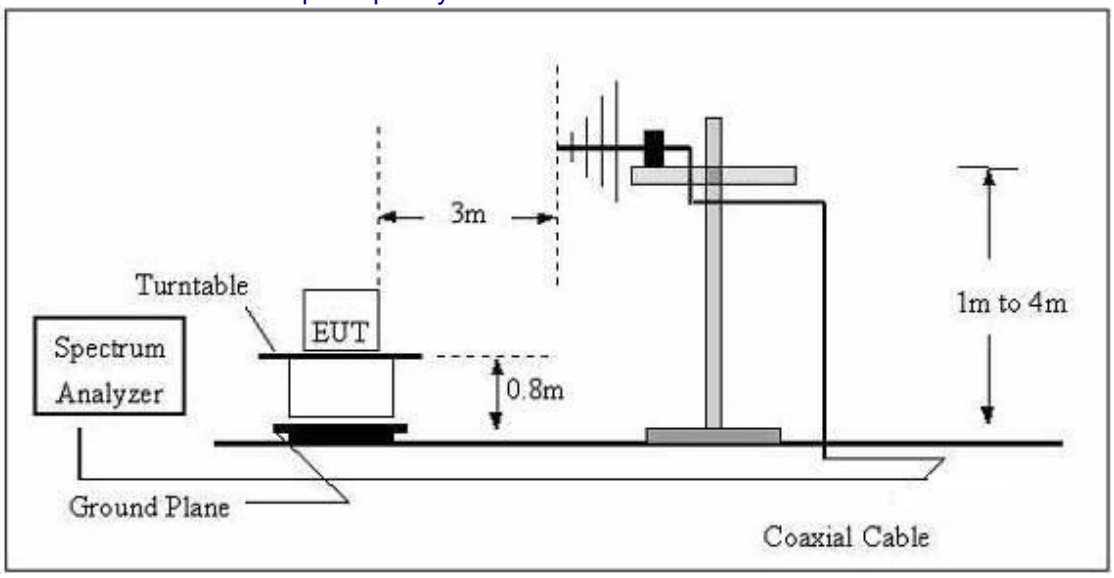

（C）Radiated Emission Test-Up Frequency Above 1GHz

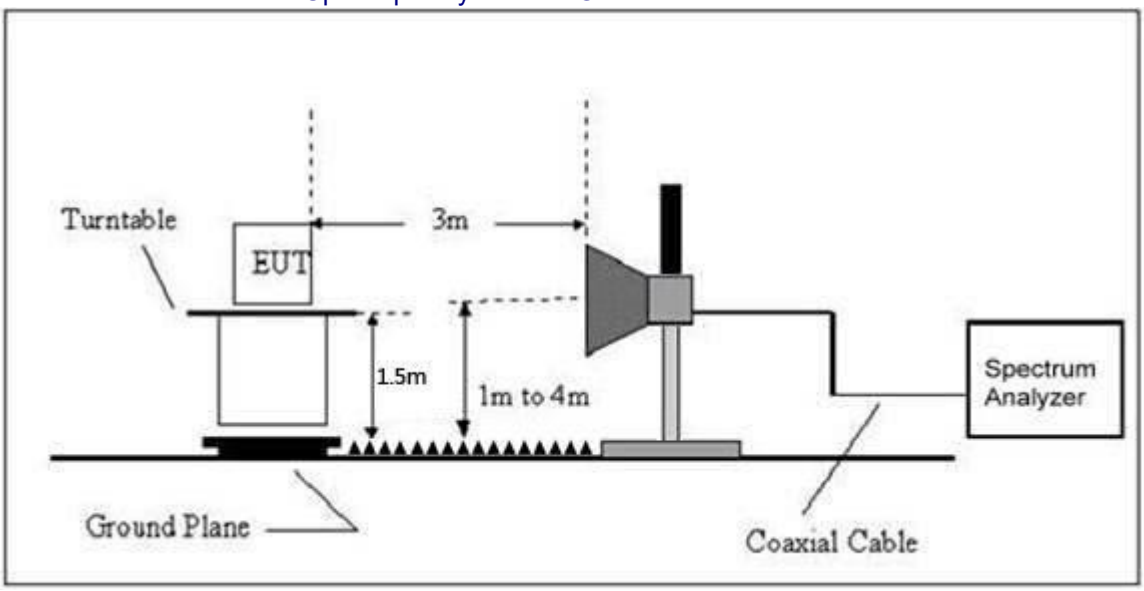

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz（Worst case 8DPSK 2441MHz）

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

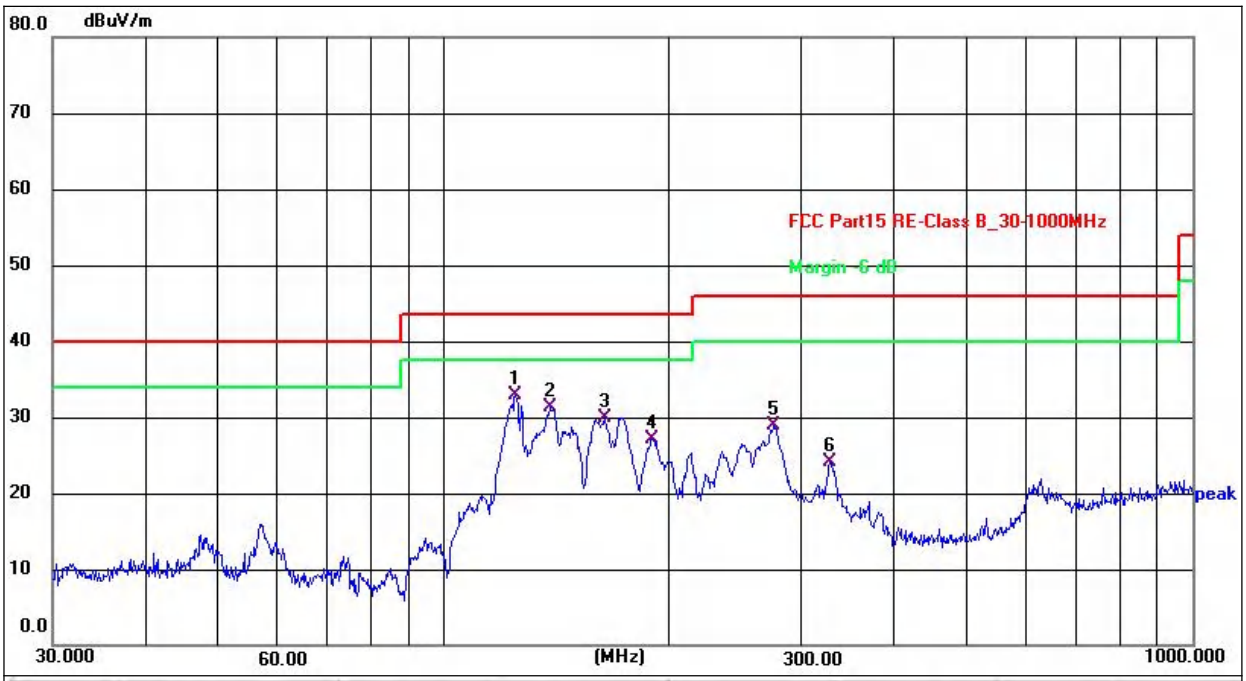

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	124.5690	50.61	-17.66	32.95	43.50	-10.55	QP
2	138.3873	48.00	-16.73	31.27	43.50	-12.23	QP
3	163.7550	46.06	-16.17	29.89	43.50	-13.61	QP
4	189.7385	46.43	-19.34	27.09	43.50	-16.41	QP
5	276.1235	46.03	-17.12	28.91	46.00	-17.09	QP
6	327.8873	40.11	-15.93	24.18	46.00	-21.82	QP

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

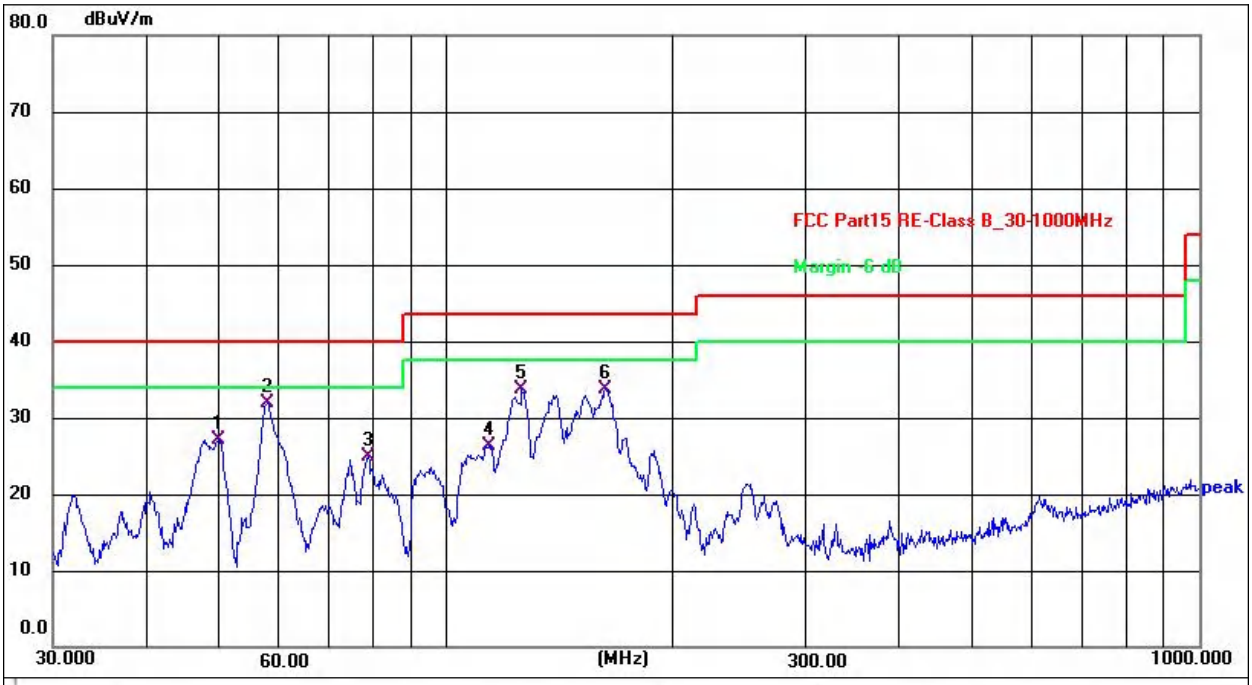

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.7066	43.80	-16.63	27.17	40.00	-12.83	QP
2 *	57.7962	49.21	-17.33	31.88	40.00	-8.12	QP
3	78.6887	45.65	-20.73	24.92	40.00	-15.08	QP
4	113.7143	44.99	-18.64	26.35	43.50	-17.15	QP
5	125.8863	51.21	-17.60	33.61	43.50	-9.89	QP
6	162.6105	49.69	-16.07	33.62	43.50	-9.88	QP

Remarks:
1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
2.The emission levels of other frequencies are very lower than the limit and not show in test report.
3.The test data shows only the worst case GFSK mode

1GHz~25GHz

GFSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	54.50	30.55	5.77	24.66	54.38	74.00	-19.62	Pk
V	4804.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
V	7206.00	53.31	30.33	6.32	24.55	53.85	74.00	-20.15	Pk
V	7206.00	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
V	9608.00	51.86	30.85	7.45	24.69	53.15	74.00	-20.85	Pk
V	9608.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
V	12010.00	51.63	31.02	8.99	25.57	55.17	74.00	-18.83	Pk
V	12010.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	4804.00	52.42	30.55	5.77	24.66	52.30	74.00	-21.70	Pk
H	4804.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
H	7206.00	50.45	30.33	6.32	24.55	50.99	74.00	-23.01	Pk
H	7206.00	43.64	30.33	6.32	24.55	44.18	54.00	-9.82	AV
H	9608.00	52.28	30.85	7.45	24.69	53.57	74.00	-20.43	Pk
H	9608.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
H	12010.00	53.56	31.02	8.99	25.57	57.10	74.00	-16.90	Pk
H	12010.00	43.59	31.02	8.99	25.57	47.13	54.00	-6.87	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	54.94	30.55	5.77	24.66	54.82	74.00	-19.18	Pk
V	4882.00	43.74	30.55	5.77	24.66	43.62	54.00	-10.38	AV
V	7323.00	54.69	30.33	6.32	24.55	55.23	74.00	-18.77	Pk
V	7323.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
V	9764.00	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	Pk
V	9764.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
V	12205.00	53.27	31.02	8.99	25.57	56.81	74.00	-17.19	Pk
V	12205.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
H	4882.00	51.60	30.55	5.77	24.66	51.48	74.00	-22.52	Pk
H	4882.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
H	7323.00	52.80	30.33	6.32	24.55	53.34	74.00	-20.66	Pk
H	7323.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
H	9764.00	54.95	30.85	7.45	24.69	56.24	74.00	-17.76	Pk
H	9764.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
H	12205.00	50.71	31.02	8.99	25.57	54.25	74.00	-19.75	Pk
H	12205.00	43.21	31.02	8.99	25.57	46.75	54.00	-7.25	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	52.08	30.55	5.77	24.66	51.96	74.00	-22.04	Pk
V	4960.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
V	7440.00	53.42	30.33	6.32	24.55	53.96	74.00	-20.04	Pk
V	7440.00	43.90	30.33	6.32	24.55	44.44	54.00	-9.56	AV
V	9920.00	52.72	30.85	7.45	24.69	54.01	74.00	-19.99	Pk
V	9920.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
V	12400.00	54.89	31.02	8.99	25.57	58.43	74.00	-15.57	Pk
V	12400.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV
H	4960.00	54.50	30.55	5.77	24.66	54.38	74.00	-19.62	Pk
H	4960.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
H	7440.00	51.81	30.33	6.32	24.55	52.35	74.00	-21.65	Pk
H	7440.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
H	9920.00	52.94	30.85	7.45	24.69	54.23	74.00	-19.77	Pk
H	9920.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
H	12400.00	52.80	31.02	8.99	25.57	56.34	74.00	-17.66	Pk
H	12400.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

π/4-DQPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	52.92	30.55	5.77	24.66	52.80	74.00	-21.20	Pk
V	4804.00	43.26	30.55	5.77	24.66	43.14	54.00	-10.86	AV
V	7206.00	51.99	30.33	6.32	24.55	52.53	74.00	-21.47	Pk
V	7206.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
V	9608.00	54.56	30.85	7.45	24.69	55.85	74.00	-18.15	Pk
V	9608.00	43.13	30.85	7.45	24.69	44.42	54.00	-9.58	AV
V	12010.00	54.83	31.02	8.99	25.57	58.37	74.00	-15.63	Pk
V	12010.00	43.78	31.02	8.99	25.57	47.32	54.00	-6.68	AV
H	4804.00	51.51	30.55	5.77	24.66	51.39	74.00	-22.61	Pk
H	4804.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7206.00	53.08	30.33	6.32	24.55	53.62	74.00	-20.38	Pk
H	7206.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
H	9608.00	54.24	30.85	7.45	24.69	55.53	74.00	-18.47	Pk
H	9608.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
H	12010.00	51.10	31.02	8.99	25.57	54.64	74.00	-19.36	Pk
H	12010.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	51.37	30.55	5.77	24.66	51.25	74.00	-22.75	Pk
V	4882.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
V	7323.00	52.51	30.33	6.32	24.55	53.05	74.00	-20.95	Pk
V	7323.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
V	9764.00	52.20	30.85	7.45	24.69	53.49	74.00	-20.51	Pk
V	9764.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
V	12205.00	54.29	31.02	8.99	25.57	57.83	74.00	-16.17	Pk
V	12205.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV
H	4882.00	52.37	30.55	5.77	24.66	52.25	74.00	-21.75	Pk
H	4882.00	43.17	30.55	5.77	24.66	43.05	54.00	-10.95	AV
H	7323.00	53.04	30.33	6.32	24.55	53.58	74.00	-20.42	Pk
H	7323.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
H	9764.00	54.79	30.85	7.45	24.69	56.08	74.00	-17.92	Pk
H	9764.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
H	12205.00	54.76	31.02	8.99	25.57	58.30	74.00	-15.70	Pk
H	12205.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	54.40	30.55	5.77	24.66	54.28	74.00	-19.72	Pk
V	4960.00	43.31	30.55	5.77	24.66	43.19	54.00	-10.81	AV
V	7440.00	53.20	30.33	6.32	24.55	53.74	74.00	-20.26	Pk
V	7440.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	9920.00	52.35	30.85	7.45	24.69	53.64	74.00	-20.36	Pk
V	9920.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
V	12400.00	54.31	31.02	8.99	25.57	57.85	74.00	-16.15	Pk
V	12400.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV
H	4960.00	54.55	30.55	5.77	24.66	54.43	74.00	-19.57	Pk
H	4960.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
H	7440.00	51.66	30.33	6.32	24.55	52.20	74.00	-21.80	Pk
H	7440.00	43.22	30.33	6.32	24.55	43.76	54.00	-10.24	AV
H	9920.00	54.66	30.85	7.45	24.69	55.95	74.00	-18.05	Pk
H	9920.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
H	12400.00	51.04	31.02	8.99	25.57	54.58	74.00	-19.42	Pk
H	12400.00	43.63	31.02	8.99	25.57	47.17	54.00	-6.83	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8-DPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	53.06	30.55	5.77	24.66	52.94	74.00	-21.06	Pk
V	4804.00	43.20	30.55	5.77	24.66	43.08	54.00	-10.92	AV
V	7206.00	53.70	30.33	6.32	24.55	54.24	74.00	-19.76	Pk
V	7206.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
V	9608.00	54.91	30.85	7.45	24.69	56.20	74.00	-17.80	Pk
V	9608.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
V	12010.00	51.60	31.02	8.99	25.57	55.14	74.00	-18.86	Pk
V	12010.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	4804.00	51.73	30.55	5.77	24.66	51.61	74.00	-22.39	Pk
H	4804.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
H	7206.00	53.36	30.33	6.32	24.55	53.90	74.00	-20.10	Pk
H	7206.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
H	9608.00	52.97	30.85	7.45	24.69	54.26	74.00	-19.74	Pk
H	9608.00	43.94	30.85	7.45	24.69	45.23	54.00	-8.77	AV
H	12010.00	53.10	31.02	8.99	25.57	56.64	74.00	-17.36	Pk
H	12010.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	50.67	30.55	5.77	24.66	50.55	74.00	-23.45	Pk
V	4882.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7323.00	50.22	30.33	6.32	24.55	50.76	74.00	-23.24	Pk
V	7323.00	43.44	30.33	6.32	24.55	43.98	54.00	-10.02	AV
V	9764.00	51.22	30.85	7.45	24.69	52.51	74.00	-21.49	Pk
V	9764.00	43.64	30.85	7.45	24.69	44.93	54.00	-9.07	AV
V	12205.00	52.64	31.02	8.99	25.57	56.18	74.00	-17.82	Pk
V	12205.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV
H	4882.00	53.48	30.55	5.77	24.66	53.36	74.00	-20.64	Pk
H	4882.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
H	7323.00	50.96	30.33	6.32	24.55	51.50	74.00	-22.50	Pk
H	7323.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
H	9764.00	52.26	30.85	7.45	24.69	53.55	74.00	-20.45	Pk
H	9764.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
H	12205.00	52.62	31.02	8.99	25.57	56.16	74.00	-17.84	Pk
H	12205.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	51.01	30.55	5.77	24.66	50.89	74.00	-23.11	Pk
V	4960.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
V	7440.00	53.53	30.33	6.32	24.55	54.07	74.00	-19.93	Pk
V	7440.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
V	9920.00	50.25	30.85	7.45	24.69	51.54	74.00	-22.46	Pk
V	9920.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
V	12400.00	50.38	31.02	8.99	25.57	53.92	74.00	-20.08	Pk
V	12400.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV
H	4960.00	52.12	30.55	5.77	24.66	52.00	74.00	-22.00	Pk
H	4960.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
H	7440.00	51.63	30.33	6.32	24.55	52.17	74.00	-21.83	Pk
H	7440.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
H	9920.00	52.74	30.85	7.45	24.69	54.03	74.00	-19.97	Pk
H	9920.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
H	12400.00	51.89	31.02	8.99	25.57	55.43	74.00	-18.57	Pk
H	12400.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10:2020
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

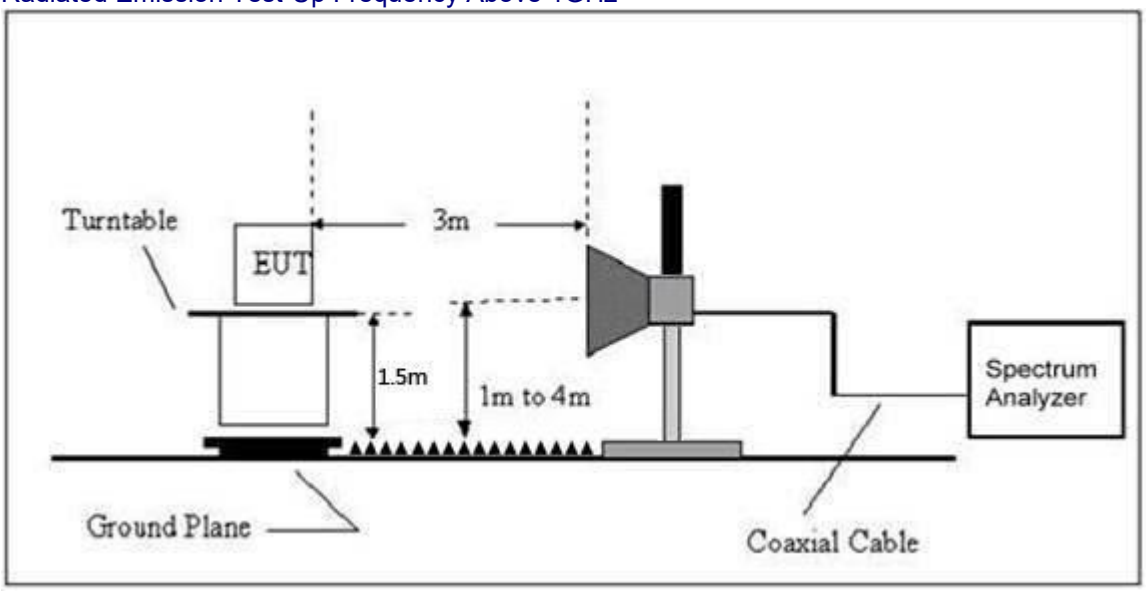

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	53.93	30.22	4.85	23.98	52.54	74.00	PK	PASS
	H	2310.00	44.24	30.22	4.85	23.98	42.85	54.00	AV	PASS
	H	2390.00	53.29	30.22	4.85	23.98	51.90	74.00	PK	PASS
	H	2390.00	44.08	30.22	4.85	23.98	42.69	54.00	AV	PASS
	V	2310.00	53.38	30.22	4.85	23.98	51.99	74.00	PK	PASS
	V	2310.00	44.26	30.22	4.85	23.98	42.87	54.00	AV	PASS
	V	2390.00	54.32	30.22	4.85	23.98	52.93	74.00	PK	PASS
	V	2390.00	44.23	30.22	4.85	23.98	42.84	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.80	30.22	4.85	23.98	52.41	74.00	PK	PASS
	H	2483.50	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
	H	2500.00	54.17	30.22	4.85	23.98	52.78	74.00	PK	PASS
	H	2500.00	44.37	30.22	4.85	23.98	42.98	54.00	AV	PASS
	V	2483.50	54.03	30.22	4.85	23.98	52.64	74.00	PK	PASS
	V	2483.50	44.47	30.22	4.85	23.98	43.08	54.00	AV	PASS
	V	2500.00	53.70	30.22	4.85	23.98	52.31	74.00	PK	PASS
	V	2500.00	44.49	30.22	4.85	23.98	43.10	54.00	AV	PASS
π/4-DQPSK	Low Channel: 2402MHz									
	H	2310.00	54.95	30.22	4.85	23.98	53.56	74.00	PK	PASS
	H	2310.00	44.87	30.22	4.85	23.98	43.48	54.00	AV	PASS
	H	2390.00	53.17	30.22	4.85	23.98	51.78	74.00	PK	PASS
	H	2390.00	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	V	2310.00	54.02	30.22	4.85	23.98	52.63	74.00	PK	PASS
	V	2310.00	44.40	30.22	4.85	23.98	43.01	54.00	AV	PASS
	V	2390.00	54.80	30.22	4.85	23.98	53.41	74.00	PK	PASS
	V	2390.00	44.24	30.22	4.85	23.98	42.85	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.47	30.22	4.85	23.98	52.08	74.00	PK	PASS
	H	2483.50	44.84	30.22	4.85	23.98	43.45	54.00	AV	PASS
	H	2500.00	54.63	30.22	4.85	23.98	53.24	74.00	PK	PASS
	H	2500.00	44.43	30.22	4.85	23.98	43.04	54.00	AV	PASS
	V	2483.50	53.80	30.22	4.85	23.98	52.41	74.00	PK	PASS
	V	2483.50	44.82	30.22	4.85	23.98	43.43	54.00	AV	PASS
	V	2500.00	53.56	30.22	4.85	23.98	52.17	74.00	PK	PASS
	V	2500.00	44.68	30.22	4.85	23.98	43.29	54.00	AV	PASS
8-DPSK	Low Channel: 2402MHz									
	H	2310.00	53.82	30.22	4.85	23.98	52.43	74.00	PK	PASS
	H	2310.00	44.24	30.22	4.85	23.98	42.85	54.00	AV	PASS
	H	2390.00	54.46	30.22	4.85	23.98	53.07	74.00	PK	PASS
	H	2390.00	44.18	30.22	4.85	23.98	42.79	54.00	AV	PASS
	V	2310.00	54.55	30.22	4.85	23.98	53.16	74.00	PK	PASS
	V	2310.00	44.02	30.22	4.85	23.98	42.63	54.00	AV	PASS
	V	2390.00	53.85	30.22	4.85	23.98	52.46	74.00	PK	PASS
	V	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.47	30.22	4.85	23.98	53.08	74.00	PK	PASS
	H	2483.50	44.57	30.22	4.85	23.98	43.18	54.00	AV	PASS

	H	2500.00	54.85	30.22	4.85	23.98	53.46	74.00	PK	PASS
	H	2500.00	44.87	30.22	4.85	23.98	43.48	54.00	AV	PASS
	V	2483.50	54.83	30.22	4.85	23.98	53.44	74.00	PK	PASS
	V	2483.50	44.45	30.22	4.85	23.98	43.06	54.00	AV	PASS
	V	2500.00	54.95	30.22	4.85	23.98	53.56	74.00	PK	PASS
	V	2500.00	44.28	30.22	4.85	23.98	42.89	54.00	AV	PASS

Remark:
Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

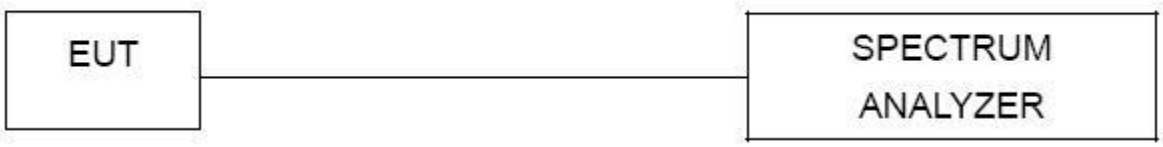

6.3 Test procedure

Using the following spectrum analyzer setting:
A) Set the RBW = 100KHz.
B) Set the VBW = 300KHz.
C) Sweep time = auto couple.
D) Detector function = peak.
E) Trace mode = max hold.
F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD

No deviation.

6.5 Test Result

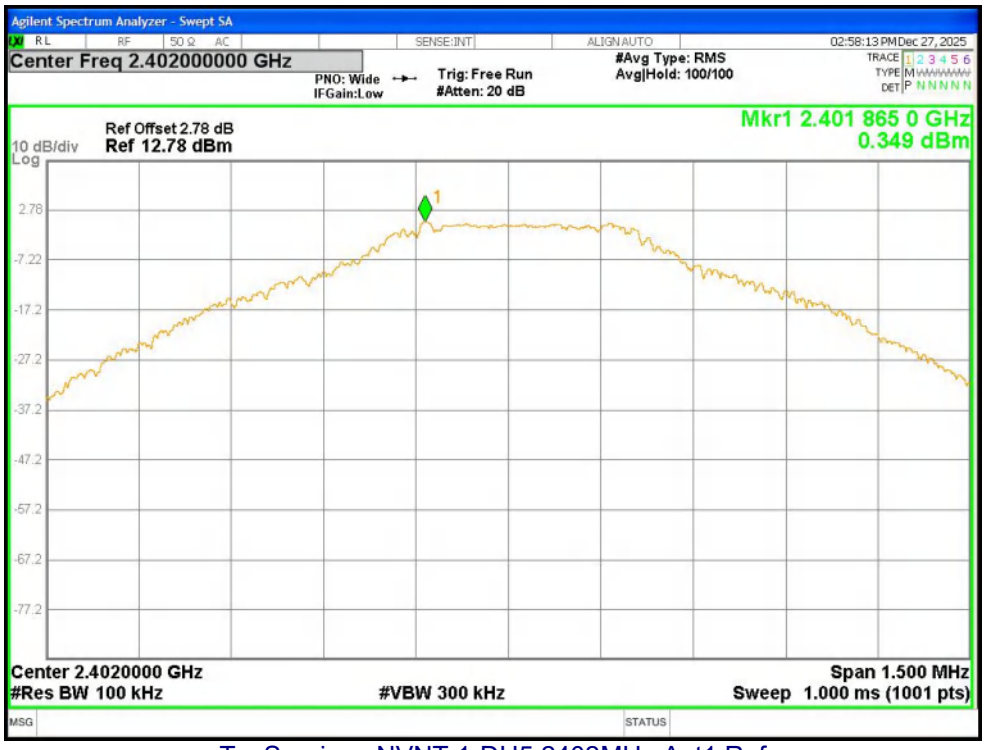

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

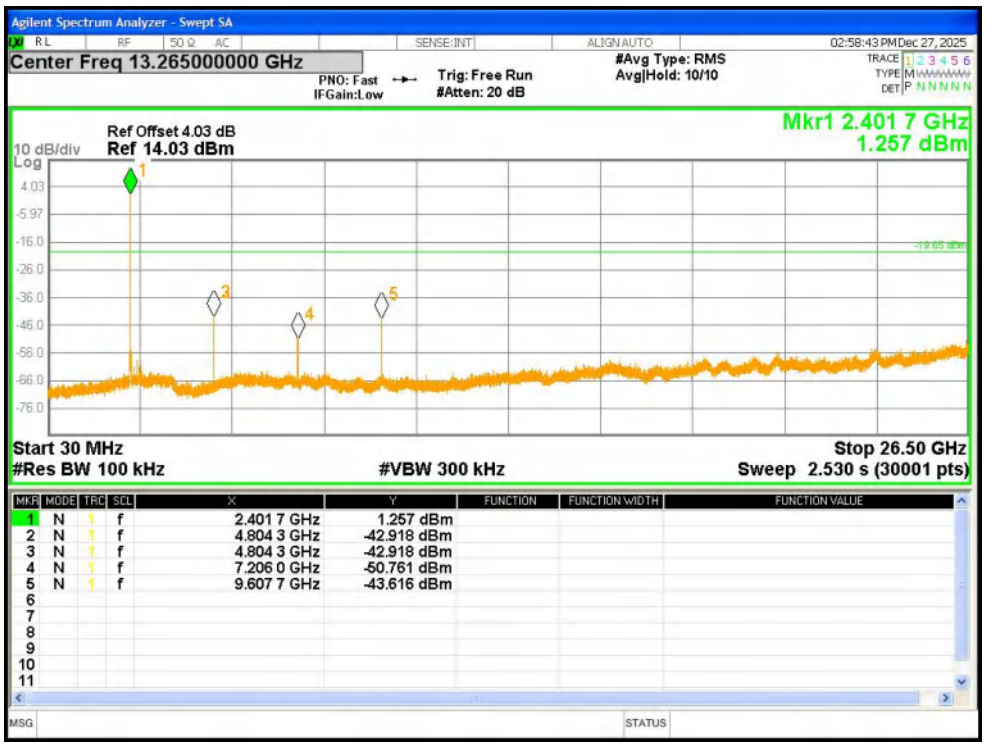

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

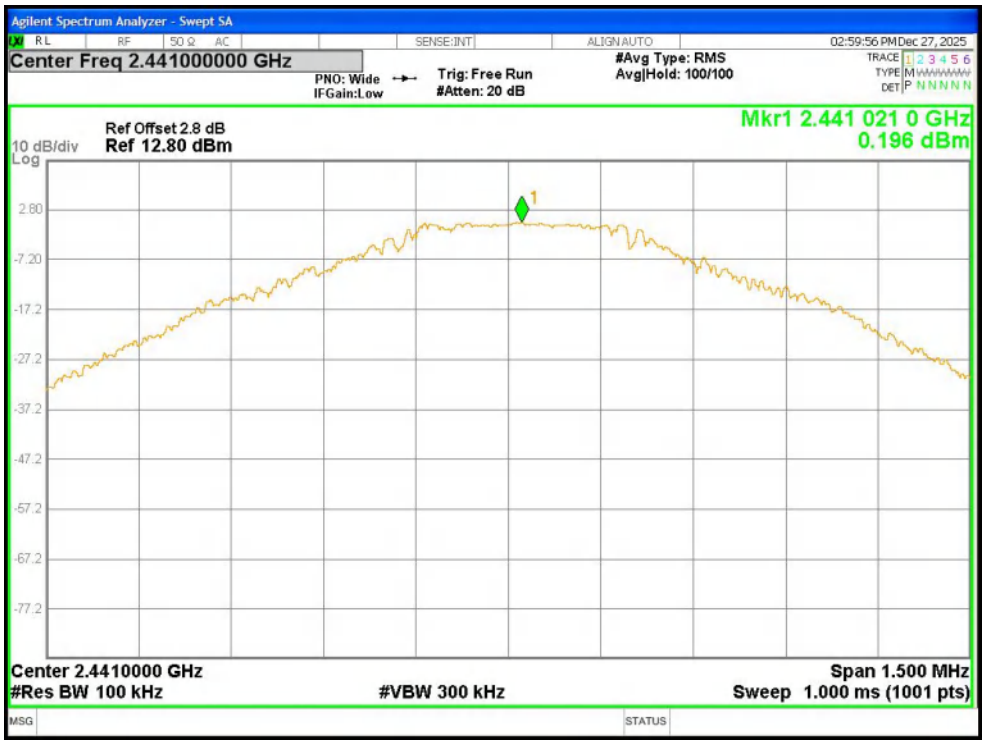

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

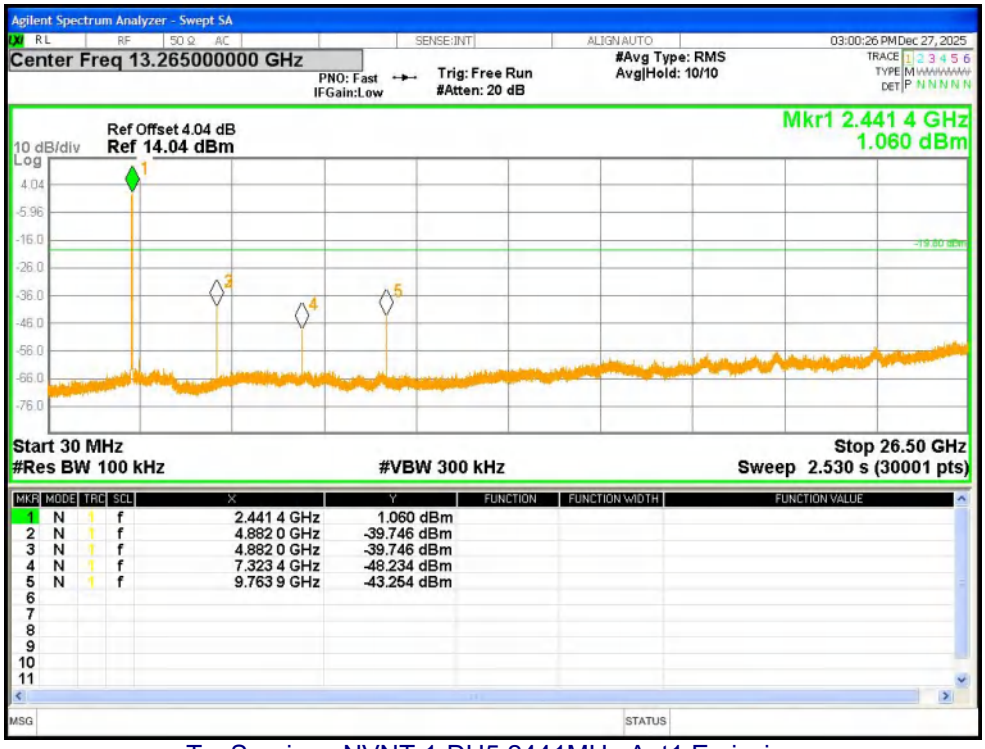

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

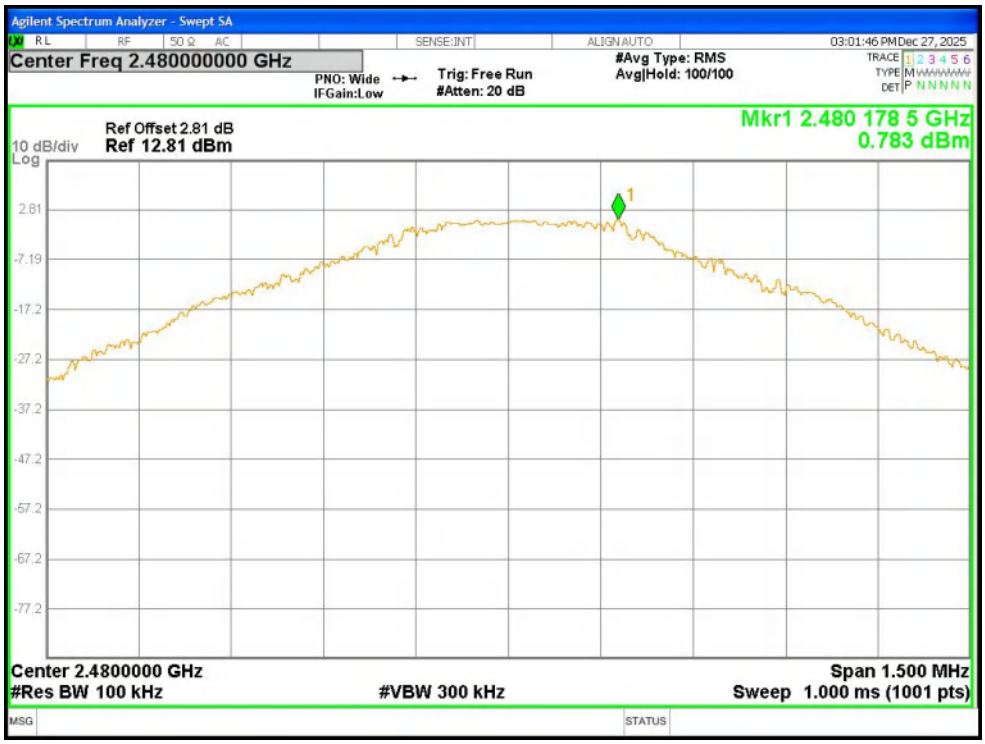

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

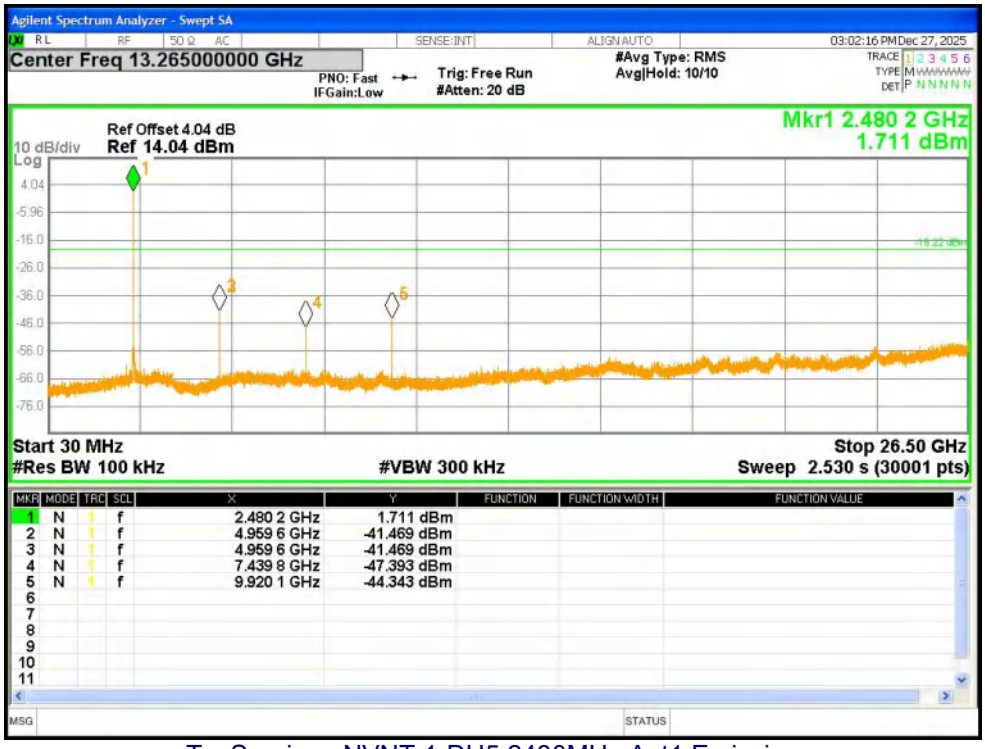

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

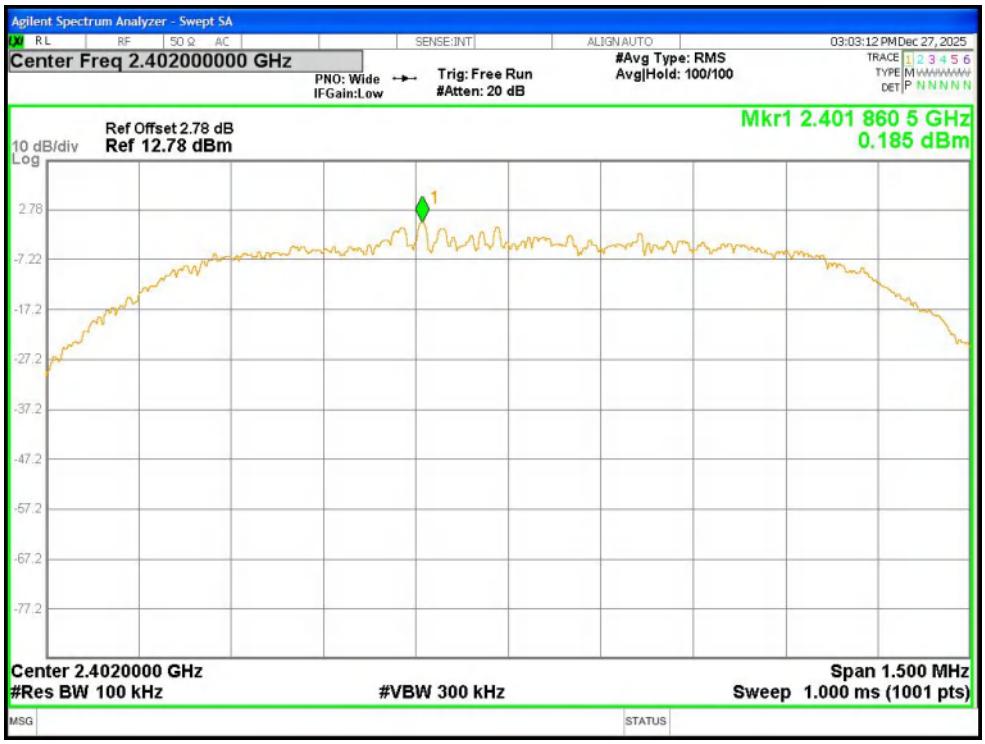

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

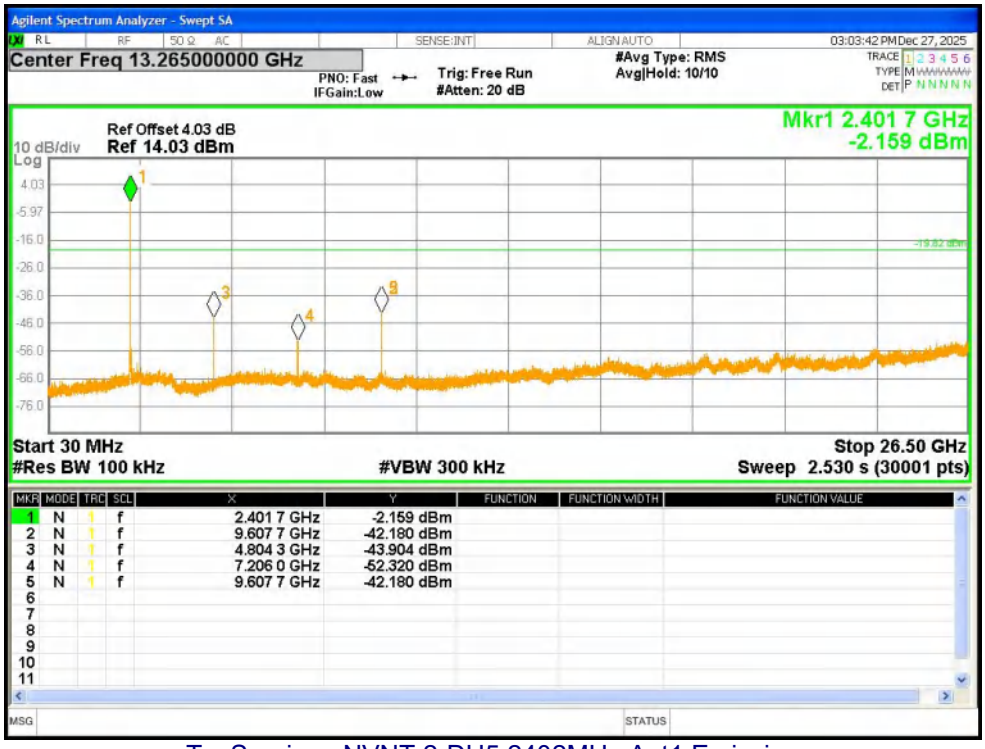

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

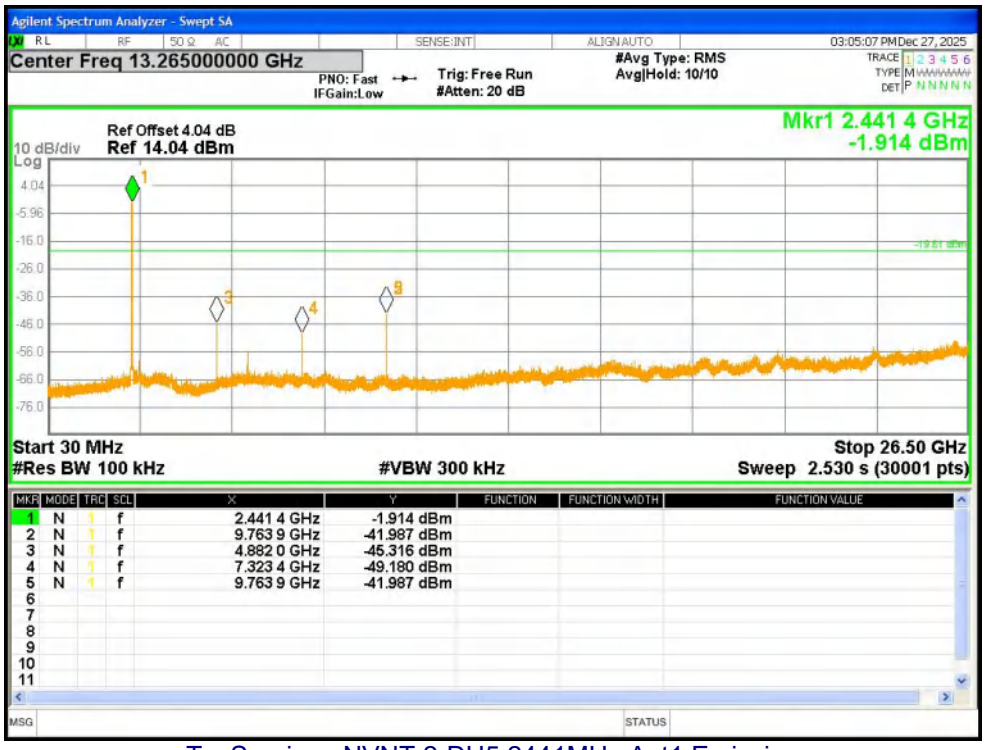

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

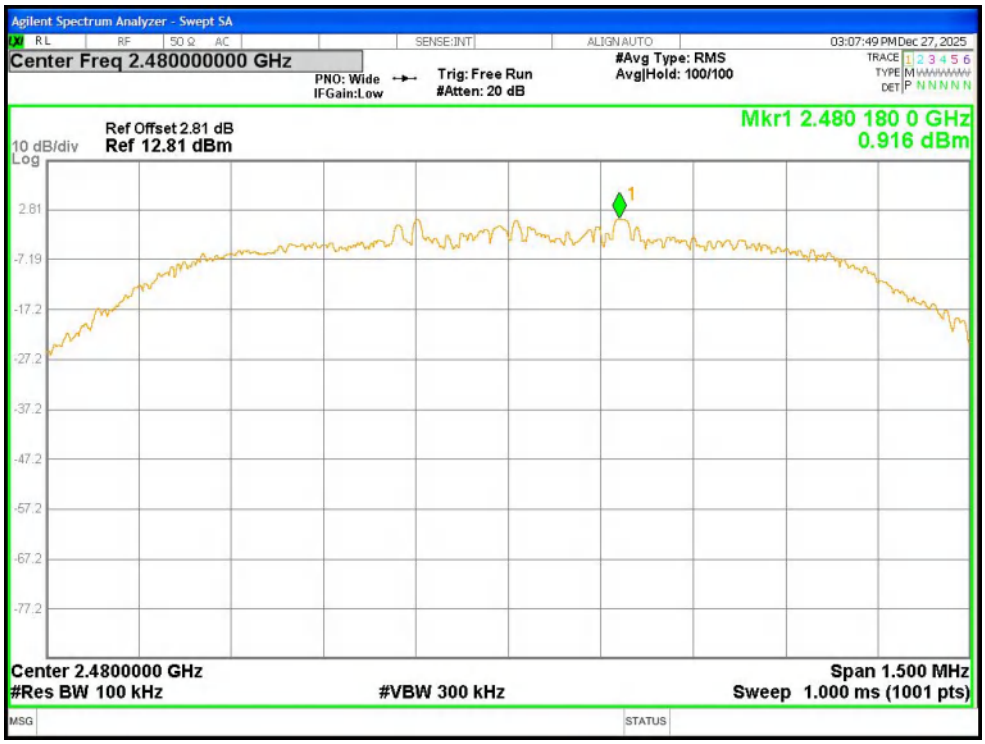

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

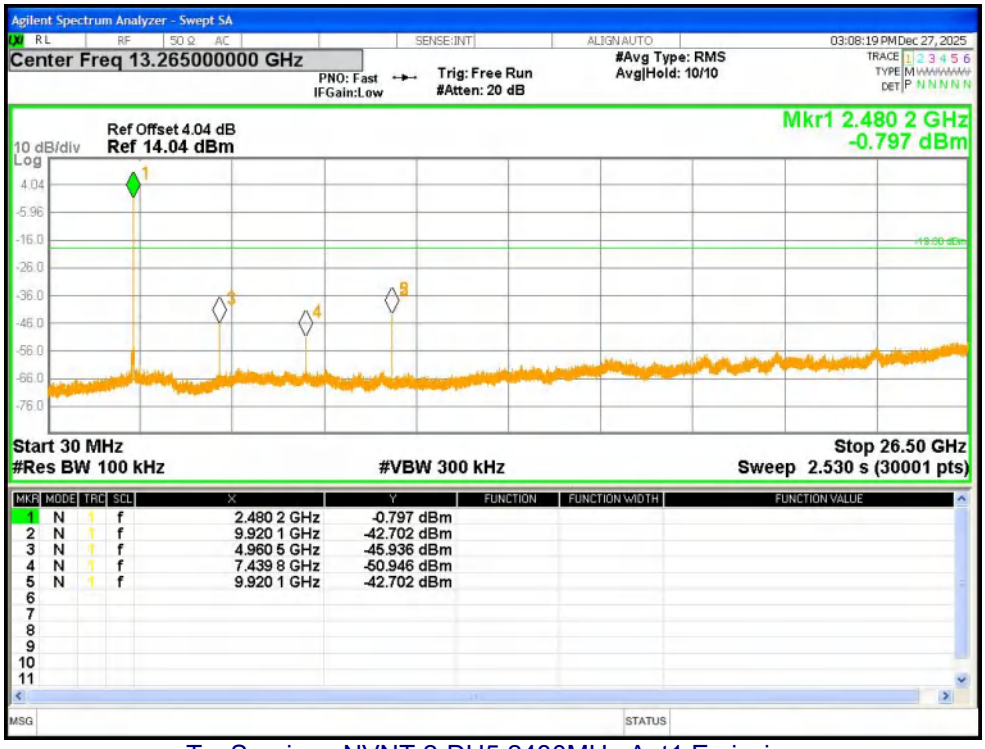

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

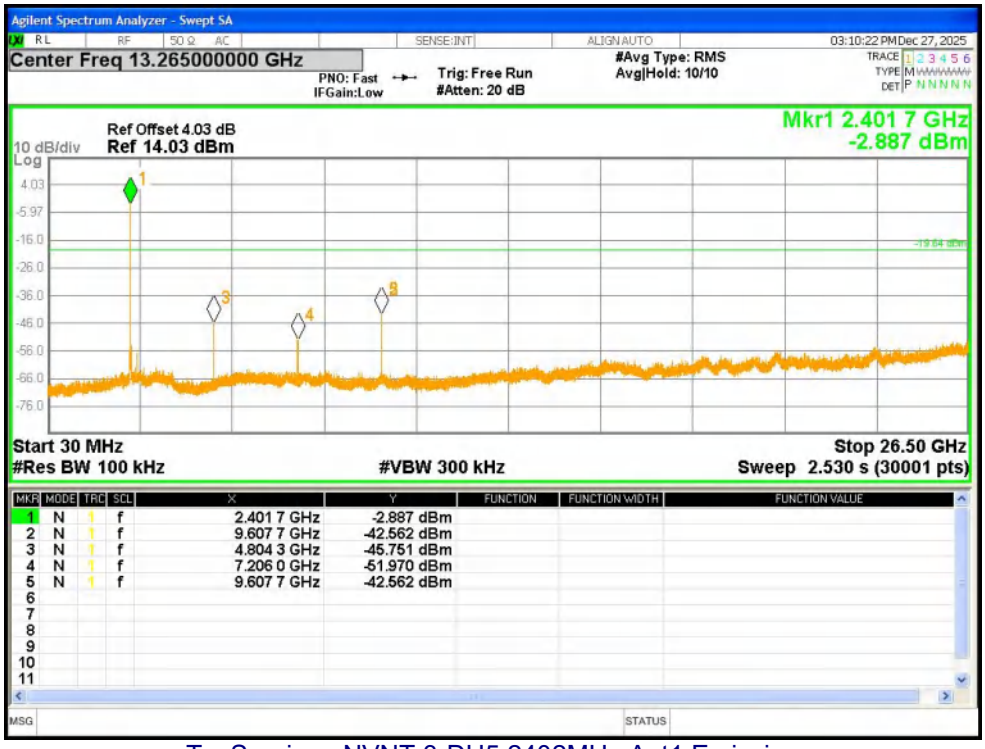

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

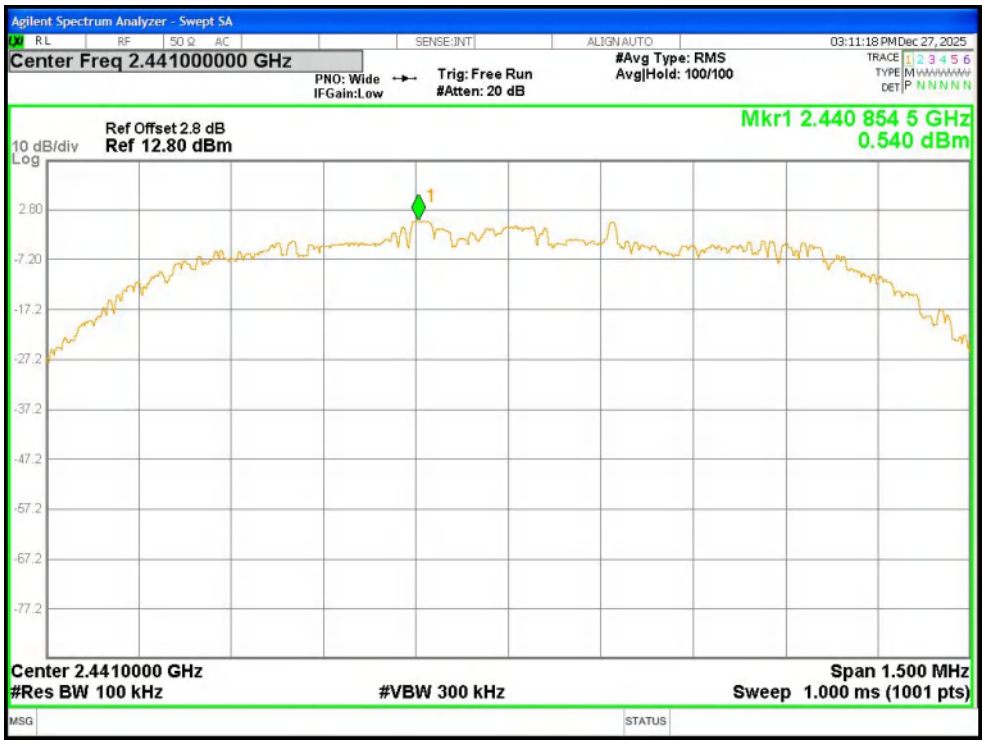

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

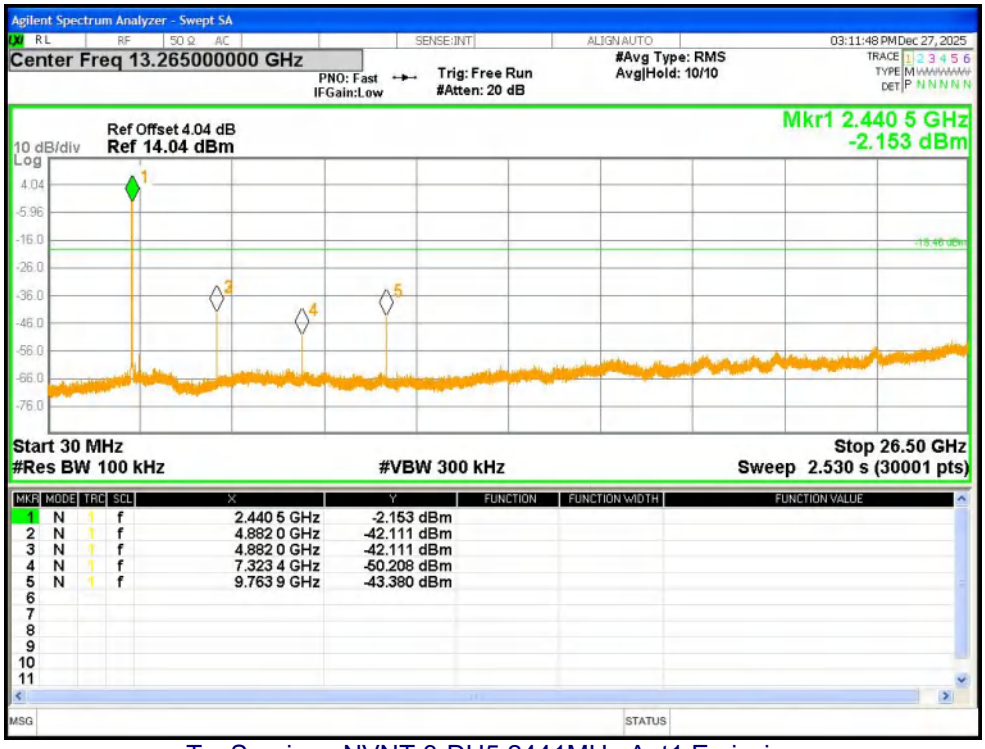

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

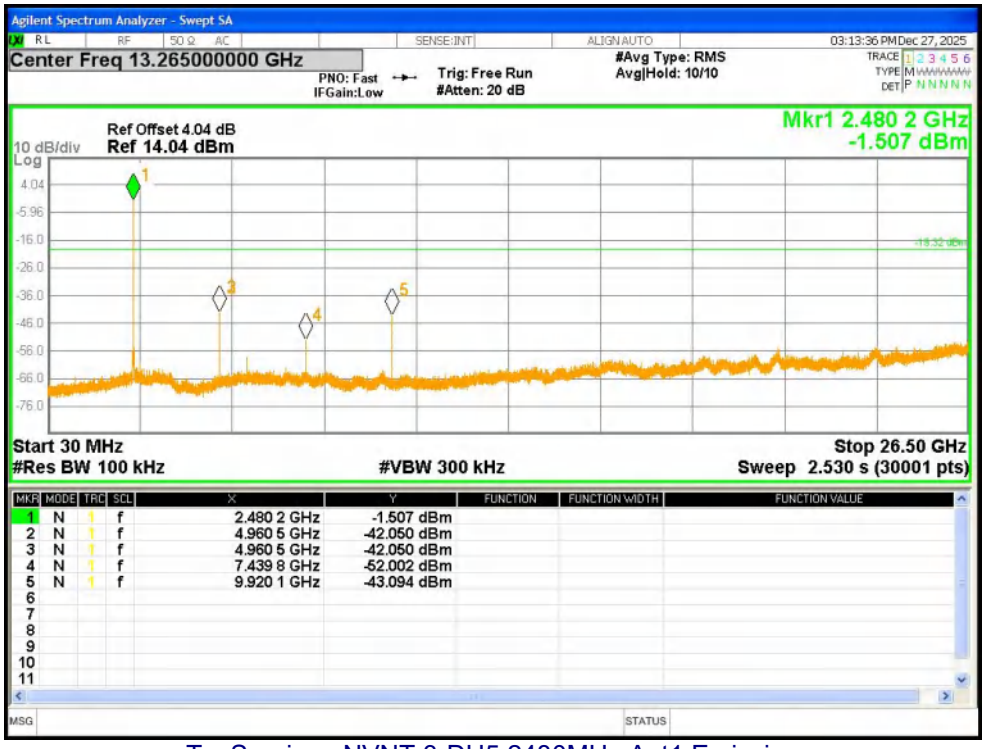

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

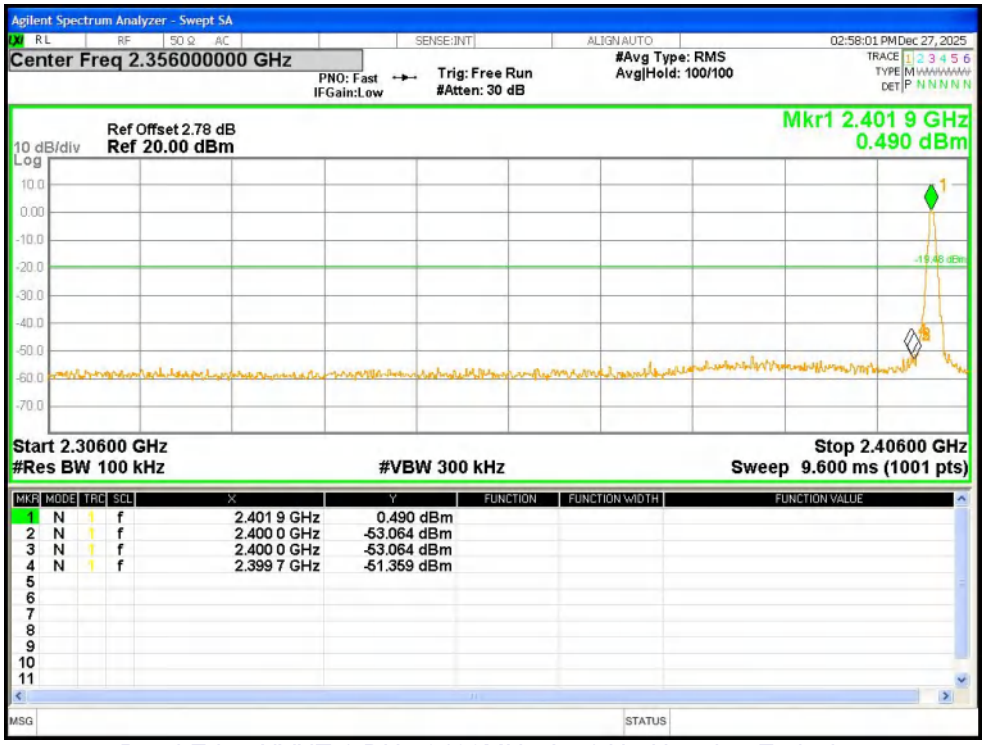

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

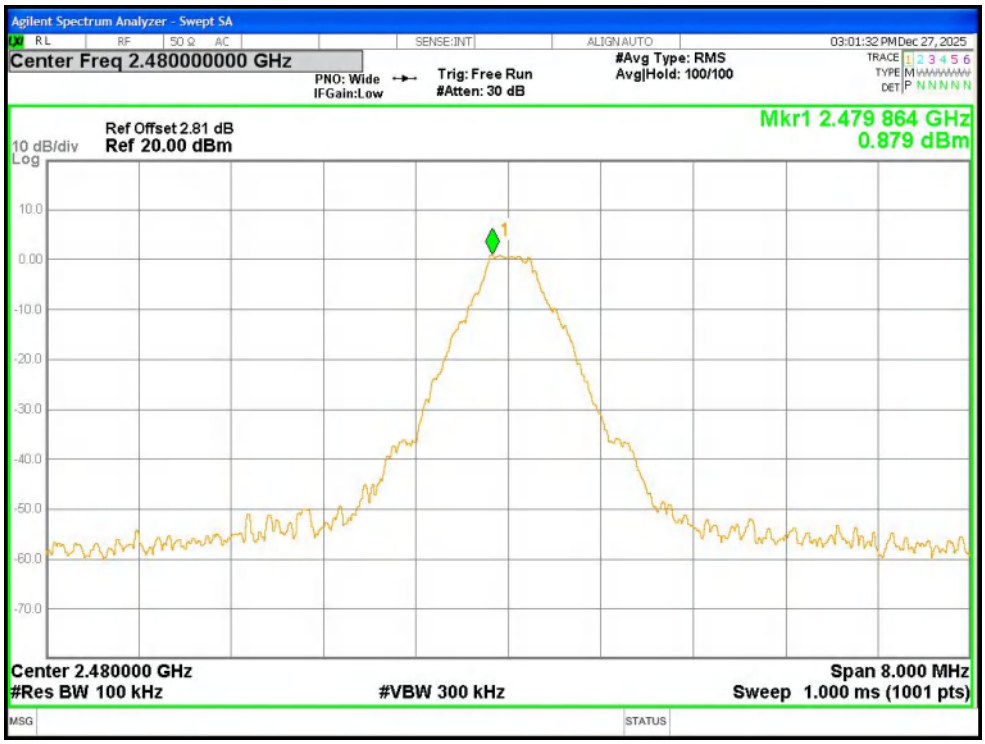

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

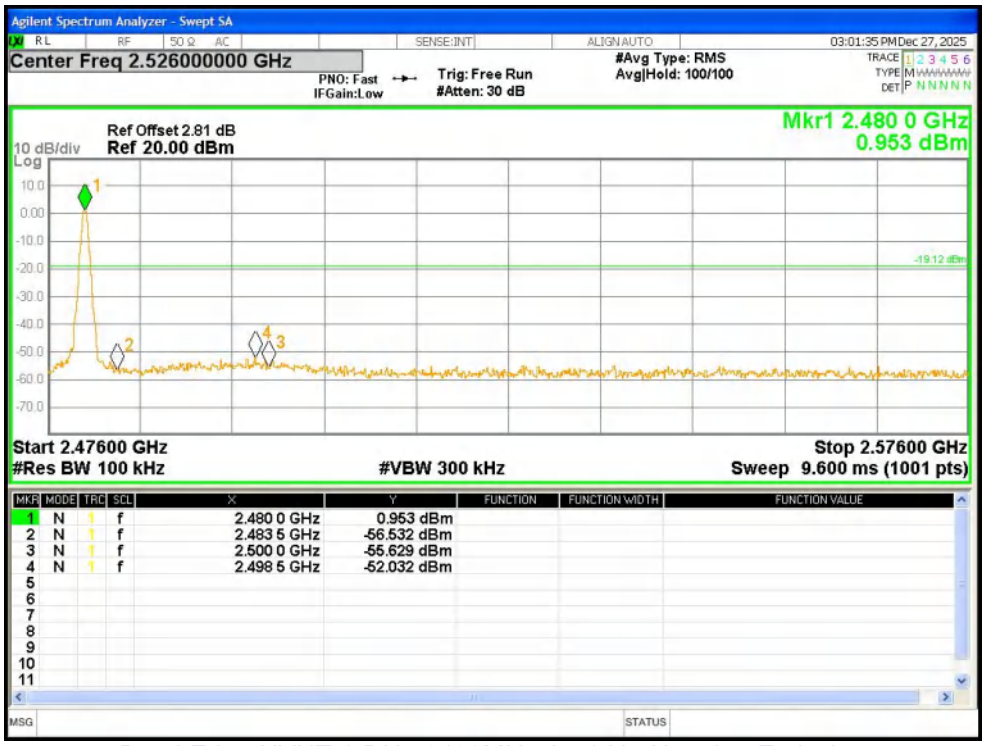

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

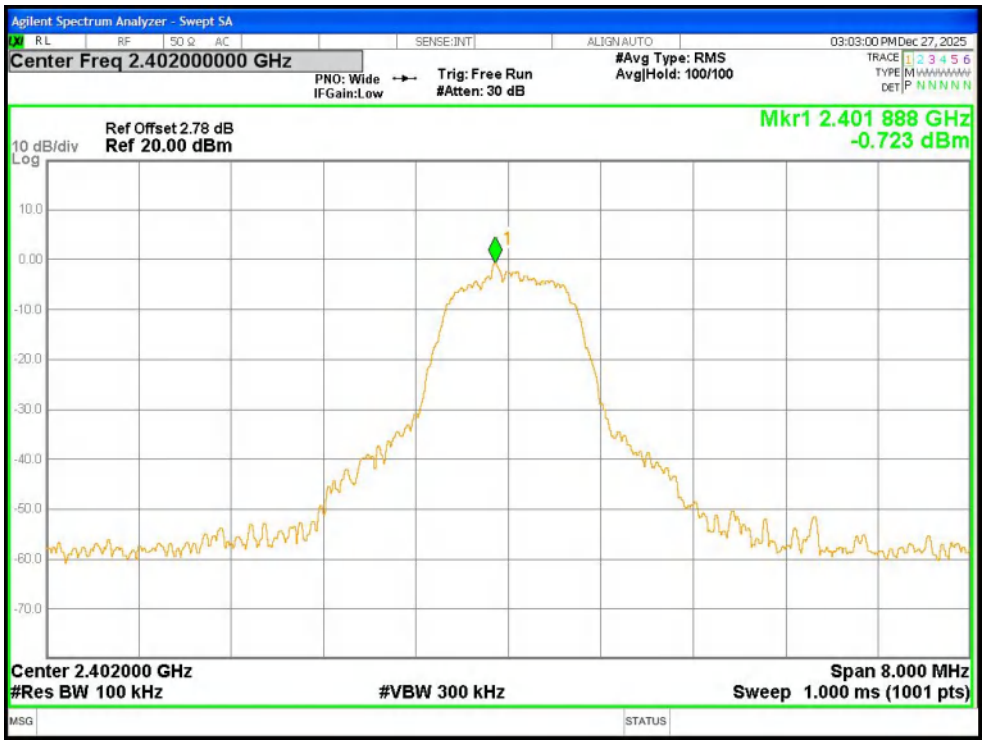

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

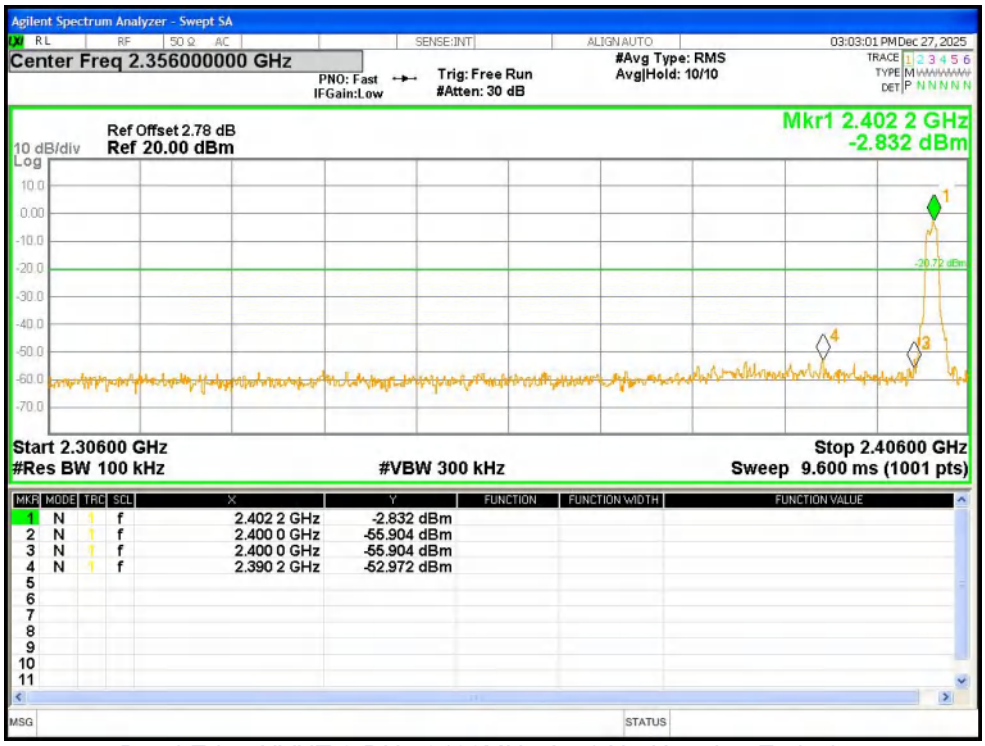

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

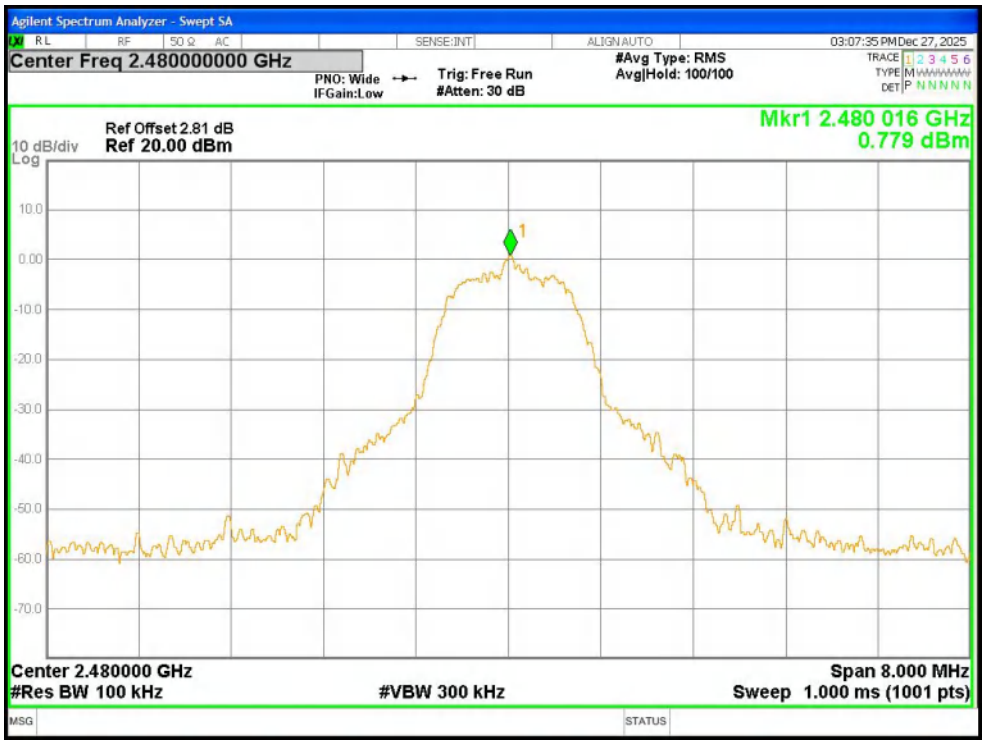

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

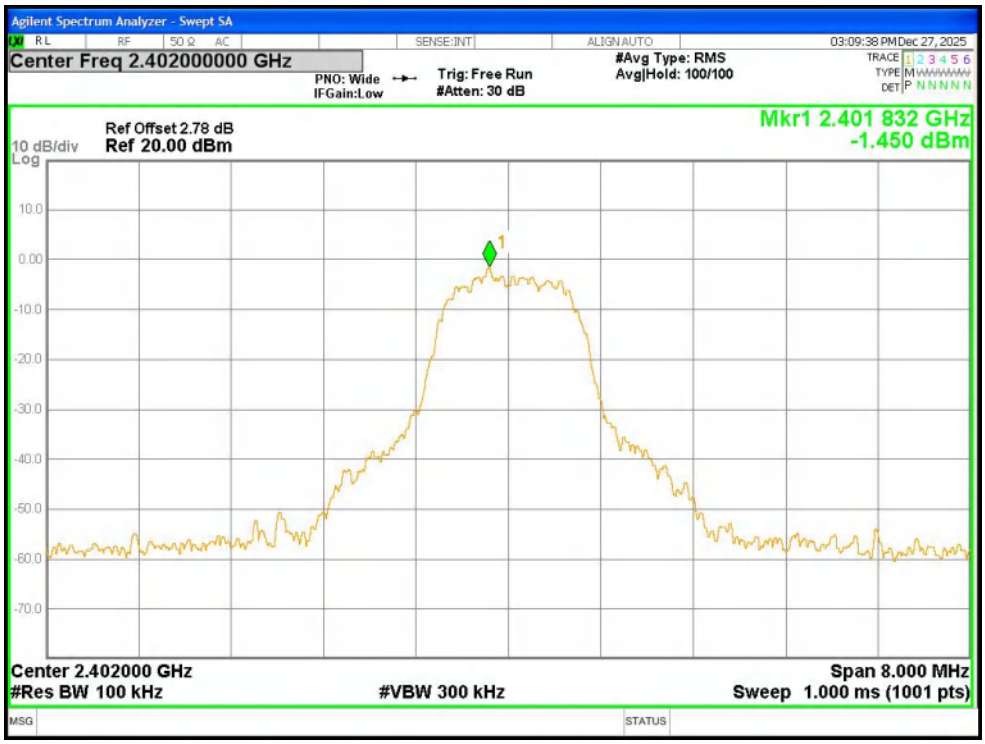

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

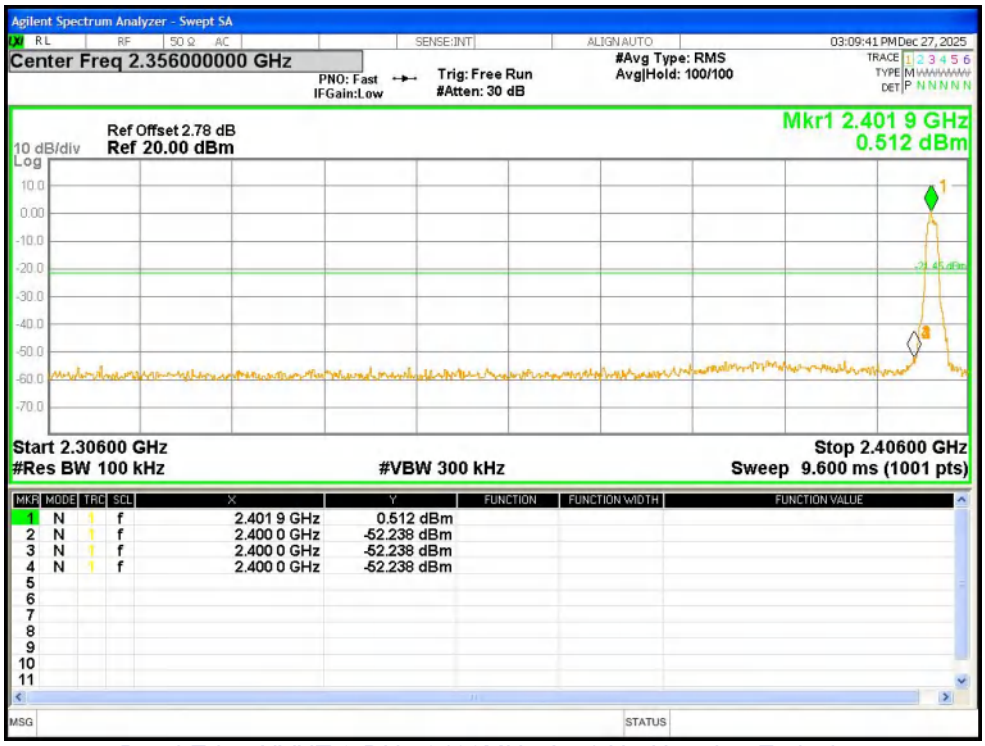

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

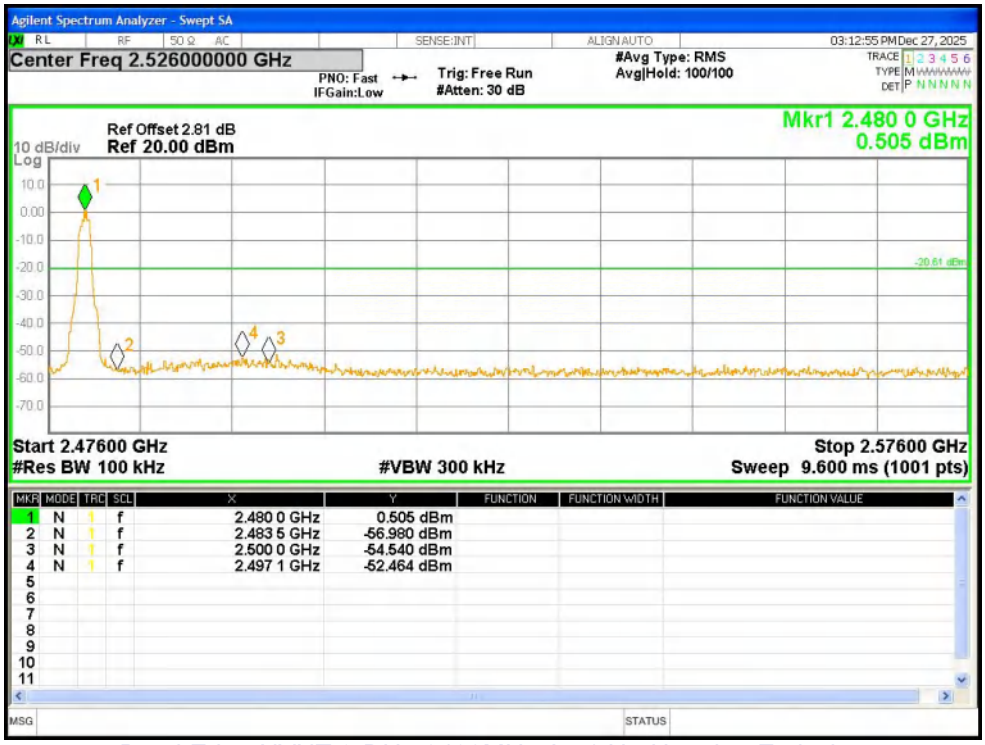

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

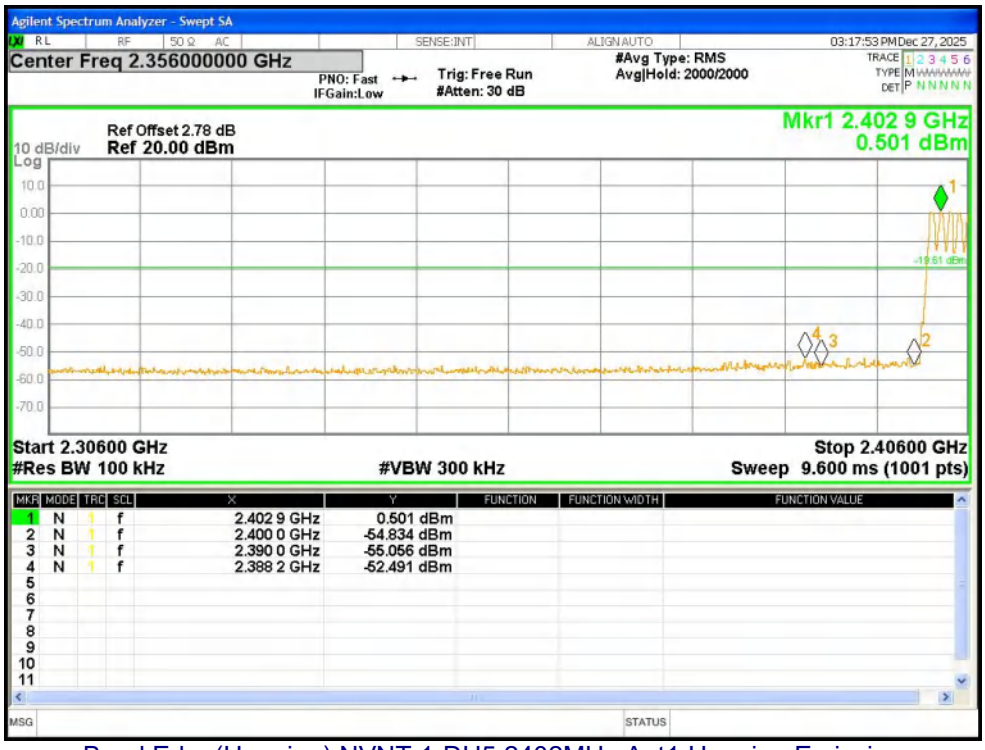

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

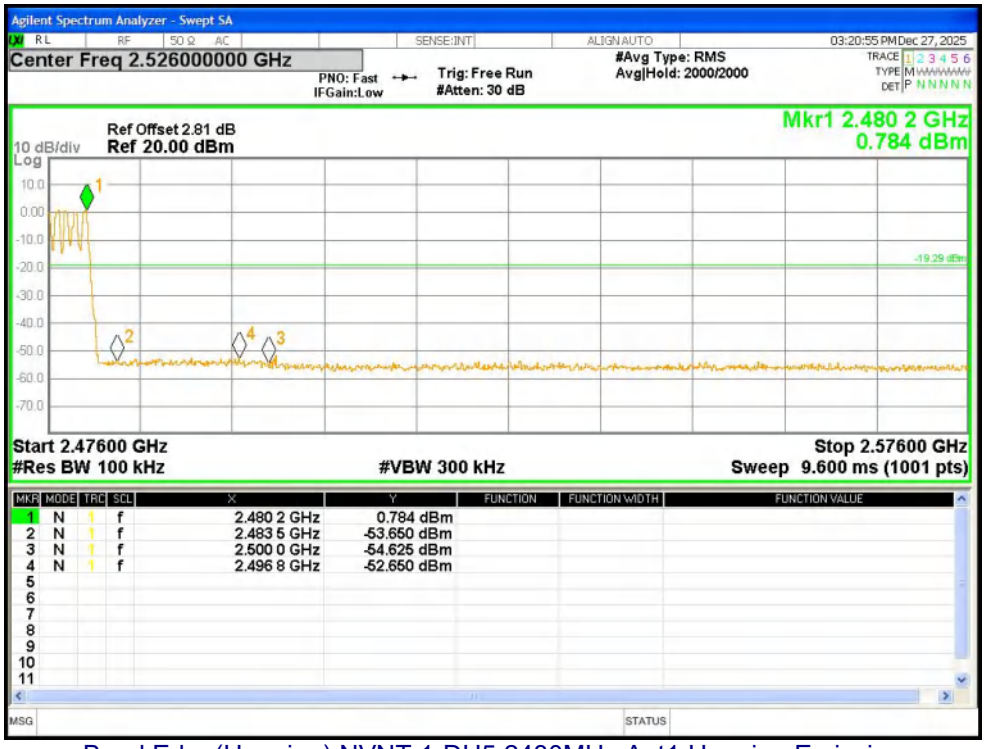

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

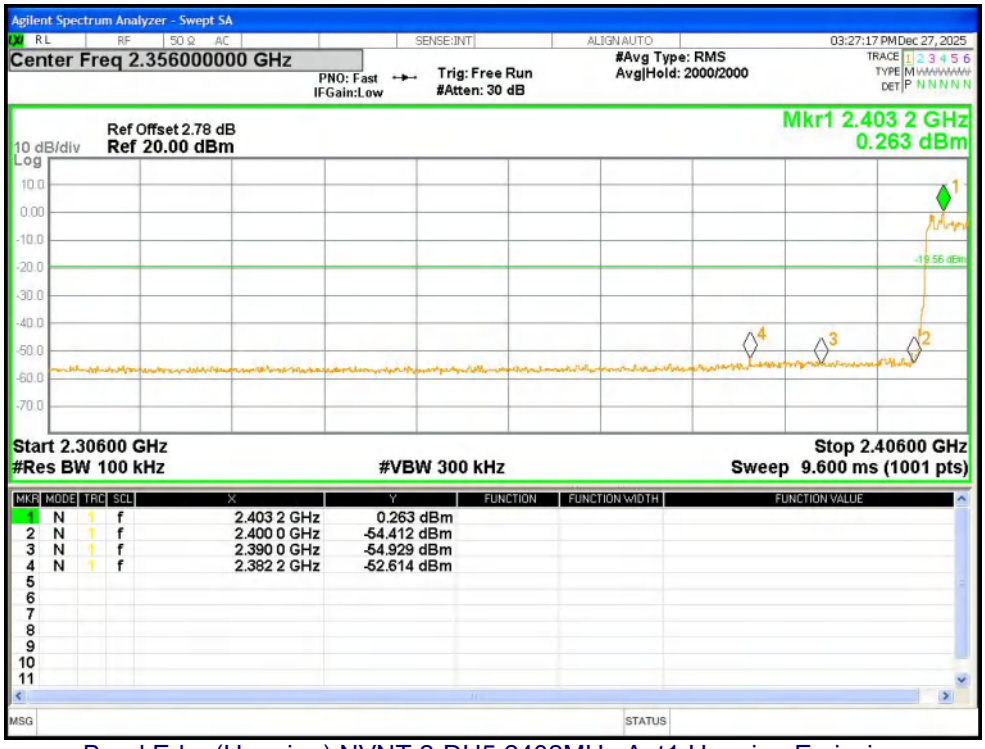

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

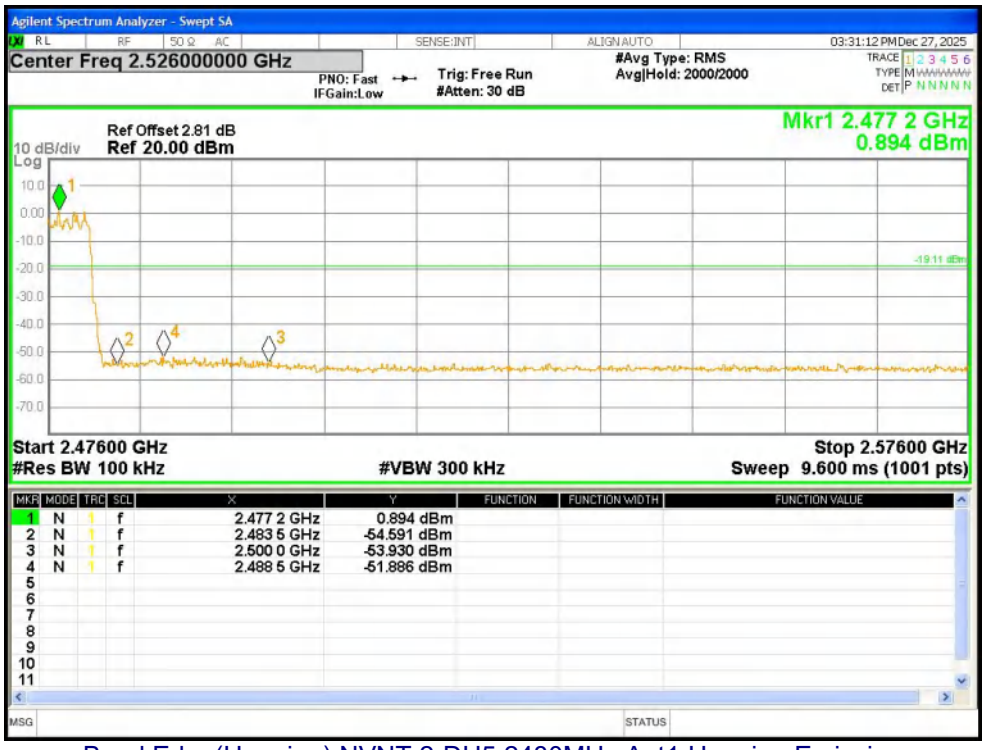

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

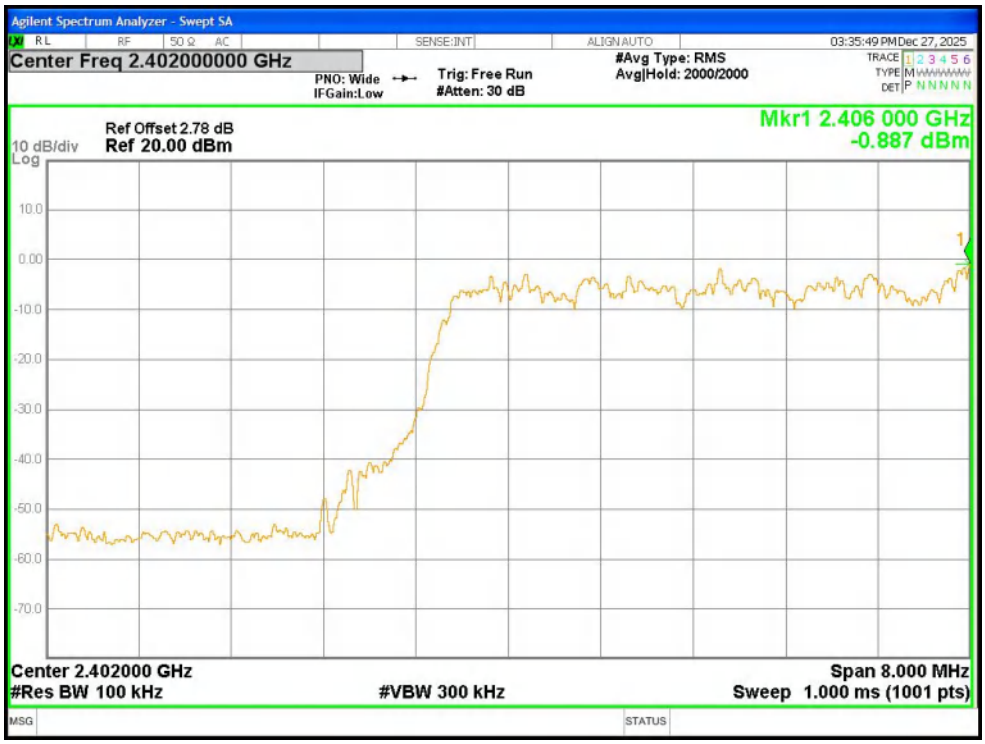

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

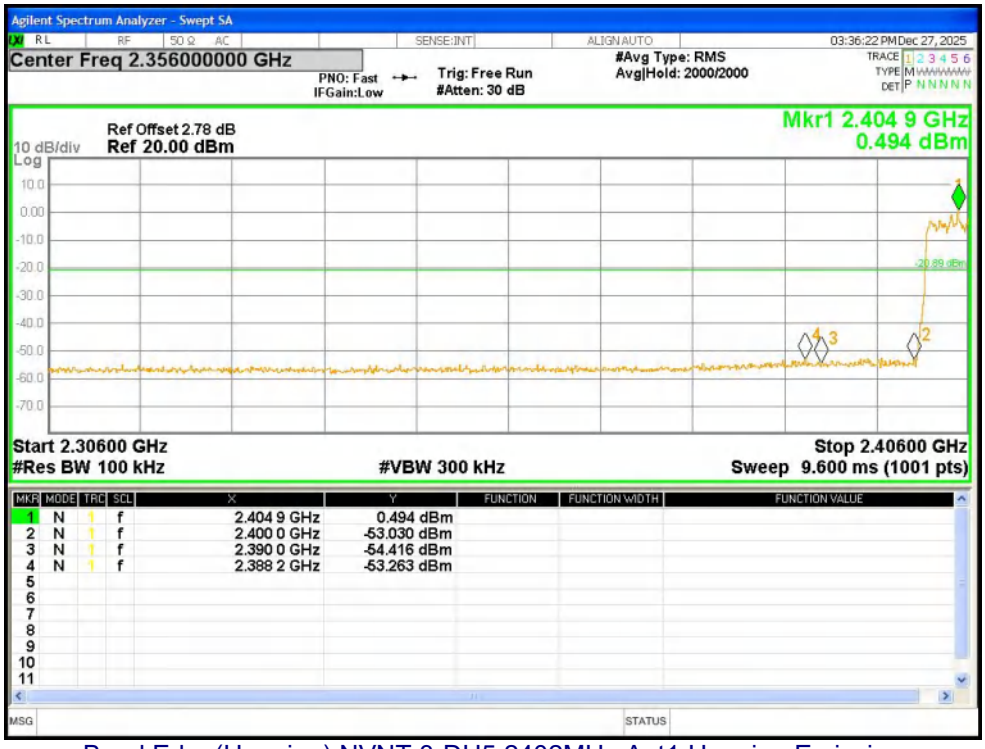

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

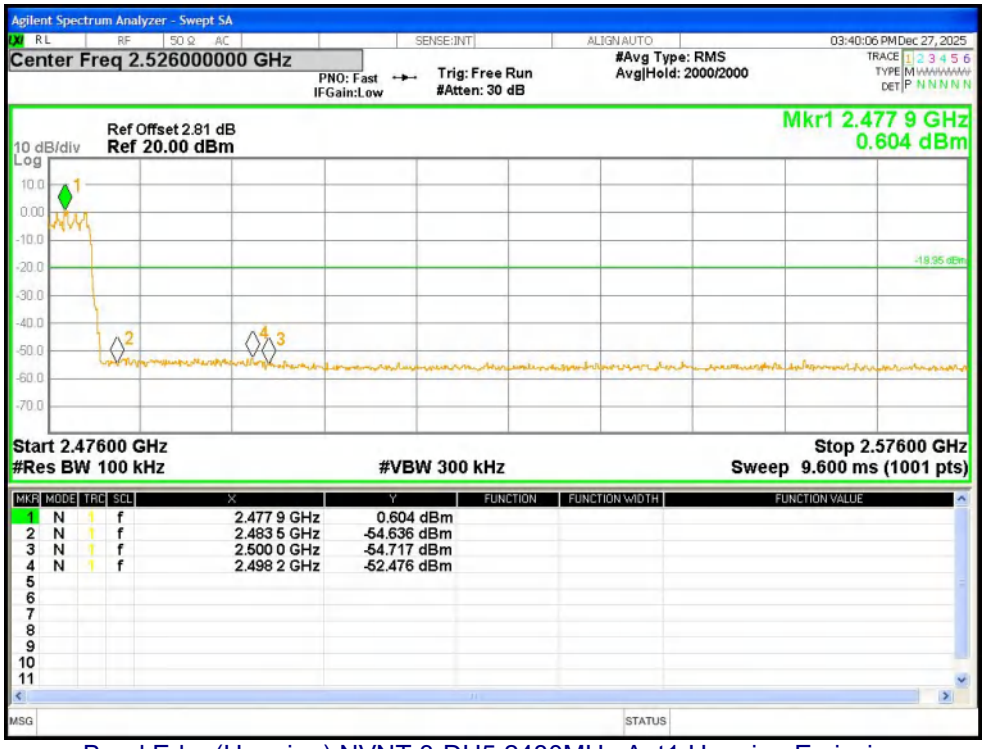

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020

7.1 Test Setup

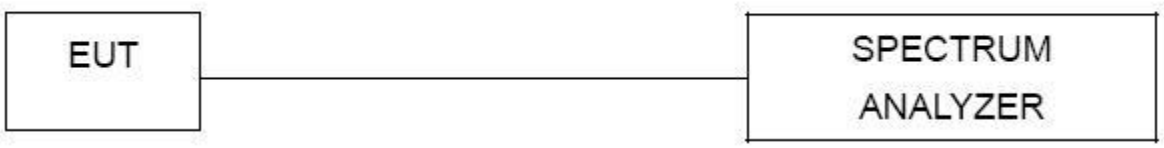

7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	1.04	0.924	Pass
	Middle	1.031	0.941	
	Highest	1.039	0.954	
π/4-DQPSK	Lowest	1.292	1.204	Pass
	Middle	1.303	1.204	
	Highest	1.314	1.226	
8-DPSK	Lowest	1.296	1.205	Pass
	Middle	1.353	1.223	
	Highest	1.303	1.221	

Test plots

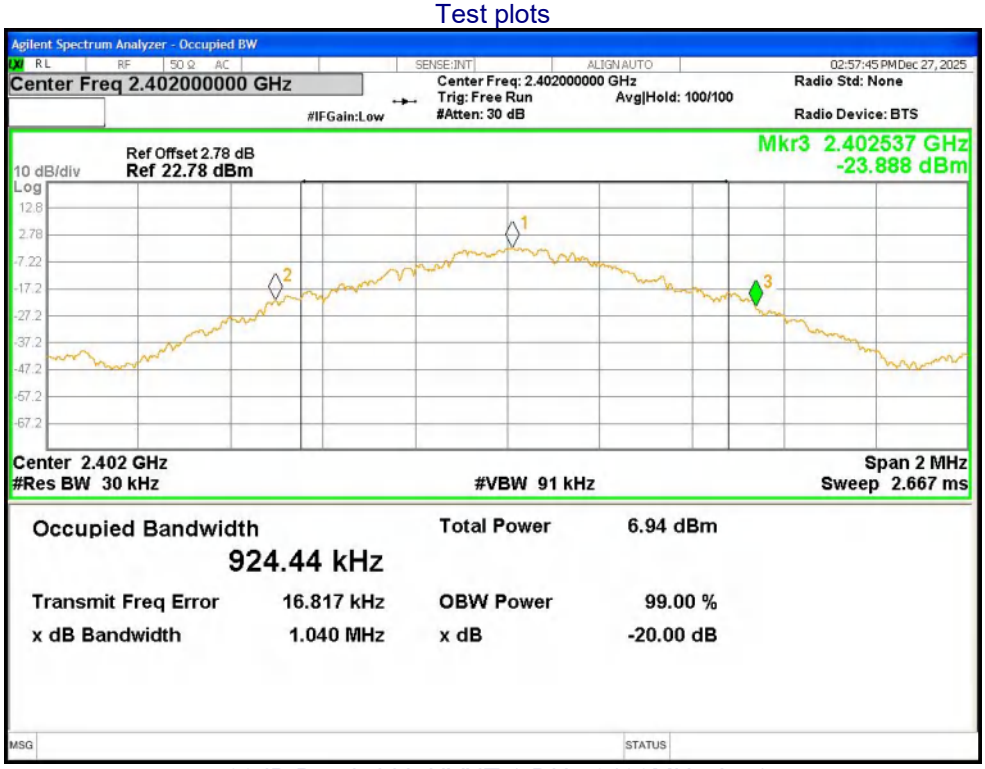

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

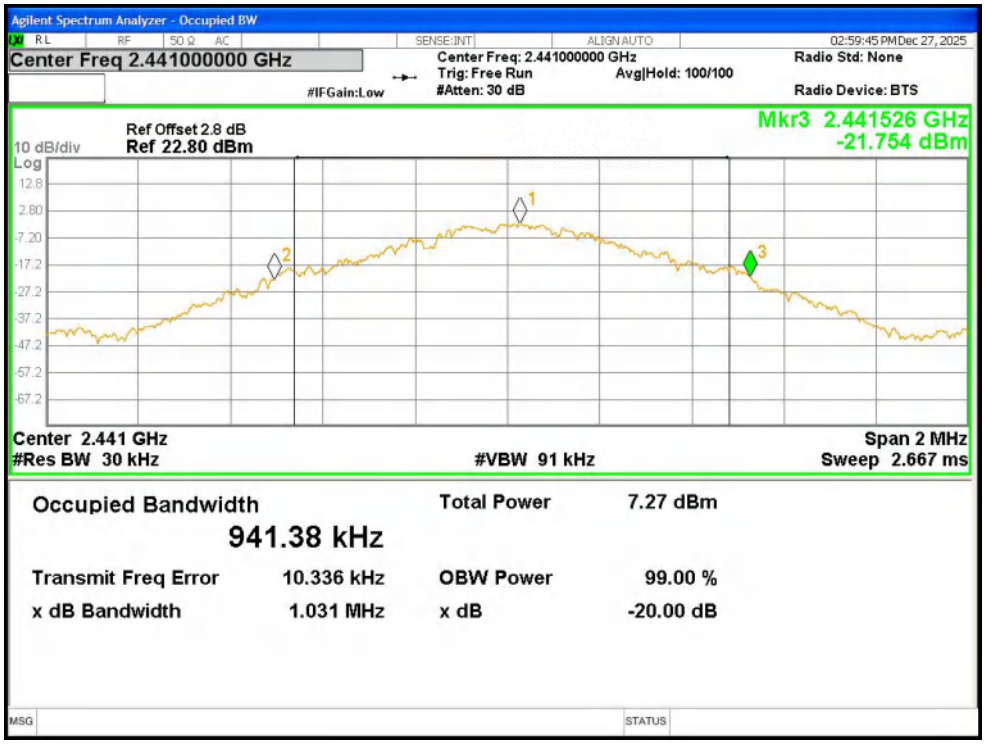

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

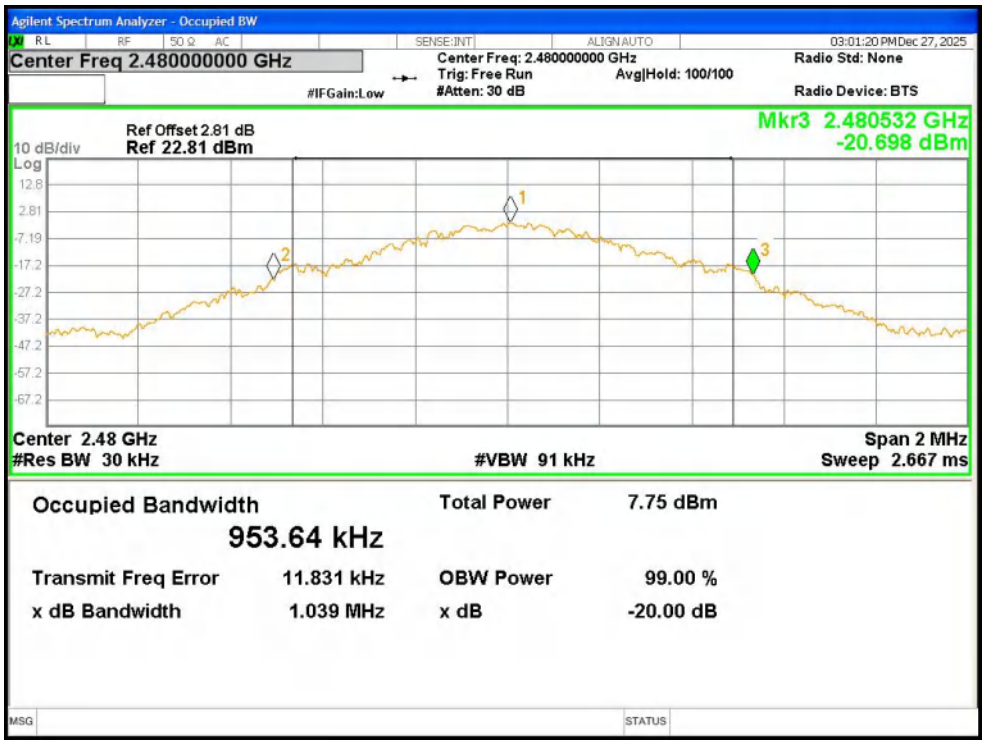

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

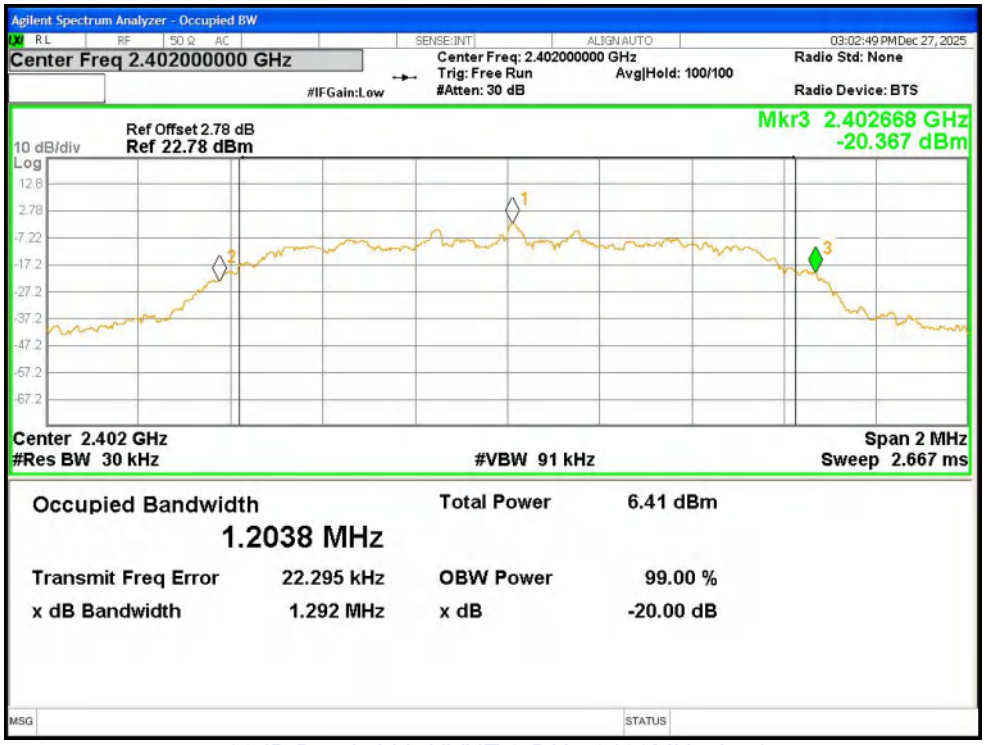

-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

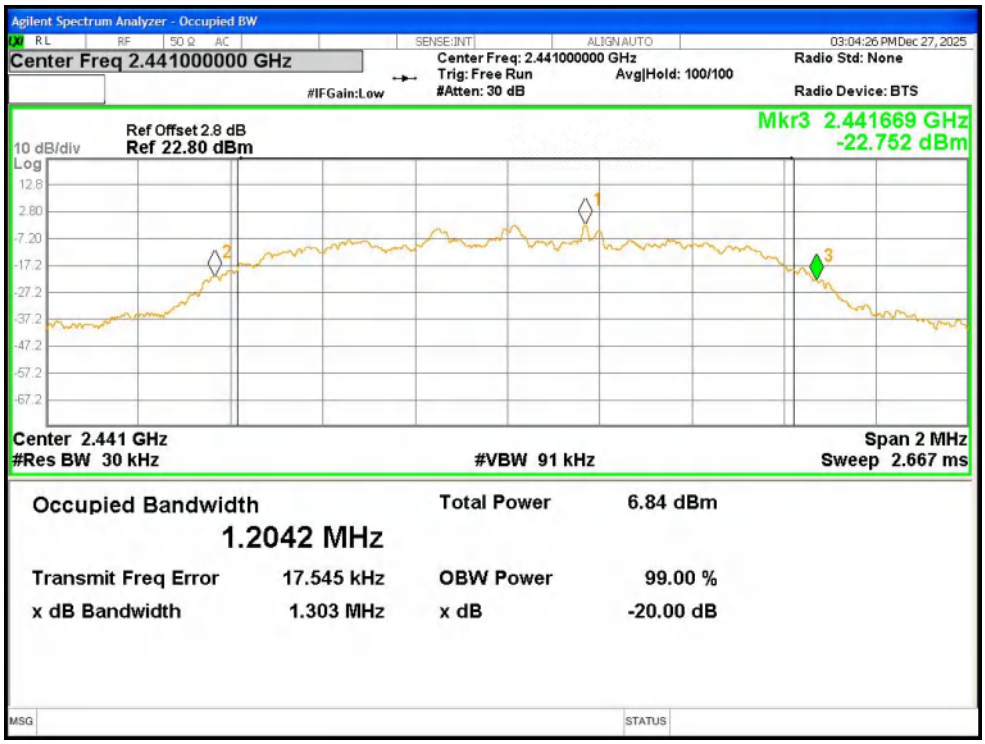

-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

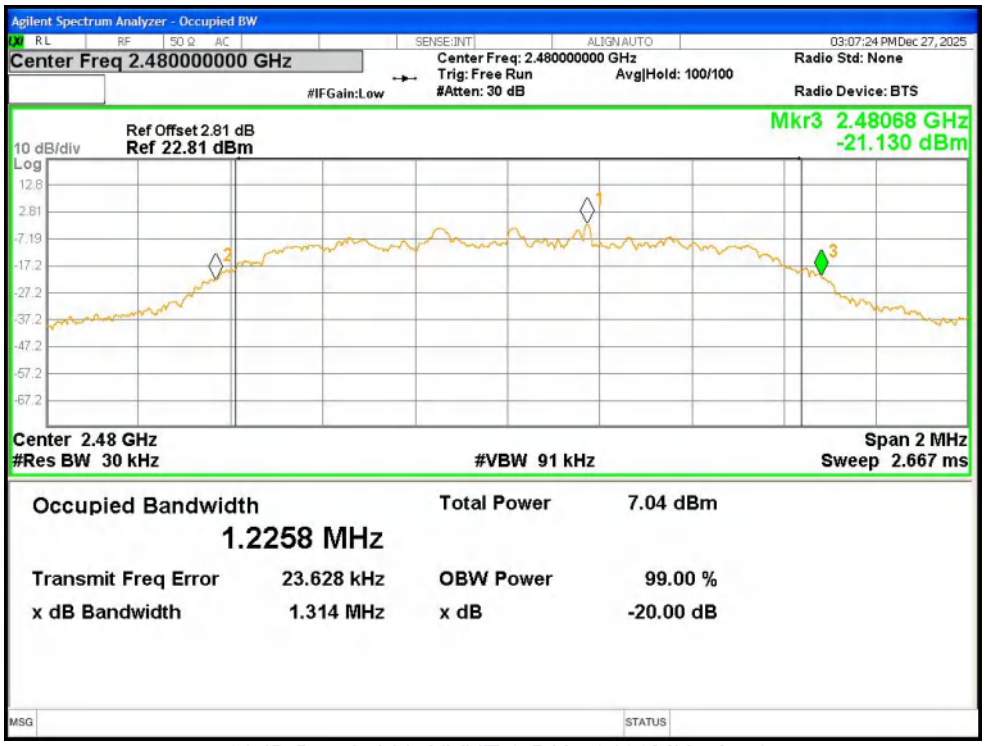

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

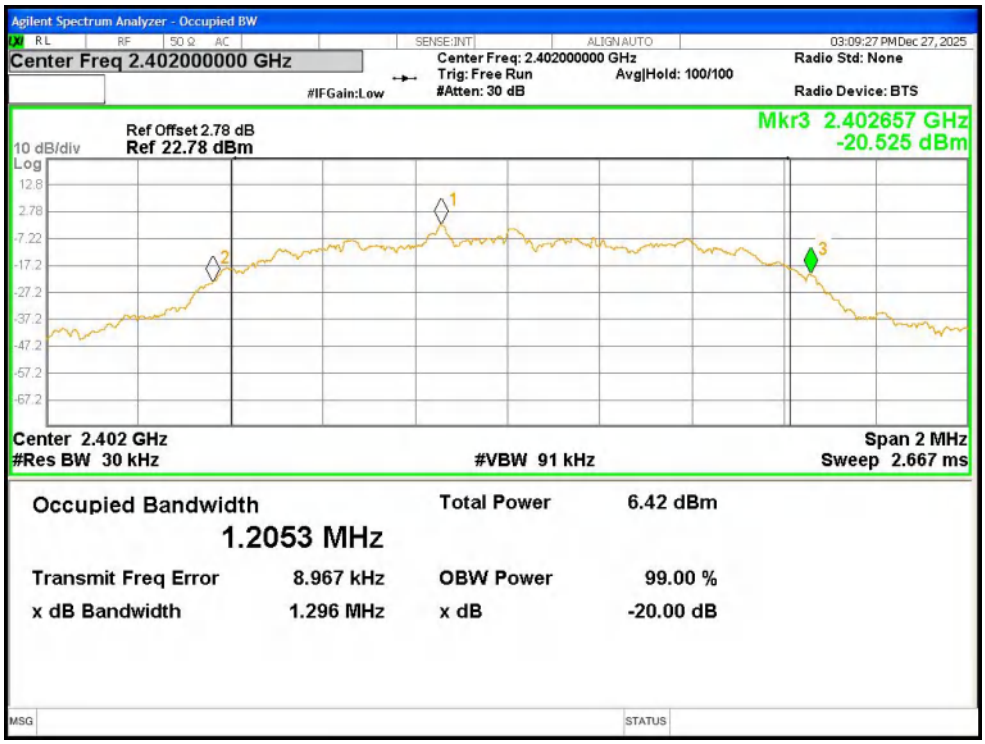

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

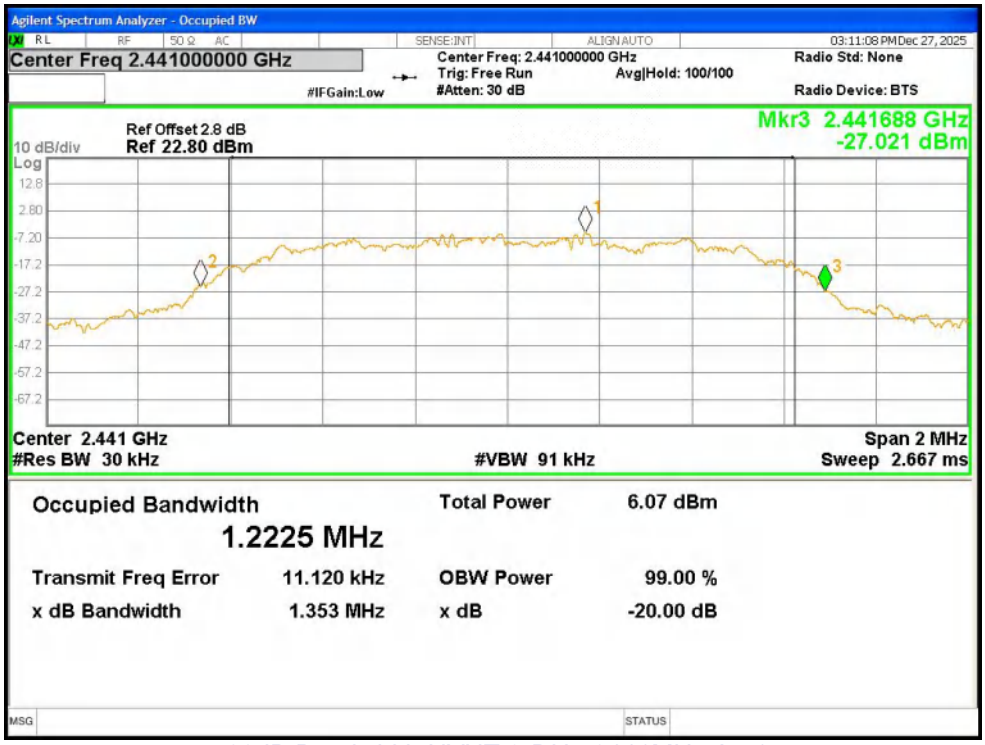

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

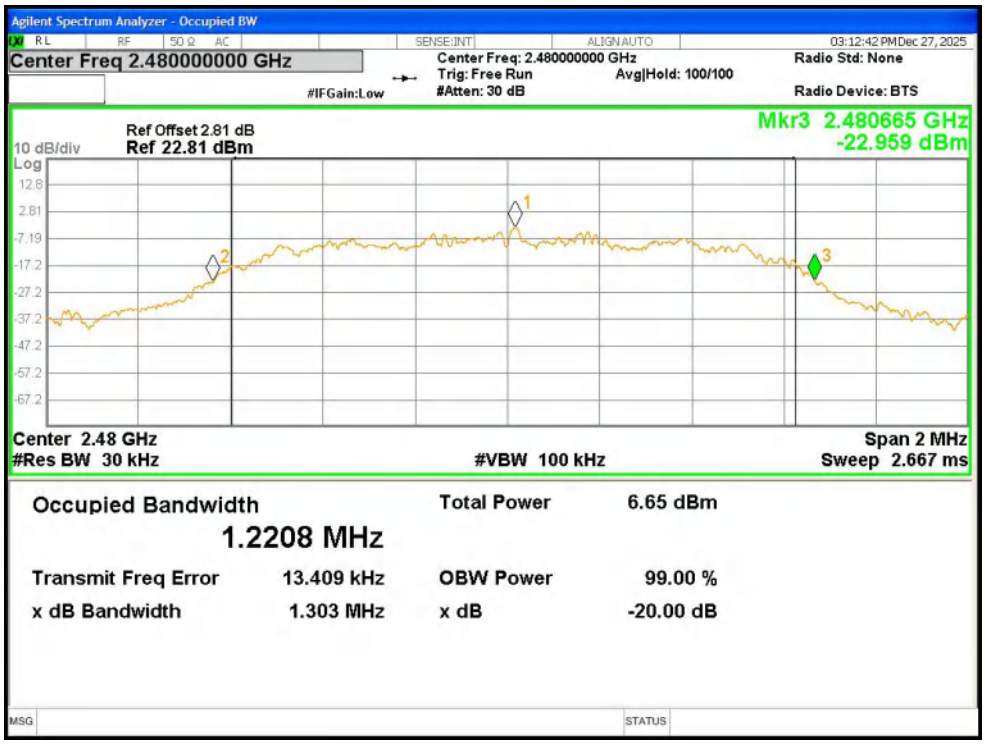

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2020
Limit:	GFSK:30 dBm π/4-DQPSK:20.97 dBm

8.1 Block Diagram Of Test Setup

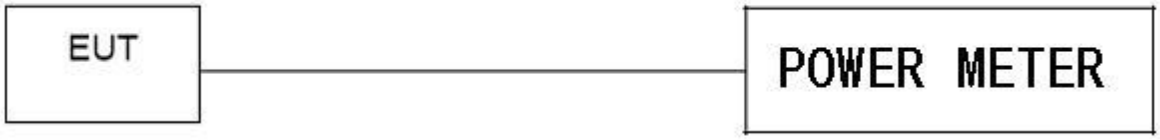

8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

The EUT was directly connected to the Power meter

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	0.71	30.00	Pass
	Middle	0.93		
	Highest	1.26		
π/4-DQPSK	Lowest	1.56	21.00	Pass
	Middle	1.77		
	Highest	2.1		
8-DPSK	Lowest	1.92	21.00	Pass
	Middle	2.12		
	Highest	2.5		

9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth π/4-DQPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup

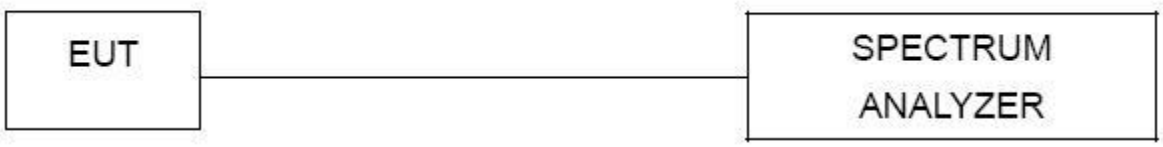

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 30kHz. VBW =100kMHz. Sweep = auto; Detector Function = Peak.

3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.158	0.693	PASS
GFSK	Middle	0.952	0.687	PASS
GFSK	High	1.02	0.693	PASS
π/4-DQPSK	Low	1.268	0.861	PASS
π/4-DQPSK	Middle	1.334	0.869	PASS
π/4-DQPSK	High	1.33	0.876	PASS
8-DPSK	Low	1.146	0.864	PASS
8-DPSK	Middle	0.984	0.902	PASS
8-DPSK	High	0.998	0.869	PASS

Test plots

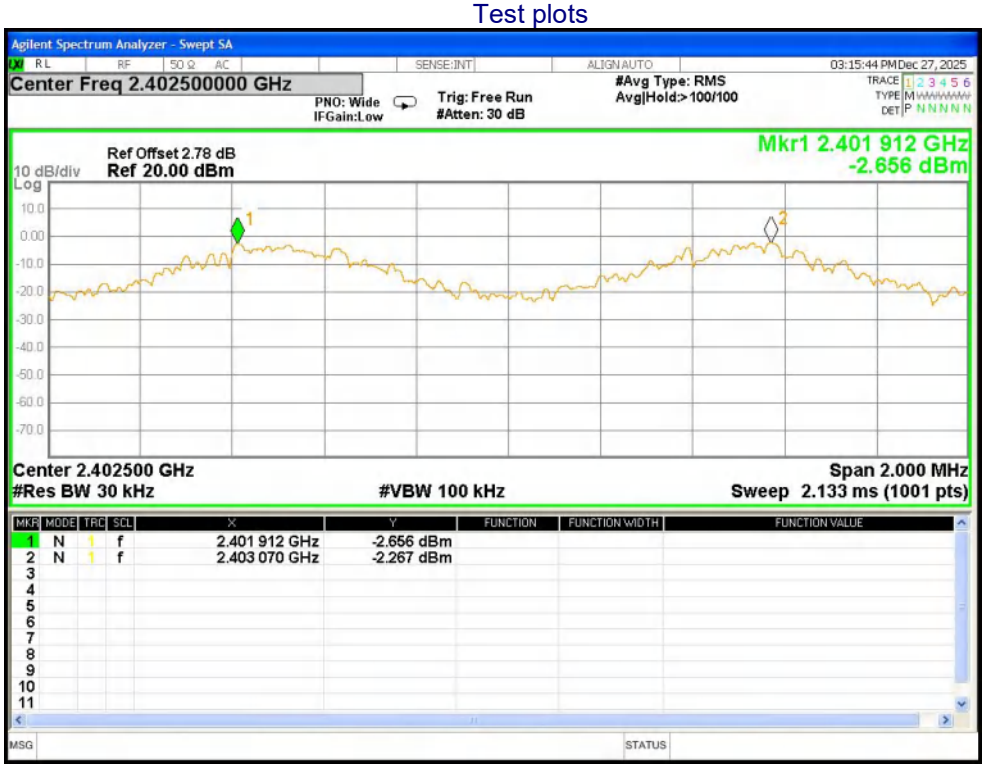

CFS NVNT 1-DH5 2402MHz Ant1

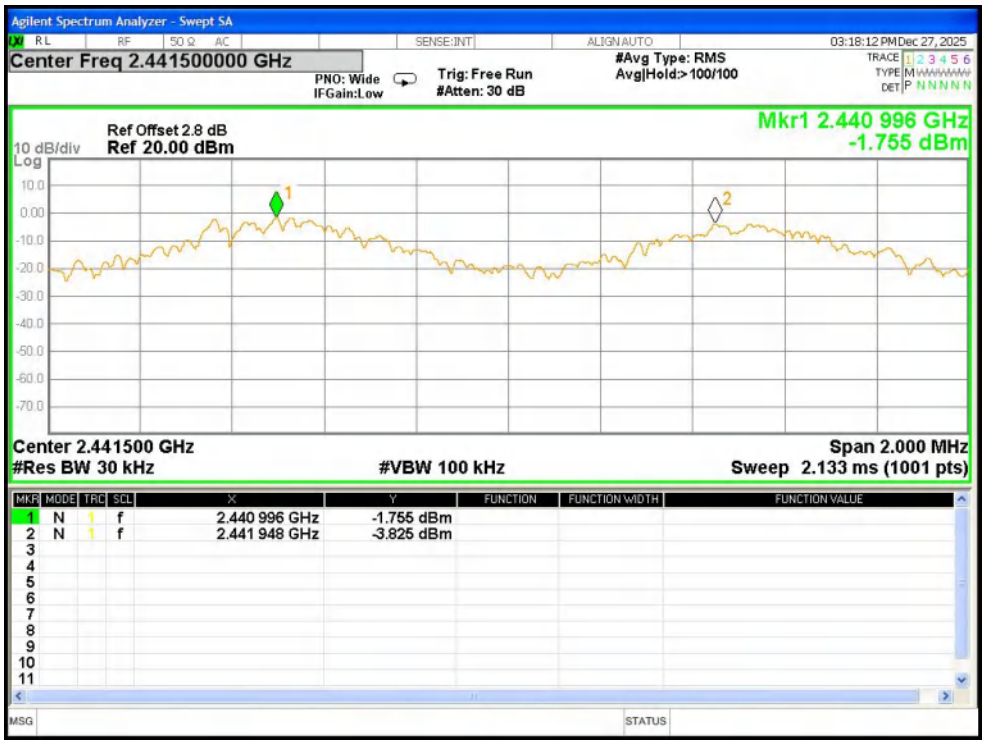

CFS NVNT 1-DH5 2441MHz Ant1

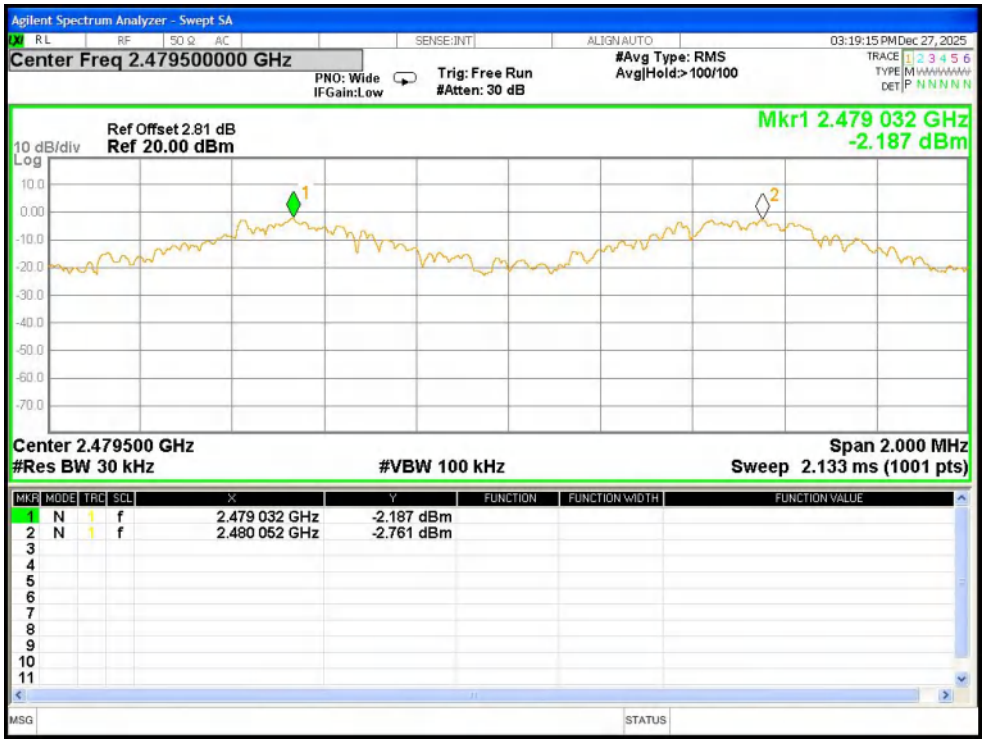

CFS NVNT 1-DH5 2480MHz Ant1

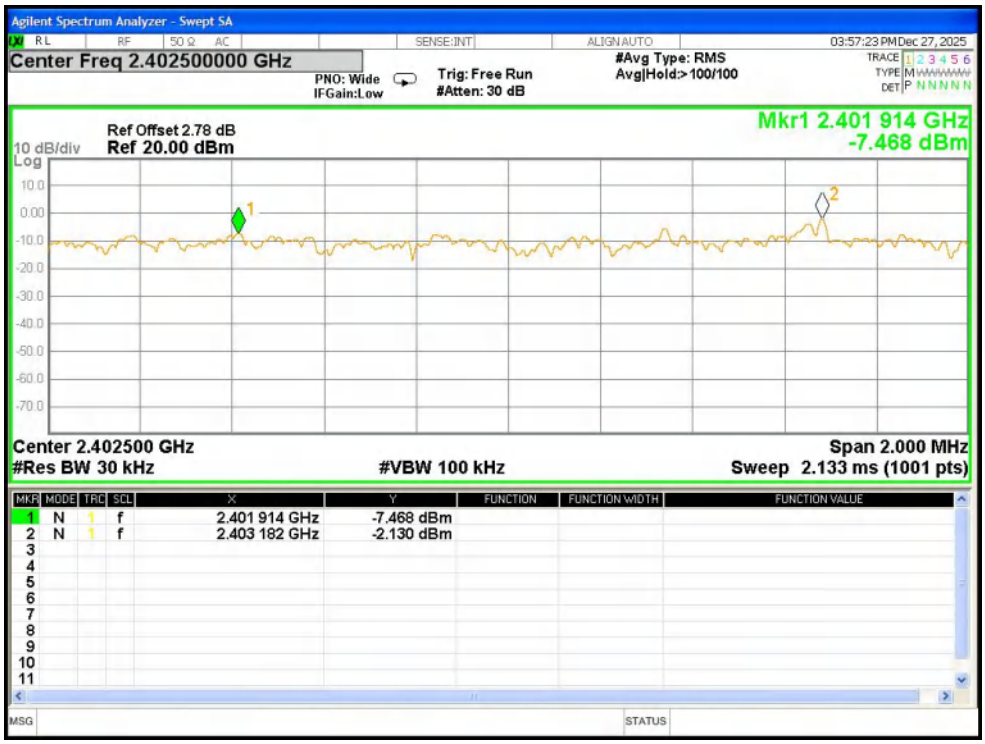

CFS NVNT 2-DH5 2402MHz Ant1

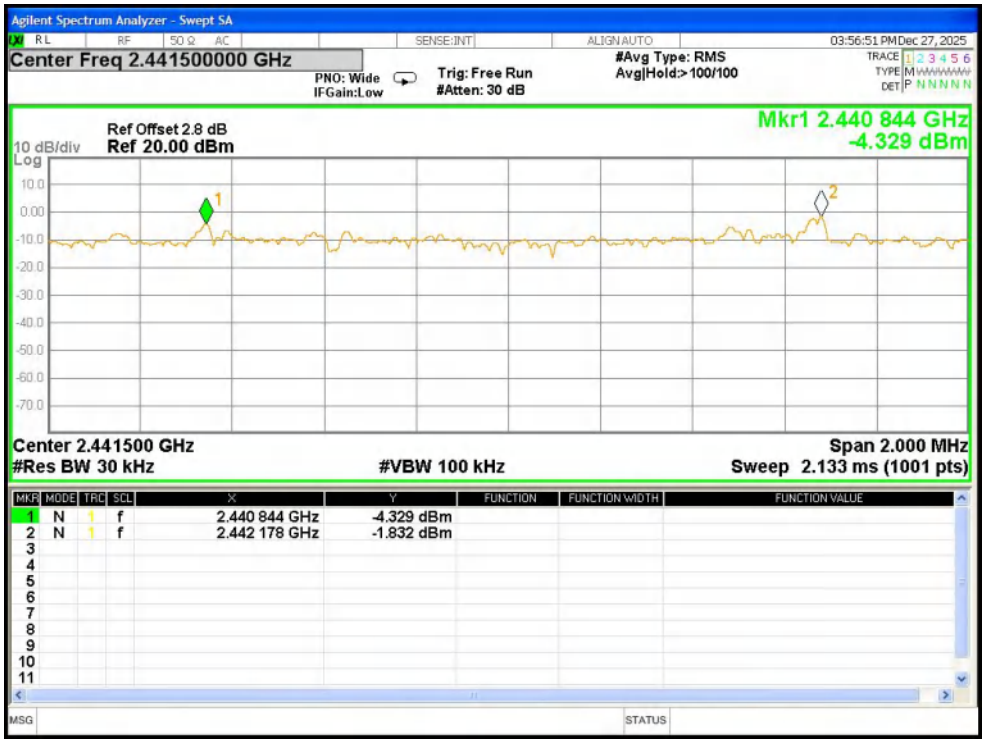

CFS NVNT 2-DH5 2441MHz Ant1

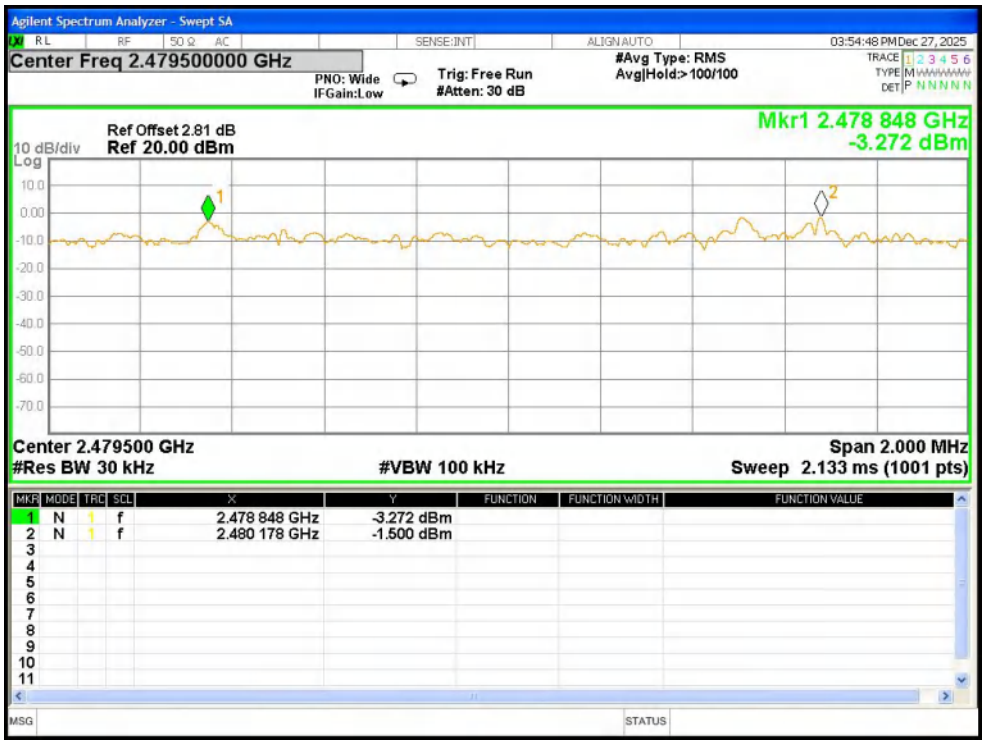

CFS NVNT 2-DH5 2480MHz Ant1

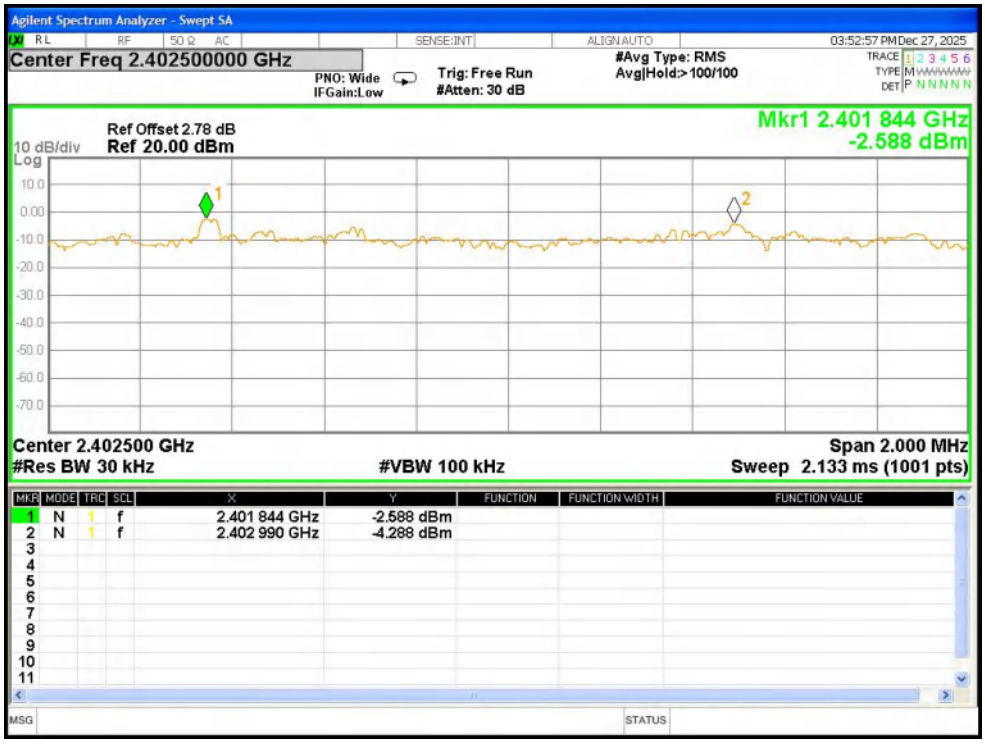

CFS NVNT 3-DH5 2402MHz Ant1

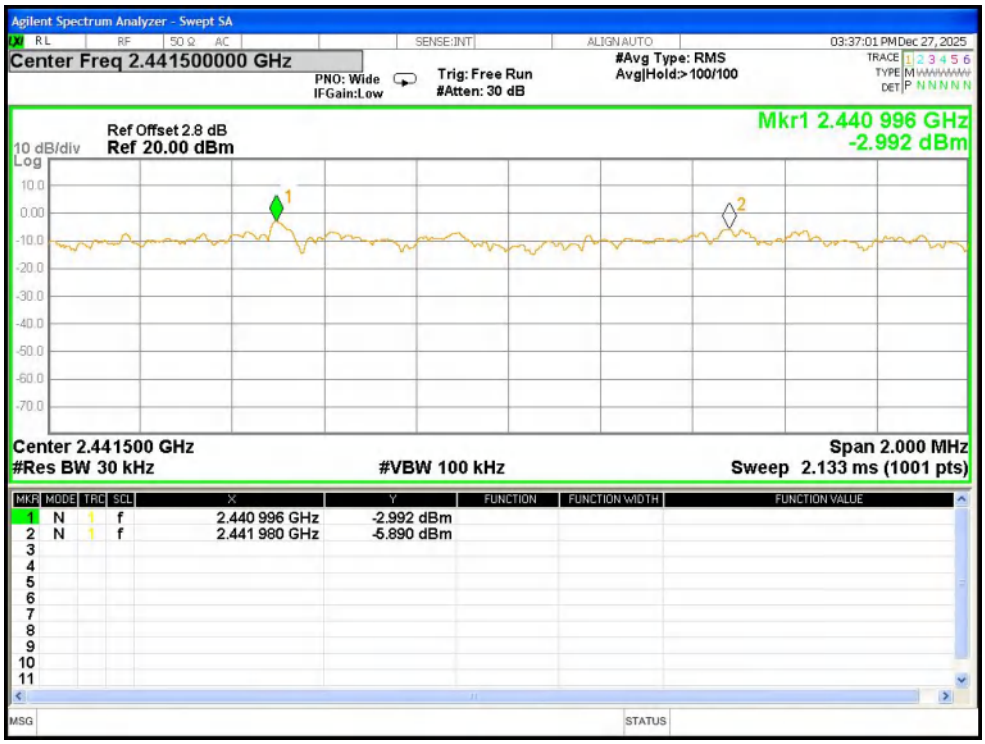

CFS NVNT 3-DH5 2441MHz Ant1

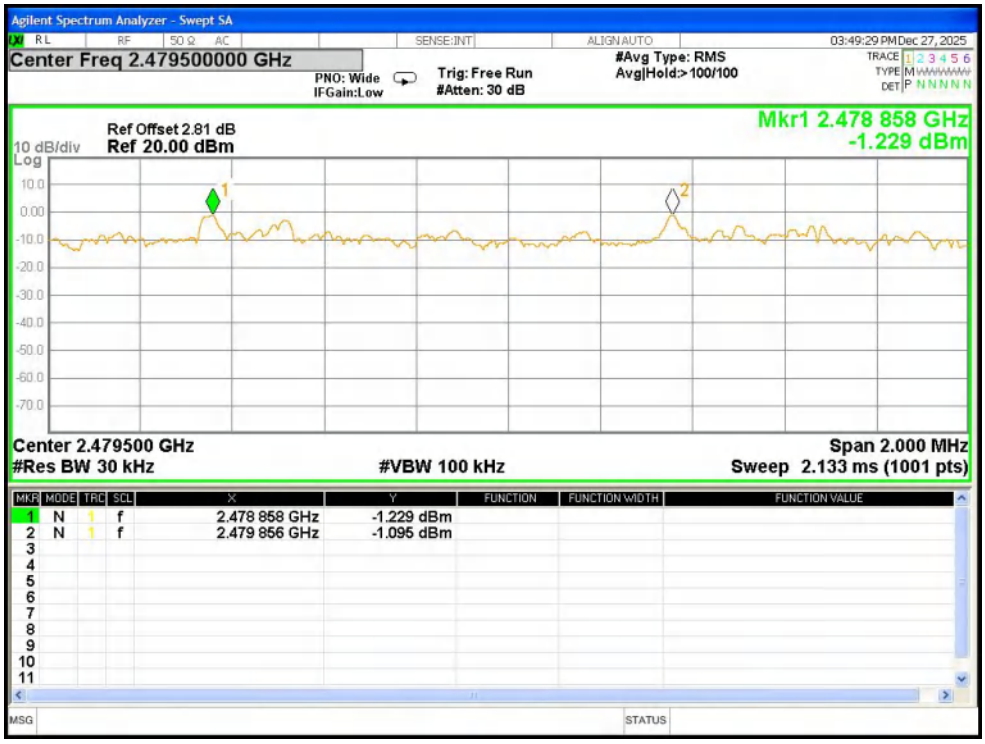

CFS NVNT 3-DH5 2480MHz Ant1

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup

10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.

4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 Test Result

Test Plots:
79 Channels in total

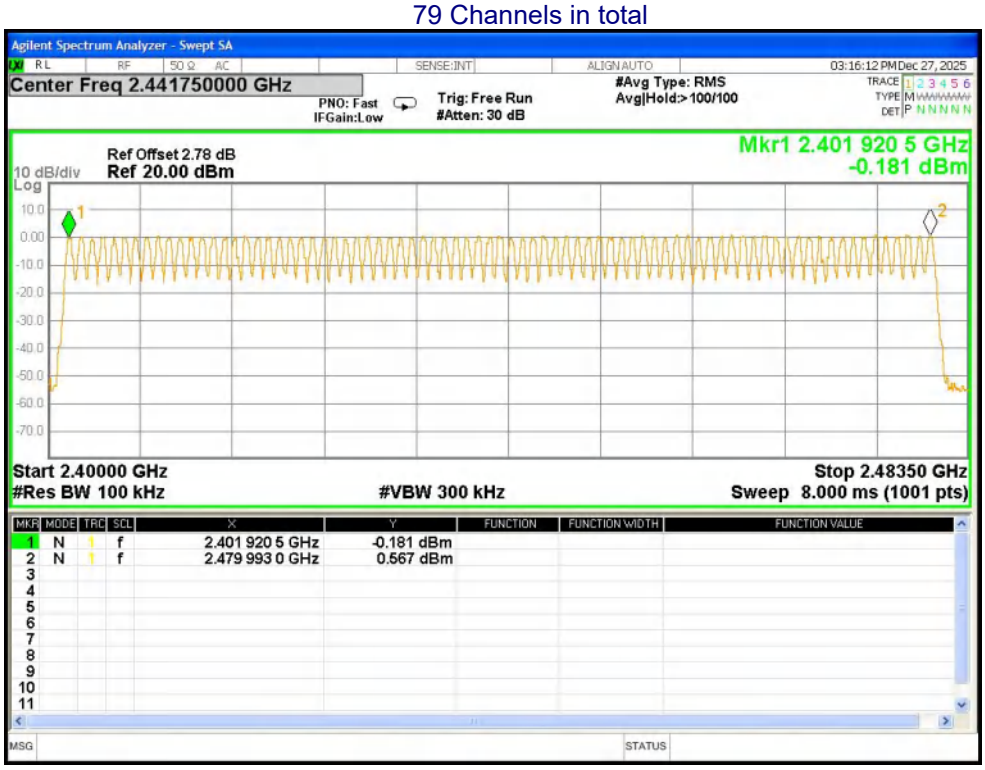

Hopping No. NVNT 1-DH5 2441MHz Ant1

Hopping No. NVNT 2-DH5 2441MHz Ant1

Hopping No. NVNT 3-DH5 2441MHz Ant1

11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	≤0.4 Second

11.1 Test Setup

11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set spectrum analyzer span = 0Hz;

3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH1/DH2/2DH1/2DH3/DH5/2DH5 packet transmitting.

4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 Test Result

Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH5	2402	Ant1	2.88	308.16	107	31600	400	Pass
1-DH5	2441	Ant1	2.878	325.214	113	31600	400	Pass
1-DH5	2480	Ant1	2.879	310.932	108	31600	400	Pass
2-DH5	2402	Ant1	2.886	300.144	104	31600	400	Pass
2-DH5	2441	Ant1	2.882	317.02	110	31600	400	Pass
2-DH5	2480	Ant1	2.886	297.258	103	31600	400	Pass
3-DH5	2402	Ant1	2.887	294.474	102	31600	400	Pass
3-DH5	2441	Ant1	2.887	317.57	110	31600	400	Pass
3-DH5	2480	Ant1	2.887	294.474	102	31600	400	Pass

Note1：Total Dwell Time (ms)=Pulse Time (ms)*Burst Count
Note2：Only the worst test data DH5/2DH5 put in the report

Test Plots

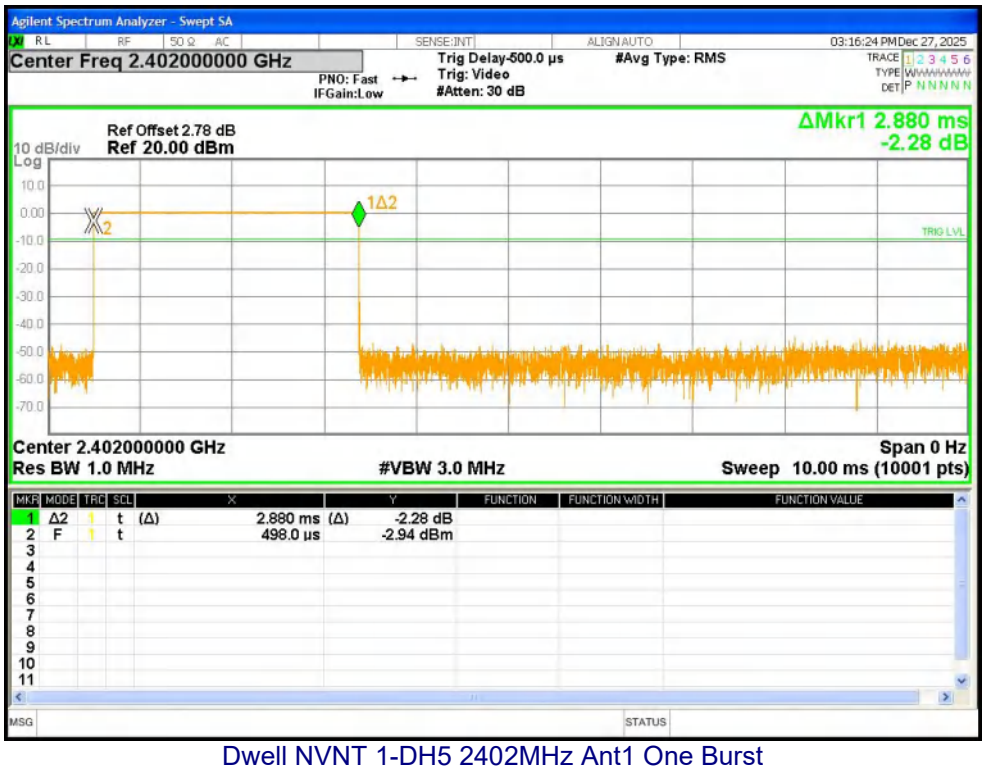

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

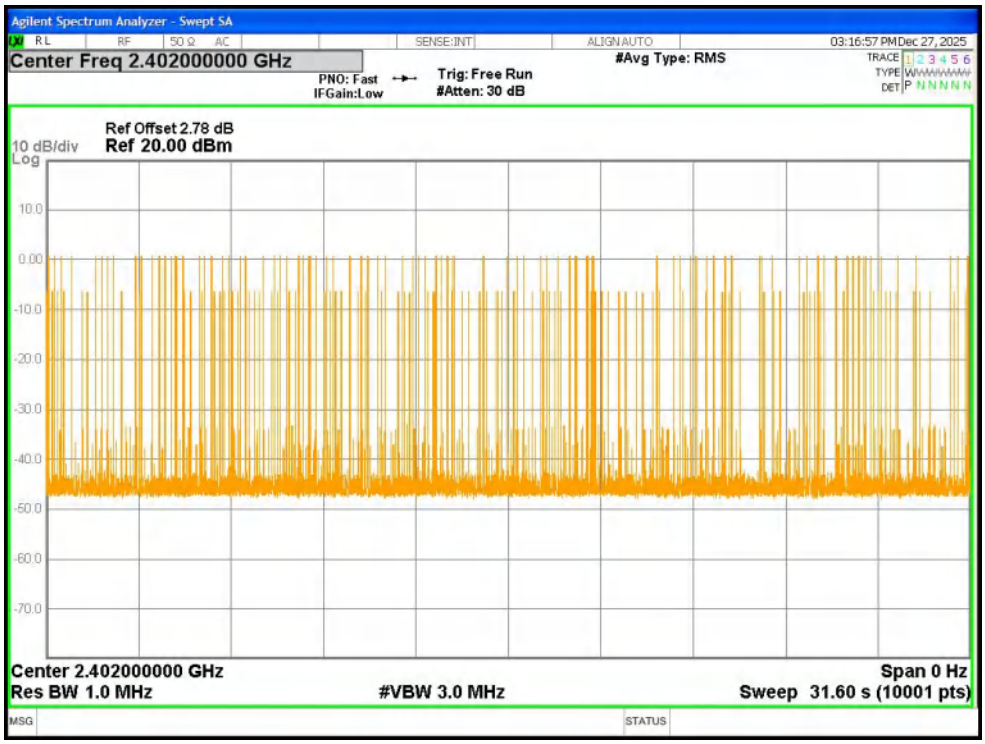

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

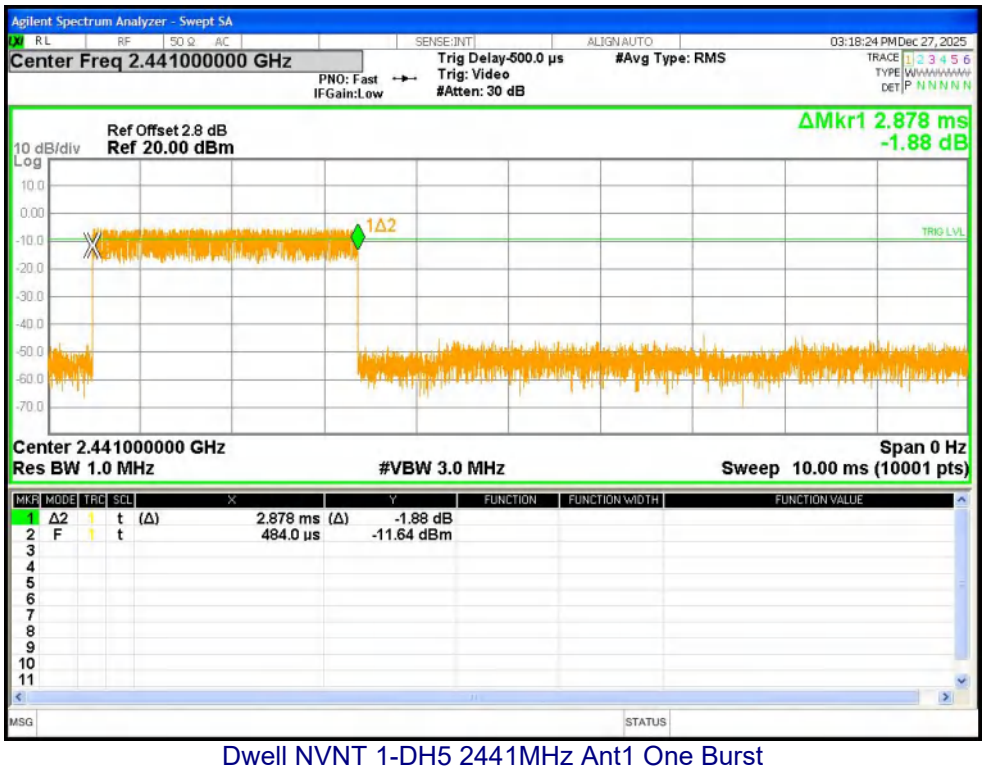

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

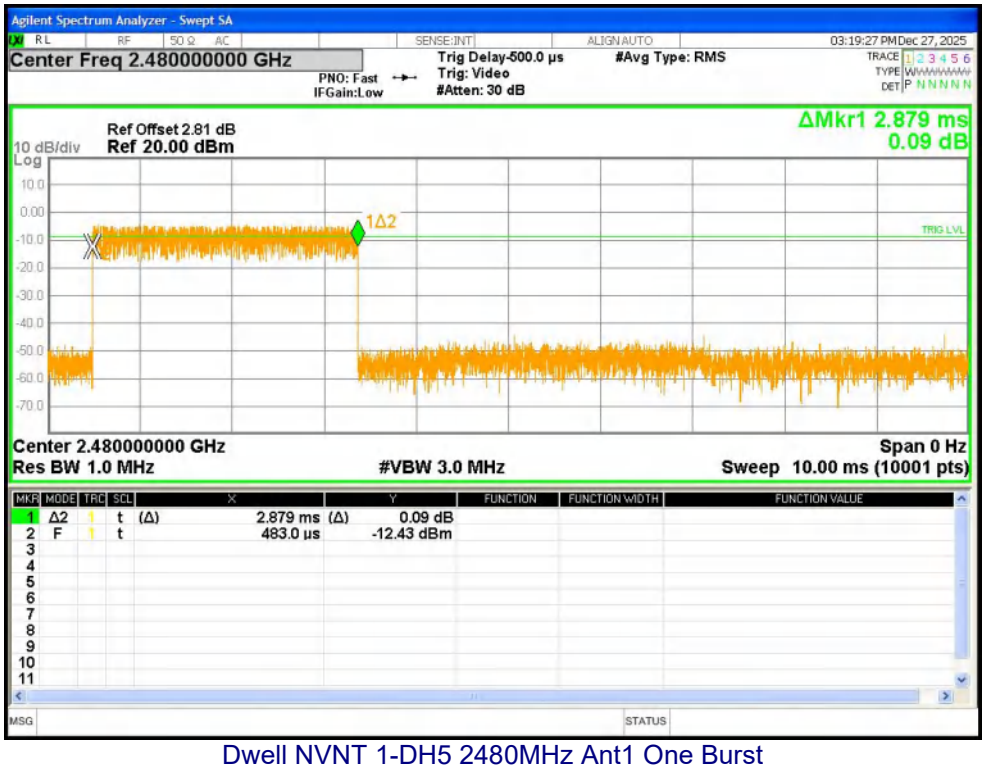

Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

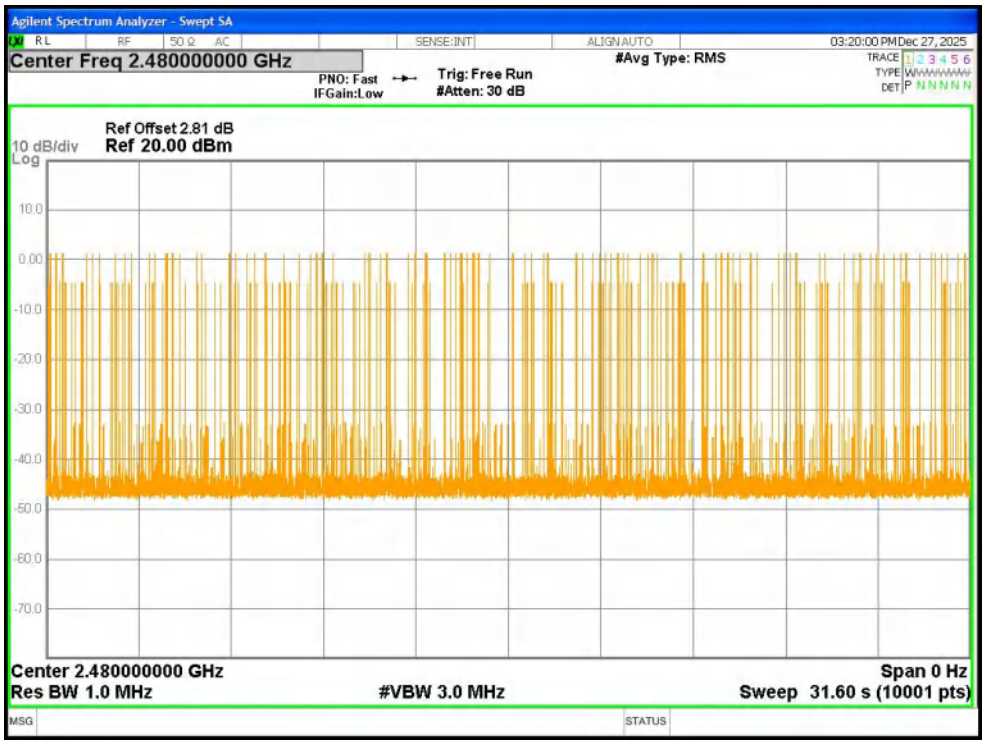

Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

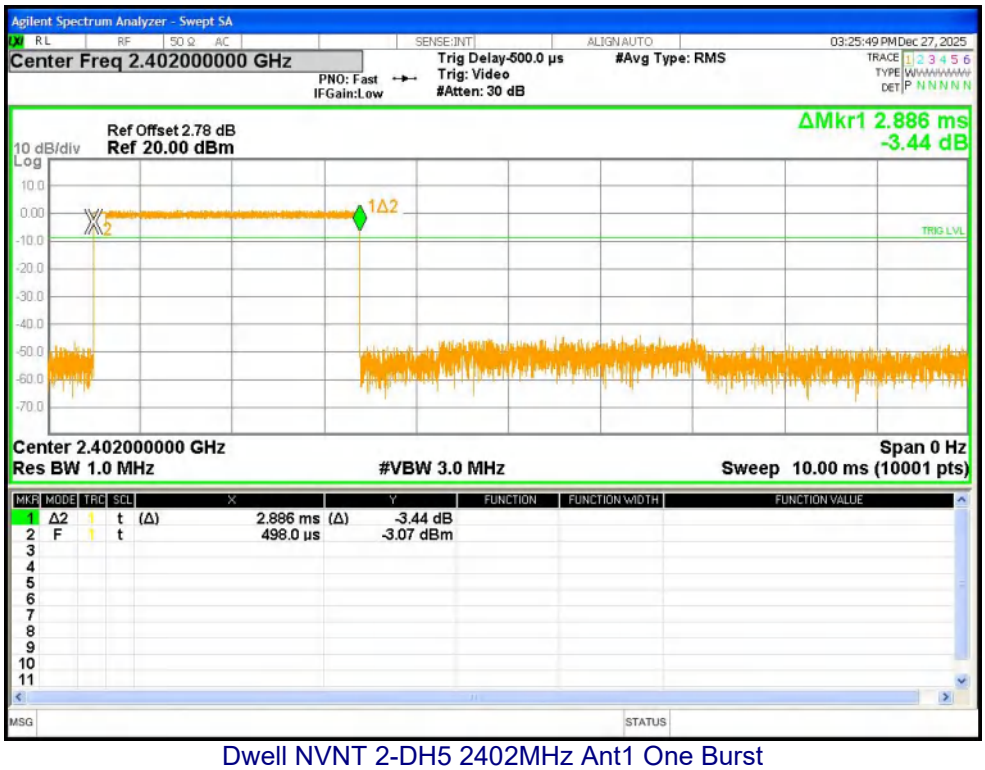

Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

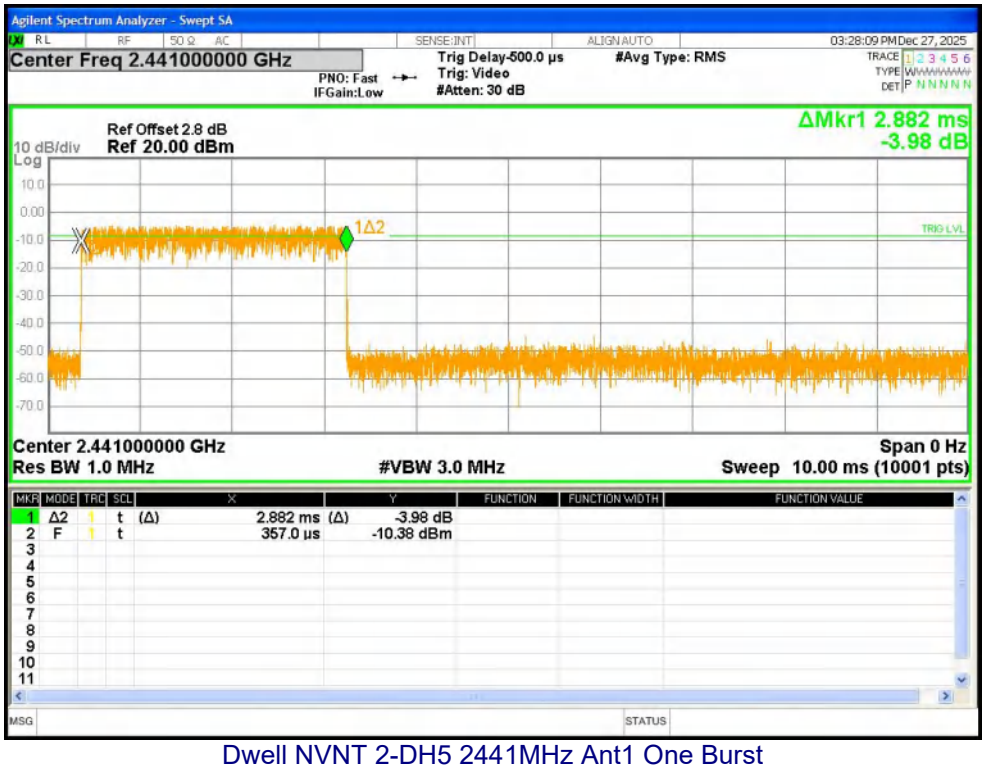

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

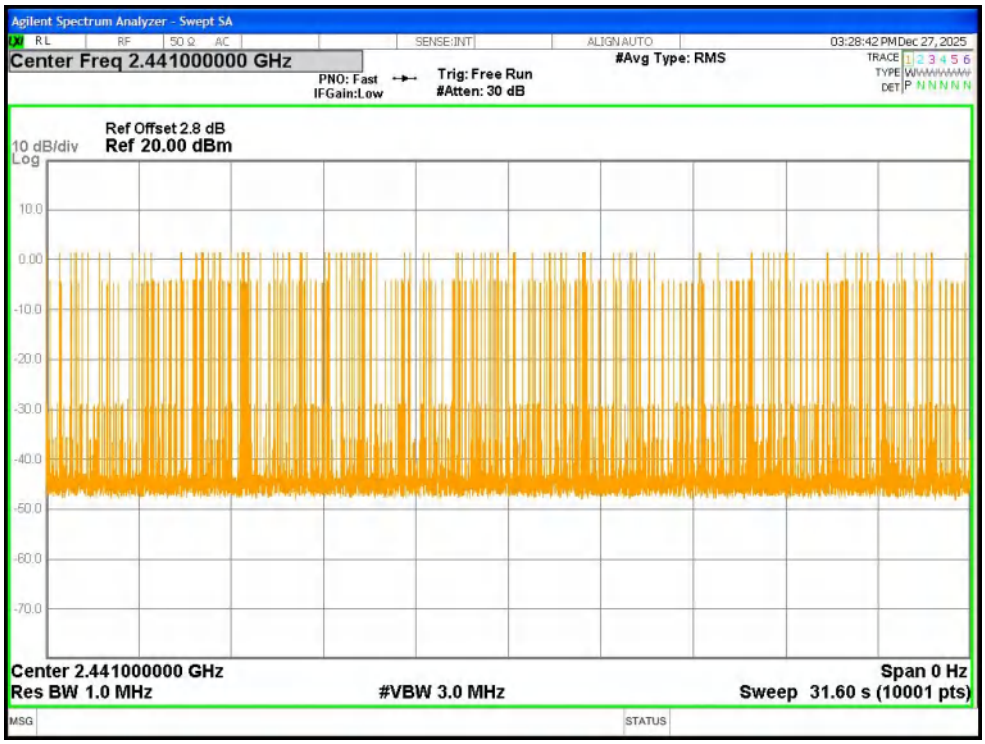

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

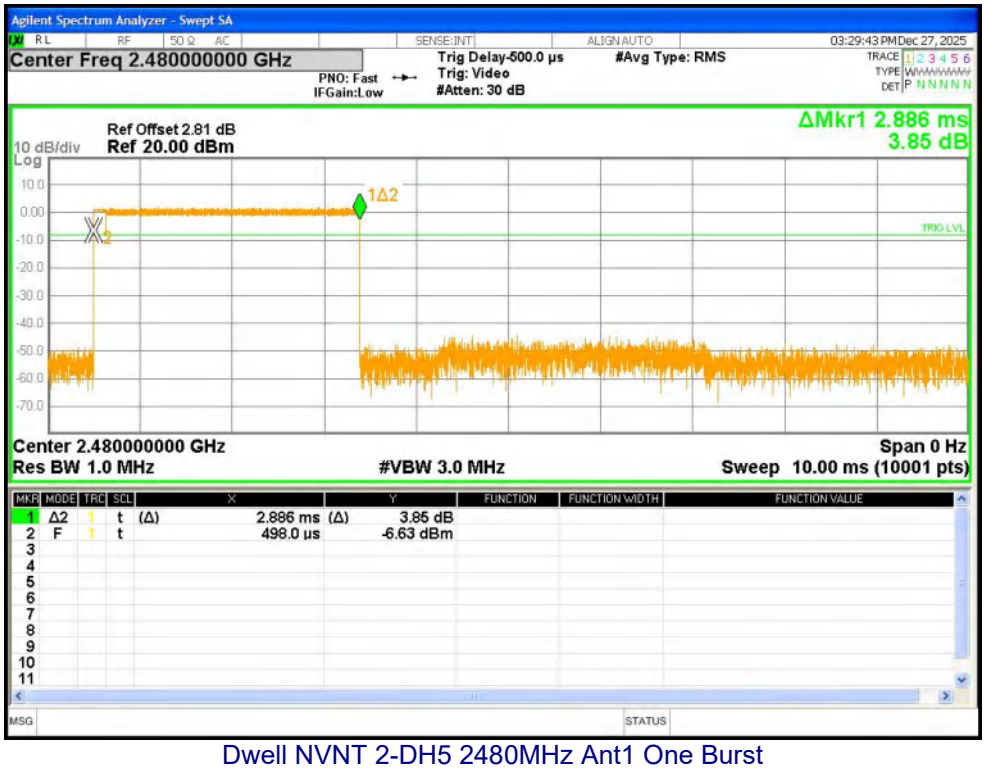

Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

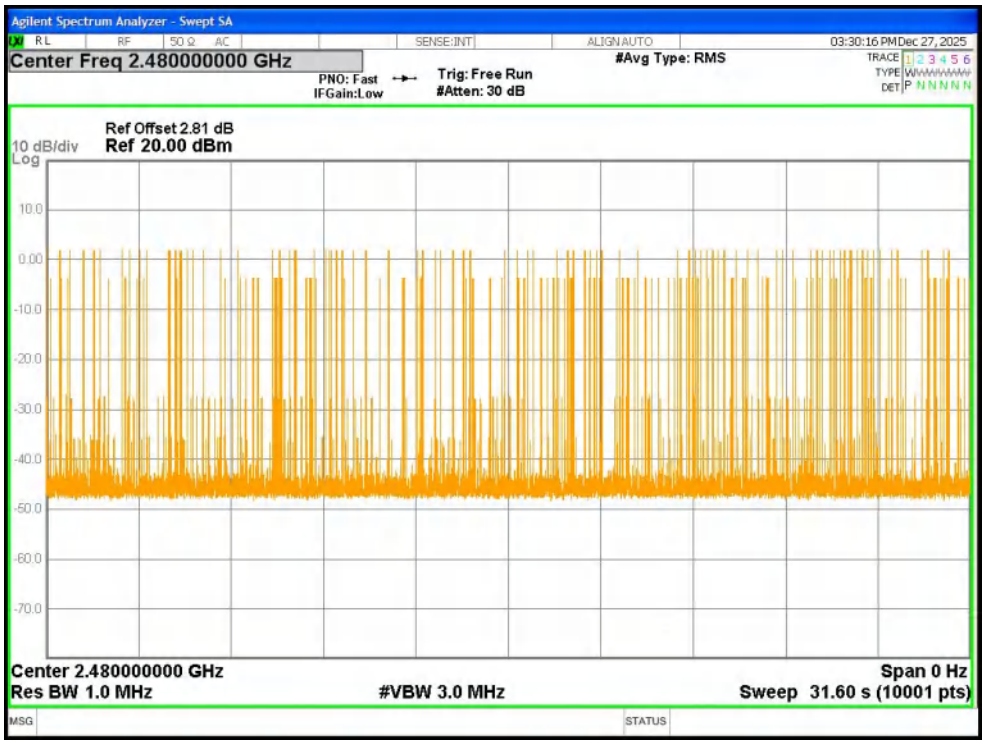

Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

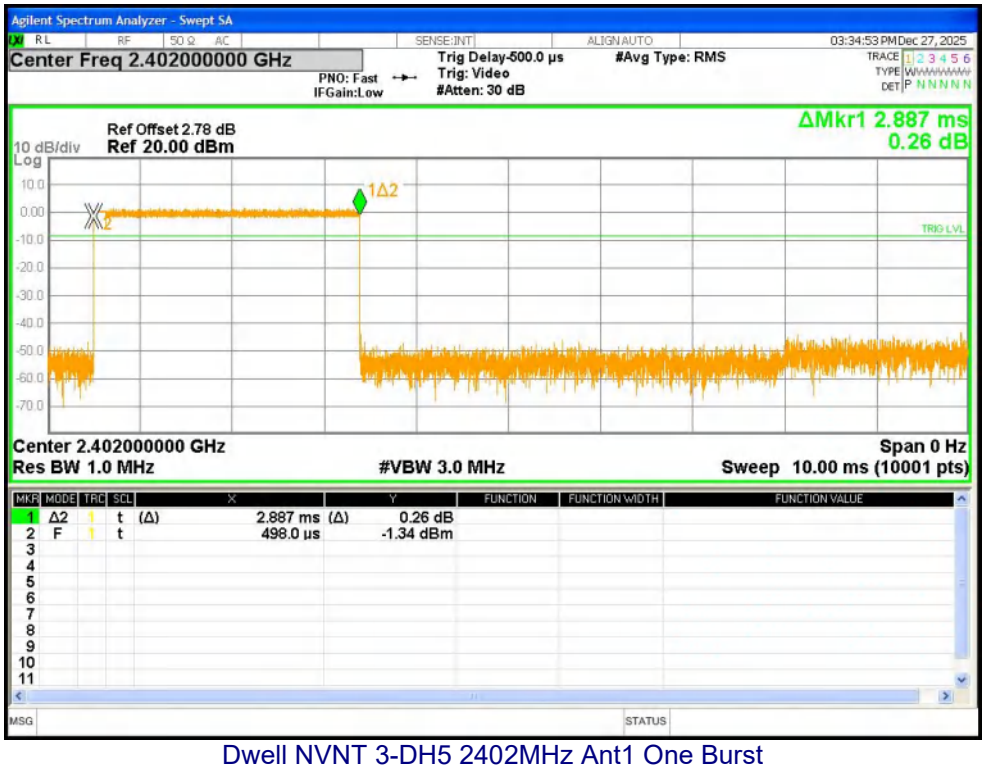

Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

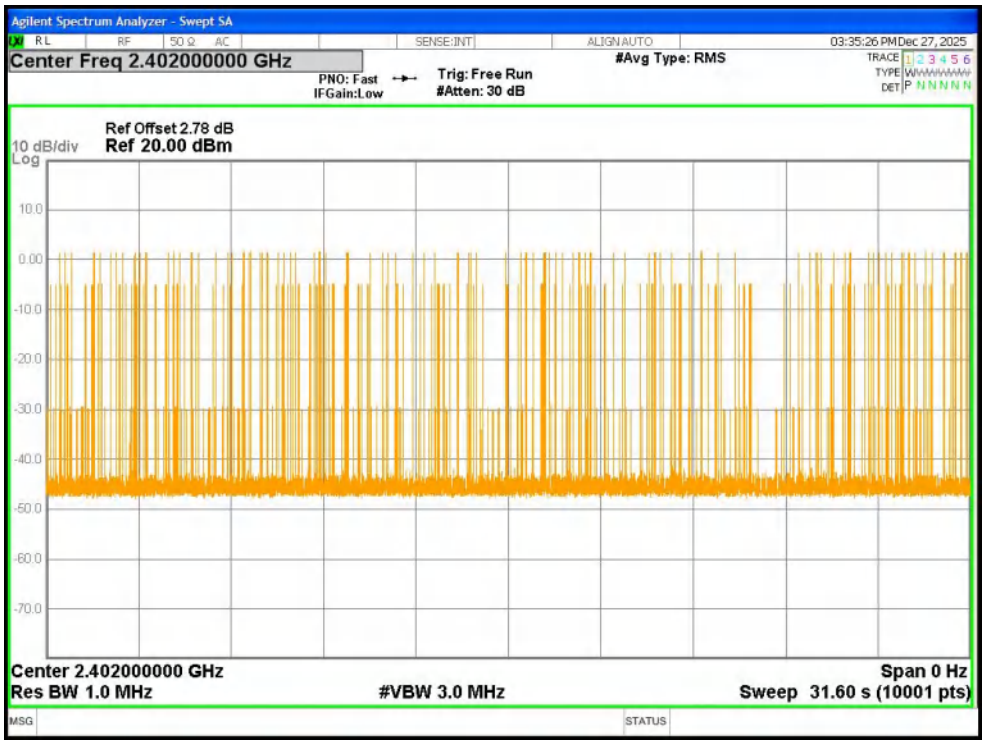

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

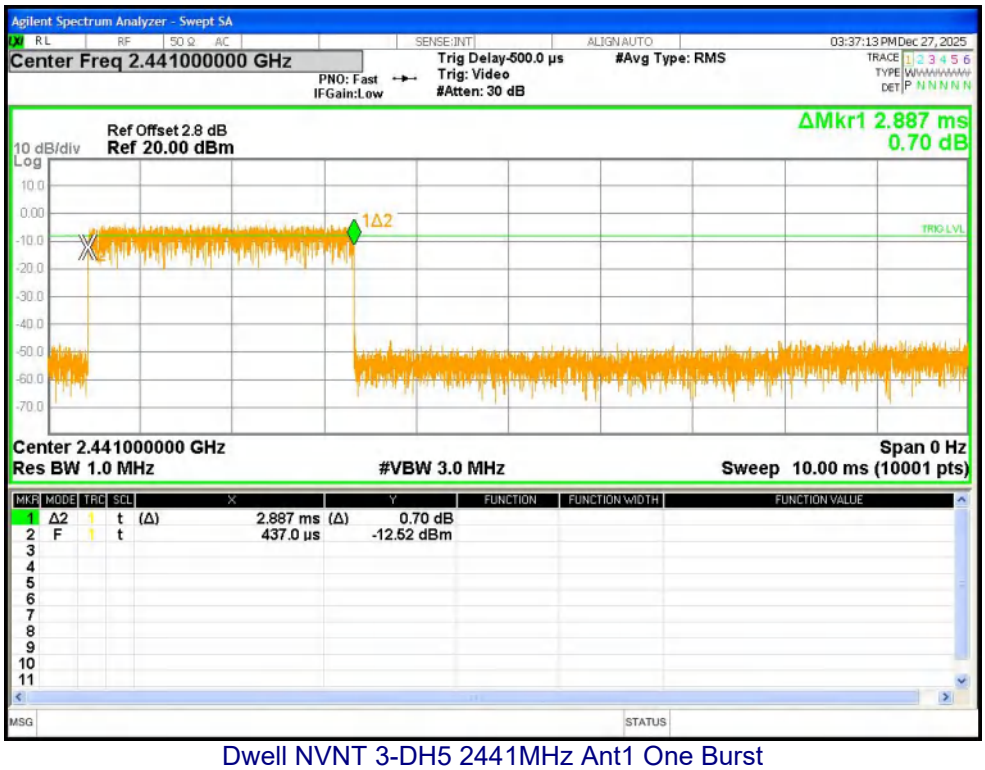

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

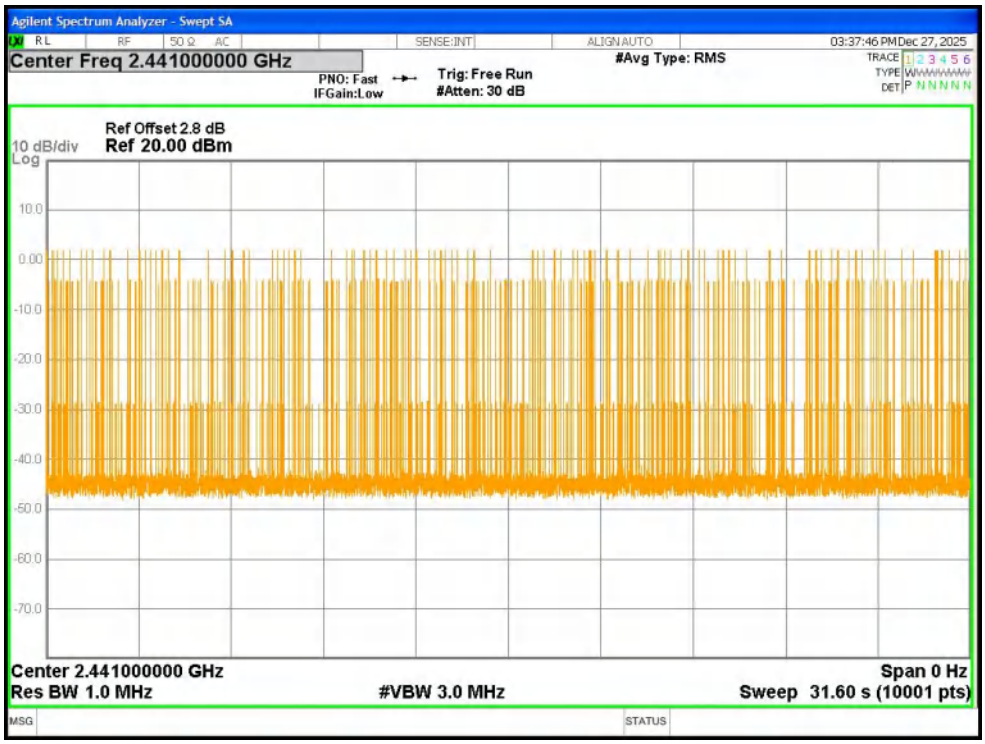

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

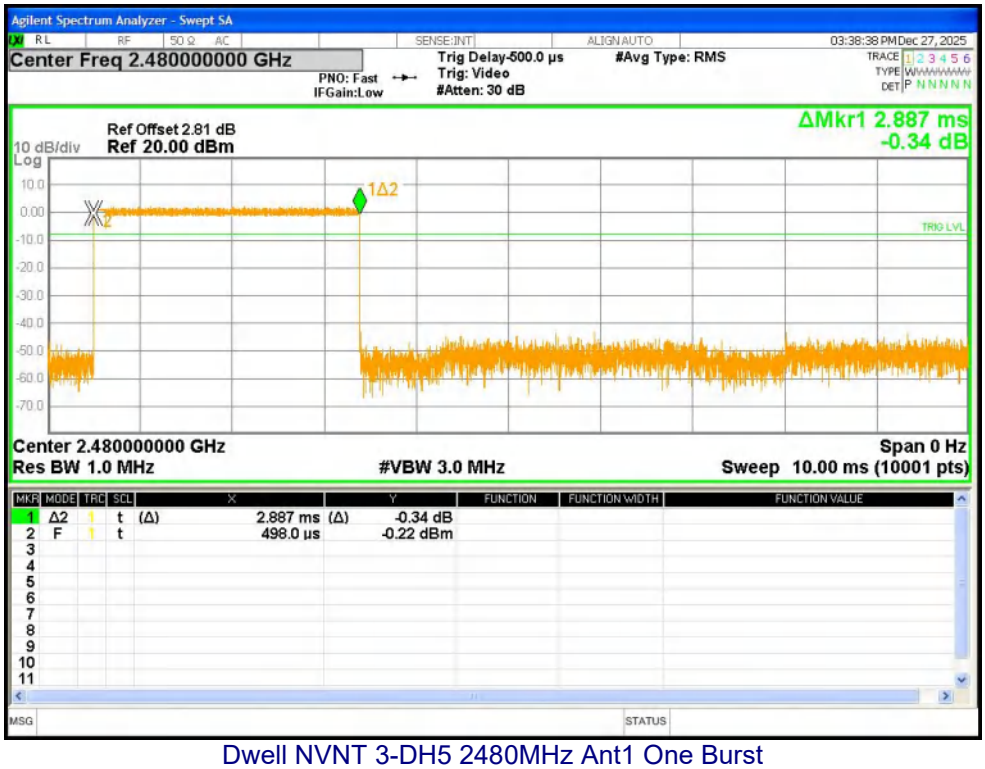

Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

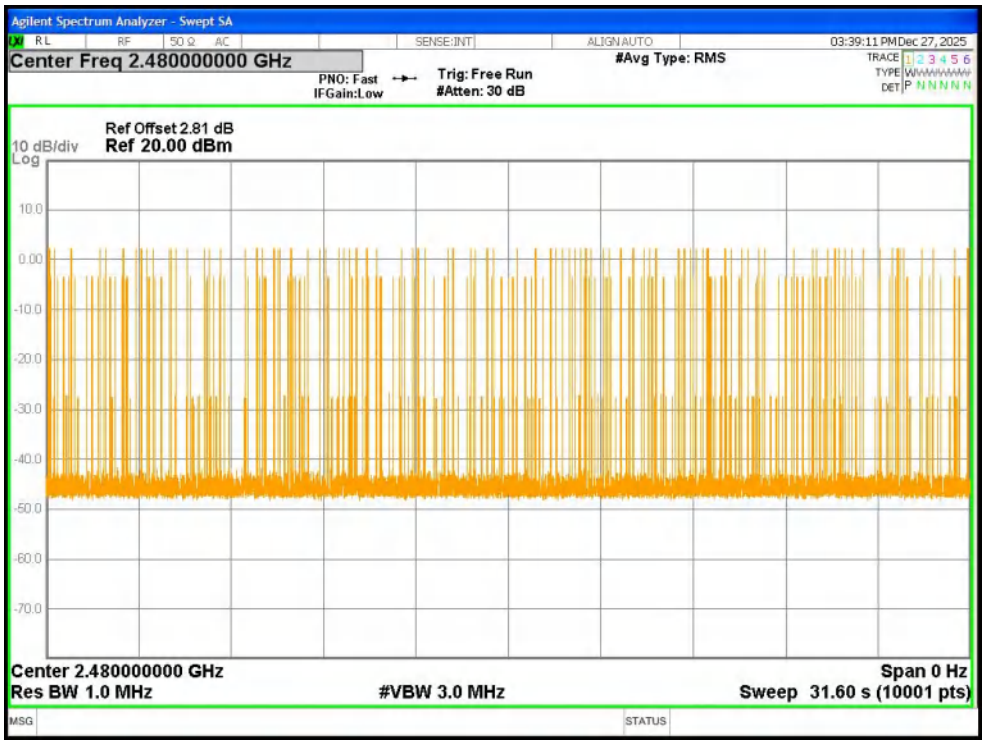

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is External antenna, the best case gain of the antennas is 2.36dBi, reference to the appendix II for details	

13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

※※※※※ END OF REPORT ※※※※※