



32inch Touch Kiosk

Product Specifications

Table of Contents

1.Mechanical specifications 3

2.Technical Speciation 5



3.Code for ordering 8

4. Changelog 8



1 Mechanical specifications



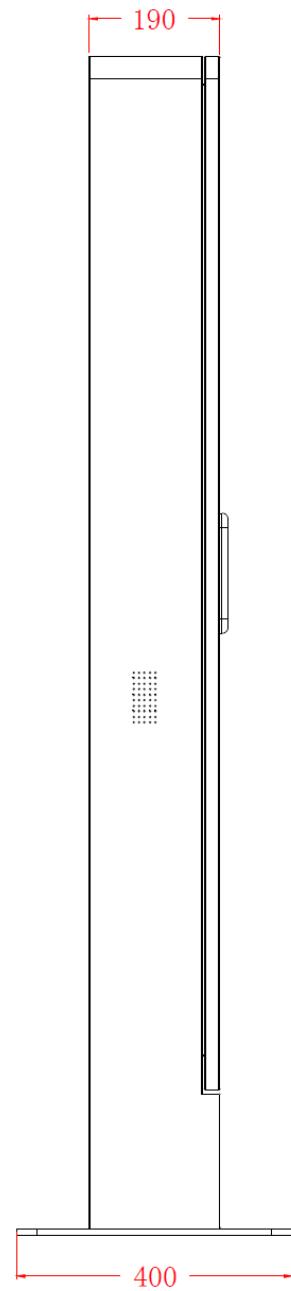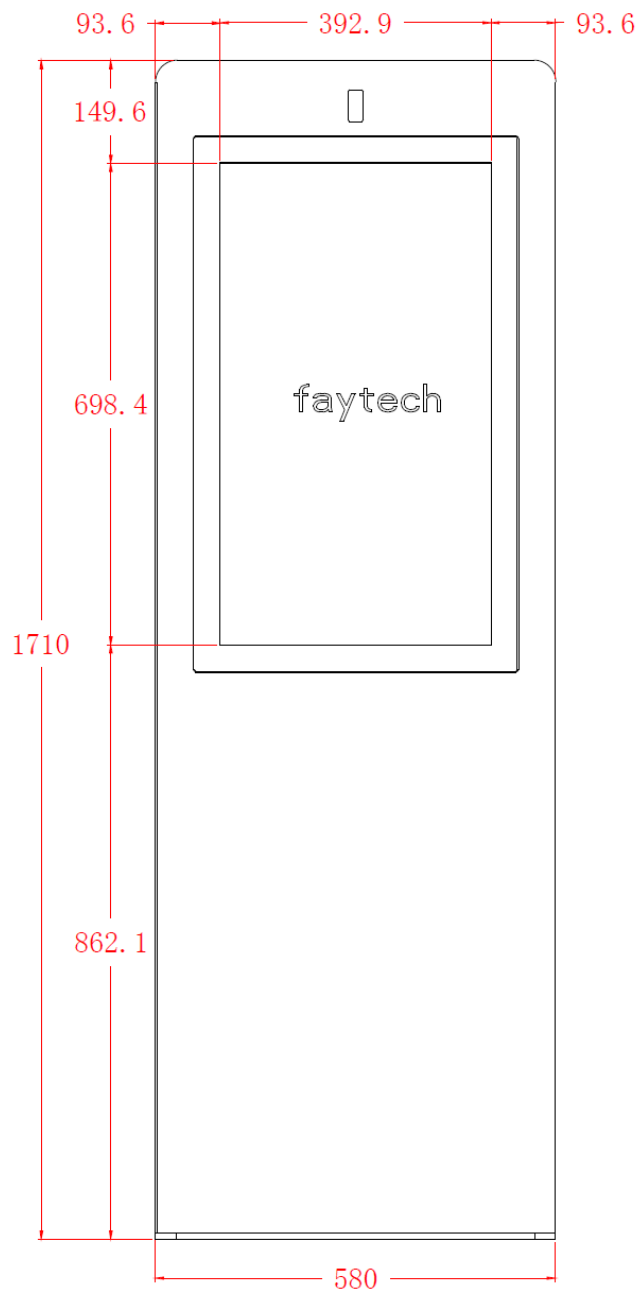

2 Technical Speciation

Housing	Dimension	1710.10*392.90*190.00mm
	Material	Aluminum and Metal
	Mounting	6xø14, bolted to the ground
	Color	Black
LCD Panel	Size	32" 16:9
	Resolution	1920*1080
	Colours displayed	16.7M
	Luminance	Typ. 2000nits
	Luminance Uniformity	75%
	Contrast	Typ.4000:1
	Viewing Angle	R/L 178, U/D 178
	Response Time	Typ. 8ms
	Backlight / Backlight Lifetime (hours)	LED / 50,000
Touch Panel	Type	PCAP Capacitive Touch
	Surface Treatment	AG
	Surface Hardness	7H
	Touch Life (Contacts)	Unlimited
	CG Transparency	90%±5%
	Touch Points	10 points touch
	Touch controller/Driver	EETI touch controller / driver http://home.eeti.com.tw/LinuxDriverDownload.html

Bonding Technology	OB	Optical Bonding
Key Board	Button	Input, MENU Vol- Vol+ Power
	Indicator	Red/Green (position together with the buttons)
Speaker		2x8Ω2W
External Interface (Monitor)		1x USB 2.0 TypeB for touch
		1x HDMI2.0 IN
		1x DP1.2 IN
		1x VGA IN
		1x Audio In for VGA
		1x 12V DC-Out
		1x COM (for serial port control)
		1x 100~240V AC-IN
IPC (Optional)		
Option 1	CPU	Intel® Gemini Lake Refresh Processor J4125:2.0Ghz~2.7Ghz (Quad-core/TDP10W)
	GPU	Intel® UHD Graphics 60
	OS	Windows 11
	RAM	8GB
	Storage	128GB
	WIFI	WiFi 802.11ac/b/g/n(2.4G/5G dual band)
	Bluetooth	BT4.2 built-in with WiFi module
	Ethernet	Gigabit Ethernet × 1 (RTL8111H/RTL8111hs)
	Connectors	1x Micro SDXC 1x HDMI Out 1x Audio output/input 1x Power on/off 4x USB 3.0 1x Security Lock

		1x CMOS Reset
Option 2	CPU	Intel® Atom® x6211E
	OS	Windows 10
	RAM	4GB
	Storage	120GB
	WIFI	WiFi 802.11ac/b/g/n(2.4G/5G dual band)
	Bluetooth	BT5.2 built-in with WiFi module
	Ethernet	2x 10/100/1000Mbit RJ45 Ports (LAN1 PoE)
	Connectors	1x HDMI Out 1x Display Port OUT 1x 12V DC-IN 2x USB3.0 2x USB2.0 1x Audio Jack 1x Micro SD-card Slot 1x COM (RS232) + 1x internal RS485 & 1x internal RS232 2x 10/100/1000Mbit RJ45 Ports (LAN1 PoE) 1x SIM-card slo
POWER	Power Supply	100~240V AC-IN
	Working Power (V)	100~240V AC-IN
	Power Consumption (W)	~350W
	Stand-By Consumption (W)	<1W
Environment	IP rating	IP65
	Operation Temperature	-10~60°

Weight	Net weight (kg)	~70.0 (TBD)
	Gross weight (kg)	~90.00 (incl. wooden box) (TBD)
Included in the Delivery	AC Cable	x1
	HDMI Cable	x 1
	USB-Touch Cable	x 1
Certification	CE/FCC	To be charged additionally for project products

3 Code for ordering

- 3030512083

4 Changelog

- 04.08.2022 Nathan Set up

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.