


Antenna Data Sheet

Passive Test												
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	16.95	-7.71	-1.47	-3.62	6.826	10.127	-1.47	-23.04	6.24	90	48.78	48.44
2410	15.2	-8.18	-2.14	-4.29	6.196	9.001	-2.14	-25.23	6.04	90	47.25	47.13
2420	13.58	-8.67	-2.78	-4.93	5.636	7.947	-2.78	-24.83	5.89	90	47.2	47.06
2430	15.71	-8.04	-2.29	-4.44	6.583	9.122	-2.29	-22.71	5.75	90	47.99	47.91
2440	11.74	-9.3	-3.62	-5.77	4.956	6.789	-3.62	-22.14	5.69	90	46.92	46.94
2450	12.05	-9.19	-3.59	-5.74	5.132	6.92	-3.59	-20.83	5.6	90	47.17	47.19
2460	11.93	-9.24	-3.63	-5.78	5.028	6.897	-3.63	-19.54	5.61	90	47.73	47.62
2470	11.01	-9.58	-4.01	-6.16	4.68	6.325	-4.01	-21.03	5.57	90	47.63	47.61
2480	11.97	-9.22	-3.69	-5.84	5.077	6.898	-3.69	-21.83	5.53	90	47.45	47.26
2490	8.6	-10.66	-5.31	-7.46	3.686	4.913	-5.31	-23.5	5.34	90	47.14	46.86
2500	11.04	-9.57	-4.07	-6.22	4.707	6.337	-4.07	-22.1	5.5	30	47.93	47.75


Antenna Photo & Length (mm)

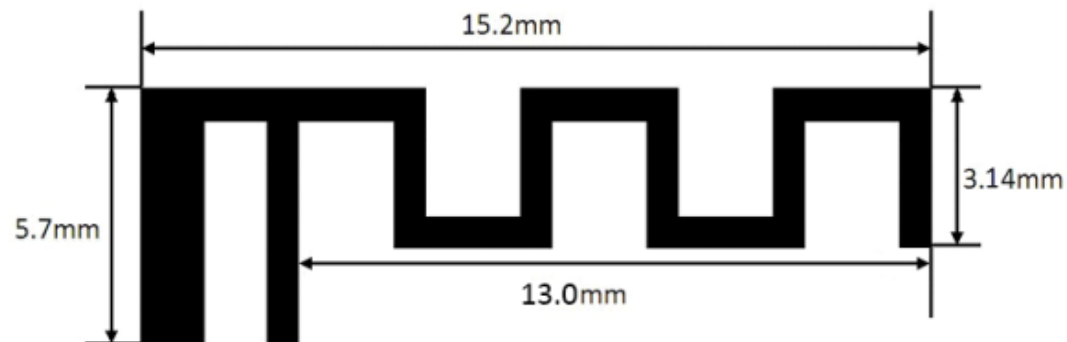


Manufacturer: Shenzhen Topu Zhihui Technology Co., Ltd
Address: 217-1, No. 14 Xiangxing Road, Buyong Community, Shajing Street,
Bao'an District, Shenzhen

Application Information	
04Version	5.258.361
TotalTime	5m 35s 637ms
AdditionalInfor	NULL


2400.00MHz - 2500.00MHz Gain

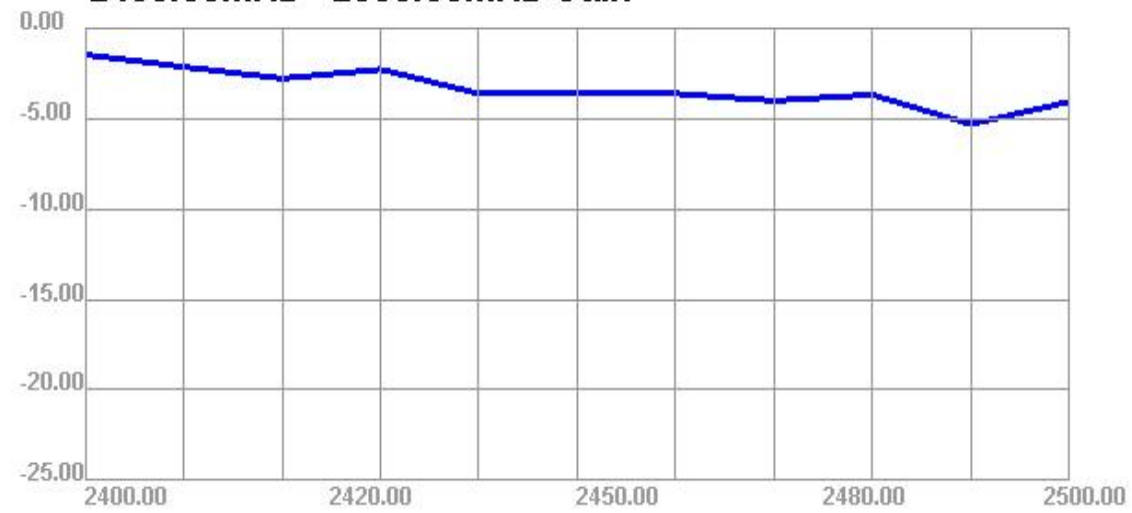


2400.00MHz - 2500.00MHz Efficiency

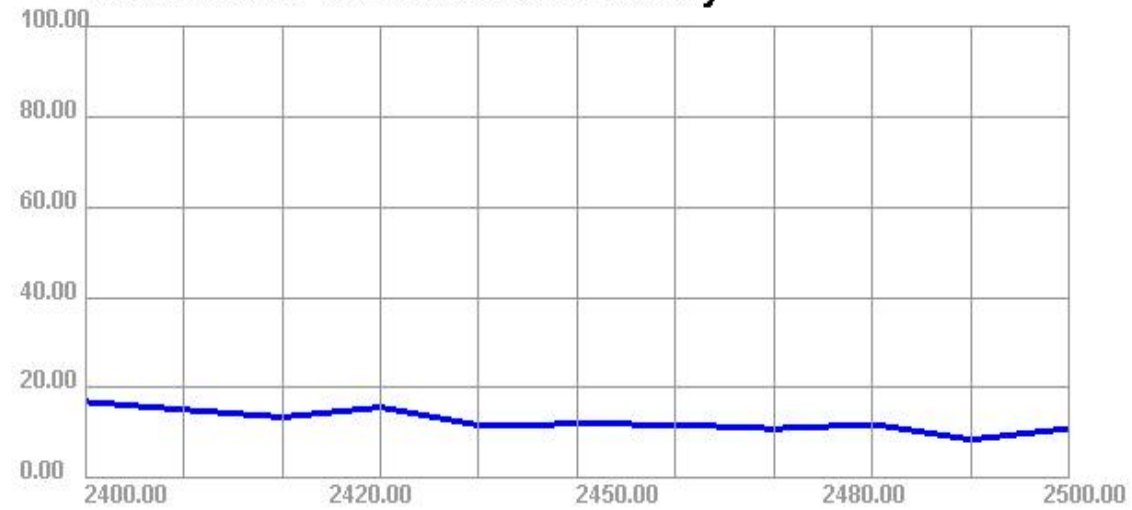


2400.000MHz

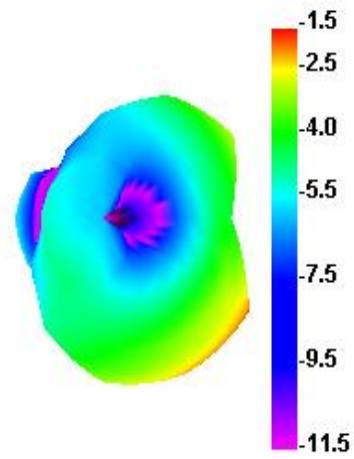


2400.000MHz H

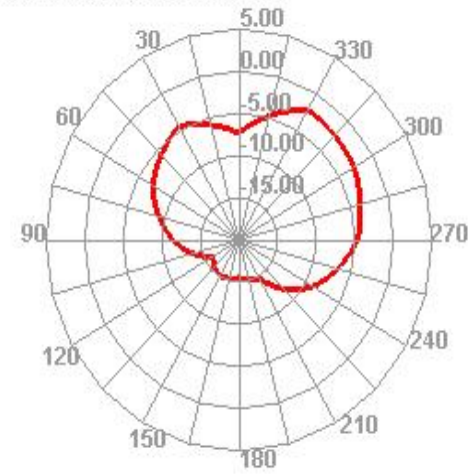


2400.000MHz E1

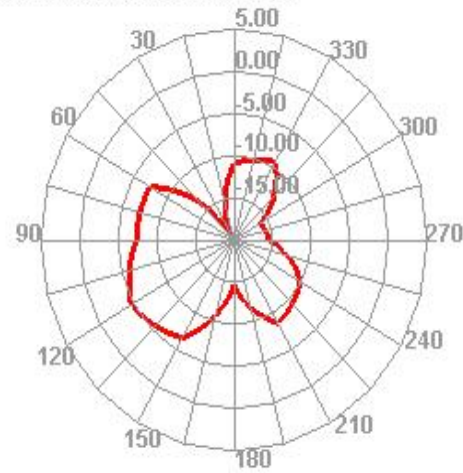


2400.000MHz E2

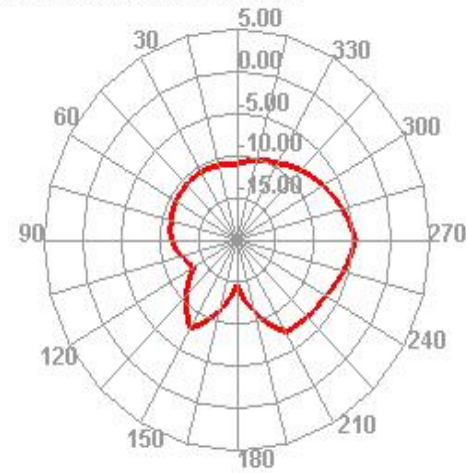


2450.000MHz

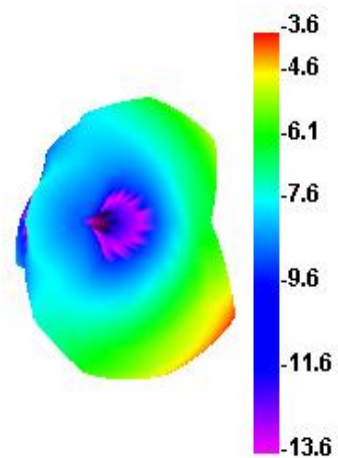


2450.000MHz H

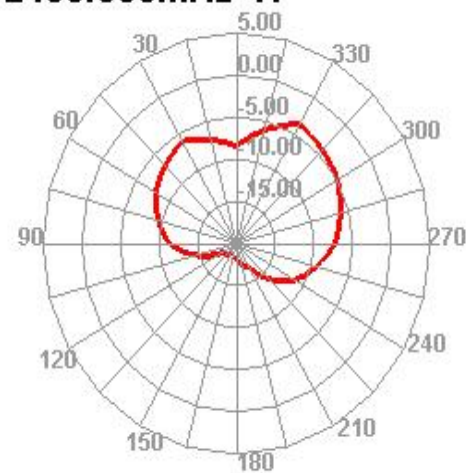


2450.000MHz E1

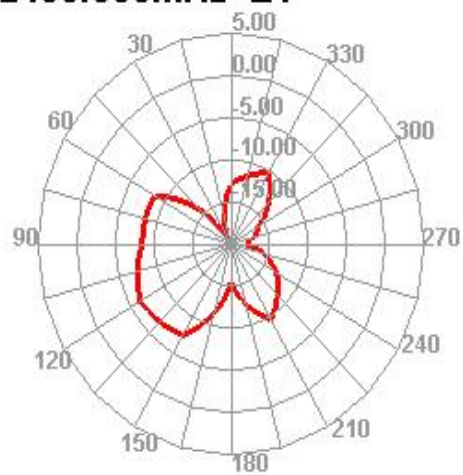


2450.000MHz E2

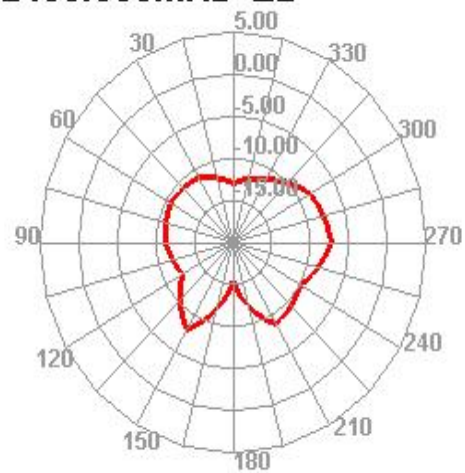


2500.000MHz

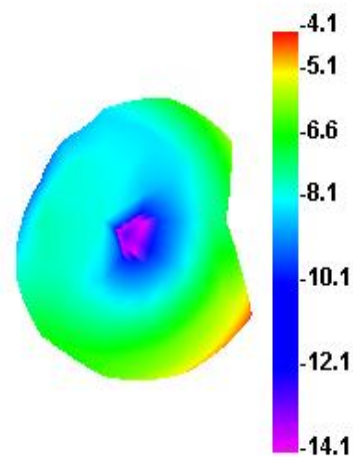

2500.000MHz H

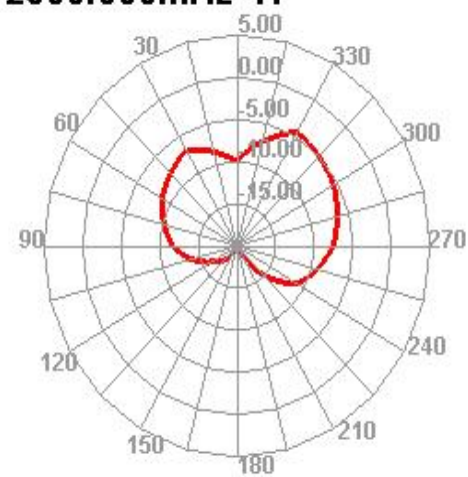

2500.000MHz E1

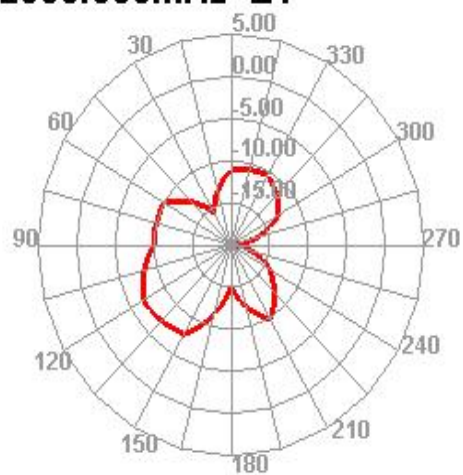

2500.000MHz E2

