

FCC TEST REPORT

For

Shenzhen Huahao Trading Co., Ltd.

Suitable for car interior wireless charging storage box

Test Model: 2411016

Prepared for	:	Shenzhen Huahao Trading Co., Ltd. Room 1103, Block C, Phase II, Lianjian Industrial Park, Huarong
Address	:	Road, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen
Prepared by	:	Guangzhou LCS Compliance Testing Laboratory Ltd.
Address	:	No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China
Tel	:	(+86) 020-39166689
Fax	:	(+86) 020-39166619
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	September 12, 2025
Number of tested samples	:	2
Sample No.	:	C250729009-1, C250729009-2
Serial number	:	Prototype
Date of Test	:	September 12, 2025 ~ September 16, 2025
Date of Report	:	September 17, 2025


RF Exposure Evaluation	
Report Reference No.	LCSC06255010EB
Date of Issue	September 17, 2025
Testing Laboratory Name	Guangzhou LCS Compliance Testing Laboratory Ltd.
Address	101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Testing Location/ Procedure	Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method □
Applicant's Name	Shenzhen Huahao Trading Co., Ltd.
Address	Room 1103, Block C, Phase II, Lianjian Industrial Park, Huarong Road, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen
Test Specification	
Standard	FCC CFR 47 part1 1.1310 FCC CFR 47 part2 2.1093 KDB447498 D01 General RF Exposure Guidance v06 KDB 680106 D01 Wireless Power Transfer v04
Test Report Form No.	TRF-4-E-148 A/0
TRF Originator	Guangzhou LCS Compliance Testing Laboratory Ltd.
Master TRF	Dated 2011-03
Guangzhou LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Guangzhou LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Guangzhou LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
EUT Description.	Suitable for car interior wireless charging storage box
Trade Mark	N/A
Test Model	2411016
Ratings	Please Refer to Page 6
Result	PASS

Compiled by:

Supervised by:

Approved by:





Lifeng Le/ Administrator

Justin Zhu/ Technique principal

Gavin Liang/ Manager

FCC TEST REPORT

Test Report No. : LCSC06255010EB	<u>September 17, 2025</u> Date of issue
---	--

Test Model.....	: 2411016
EUT.....	: Suitable for car interior wireless charging storage box
Applicant.....	: Shenzhen Huahao Trading Co., Ltd.
Address.....	: Room 1103, Block C, Phase II, Lianjian Industrial Park, Huarong Road, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Huahao Trading Co., Ltd.
Address.....	: Room 1103, Block C, Phase II, Lianjian Industrial Park, Huarong Road, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Kunyu Precision Technology Co., Ltd.
Address.....	: No. 43, Yonghong Road, Liulian Community, Pingdi Street, Longgang District, Shenzhen
Telephone.....	: /
Fax.....	: /

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	September 17, 2025	Initial Issue	--

TABLE OF CONTENTS

	DESCRIPTION	PAGE
1. GENERAL INFORMATION		6
2. TEST METHODOLOGY		11
3. TEST RESULTS		14
4. TEST SETUP PHOTOS.....		20

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Suitable for car interior wireless charging storage box

Test Model : 2411016
Input: DC 5V, 2A, Max 10W
USB-C Output (30W) - Fast-charge phones/laptops/tablets/earphones.

Ratings : Wireless Charging Output(15W)- Fast-charge phones/earphones.
A+C Output PCBA (Combined Output 20W)-Fast-charge phones/earphone.

Hardware Version : /

Software Version : /

Wireless Charging :

Operating Frequency : 110.1-205KHz

Modulation Type : ASK

Antenna Type : Coil Antenna

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Huawei	Mobile phone	FRD-AL10	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	1	N/A

1.4. Description of Test Facility

Site Description

EMC Lab. : CNAS Registration Number is L11555
A2LA Certificate Number: 5099.01
FCC Designation Number is CN1379
Test Firm Registration Number: 729882

1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2024-11-11	2025-11-10
B-Field Probe	Narda	100cm ²	M-1154	2024-10-08	2025-10-07

Exposure Level Tester ELT-400 detailed parameters are as follows:

ELT – 400 with 100 cm ² probe				
Frequency range (-3 dB), selectable		1 Hz to 400 kHz, 10 Hz to 400 kHz, 30 Hz to 400 kHz		
Probe type		Magnetic (B-) field		
Sensor		Isotropic coil 100 cm ²		
Damage level	RMS	160 mT	The damage level reduces linearly with increasing frequency above 77.5 Hz (1/f)	
	Peak	226 mT	The damage level reduces linearly with increasing frequency above 620 Hz (1/f). The damage level (peak) applies for pulse duration ≤15.6 ms and duty cycle ≤ 1/64.	
Measurement uncertainty ^a		±4 % (50 Hz to 120 kHz)		
E-Field response		< 20 nT @ f < 2 kHz, 100 V/m < 300 nT @ f = 50 Hz, 50 kV/m		
Mounting thread		1/4-20UNC-2B (standard thread)		
EXPOSURE STD MODE				
Exposure evaluation		Comparison with standard (see Ordering Information)		
MODE ^b		2013/35/EU, EMFV 2016 ICNIRP / IEC 62311		IEC/EN 62233
RANGE	LOW	HIGH	LOW	HIGH
Overload limit	160 %	1 600 %	160 %	1 600 %
Noise level, typical ^c	1 %	5 %	0.4 %	2 %
Resolution		0.001 % (RANGE: LOW)		
Detection, selectable		Automatic according to selected standard, or RMS (averaging time 1 s), or Peak Value		
Display mode, selectable		Instantaneous or Max Hold		
FIELD STRENGTH MODE				
Frequency response		Flat		
MODE ^b		320 µT		80 mT
RANGE	LOW	HIGH	LOW	HIGH
Overload limit	32 µT	320 µT	8 mT	80 mT
Noise level, typical ^c	60 nT	320 nT	10 µT	80 µT
Resolution		1 nT (RANGE: LOW)		
Detection, selectable		RMS (averaging time 1 s), or Peak Value		
Display mode, selectable		Instantaneous or Max Hold		
OUTPUT				
Analog scope output		Three channel (X-Y-Z)		
Analog output level		The open-circuit analog output voltage is 800 mV when the field strength value corresponds to the overload limit (sensitivity = 800 mV/ overload limit). Load impedance ≥ 10 kΩ		
Interface (remote control and readout)		RS-232 (19200 baud, 8n1, XON/XOFF), 3-wire, 2.5 mm stereo jack		
GENERAL SPECIFICATIONS				
Operating temperature range		-10 °C to +50 °C		
Operating humidity range		< 95 % (30 °C) or < 29 g/m ³ , non-condensing		
Weight		910 g (with probe)		
Dimensions		180 mm x 100 mm x 55 mm (basic unit) / 290 mm x 125 mm Ø (probe)		
Display		LCD with backlight; refresh rate 4 times per second		
Battery		NiMH batteries (4 x Mignon, AA), exchangeable		
Operating life, typical		12 h		
Charger unit		100 to 240 V AC / 47 to 63 Hz, fits all AC line connectors		
Charging time, typical		2 h		
Recommended calibration interval		24 months		
Country of origin		Germany		

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Field Strength Uncertainty	1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China


Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Test Modes		
Mode 1	DC (5V/2A) + EUT + Mobile phone(Battery Status: <1%)	Record
Mode 2	DC (5V/2A)+ EUT + Mobile phone(Battery Status: <50%)	Pre-Scan
Mode 3	DC (5V/2A) + EUT + Mobile phone(Battery Status: 100%)	Pre-Scan
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

1.8. Coil Description

Config.	Mode	Descriptions
1	Standby (Flatbed Position) @147.7kHz	EUT Alone powered by DC
2	Operating (Flatbed Position) (Phone @147.7KHz ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to DC & Wireless Charging to WPT Client. 15W: Direct Contact 15W: 2mm Airgap, 2mm Shift Top as Worst-Case Position

1.9. Coil Size

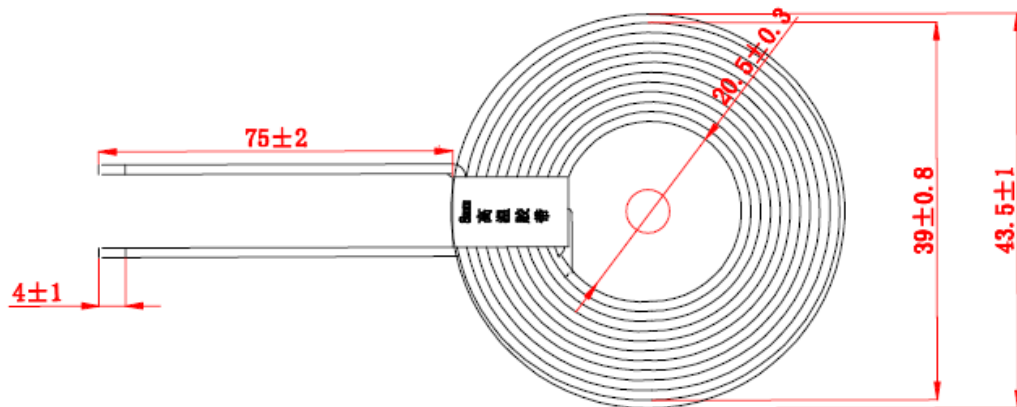


(Unit: mm)

1.10. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μ H $\pm$ 10%
Material of enclosure(s):	Multiple strands of enamelled wire
Number of turns:	Transmitter 1: 10 turns

1.11. Duty Cycle

Mode	ON Time (ms)	Period (ms)	Duty Cycle (%)
Operating (110-145kHz)	/	/	100

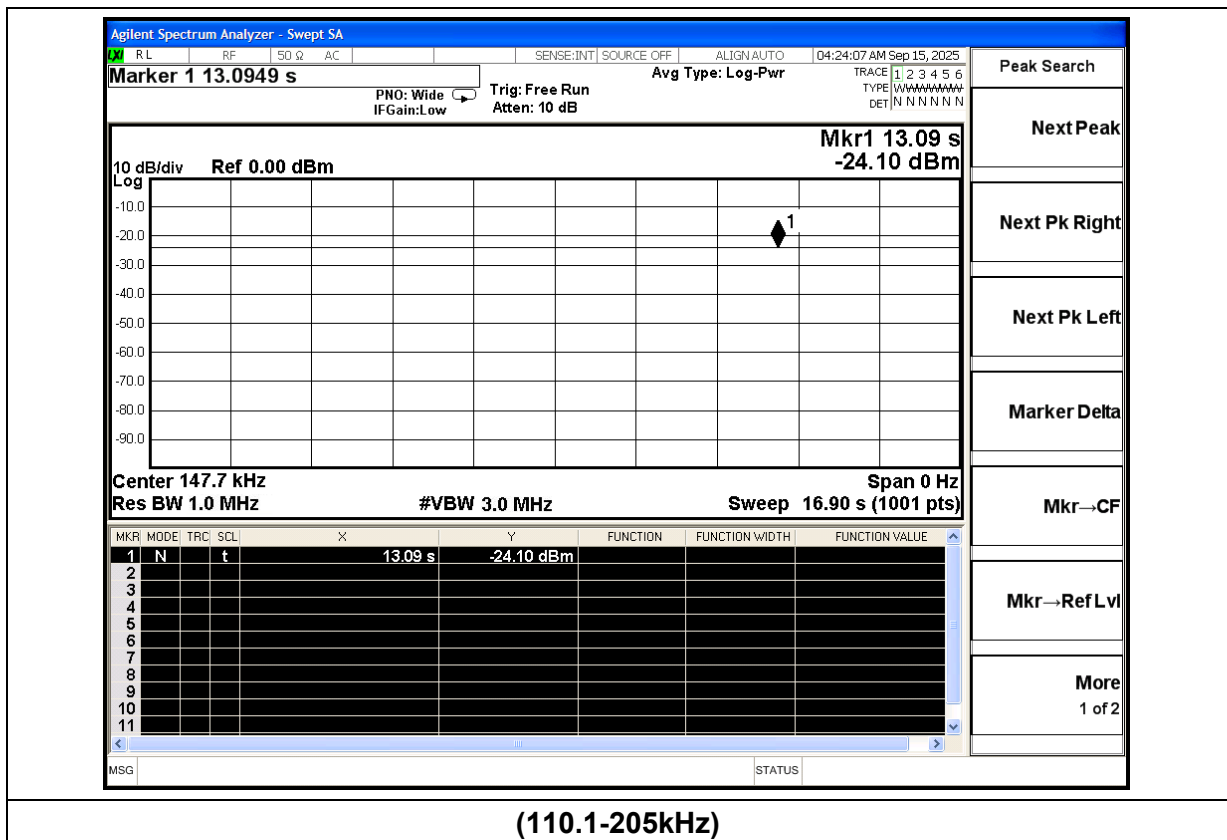

2. TEST METHODOLOGY

2.1. Reference Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1093: Radiofrequency radiation exposure evaluation: portable devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz


* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.


2.3. Test Setup Diagram

Mobile Exposure Conditions

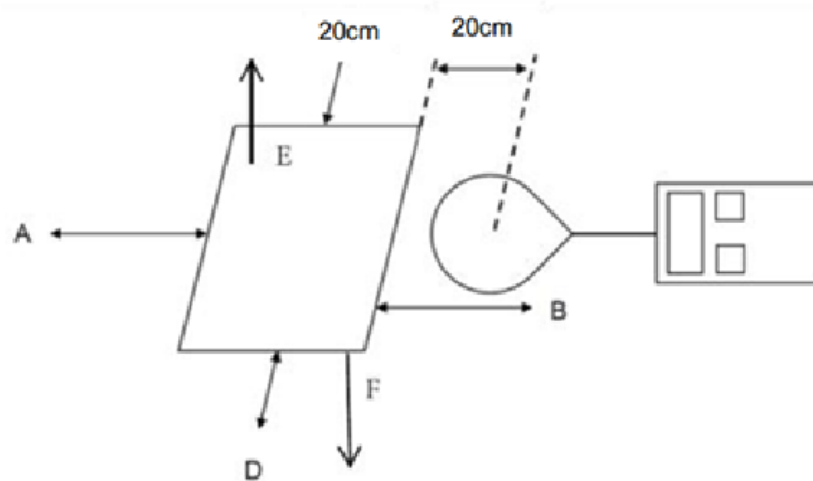

Note: The distance of the points A/B/C/D is 20cm, and the point E is 20cm.

Portable Exposure Conditions:

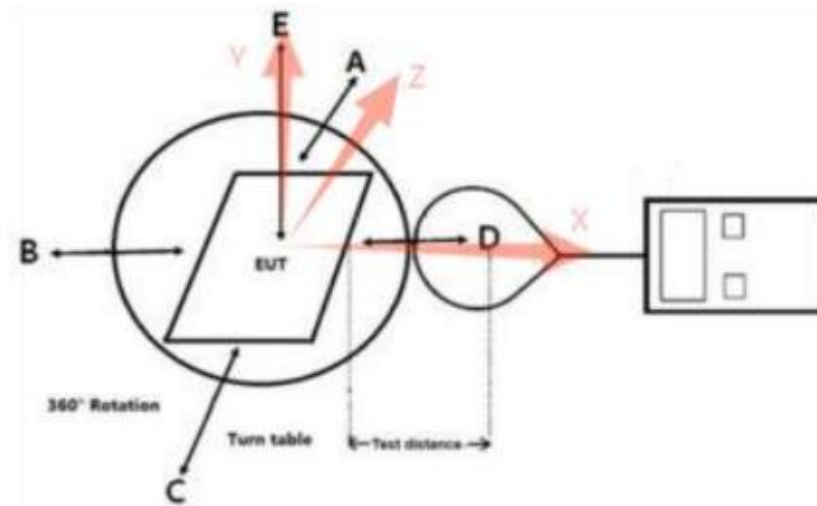

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.

The values tested by the probe are X, Y, and Z on three axes perpendicular to the edge of the device. Top and bottom side coincident with the axis(Y) of the main coil.

2.4. Measurement Procedure

Mobile Exposure Conditions

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at 20 cm surrounding EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

Portable Exposure Conditions

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.

d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.


2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110.1-205kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of each primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No	Mixed mobile and portable exposure conditions
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The E-field and H-field strengths from all simultaneous transmitting coils are demonstrated to less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	Yes	Only one radiating structure and tested at maximum Output Power

3. TEST RESULTS

For portable exposure condition


- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) Validation of Field Estimates
 - (a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellowing picture

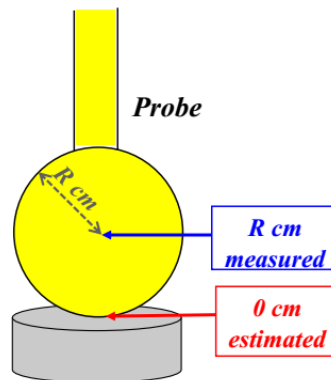

- (b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.
- (c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.
- (d) If there is only one estimated value, then a single validation point is sufficient.
- (e) Validation Example for 4 cm Probe Radius as following


Step 1

Validation Example for 4 cm Probe Radius

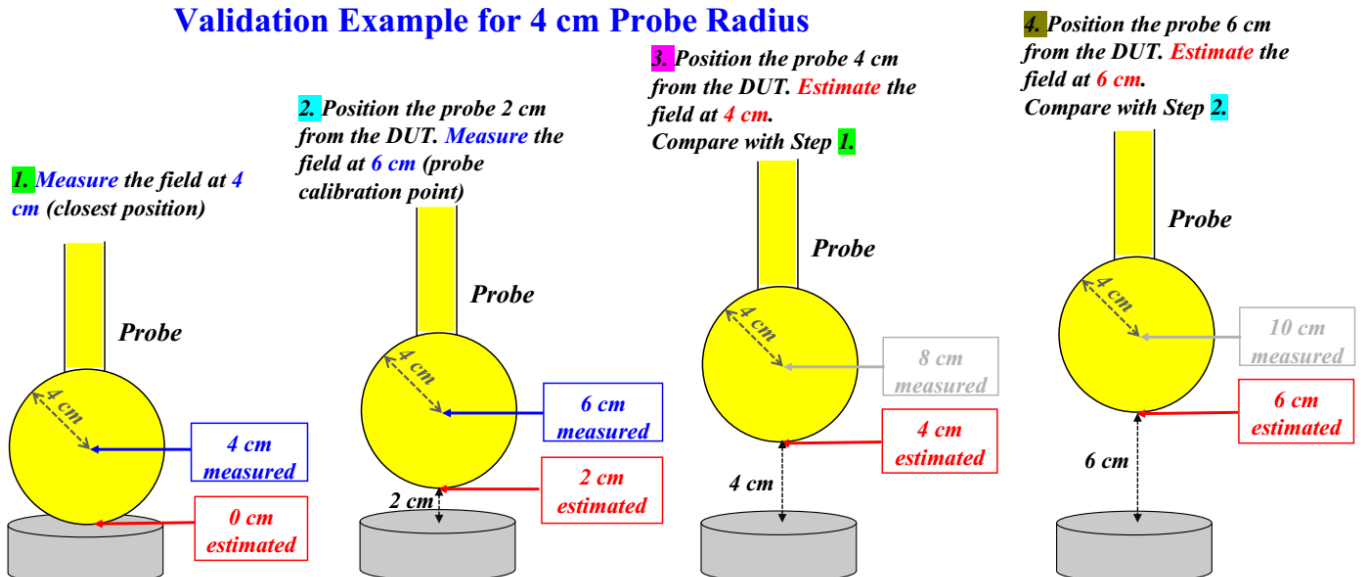


Step 2

Validation Example for 4 cm Probe Radius

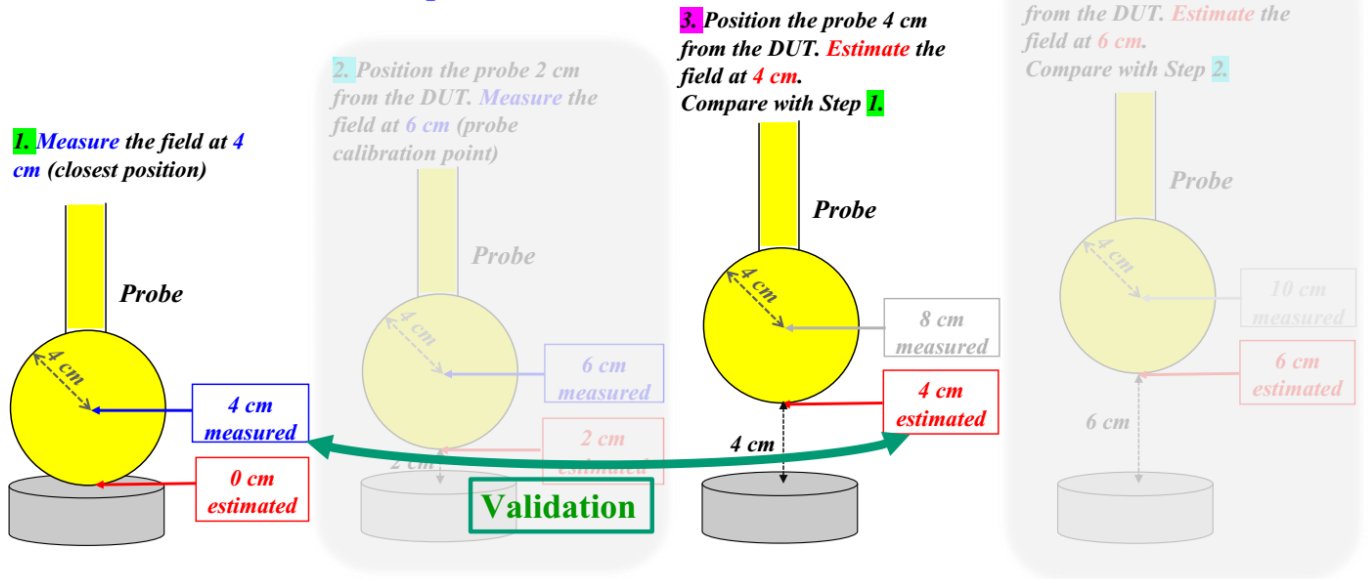

Step 3

Validation Example for 4 cm Probe Radius

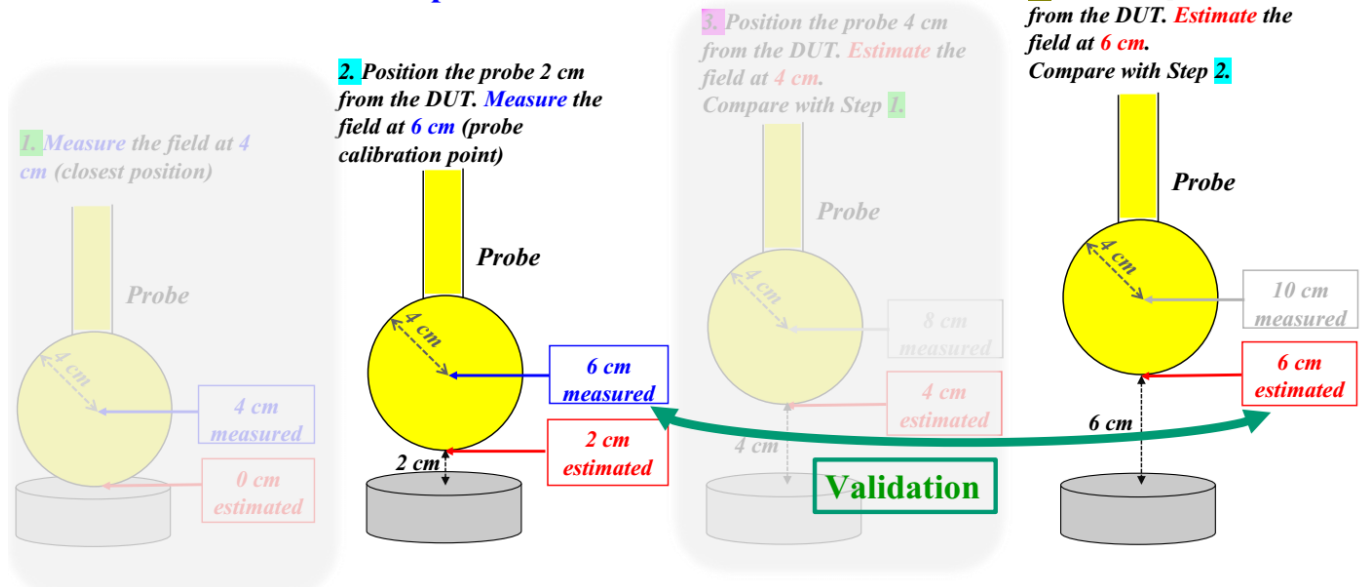


Description of the Validation Example for 4 cm Probe Radius

- Assume that $R=4$ cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe).
- Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
- Compare the estimates with the values at the same positions where the field was measured exactly (i.e., 4 cm and 6 cm)
- The difference between measurements and estimates needs to be no more than 30%.
- That validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another one at 2.1 cm, that is essentially a repetition


(6) According to Calibration information and specification about ETL-400 Probe (the B-Field Probe size is 122.66cm², the probe radius is 6.25cm), The Probe ETL-400 Probe's sensitive elements center is located in

the probe's center, and the distance from the sensitive elements center to the tip of probe is 6.25cm.

- (7) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.
- (9) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

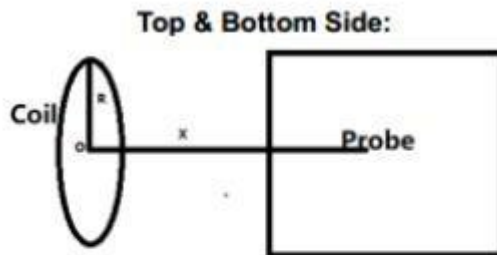

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

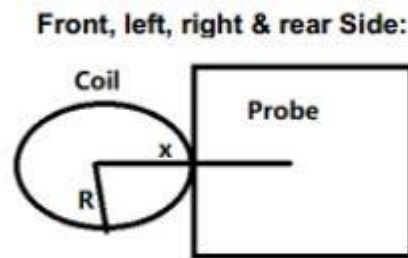

$$B = \frac{\mu_0 * I * N}{2 * x}$$

B(Unit:A/m): means H-field value;

μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I(Unit:A): A current element passing through a radiated coil;

R(Unit:mm): means the Radius of radiated coil,According to provided Antenna specification:

$R=43.5/2=21.75\text{mm}=0.2175\text{m}$;

Test Distance(Unit:cm): The distance from the sensing element of the probe to the edge of the device surface.

x(Unit:mm): means the center of the coil to the sensing elements of the probe. (For top & bottom side:

$x=\text{test distance}$; For other side: $x=\text{test distance}+R$)

N: Number of turns, according to providing “Antenna specification” files: N=10.

Validation E-Field and H-Field as bellowing;

Validation Mode: TM1 Unit: Agreement (%); H-field (A/m)							
	Top	Bottom	Left	Right	Front	Back	Conclusion
Estimated Distance: 6 cm	0.7816	0.7854	0.858	0.7175	0.7878	0.7522	PASS
Measured Distance: 6.25 cm	0.895	0.87	0.902	0.899	0.867	0.864	
contrast(%)	-12.67	-9.72	-4.88	-20.19	-9.13	-12.94	
Estimated Distance: 8 cm	0.7574	0.7115	0.3671	0.7105	0.7361	0.731	PASS
Measured Distance: 8 cm	0.897	0.871	0.877	0.894	0.885	0.895	
contrast(%)	-15.56	-18.31	-58.14	-20.53	-16.82	-18.32	
Estimated Distance: 10 cm	0.7574	0.7115	0.7671	0.7105	0.3361	0.731	PASS
Measured Distance: 10 cm	0.897	0.871	0.877	0.894	0.885	0.895	
contrast(%)	-15.56	-18.31	-12.53	-20.53	-16.82	-18.32	

Note 1:

The contrast (%)= (HEstimated Distance - HMeasured Distance)/ HMeasured Distance *100%

H-Field and E-Field Emission level with a combination of measured and estimated results.

Test condition: Mode 1

Distance(cm)	Field Strength	Result							Limit
		Type	Top	Bottom	Left	Right	Front	Back	
0	A/m	Estimate	1.428	1.376	1.445	1.461	1.415	1.428	1.63
	V/m		27.297	27.136	27.348	27.398	27.258	27.298	614
2	A/m	Estimate	1.387	1.378	1.457	1.396	1.429	1.400	1.63
	V/m		27.171	27.142	27.385	27.200	27.299	27.210	614
4	A/m	Estimate	1.375	1.404	1.453	1.383	1.447	1.385	1.63
	V/m		27.134	27.224	27.373	27.158	27.355	27.166	614
6	uT	Measured	1.118	1.088	1.128	1.124	1.084	1.080	--
	A/m		0.895	0.870	0.902	0.899	0.867	0.864	1.63
	V/m		25.266	25.146	25.304	25.289	25.130	25.114	614
8	uT	Measured	1.122	1.088	1.097	1.117	1.107	1.118	--
	A/m		0.897	0.871	0.877	0.894	0.885	0.895	1.63
	V/m		25.280	25.148	25.182	25.261	25.222	25.266	614
10	uT	Measured	1.091	1.110	1.115	1.128	1.111	1.099	--
	A/m		0.872	0.888	0.892	0.902	0.889	0.879	1.63
	V/m		25.157	25.234	25.252	25.304	25.238	25.191	614
12	uT	Measured	0.520	0.509	0.522	0.514	0.530	0.523	--
	A/m		0.416	0.408	0.417	0.411	0.424	0.418	1.63
	V/m		21.944	21.852	21.956	21.890	22.023	21.964	614
14	uT	Measured	0.526	0.515	0.522	0.515	0.524	0.510	--
	A/m		0.421	0.412	0.418	0.412	0.420	0.408	1.63
	V/m		21.991	21.898	21.959	21.900	21.978	21.860	614
16	uT	Measured	0.529	0.522	0.520	0.515	0.512	0.510	--
	A/m		0.423	0.418	0.416	0.412	0.410	0.408	1.63
	V/m		22.013	21.960	21.939	21.901	21.878	21.853	614
18	uT	Measured	0.128	0.129	0.136	0.134	0.143	0.140	--
	A/m		0.103	0.103	0.109	0.107	0.114	0.112	1.63
	V/m		15.860	15.890	16.119	16.052	16.336	16.234	614
20	uT	Measured	0.122	0.134	0.140	0.127	0.147	0.146	--
	A/m		0.098	0.107	0.112	0.102	0.118	0.117	1.63
	V/m		36.717	40.331	42.122	38.317	44.266	43.817	614

Note: $V/m = 10(((20 \lg(A/m \cdot 10^6) + 51.5) - 120)/20)$ Note: $A/m = uT/1.25$

3.3 Conclusion


A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106 D01 v04.

4. TEST SETUP PHOTOS


(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)



0cm-Left

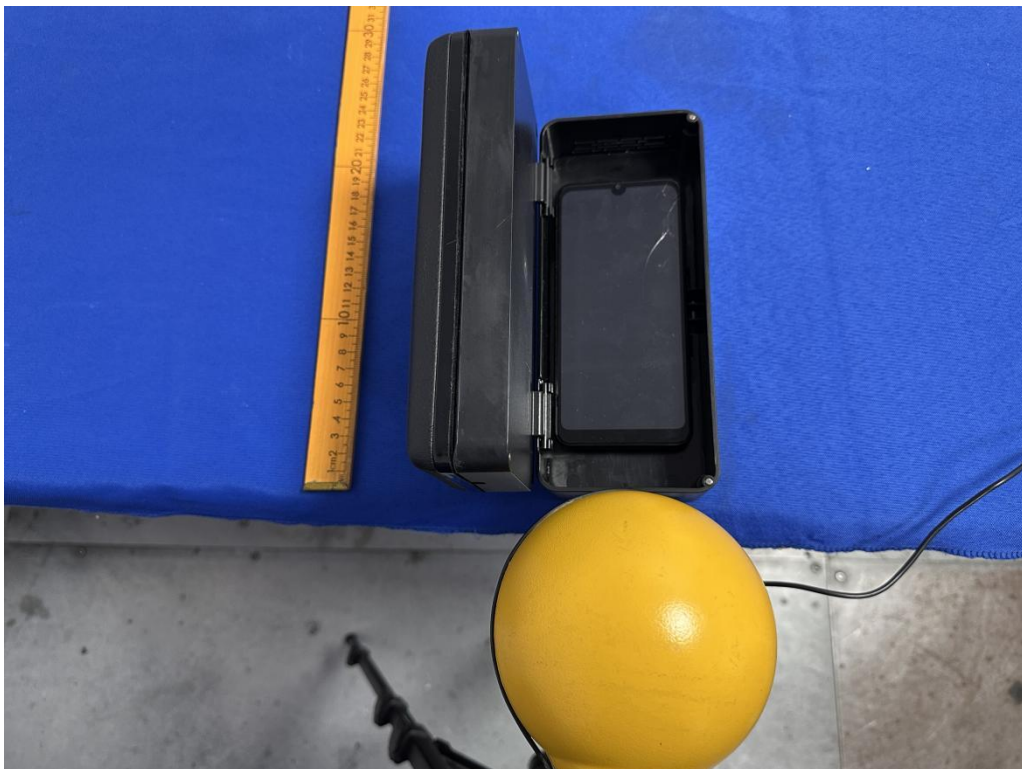


0cm-Right

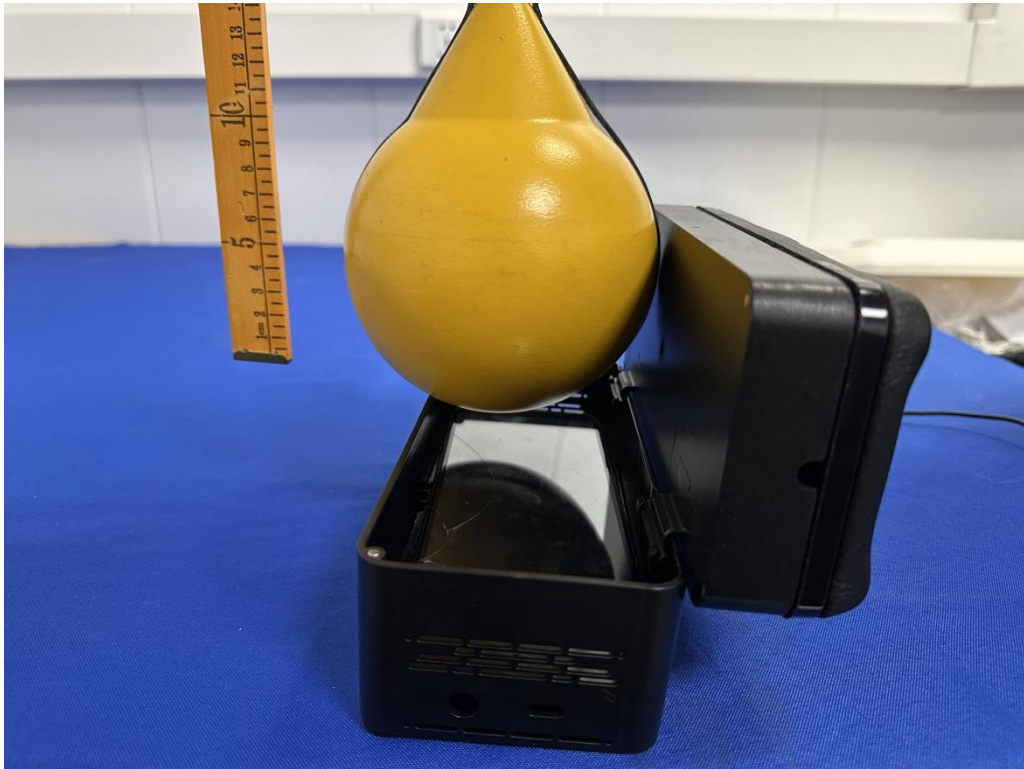

0cm-Top




0cm-Front

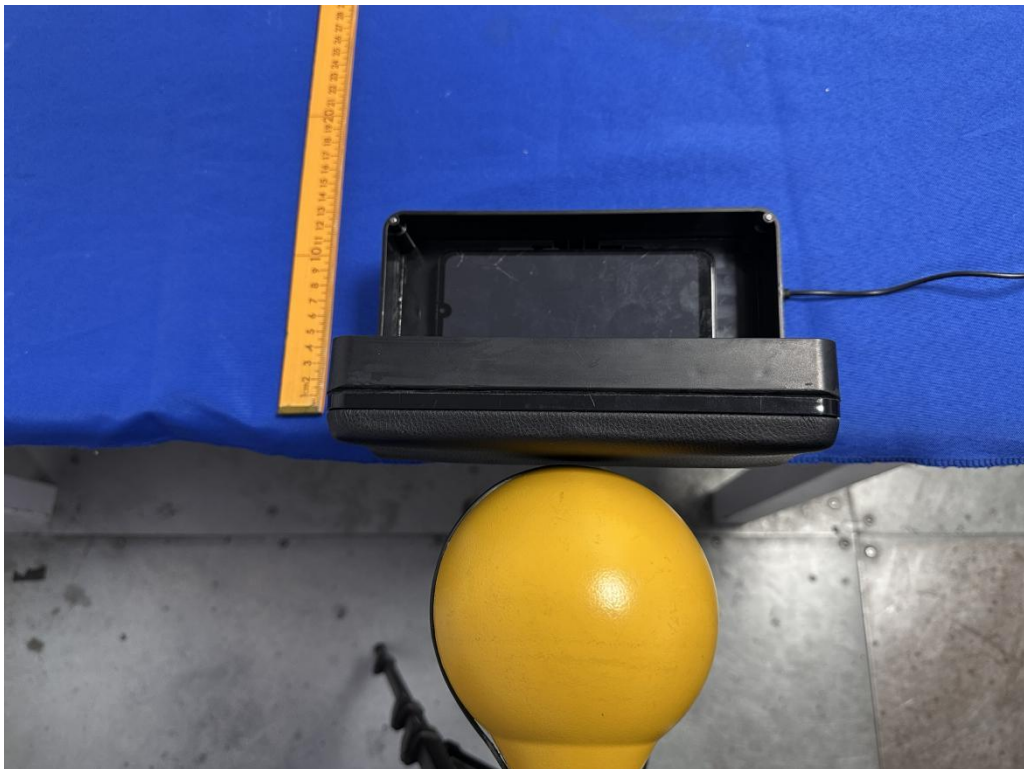

0cm-Back



20cm-Left

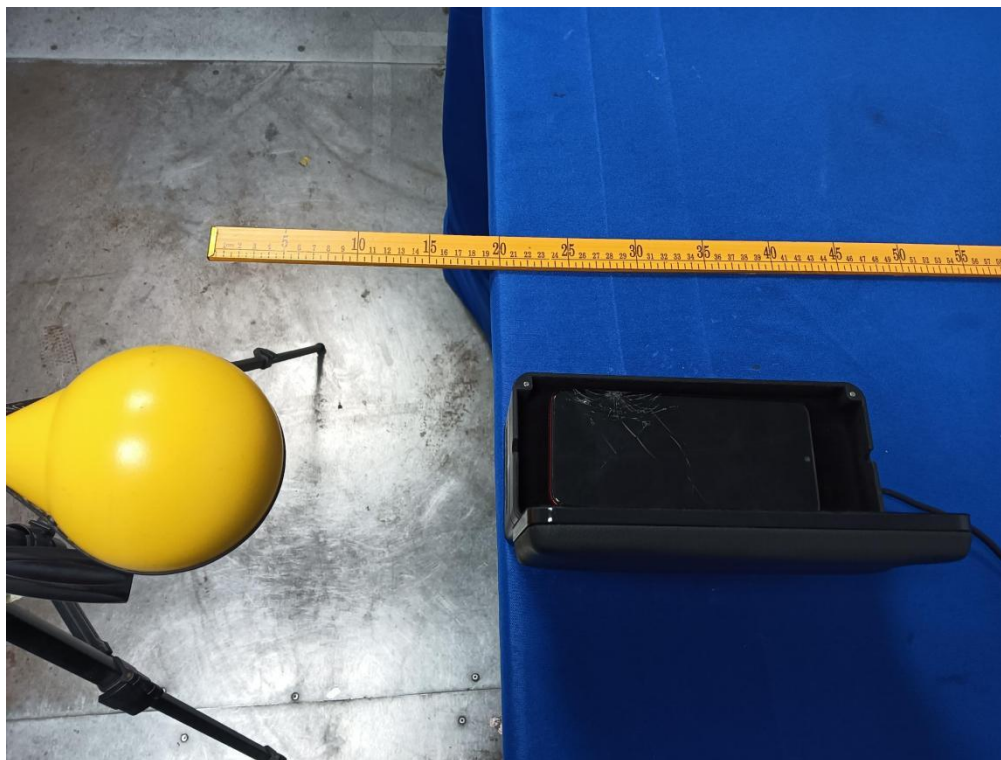


20cm-Right



20cm-Top



20cm-Front

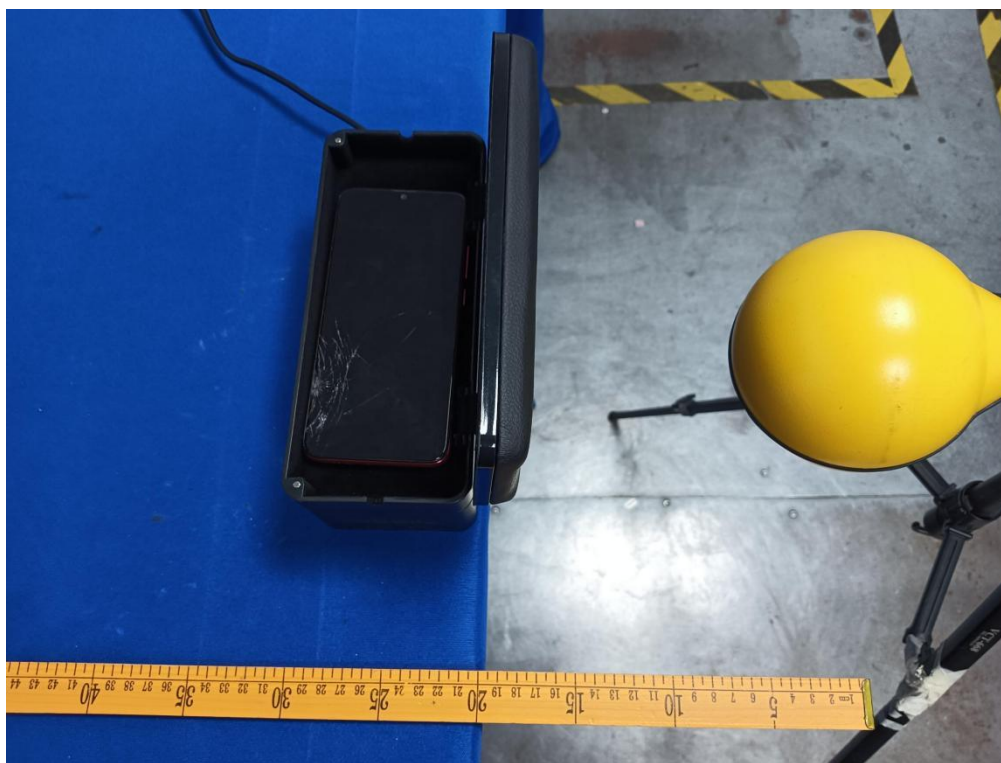

20cm-Back

-----THE END OF REPORT-----