


TEST REPORT


Report No.: MTi250722013-0201E1

Test Graphs

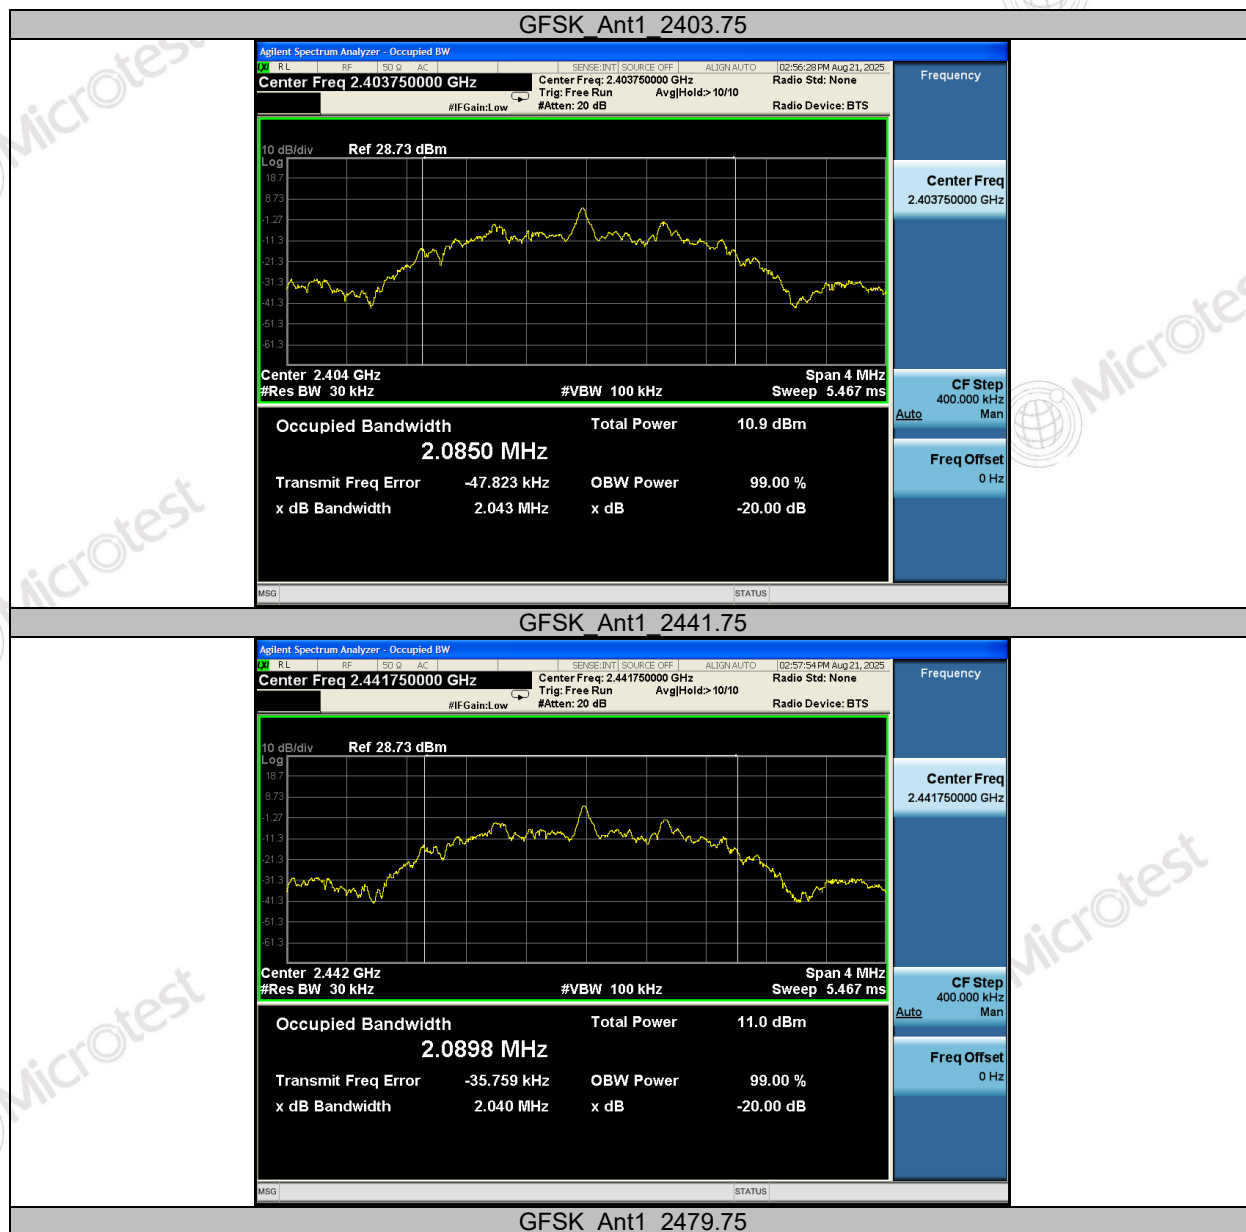

TEST REPORT

Report No.: MTi250722013-0201E1

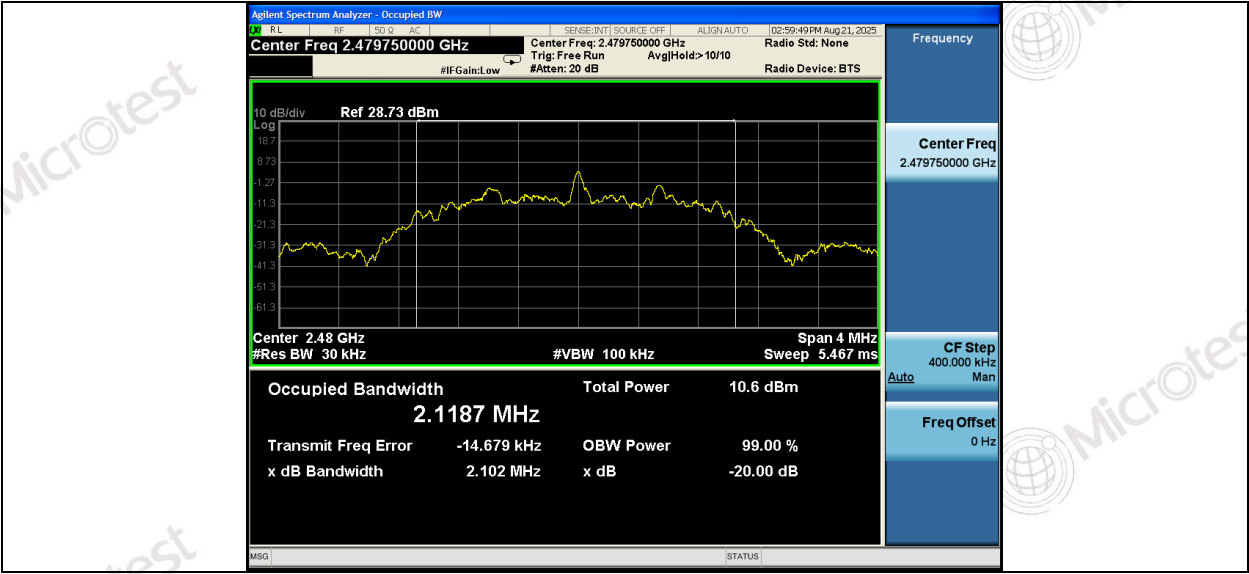

TEST REPORT

Report No.: MTi250722013-0201E1


6.3 Field strength of fundamental

Test Requirement:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
	The field strength of emissions in this band shall not exceed 2500 millivolts/meter.		
Test Method:	ANSI C63.10-2020 section 6.6		
Procedure:	ANSI C63.10-2020 section 6.6		

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.9 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.3.2 Test Setup Diagram:

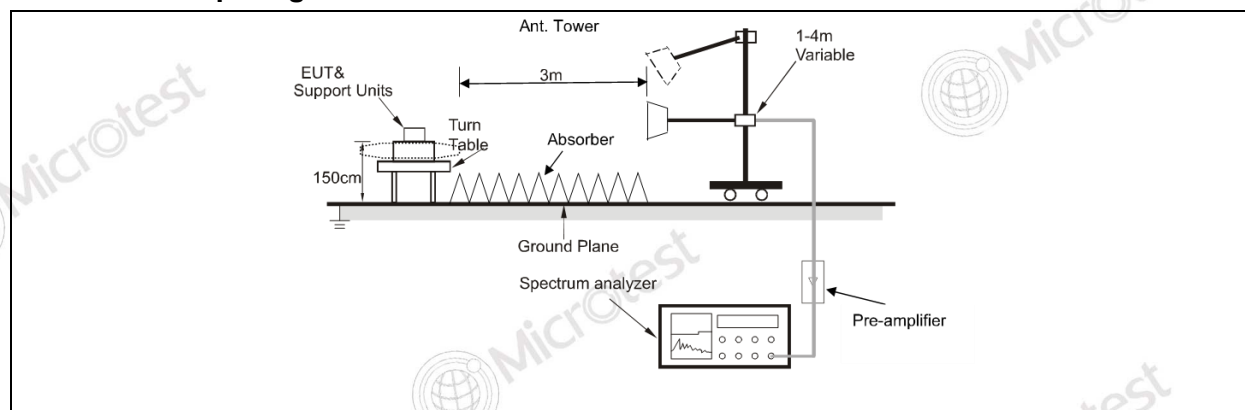

TEST REPORT

Report No.: MTi250722013-0201E1

6.3.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2403.750	88.43	-4.30	84.13	114.00	-29.87	peak
2	*	2403.750	83.96	-4.30	79.66	94.00	-14.34	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2403.750	81.51	-4.30	77.21	114.00	-36.79	peak
2	*	2403.750	76.55	-4.30	72.25	94.00	-21.75	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2441.750	88.38	-4.35	84.03	114.00	-29.97	peak
2	*	2441.750	83.92	-4.35	79.57	94.00	-14.43	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2441.750	82.98	-4.35	78.63	114.00	-35.37	peak
2	*	2441.750	78.43	-4.35	74.08	94.00	-19.92	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2479.750	89.33	-4.24	85.09	114.00	-28.91	peak
2	*	2479.750	84.85	-4.24	80.61	94.00	-13.39	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2479.750	82.42	-4.24	78.18	114.00	-35.82	peak
2	*	2479.750	77.88	-4.24	73.64	94.00	-20.36	AVG

TEST REPORT

Report No.: MTi250722013-0201E1


6.4 Band edge emissions (Radiated)

Test Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.																									
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation. <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																								
0.009-0.490	2400/F(kHz)	300																								
0.490-1.705	24000/F(kHz)	30																								
1.705-30.0	30	30																								
30-88	100 **	3																								
88-216	150 **	3																								
216-960	200 **	3																								
Above 960	500	3																								
Test Method:	ANSI C63.10-2020 section 6.6.4																									
Procedure:	ANSI C63.10-2020 section 6.6.4																									

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.9 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.4.2 Test Setup Diagram:

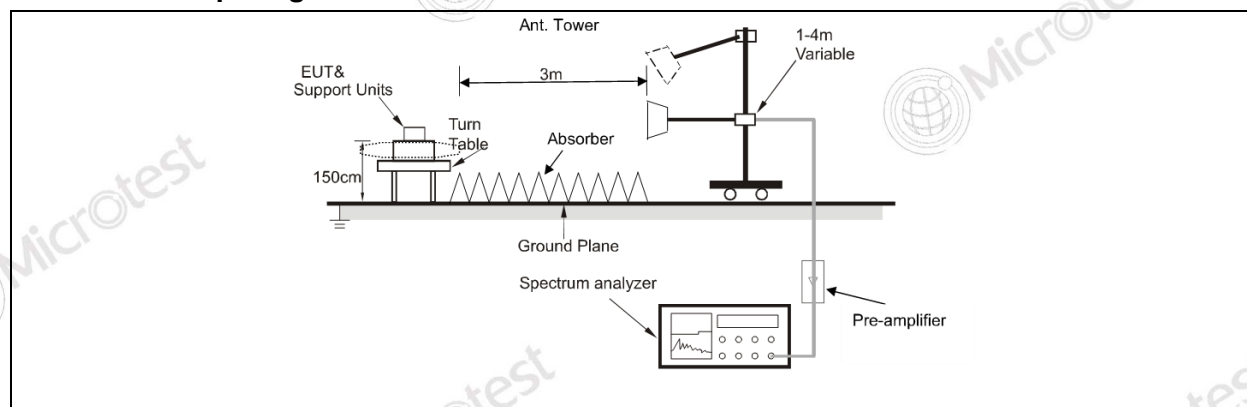

TEST REPORT

Report No.: MTI250722013-0201E1

6.4.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	49.63	-4.50	45.13	74.00	-28.87 peak
2		2310.000	38.48	-4.50	33.98	54.00	-20.02 AVG
3		2390.000	49.52	-4.31	45.21	74.00	-28.79 peak
4		2390.000	38.45	-4.31	34.14	54.00	-19.86 AVG
5		2400.000	53.38	-4.29	49.09	74.00	-24.91 peak
6	*	2400.000	41.40	-4.29	37.11	54.00	-16.89 AVG

Mode1 / Polarization: Vertical / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	49.10	-4.50	44.60	74.00	-29.40 peak
2		2310.000	38.23	-4.50	33.73	54.00	-20.27 AVG
3		2390.000	48.60	-4.31	44.29	74.00	-29.71 peak
4		2390.000	38.52	-4.31	34.21	54.00	-19.79 AVG
5		2400.000	49.77	-4.29	45.48	74.00	-28.52 peak
6	*	2400.000	39.35	-4.29	35.06	54.00	-18.94 AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	54.28	-4.23	50.05	74.00	-23.95	peak
2	*	2483.500	42.25	-4.23	38.02	54.00	-15.98	AVG
3		2500.000	48.67	-4.15	44.52	74.00	-29.48	peak
4		2500.000	38.72	-4.15	34.57	54.00	-19.43	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	50.12	-4.23	45.89	74.00	-28.11	peak
2	*	2483.500	39.59	-4.23	35.36	54.00	-18.64	AVG
3		2500.000	48.64	-4.15	44.49	74.00	-29.51	peak
4		2500.000	38.72	-4.15	34.57	54.00	-19.43	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

6.5 Emissions in frequency bands (below 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																																								
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following: <table border="1"> <thead> <tr> <th>Fundamental frequency</th><th>Field strength of fundamental (millivolts/meter)</th><th>Field strength of harmonics (microvolts/meter)</th></tr> </thead> <tbody> <tr> <td>902-928 MHz</td><td>50</td><td>500</td></tr> <tr> <td>2400-2483.5 MHz</td><td>50</td><td>500</td></tr> <tr> <td>5725-5875 MHz</td><td>50</td><td>500</td></tr> <tr> <td>24.0-24.25 GHz</td><td>250</td><td>2500</td></tr> </tbody> </table> Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation. <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.		Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																																							
902-928 MHz	50	500																																							
2400-2483.5 MHz	50	500																																							
5725-5875 MHz	50	500																																							
24.0-24.25 GHz	250	2500																																							
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																							
0.009-0.490	2400/F(kHz)	300																																							
0.490-1.705	24000/F(kHz)	30																																							
1.705-30.0	30	30																																							
30-88	100 **	3																																							
88-216	150 **	3																																							
216-960	200 **	3																																							
Above 960	500	3																																							
Test Method:	ANSI C63.10-2020 section 6.5																																								

TEST REPORT


Report No.: MTi250722013-0201E1

Procedure:	ANSI C63.10-2020 section 6.5
------------	------------------------------

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.9 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.5.2 Test Setup Diagram:

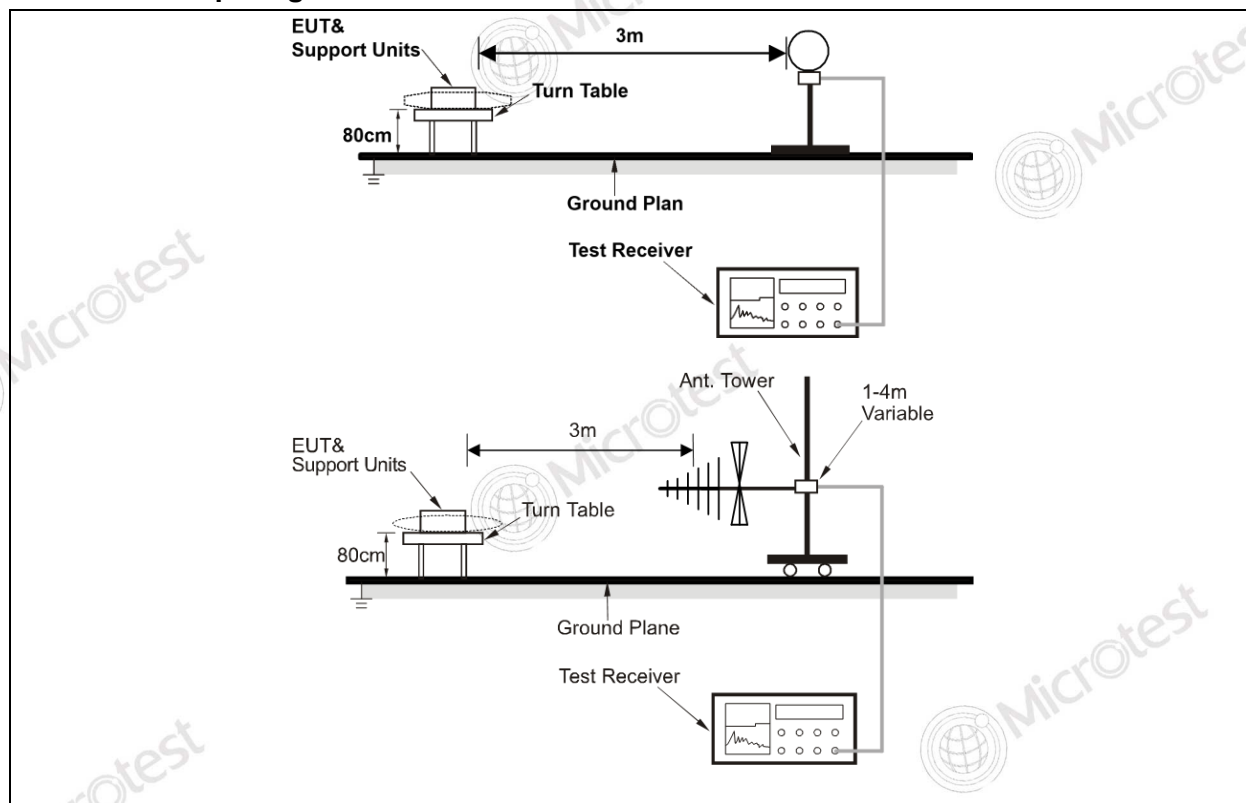


TEST REPORT

Report No.: MTi250722013-0201E1

6.5.3 Test Data:


Mode1 / Polarization: Horizontal / CH: H

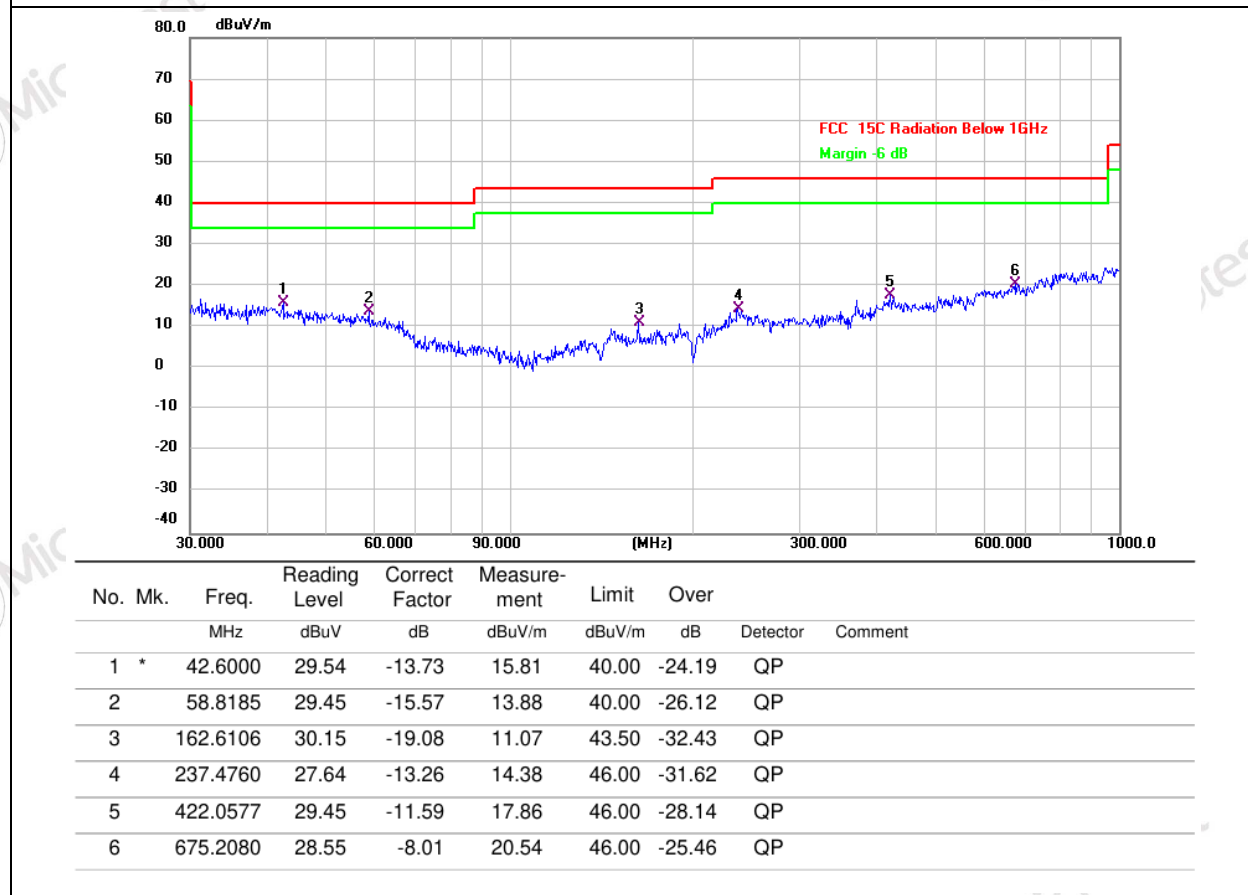

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Vertical / CH: H

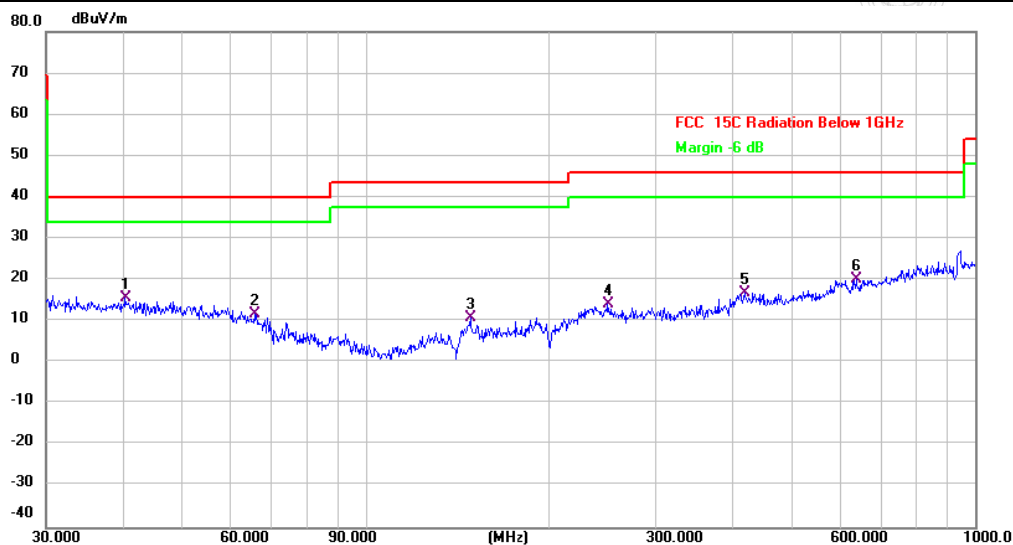

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40.4172	38.98	-23.36	15.62	40.00	-24.38	QP	
2		65.8031	30.85	-19.08	11.77	40.00	-28.23	QP	
3		148.4410	26.05	-15.22	10.83	43.50	-32.67	QP	
4		250.3012	30.58	-16.57	14.01	46.00	-31.99	QP	
5		419.1081	29.46	-12.68	16.78	46.00	-29.22	QP	
6		638.3686	30.28	-10.01	20.27	46.00	-25.73	QP	

TEST REPORT

Report No.: MTi250722013-0201E1

6.6 Emissions in frequency bands (above 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																																								
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following: <table border="1"> <thead> <tr> <th>Fundamental frequency</th><th>Field strength of fundamental (millivolts/meter)</th><th>Field strength of harmonics (microvolts/meter)</th></tr> </thead> <tbody> <tr> <td>902-928 MHz</td><td>50</td><td>500</td></tr> <tr> <td>2400-2483.5 MHz</td><td>50</td><td>500</td></tr> <tr> <td>5725-5875 MHz</td><td>50</td><td>500</td></tr> <tr> <td>24.0-24.25 GHz</td><td>250</td><td>2500</td></tr> </tbody> </table> Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation. <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.		Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																																							
902-928 MHz	50	500																																							
2400-2483.5 MHz	50	500																																							
5725-5875 MHz	50	500																																							
24.0-24.25 GHz	250	2500																																							
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																							
0.009-0.490	2400/F(kHz)	300																																							
0.490-1.705	24000/F(kHz)	30																																							
1.705-30.0	30	30																																							
30-88	100 **	3																																							
88-216	150 **	3																																							
216-960	200 **	3																																							
Above 960	500	3																																							
Test Method:	ANSI C63.10-2020 section 6.6																																								

TEST REPORT


Report No.: MTi250722013-0201E1

Procedure:	ANSI C63.10-2020 section 6.6
------------	------------------------------

6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.9 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.6.2 Test Setup Diagram:

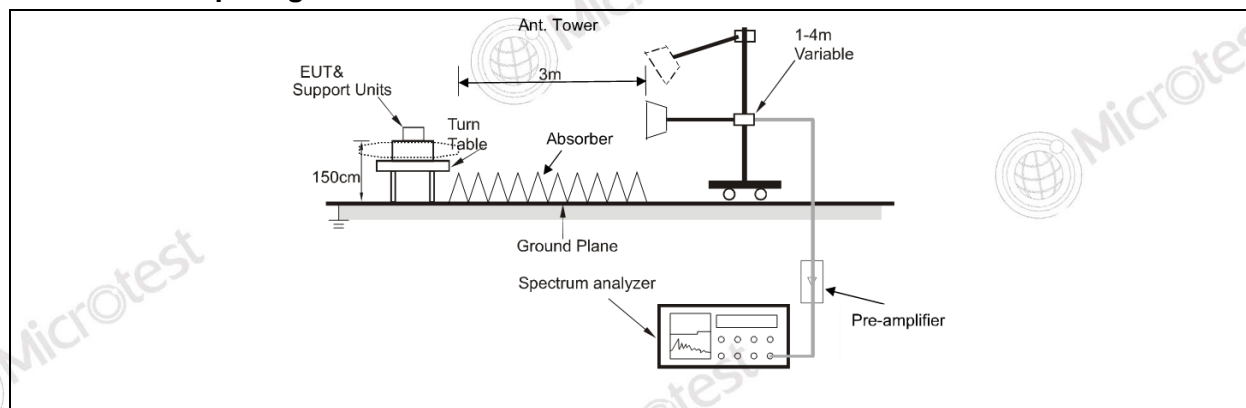

TEST REPORT

Report No.: MTI250722013-0201E1

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4807.500	48.50	1.79	50.29	74.00	-23.71	peak
2		4807.500	42.59	1.79	44.38	54.00	-9.62	AVG
3		7211.250	58.56	7.55	66.11	74.00	-7.89	peak
4		7211.250	33.04	7.55	40.59	54.00	-13.41	AVG
5		9615.000	45.37	8.84	54.21	74.00	-19.79	peak
6	*	9615.000	39.63	8.84	48.47	54.00	-5.53	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4807.500	43.44	1.79	45.23	74.00	-28.77	peak
2		4807.500	37.68	1.79	39.47	54.00	-14.53	AVG
3		7211.250	56.54	7.55	64.09	74.00	-9.91	peak
4		7211.250	32.71	7.55	40.26	54.00	-13.74	AVG
5		9615.000	45.20	8.84	54.04	74.00	-19.96	peak
6	*	9615.000	39.28	8.84	48.12	54.00	-5.88	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4883.500	47.85	2.10	49.95	74.00	-24.05	peak
2		4883.500	41.28	2.10	43.38	54.00	-10.62	AVG
3		7325.250	52.63	7.95	60.58	74.00	-13.42	peak
4		7325.250	32.82	7.95	40.77	54.00	-13.23	AVG
5		9767.000	44.55	9.34	53.89	74.00	-20.11	peak
6	*	9767.000	38.28	9.34	47.62	54.00	-6.38	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4883.500	44.18	2.10	46.28	74.00	-27.72	peak
2		4883.500	38.18	2.10	40.28	54.00	-13.72	AVG
3		7325.250	46.72	7.95	54.67	74.00	-19.33	peak
4		7325.250	32.44	7.95	40.39	54.00	-13.61	AVG
5		9767.000	44.32	9.34	53.66	74.00	-20.34	peak
6	*	9767.000	37.90	9.34	47.24	54.00	-6.76	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4959.500	48.61	2.45	51.06	74.00	-22.94	peak
2		4959.500	43.20	2.45	45.65	54.00	-8.35	AVG
3		7439.250	59.85	7.79	67.64	74.00	-6.36	peak
4		7439.250	32.95	7.79	40.74	54.00	-13.26	AVG
5		9919.000	45.24	9.17	54.41	74.00	-19.59	peak
6	*	9919.000	39.10	9.17	48.27	54.00	-5.73	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4959.500	44.82	2.45	47.27	74.00	-26.73	peak
2		4959.500	39.02	2.45	41.47	54.00	-12.53	AVG
3		7439.250	60.66	7.79	68.45	74.00	-5.55	peak
4		7439.250	33.00	7.79	40.79	54.00	-13.21	AVG
5		9919.000	44.41	9.17	53.58	74.00	-20.42	peak
6	*	9919.000	39.48	9.17	48.65	54.00	-5.35	AVG

TEST REPORT

Report No.: MTi250722013-0201E1

Photographs of the test setup

Refer to Appendix - Test Setup Photos

TEST REPORT

Report No.: MTi250722013-0201E1

Photographs of the EUT

Refer to Appendix - EUT Photos

TEST REPORT

Report No.: MTi250722013-0201E1

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****