

Meas1.Head Right cheek GSM 850 Ch190 ANT1

Date: 2025/7/13

Communication System Band: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.302 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.999 W/kg

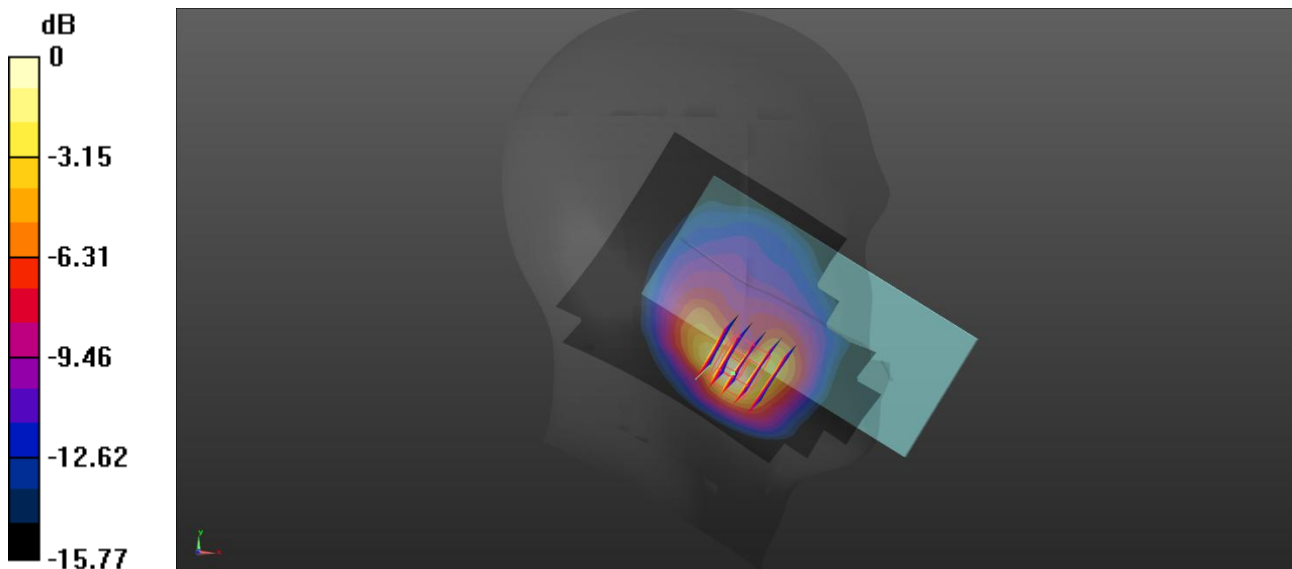

0 dB = 0.999 W/kg

Meas2.Body-worn Back side 5mm GSM 850 Ch251 ANT0

Date: 2025/7/13

Communication System Band: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.35 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 1.18 W/kg

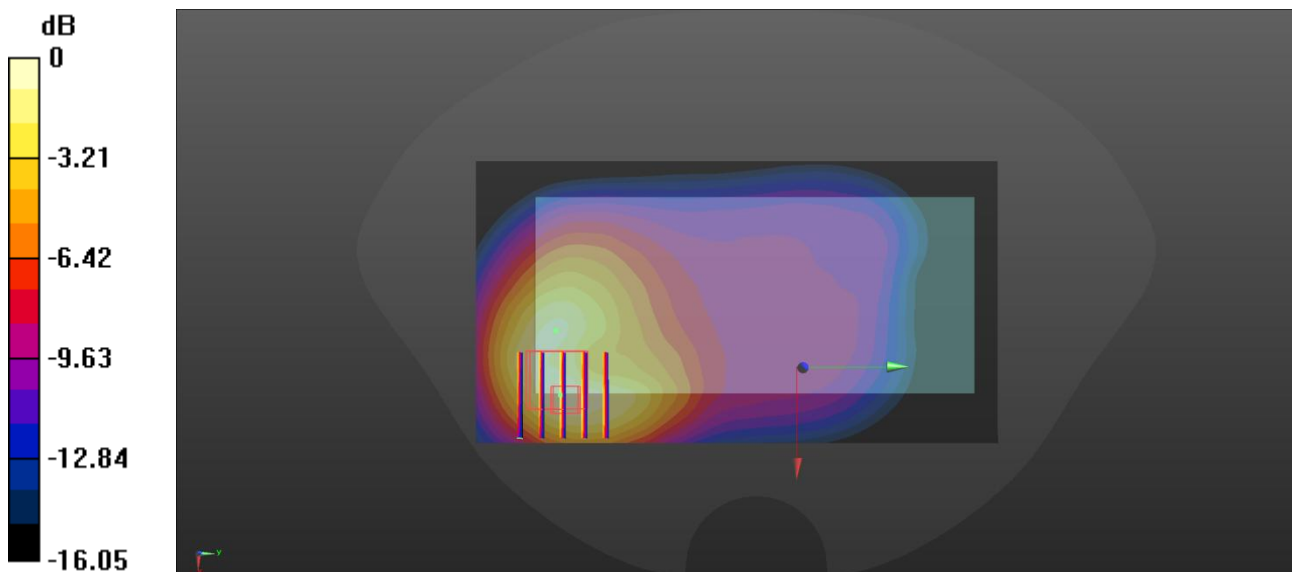

0 dB = 1.18 W/kg

Meas3.Hotspot Back side 10mm GSM 850 Ch251 ANT0

Date: 2025/7/13

Communication System Band: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.663 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.56 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.635 W/kg

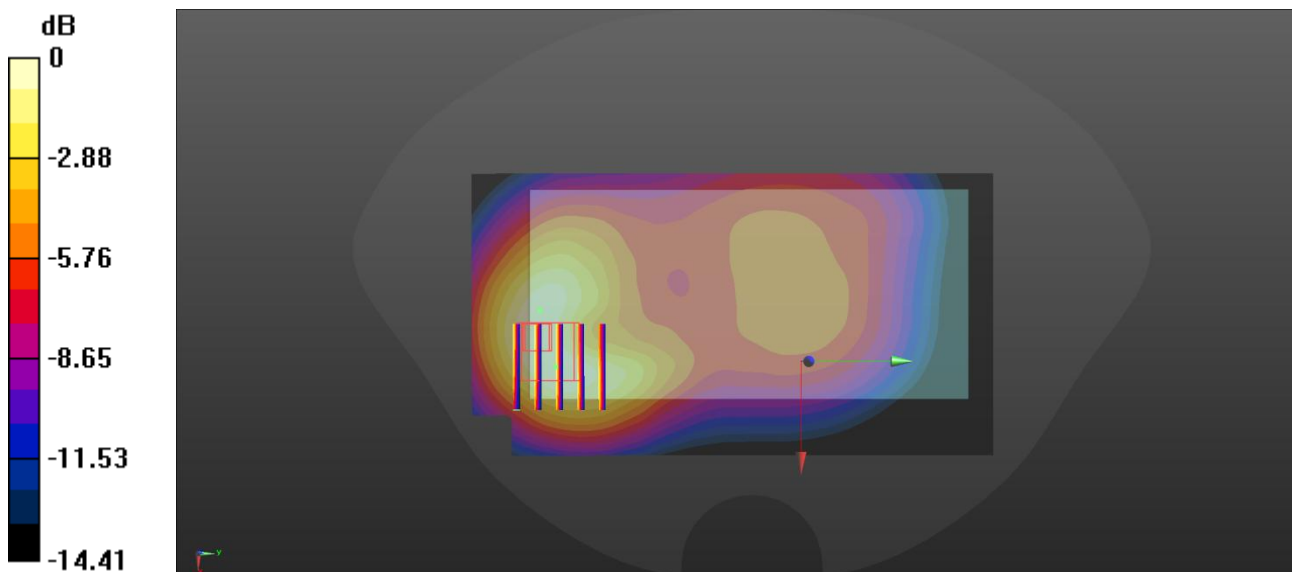

0 dB = 0.635 W/kg

Meas4.Head Right cheek GSM 1900 Ch810 ANT4

Date: 2025/7/26

Communication System Band: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 38.923$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.69 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 1.50 W/kg

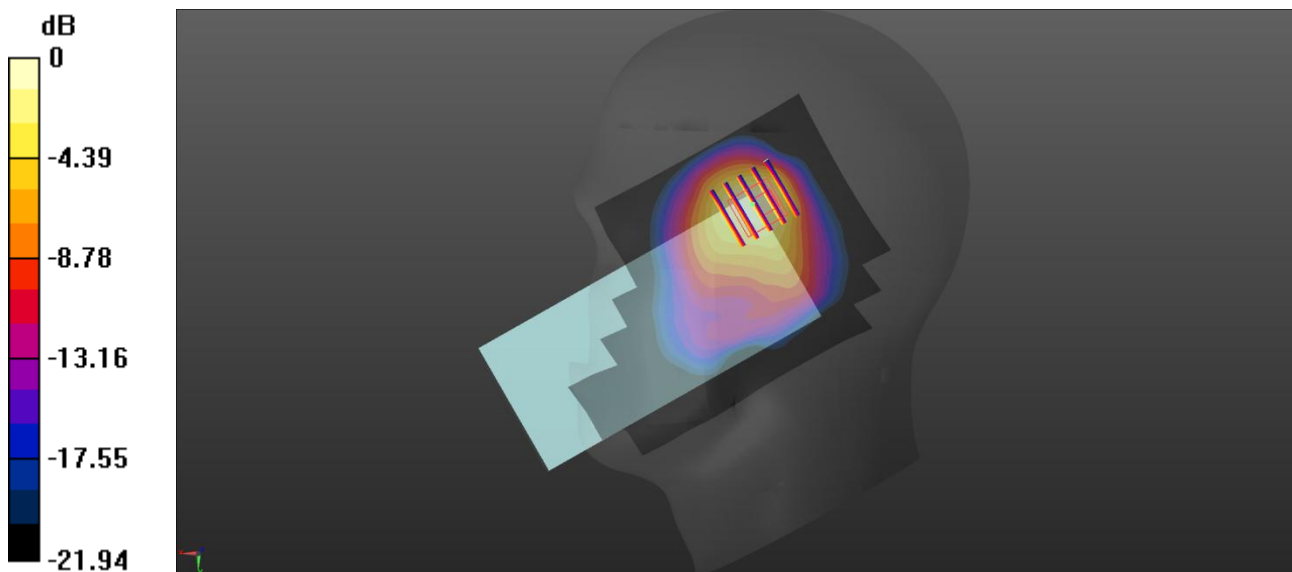

0 dB = 1.50 W/kg

Meas5.Body-worn Back side 5mm GSM 1900 Ch661 ANT3

Date: 2025/7/26

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.618 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.043 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.656 W/kg

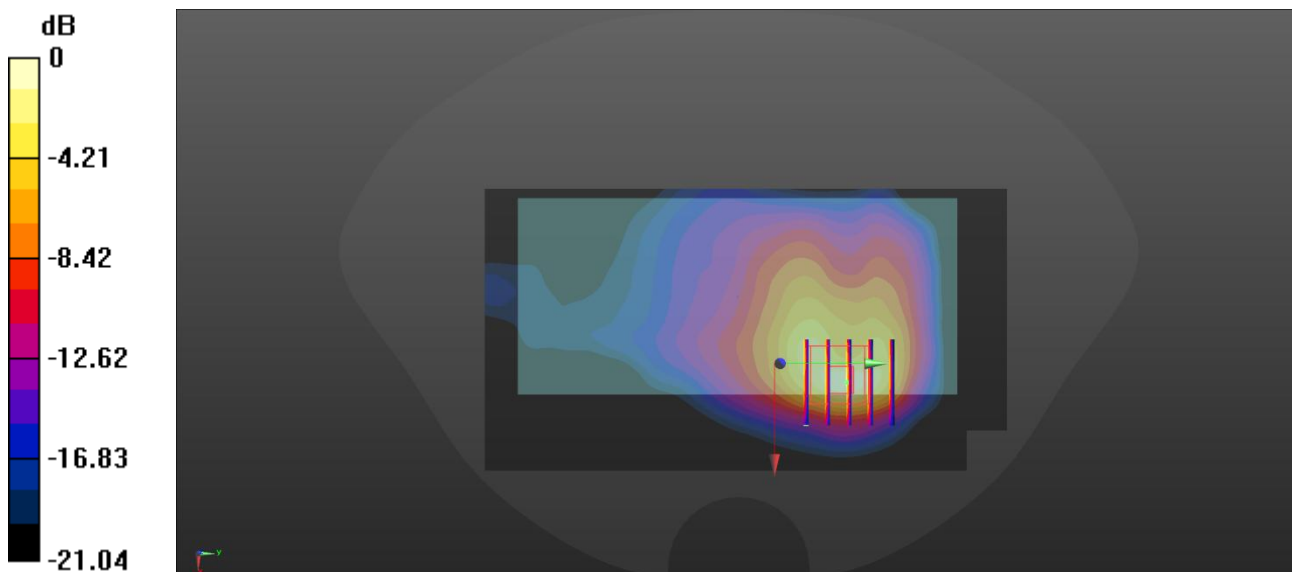

0 dB = 0.656 W/kg

Meas6.Hotspot Bottom side 10mm GSM 1900 Ch512 ANT2

Date: 2025/7/26

Communication System Band: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 38.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.92 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.16 W/kg

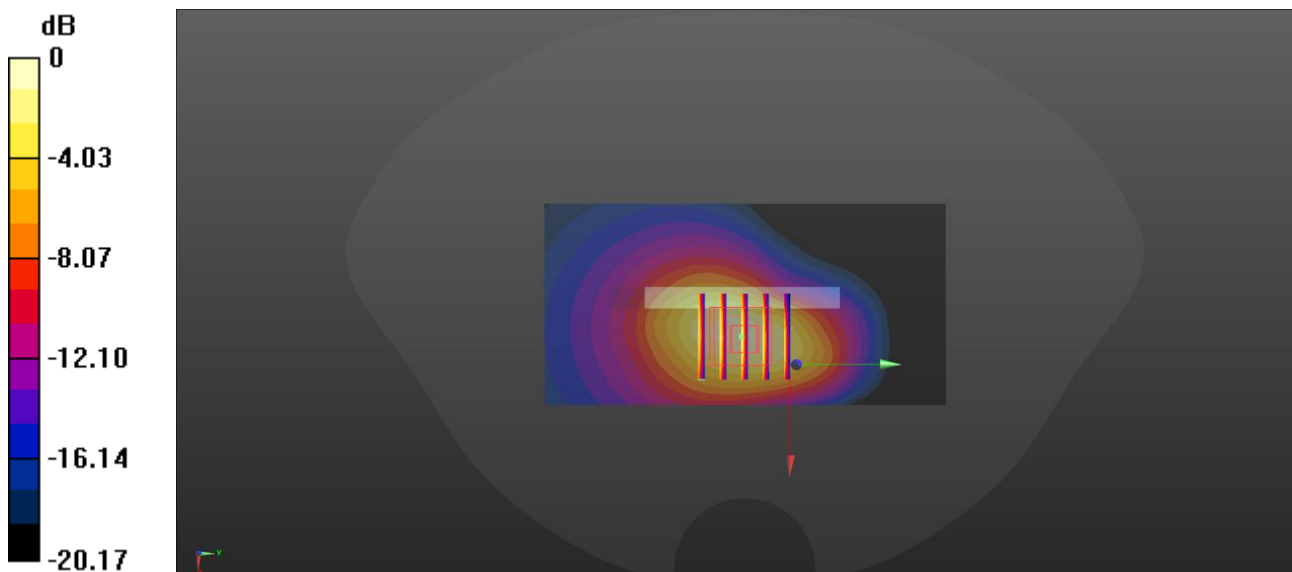

0 dB = 1.16 W/kg

Meas7.Head Right cheek WCDMA B2 Ch9262 ANT3

Date: 2025/7/27

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.379$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9262/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.932 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 1.56 W/kg

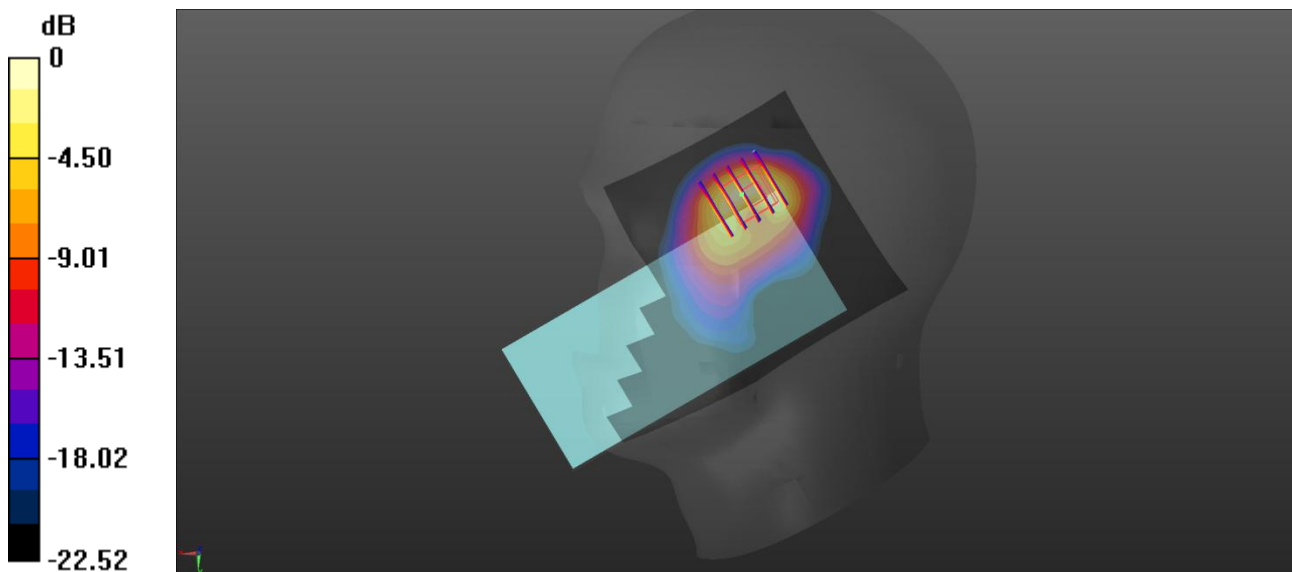

0 dB = 1.56 W/kg

Meas8.Body-worn Back side 5mm WCDMA B2 Ch9262 ANT4

Date: 2025/7/27

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.379$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9262/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.78 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.086 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.52 W/kg

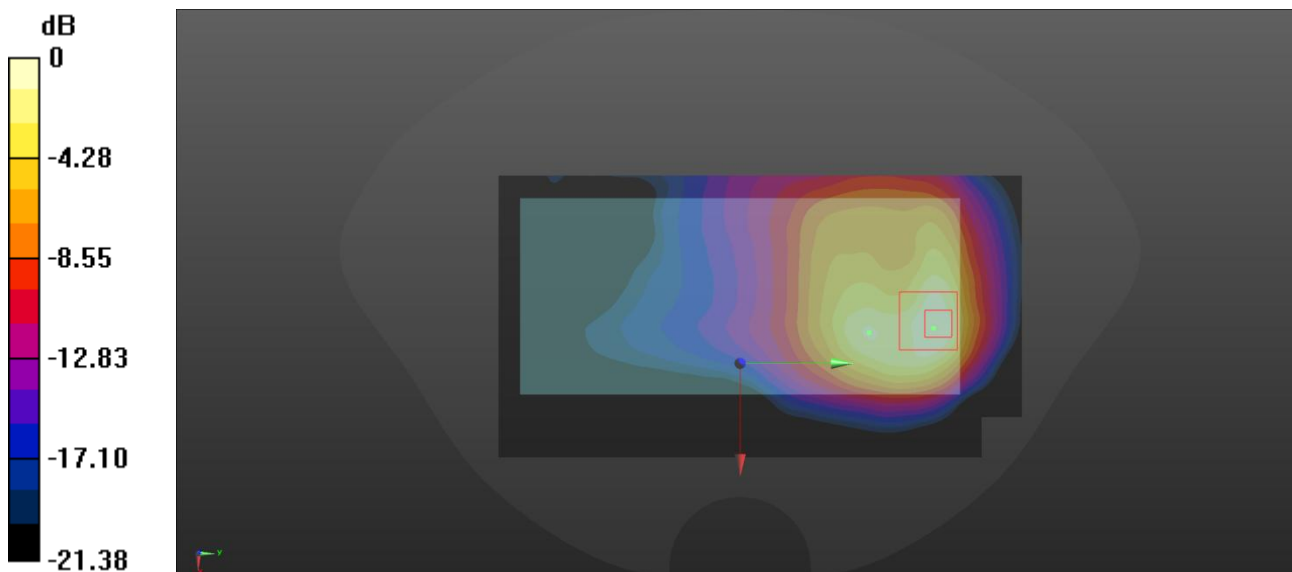

0 dB = 1.52 W/kg

Meas9.Hotspot Bottom side 10mm WCDMA B2 Ch9538 ANT2

Date: 2025/7/27

Communication System Band: II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 39.094$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9538/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.92 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.22 W/kg

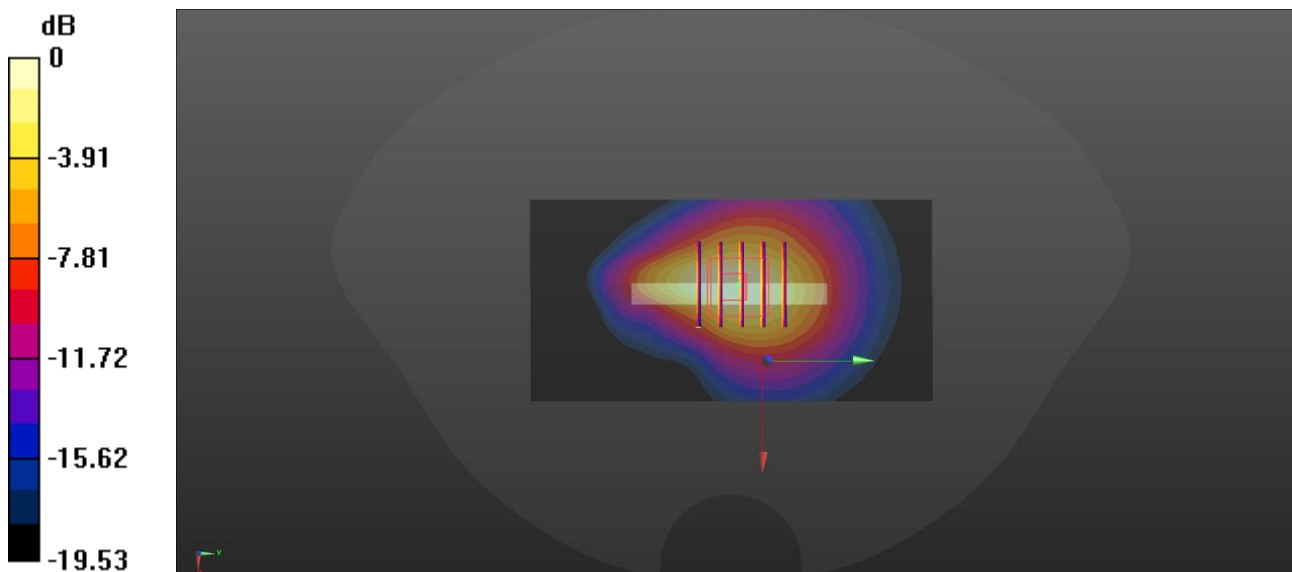

0 dB = 1.22 W/kg

Meas10.Extremity Left side 0mm WCDMA B2 Ch9262 ANT3

Date: 2025/7/27

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.379$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9262/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.92 W/kg

Ch9262/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 20.58 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 3.56 W/kg; SAR(10 g) = 1.33 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 7.22 W/kg

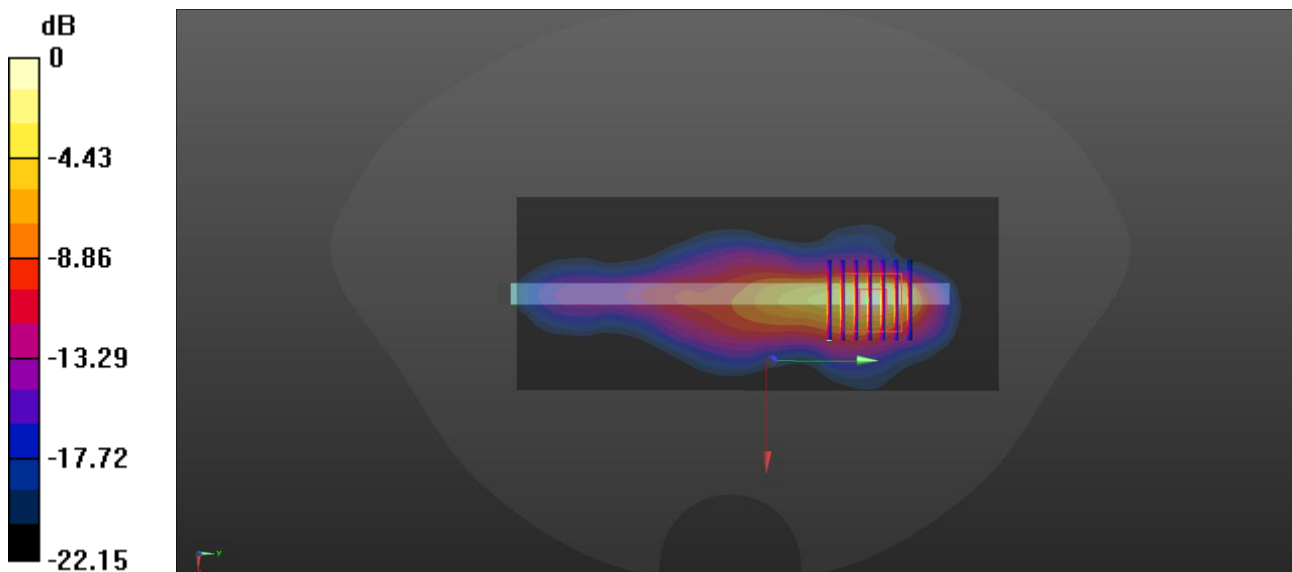

0 dB = 7.22 W/kg

Meas11.Head Right cheek WCDMA B4 Ch1513 ANT3

Date: 2025/7/20

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.205$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.665 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.537 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.84 W/kg

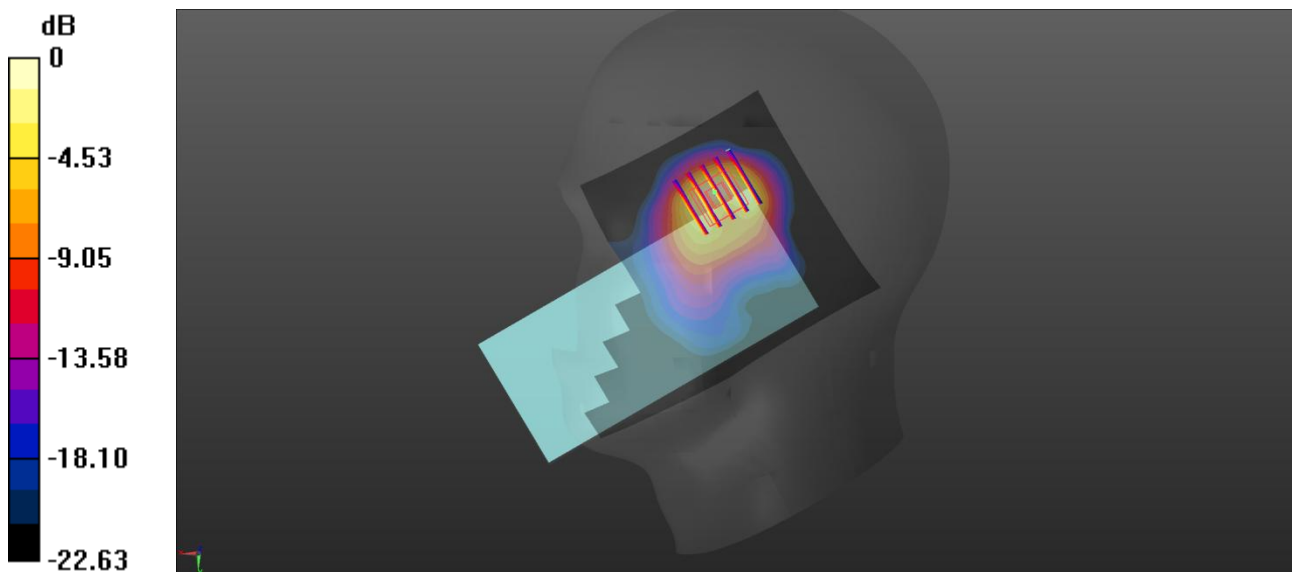

0 dB = 1.84 W/kg

Meas12.Body-worn Back side 5mm WCDMA B4 Ch1513 ANT4

Date: 2025/7/20

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.748 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 1.17 W/kg

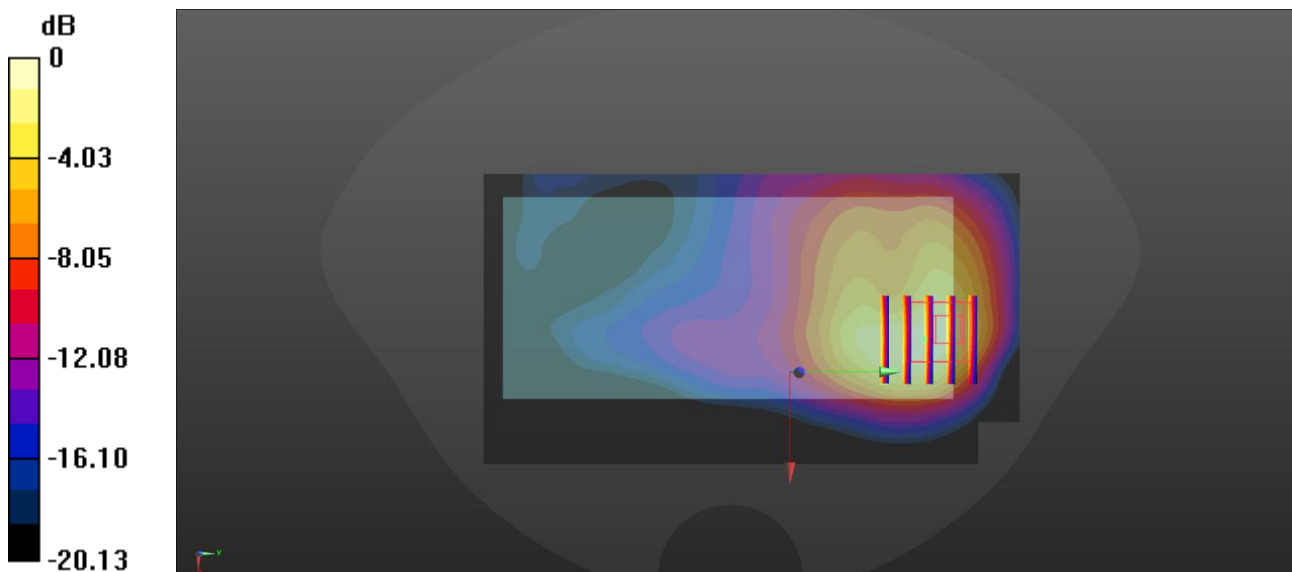

0 dB = 1.17 W/kg

Meas13.Hotspot Bottom side 10mm WCDMA B4 Ch1513 ANT2

Date: 2025/7/20

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.925 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.943 W/kg

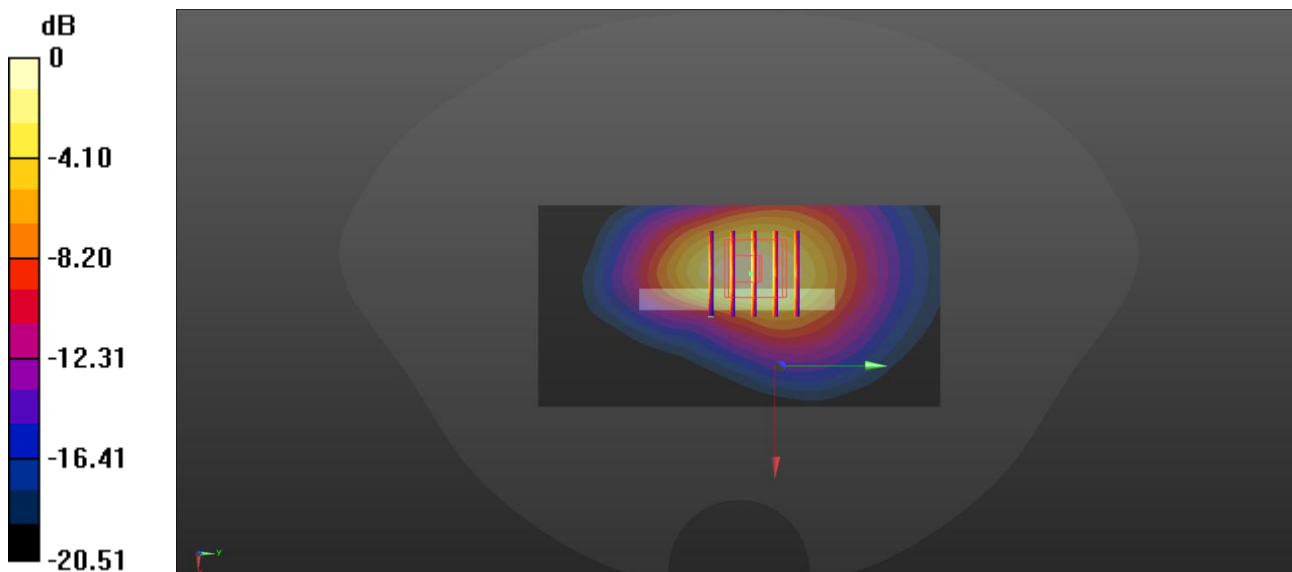

0 dB = 0.943 W/kg

Meas14.Extremity Back side 0mm WCDMA B4 Ch1513 ANT3

Date: 2025/7/20

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.45 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.635 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 2.26 W/kg; SAR(10 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 4.12 W/kg

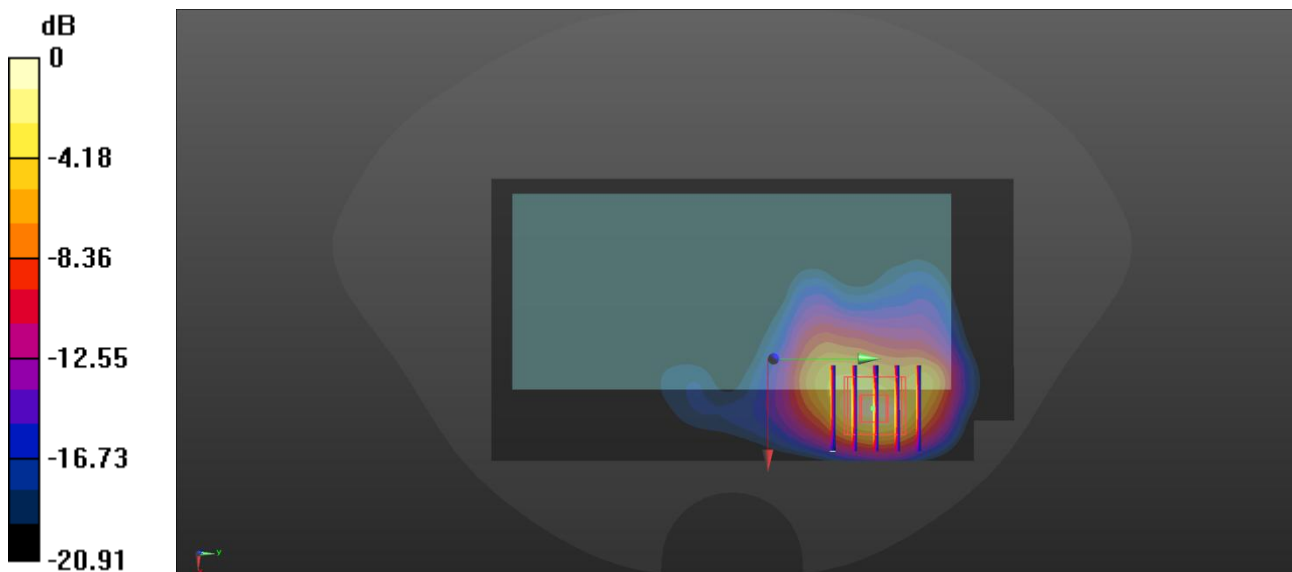

0 dB = 4.12 W/kg

Meas15.Head Left cheek WCDMA B5 Ch4182 ANT1

Date: 2025/7/13

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.870 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.882 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 39.5%

Maximum value of SAR (measured) = 1.31 W/kg

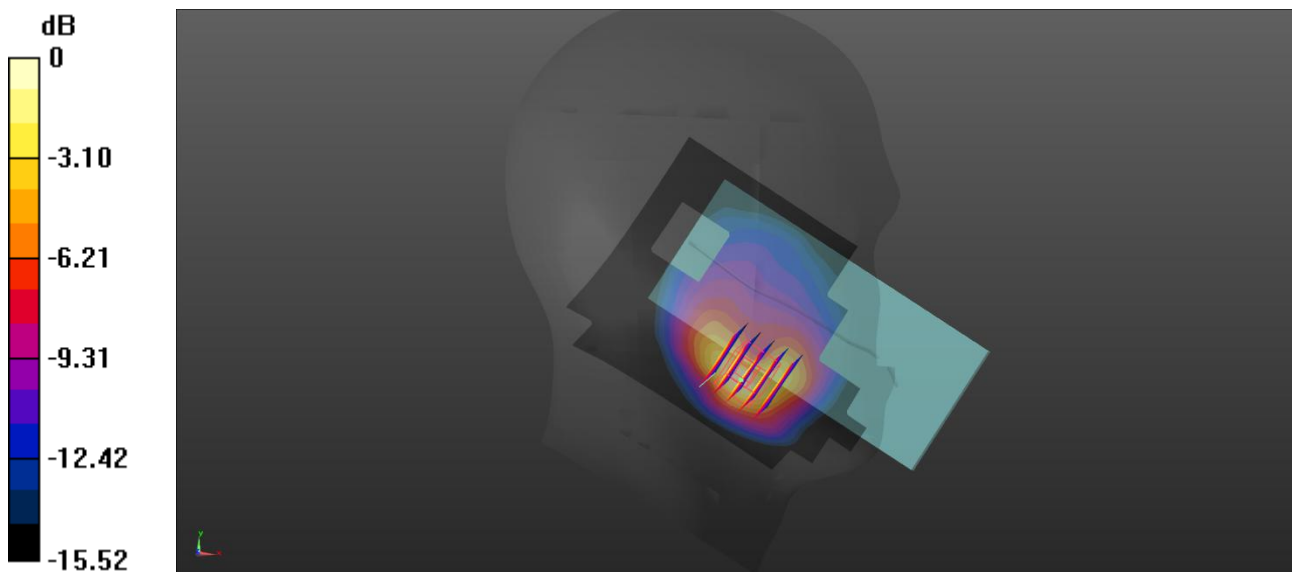

0 dB = 1.31 W/kg

Meas16.Body-worn Back side 5mm WCDMA B5 Ch4132 ANT0

Date: 2025/7/13

Communication System Band: V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.326$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4132/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 44%

Maximum value of SAR (measured) = 1.41 W/kg

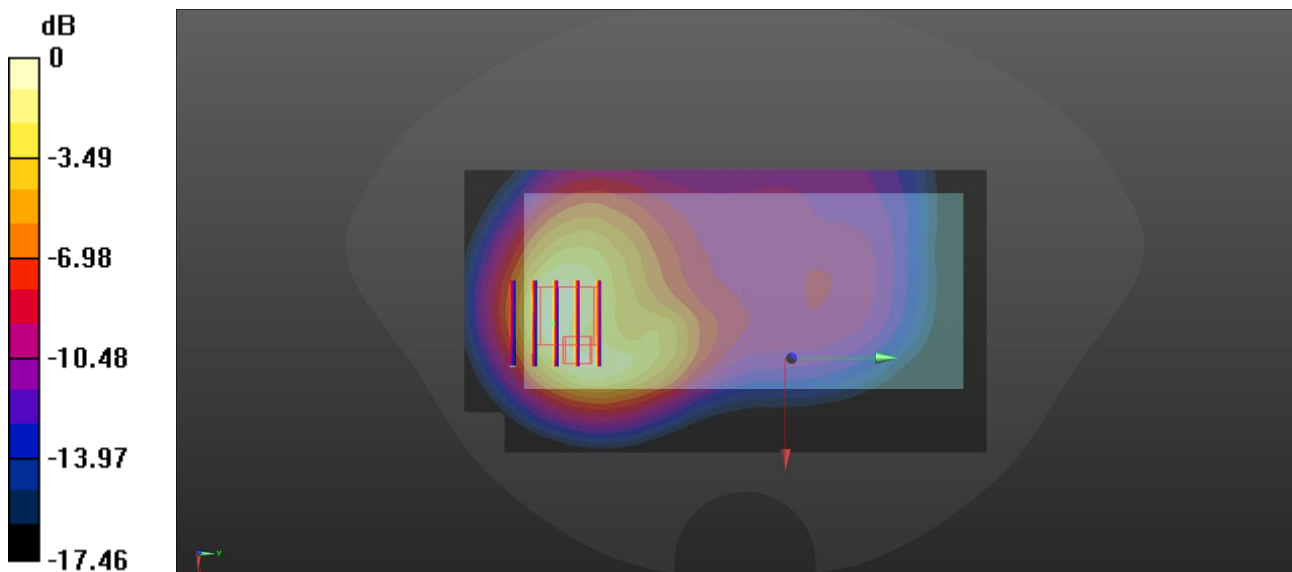

0 dB = 1.41 W/kg

Meas17.Hotspot Back side 10mm WCDMA B5 Ch4233 ANT0

Date: 2025/7/13

Communication System Band: V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C Liquid Temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4233/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.687 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.59 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.683 W/kg

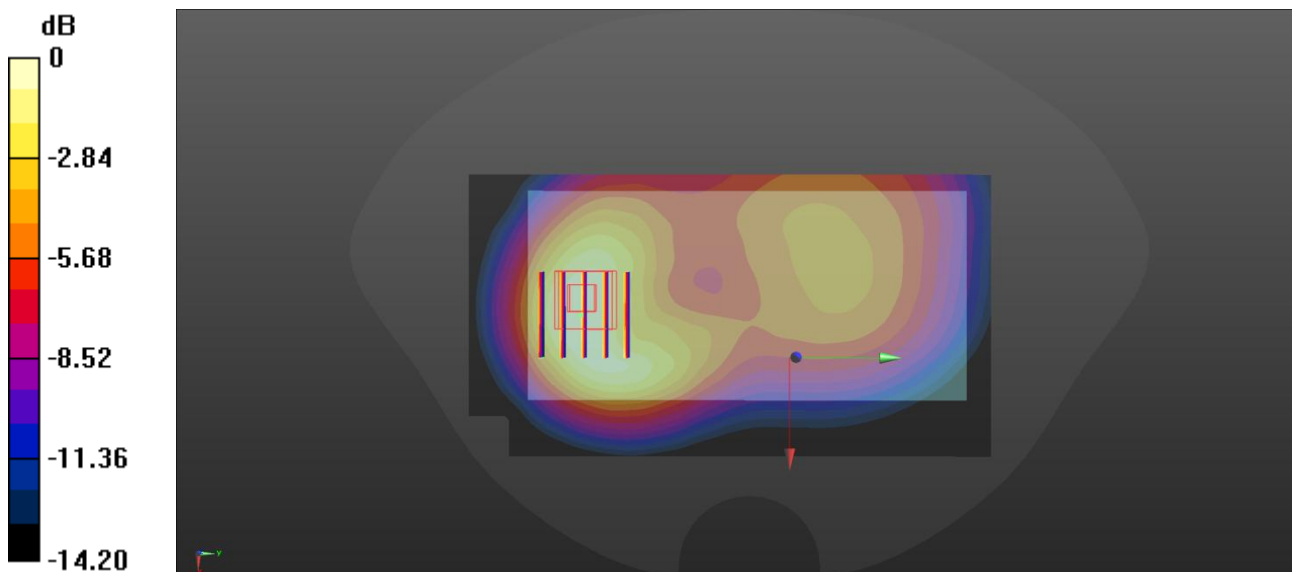

0 dB = 0.683 W/kg

Meas18.Head Right cheek LTE B2 Ch18700 ANT3

Date: 2025/7/28

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 39.065$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18700/Area Scan (81x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.66 W/kg

h18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.968 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 41.4%

Maximum value of SAR (measured) = 1.60 W/kg

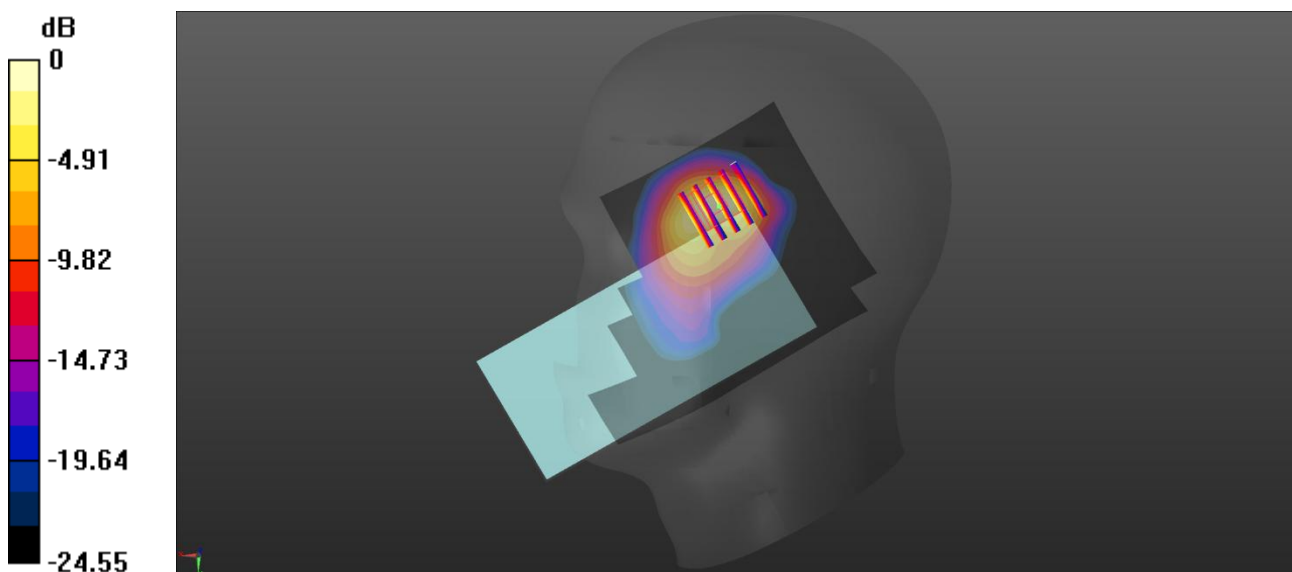

0 dB = 1.60 W/kg

Meas19.Body-worn Back side 5mm LTE B2 Ch18700 ANT3

Date: 2025/7/28

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 39.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18700/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.16 W/kg


Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 6.121 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 1.23 W/kg

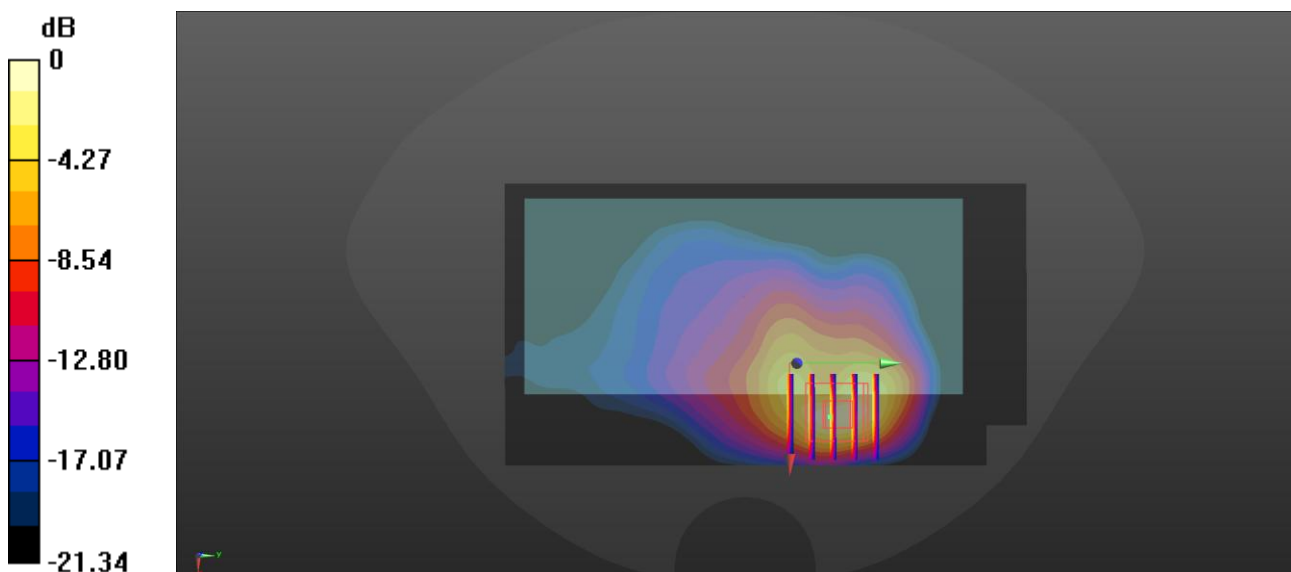

0 dB = 1.23 W/kg

Meas20.Hotspot Top side 10mm LTE B2 Ch18700 ANT4

Date: 2025/7/29

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 38.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18700/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.864 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.47 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.837 W/kg

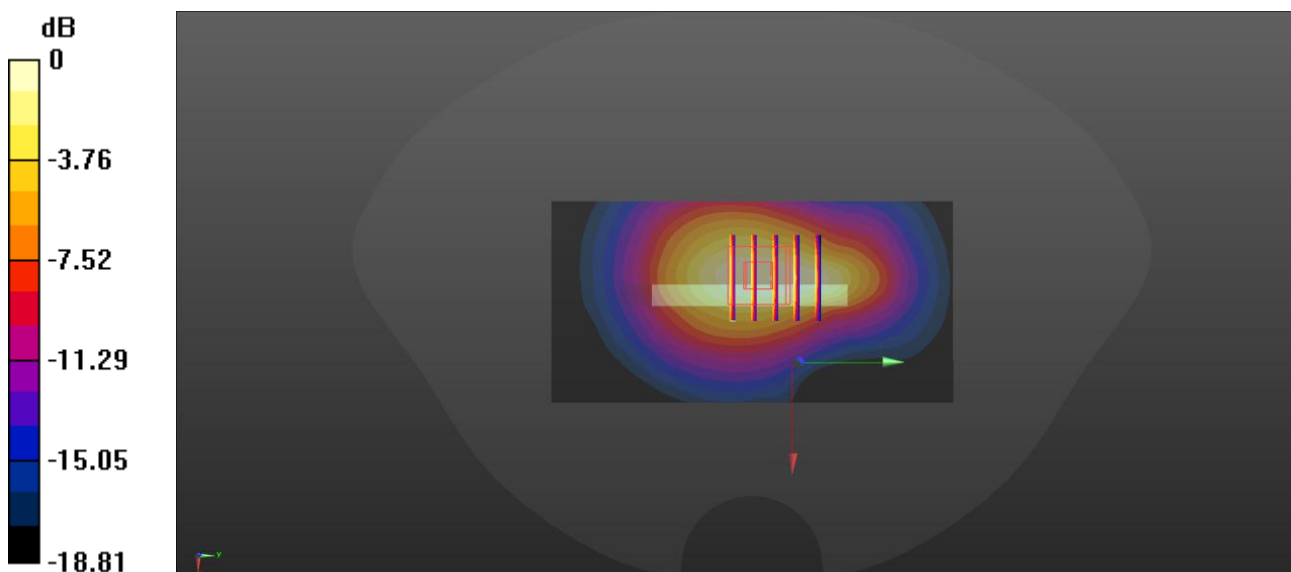

0 dB = 0.837 W/kg

Meas21.Extremity Top side 0mm LTE B2 Ch18700 ANT4

Date: 2025/7/29

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 38.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18700/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 6.12 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 49.52 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 9.91 W/kg

SAR(1 g) = 3.15 W/kg; SAR(10 g) = 1.3 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 29.8%

Maximum value of SAR (measured) = 7.22 W/kg

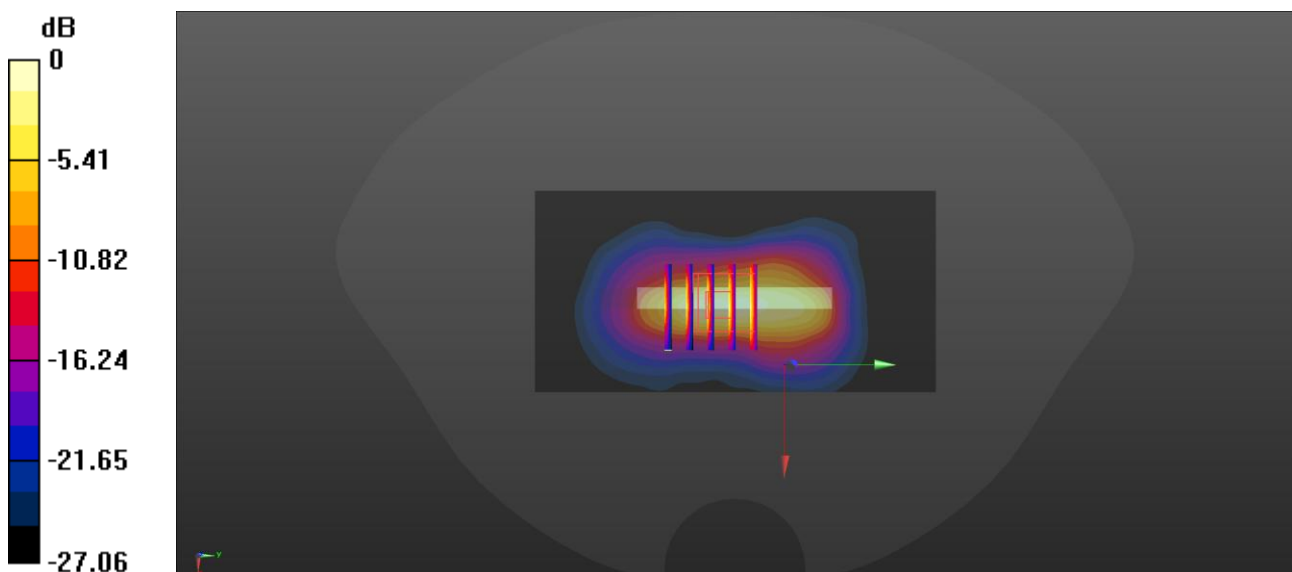

0 dB = 7.22 W/kg

Meas22.Head Right cheek LTE B4 Ch20300 ANT4

Date: 2025/7/21

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 39.515$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.0°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63) @ 1745 MHz; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20300 2/Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.13 W/kg


Ch20300 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 13.30 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 1.10 W/kg

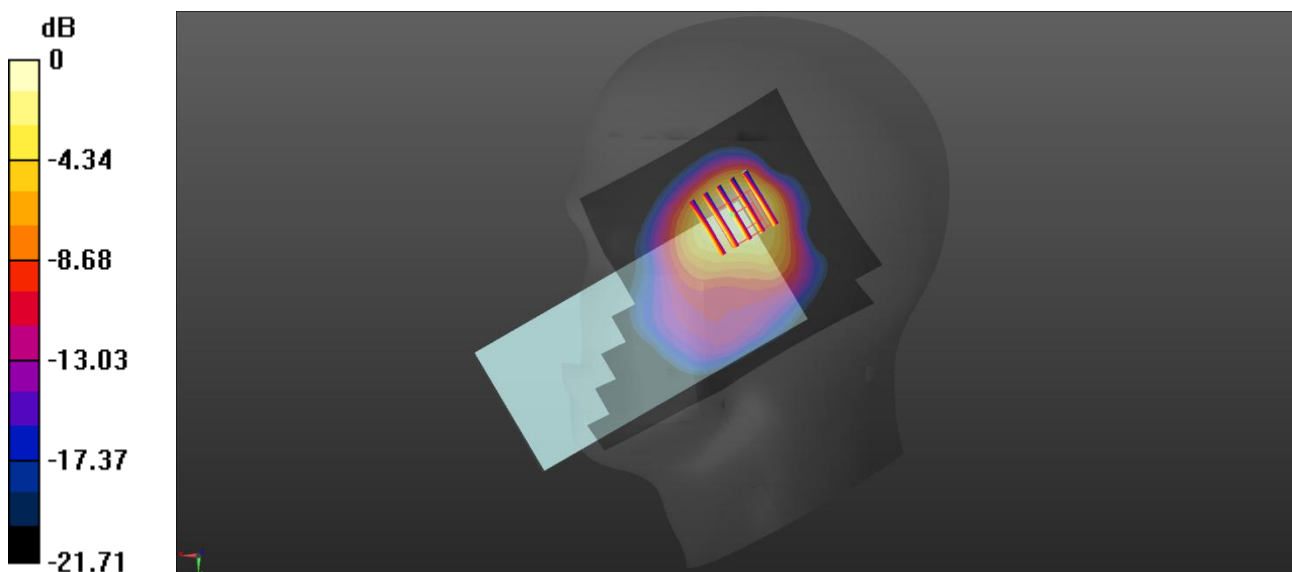

0 dB = 1.10 W/kg

Meas23.Body-worn Back side 5mm LTE B4 Ch20300 ANT3

Date: 2025/7/21

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 39.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20300/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.21 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.336 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.30 W/kg

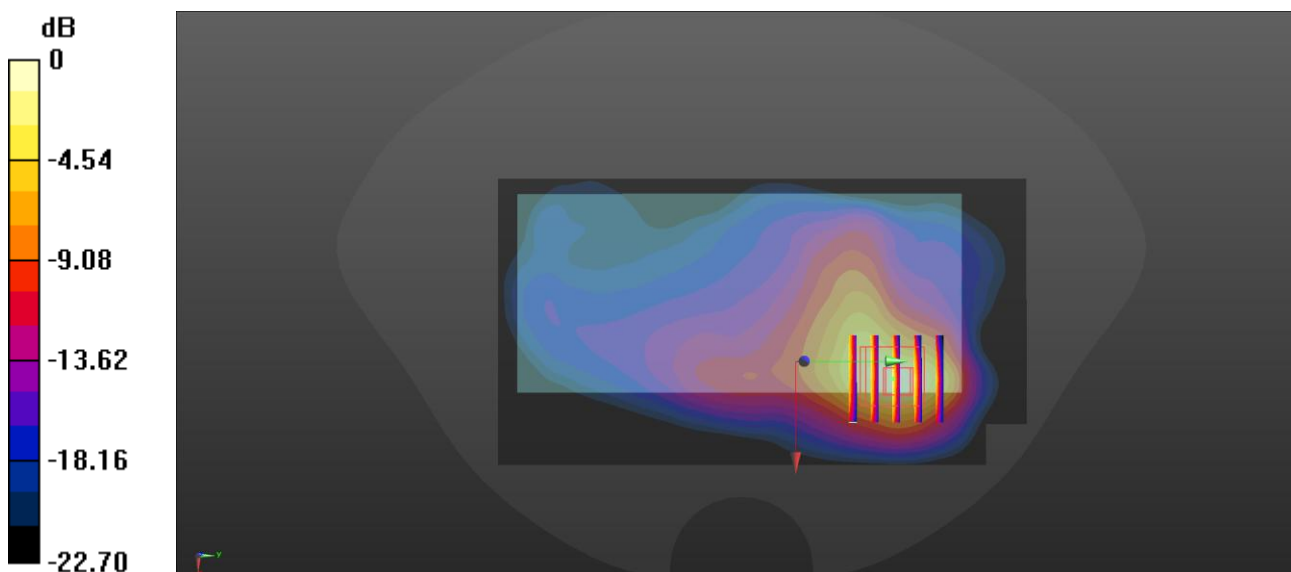

0 dB = 1.30 W/kg

Meas24.Hotspot Top side 10mm LTE B4 Ch20175 ANT4

Date: 2025/7/22

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.368$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20175/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.758 W/kg

Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.00 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.727 W/kg

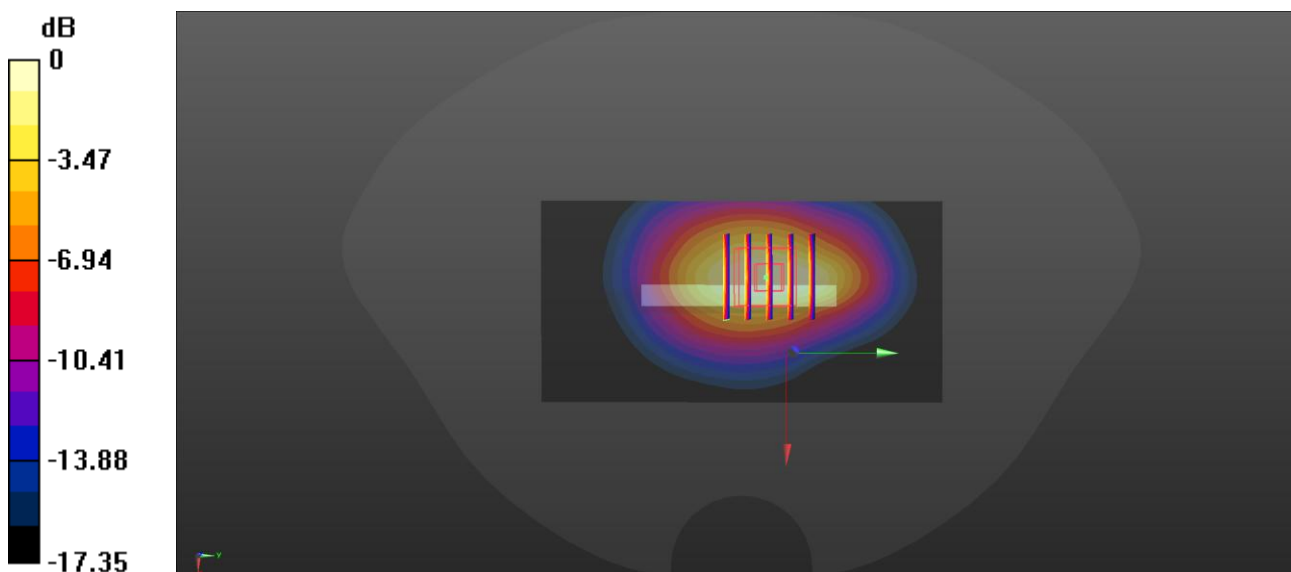

0 dB = 0.727 W/kg

Meas25.Extremity Top side 0mm LTE B4 Ch20300 ANT4

Date: 2025/7/22

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20300/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 3.81 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 43.72 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 7.75 W/kg

SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 28.7%

Maximum value of SAR (measured) = 5.93 W/kg

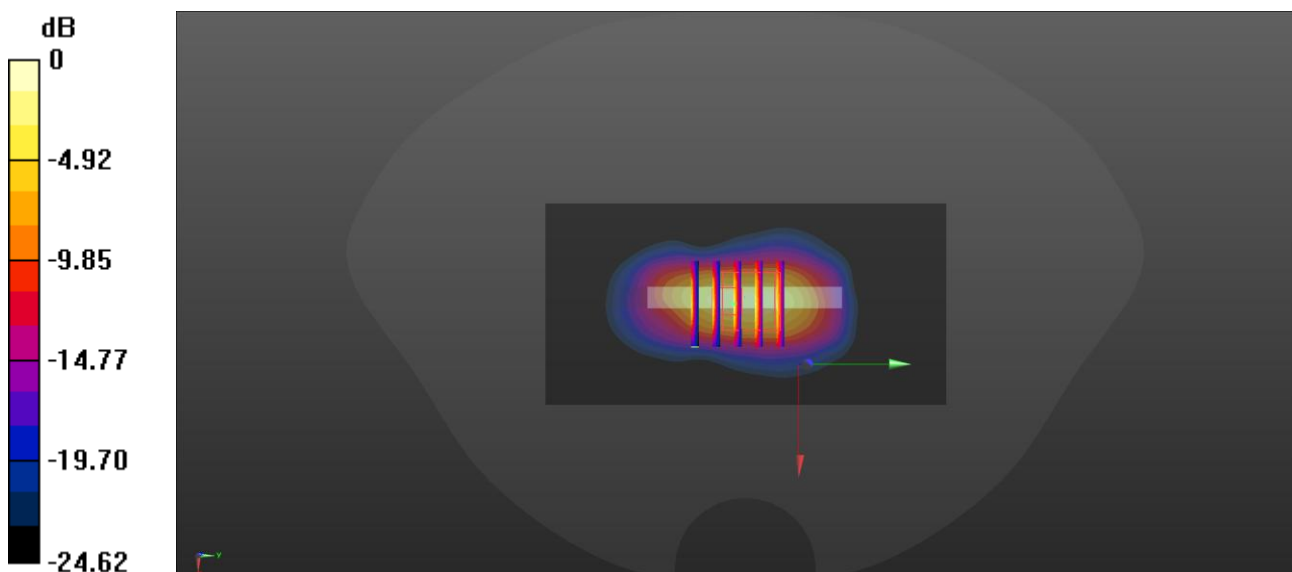

0 dB = 5.93 W/kg

Meas26.Head Left cheek LTE B5 Ch20525 ANT1

Date: 2025/7/14

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.0°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.12 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.264 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 38.3%

Maximum value of SAR (measured) = 1.33 W/kg

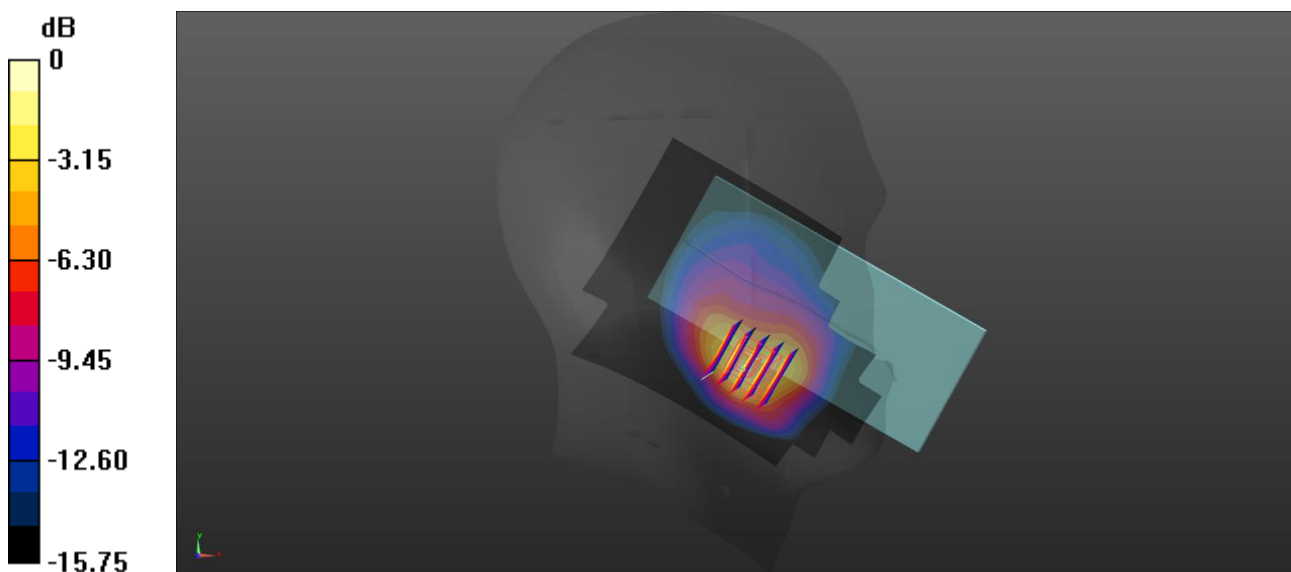

0 dB = 1.33 W/kg

Meas27.Body-worn Back side 5mm LTE B5 Ch20450 ANT0

Date: 2025/7/14

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.0°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20450/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.28 W/kg

Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 11.61 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.407 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 1.27 W/kg

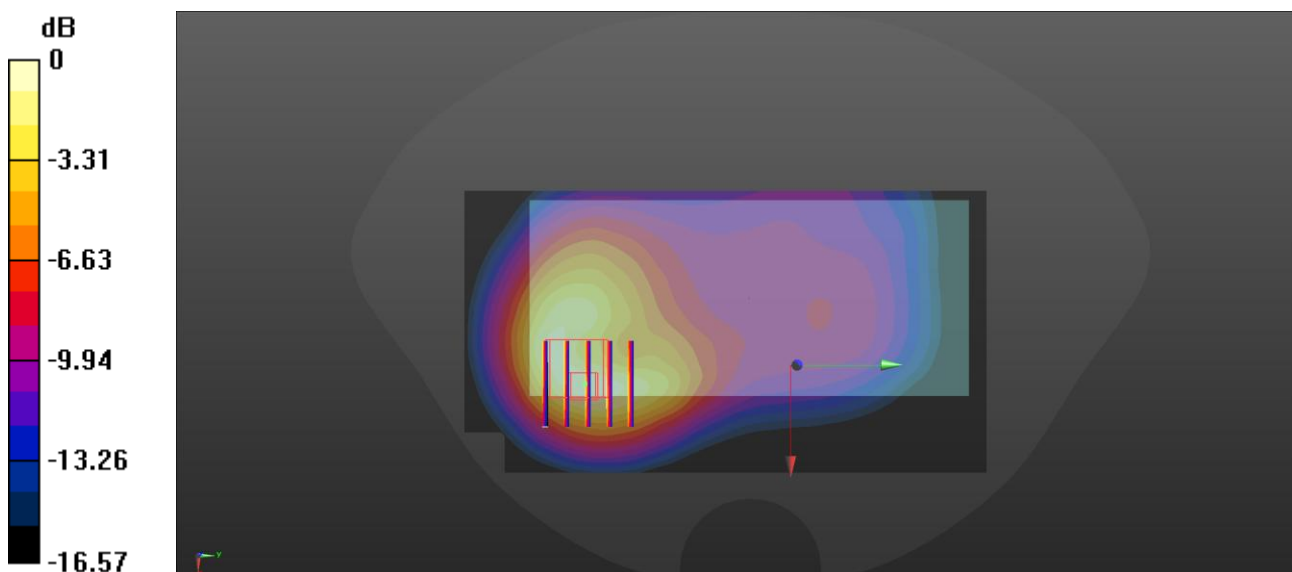

0 dB = 1.27 W/kg

Meas28.Hotspot Back side 10mm LTE B5 Ch20600 ANT1

Date: 2025/7/14

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.0°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20600/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.859 W/kg


Ch20600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.26 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.874 W/kg

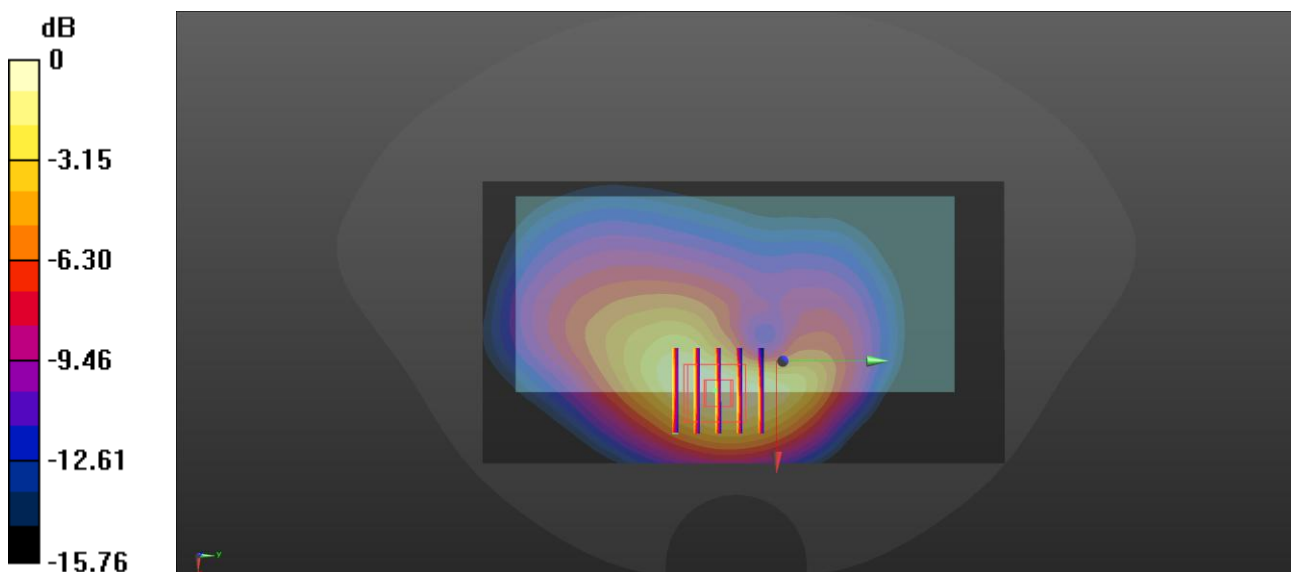

0 dB = 0.874 W/kg

Meas29.Head Right cheek LTE B7 Ch21350 ANT4

Date: 2025/8/22

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 38.192$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.0°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.158 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 40%

Maximum value of SAR (measured) = 1.32 W/kg

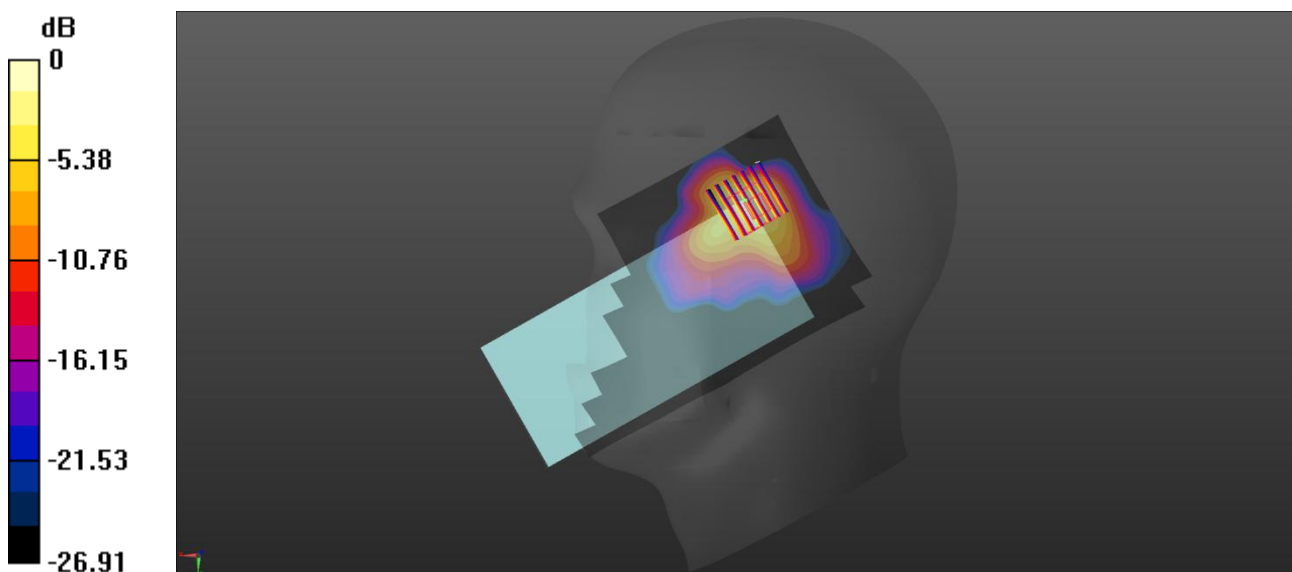

0 dB = 1.32 W/kg

Meas30.Body-worn Back side 5mm LTE B7 Ch20850 ANT2

Date: 2025/8/22

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 38.222$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.0°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20850/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.48 W/kg


Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 4.348 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 1.40 W/kg

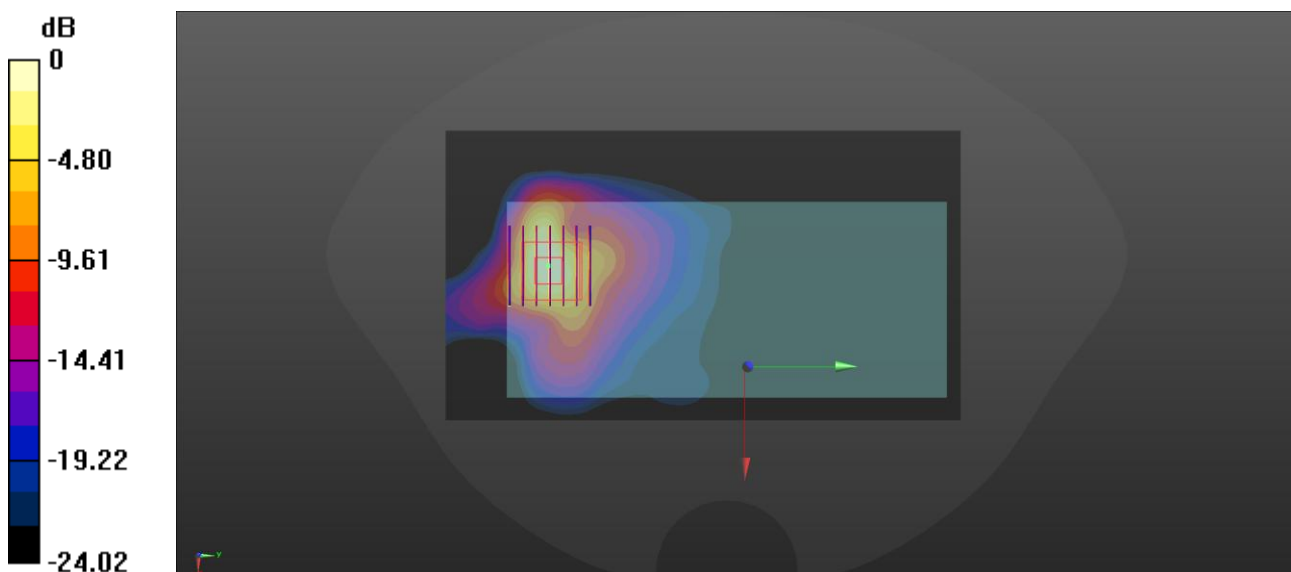

0 dB = 1.40 W/kg

Meas31.Hotspot Back side 10mm LTE B7 Ch20850 ANT2

Date: 2025/8/23

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 38.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20850/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.778 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.240 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.753 W/kg

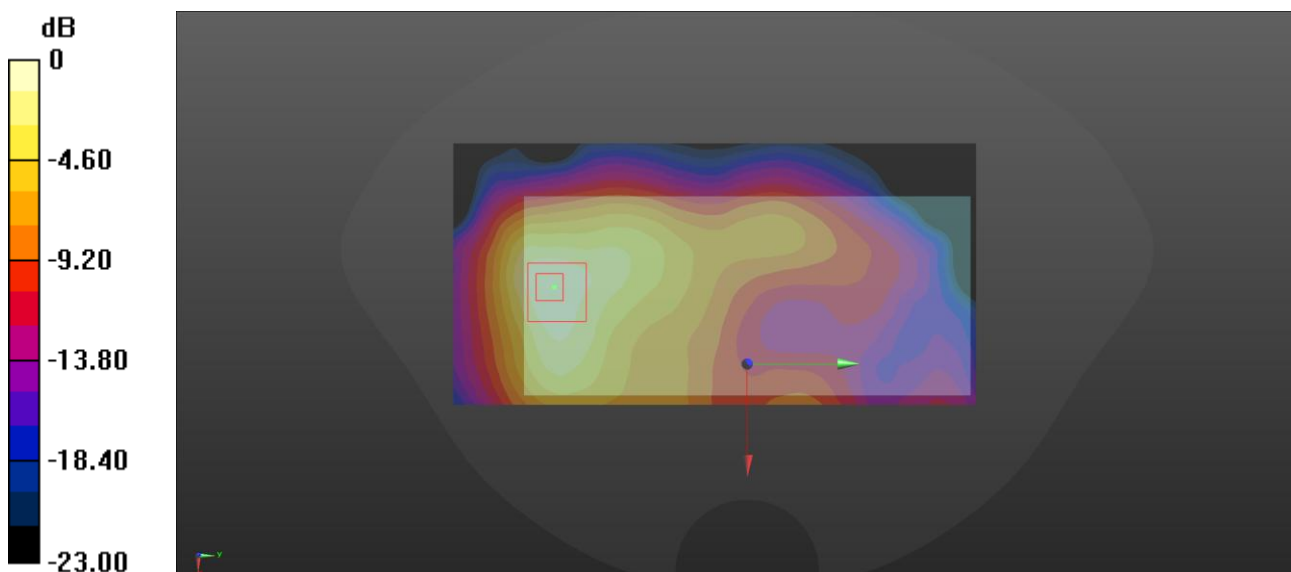

0 dB = 0.753 W/kg

Meas32.Extremity Bac side 0mm LTE B7 Ch21350 ANT2

Date: 2025/8/23

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.912$ S/m; $\epsilon_r = 38.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (71x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 9.67 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.084 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 13.0 W/kg

SAR(1 g) = 4.96 W/kg; SAR(10 g) = 1.94 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 9.13 W/kg

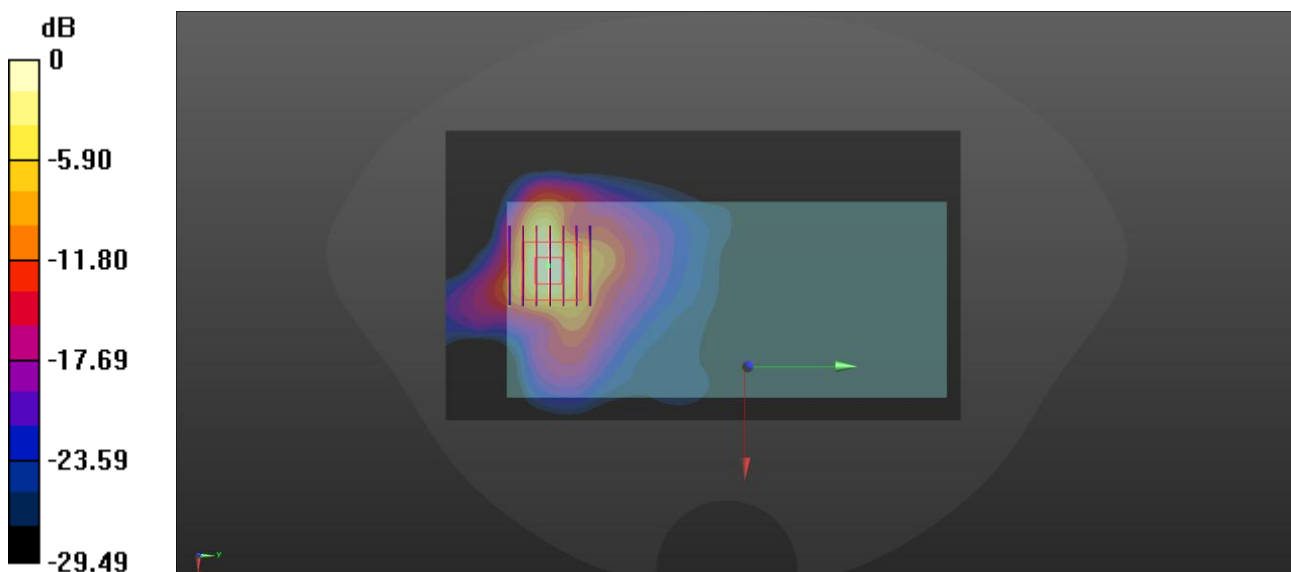

0 dB = 9.13 W/kg

Meas33.Head Left cheek LTE B12 Ch23095 ANT1

Date: 2025/7/17

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.916$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.2°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (81x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.828 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 1.16 W/kg

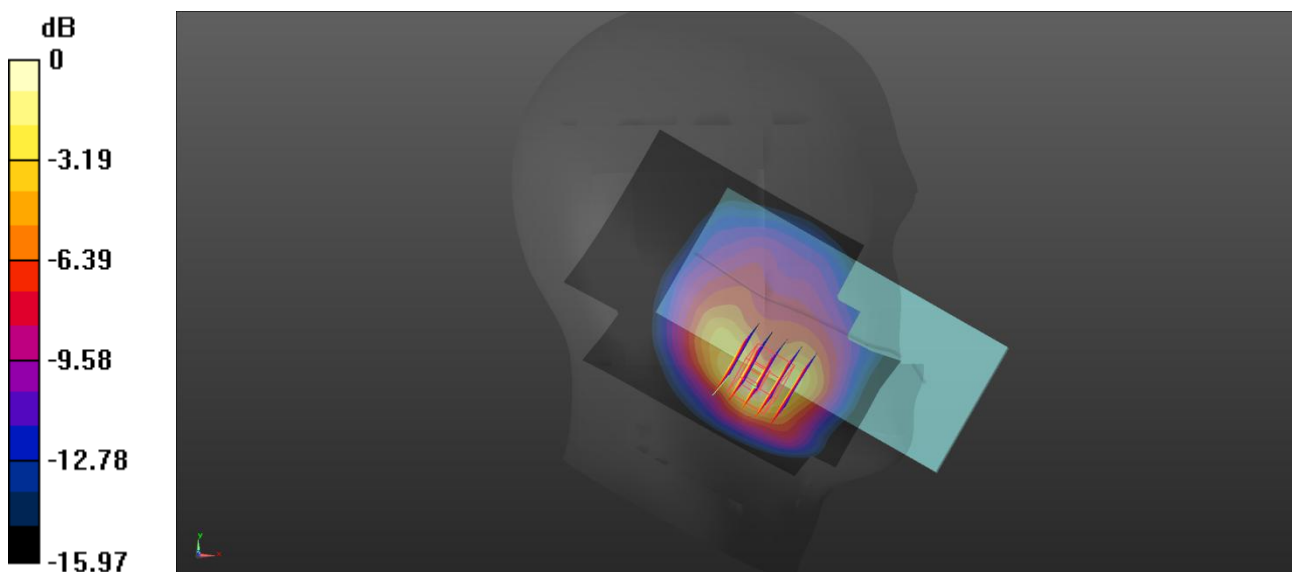

0 dB = 1.16 W/kg

Meas34.Body-worn Back side 5mm LTE B12 Ch23060 ANT1

Date: 2025/7/17

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.2°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23060 2/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.28 W/kg


Ch23060 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 12.06 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.25 W/kg

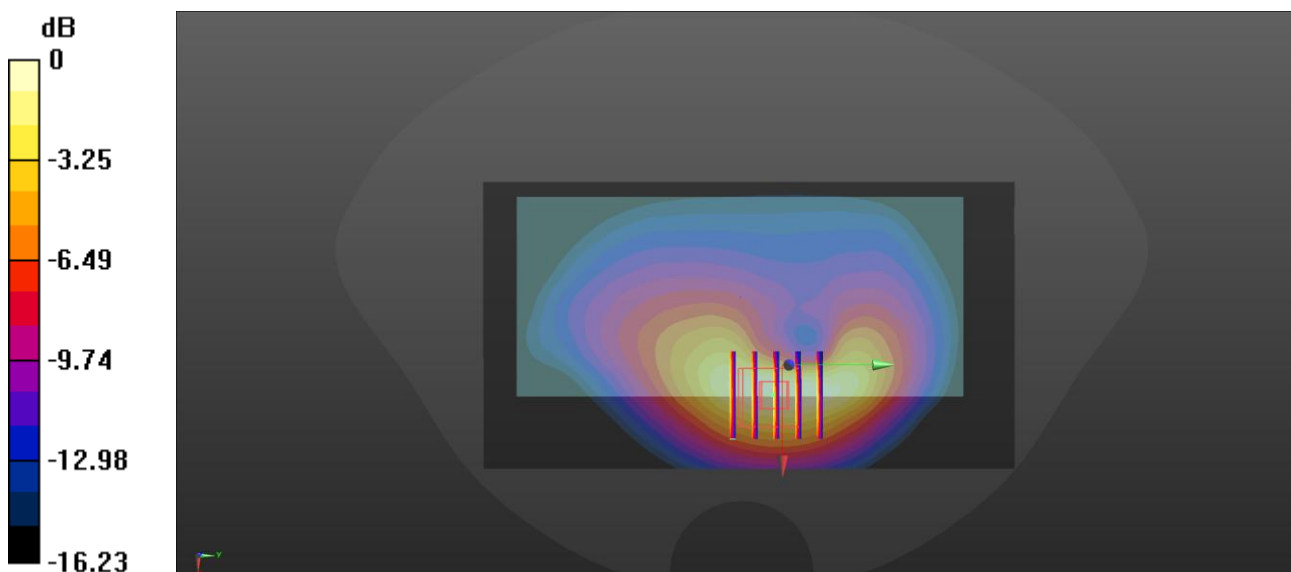

0 dB = 1.25 W/kg

Meas35.Hotspot Back side 10mm LTE B12 Ch23060 ANT1

Date: 2025/7/17

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.2°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23060/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.726 W/kg


Ch23060/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.327 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.719 W/kg

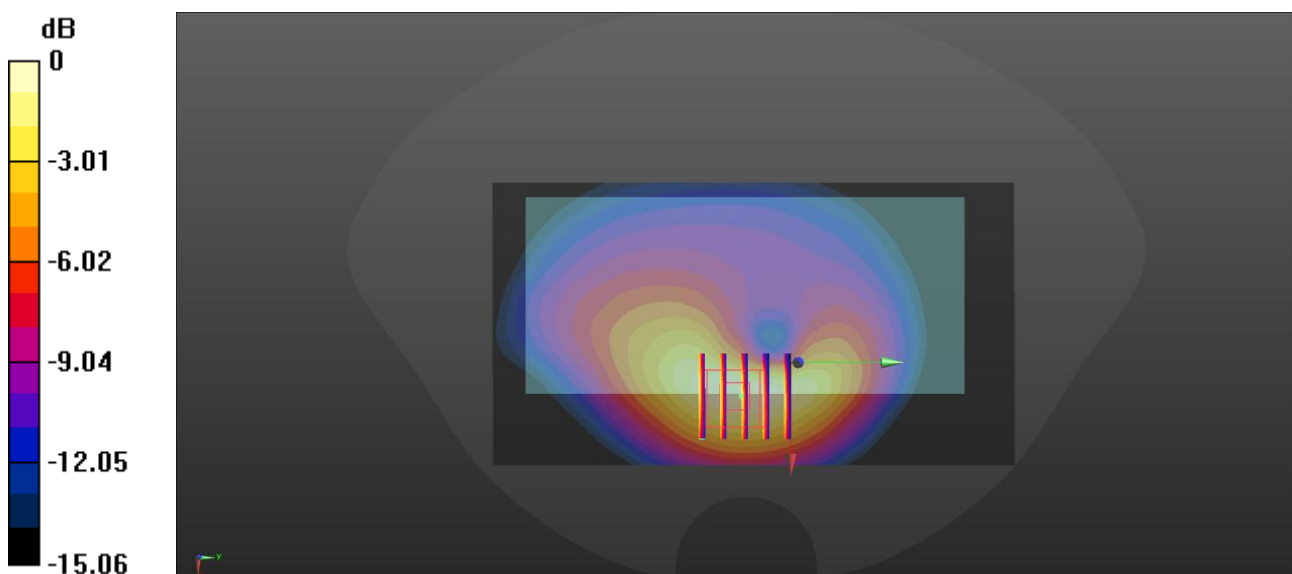

0 dB = 0.719 W/kg

Meas36.Extremity Back side 0mm LTE B12 Ch23060 ANT1

Date: 2025/7/17

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.2°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23060/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 2.37 W/kg


Ch23060/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 13.76 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.666 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 2.17 W/kg

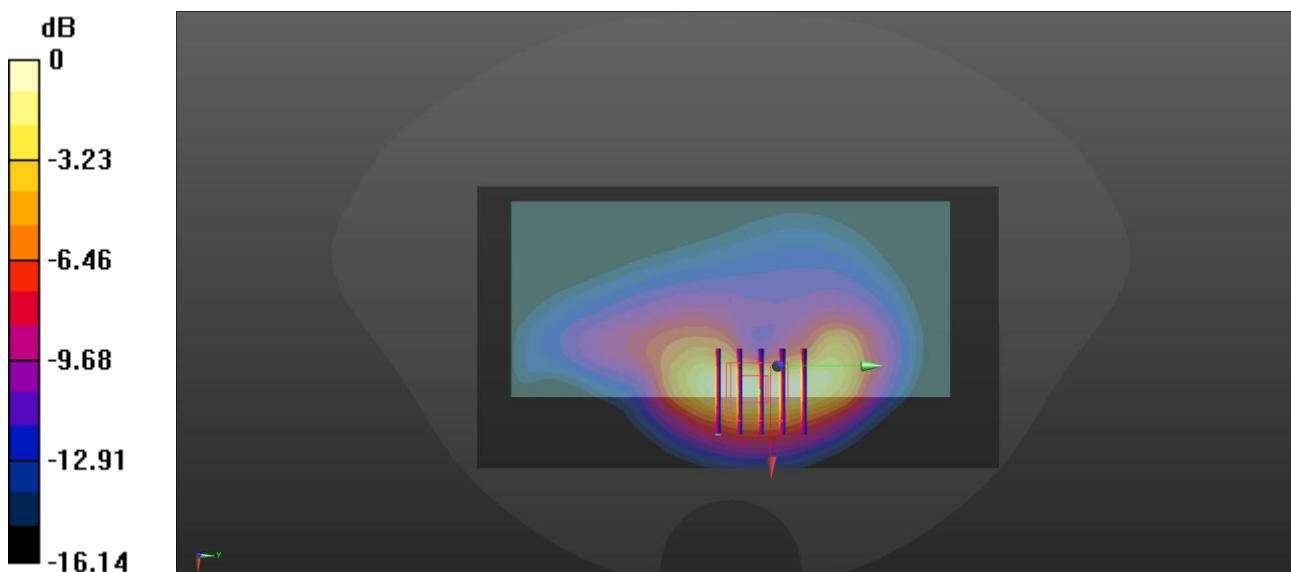

0 dB = 2.17 W/kg

Meas37.Head Left cheek LTE B17 Ch23800 ANT1

Date: 2025/7/19

Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.728$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.3°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23800/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Ch23800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.792 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 37.3%

Maximum value of SAR (measured) = 1.10 W/kg

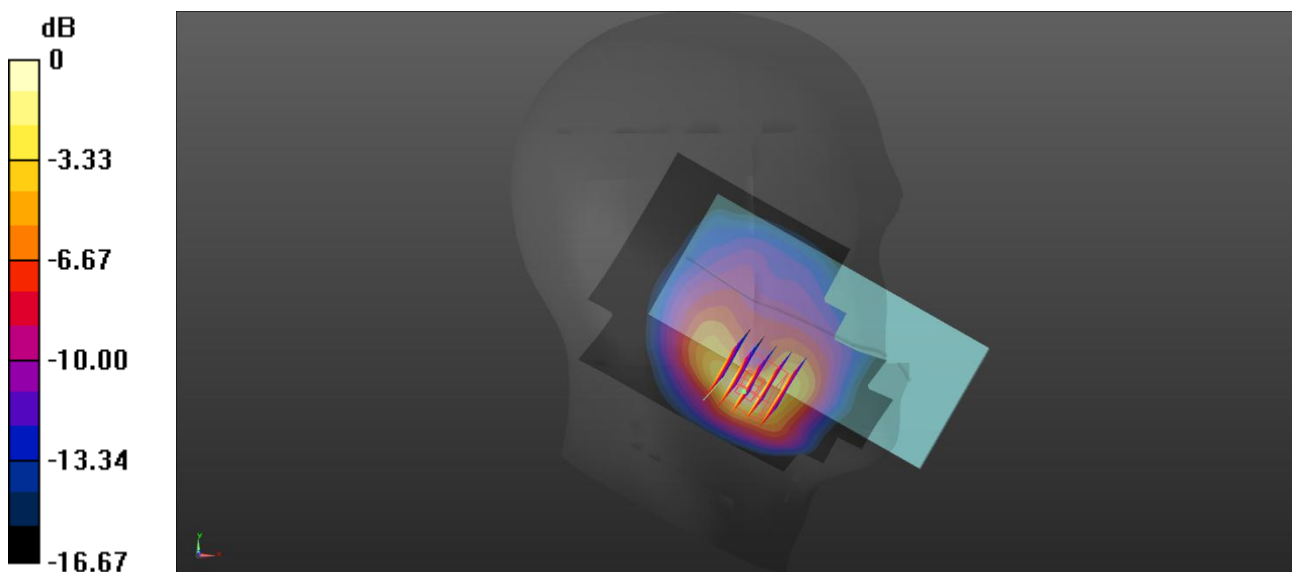

0 dB = 1.10 W/kg

Meas38.Body-worn Back side 5mm LTE B17 Ch23780 ANT1

Date: 2025/7/19

Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23780/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.29 W/kg

Ch23780/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.56 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.25 W/kg

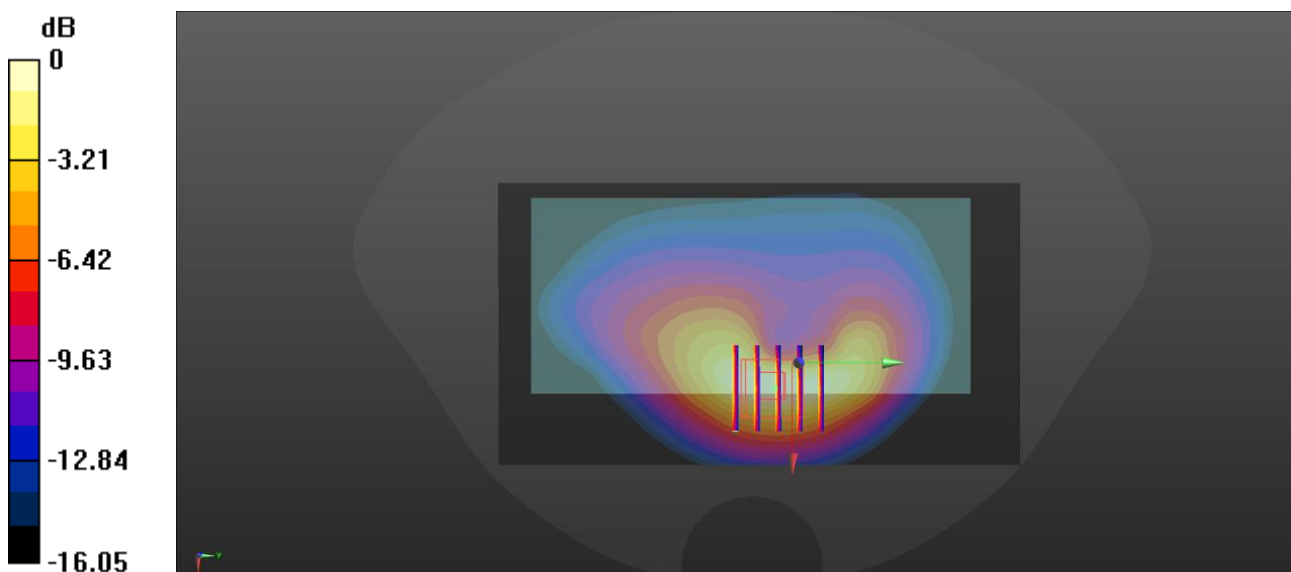

0 dB = 1.25 W/kg

Meas39.Hotspot Back side 10mm LTE B17 Ch23780 ANT1

Date: 2025/7/19

Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23780/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.693 W/kg

Ch23780/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.698 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.694 W/kg

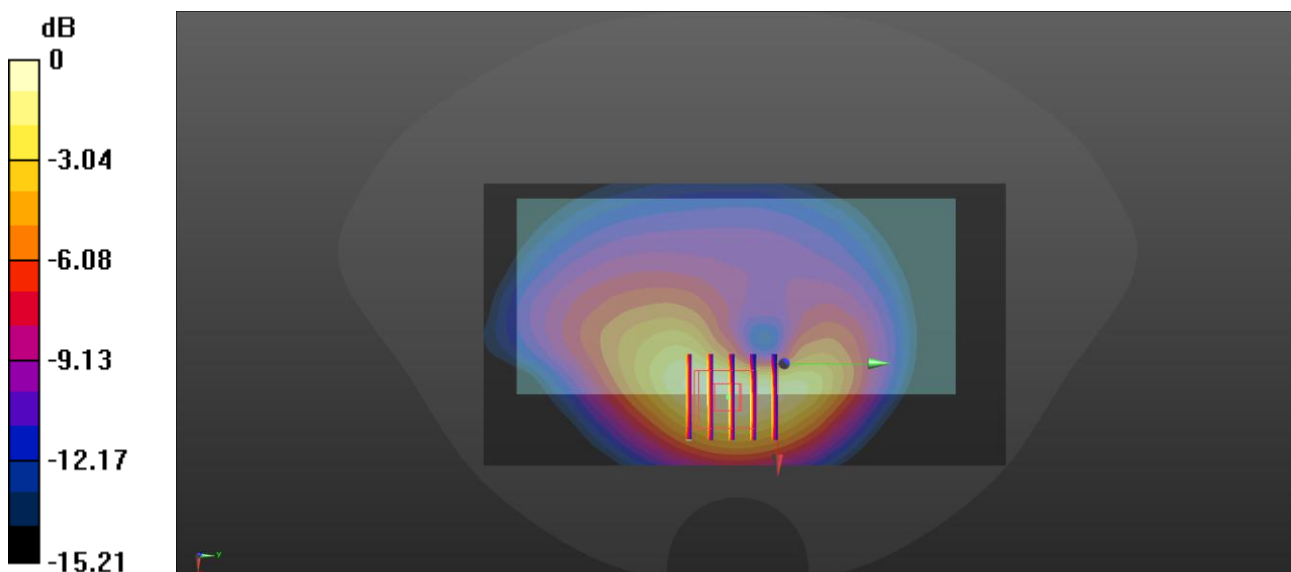

0 dB = 0.694 W/kg

Meas40.Extremity Back side 0mm LTE B17 Ch23780 ANT1

Date: 2025/7/19

Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23780/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 2.34 W/kg

Ch23780/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.93 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.652 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 2.18 W/kg

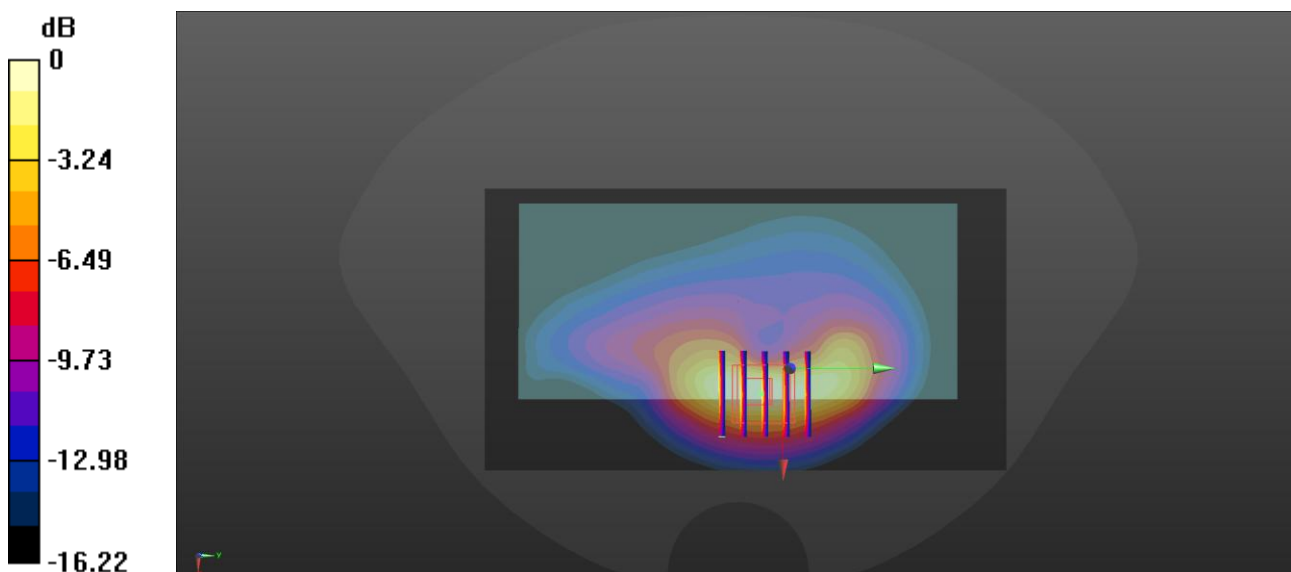

0 dB = 2.18 W/kg

Meas41.Head Left cheek LTE B26 Ch26865 ANT1

Date: 2025/7/15

Communication System Band: Band26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.523$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.870 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.981 W/kg

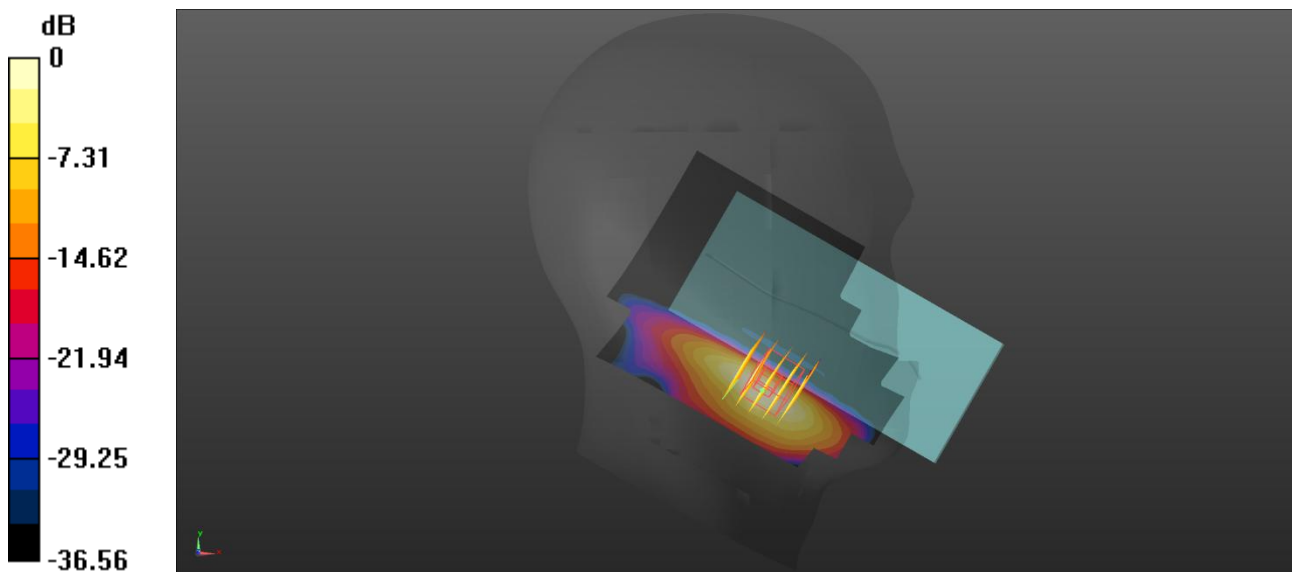

0 dB = 0.981 W/kg

Meas42.Body-worn Back side 5mm LTE B26 Ch26765 ANT0

Date: 2025/7/15

Communication System Band: Band26; Frequency: 821.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 821.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26765/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch26765/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.88 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.408 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 1.22 W/kg

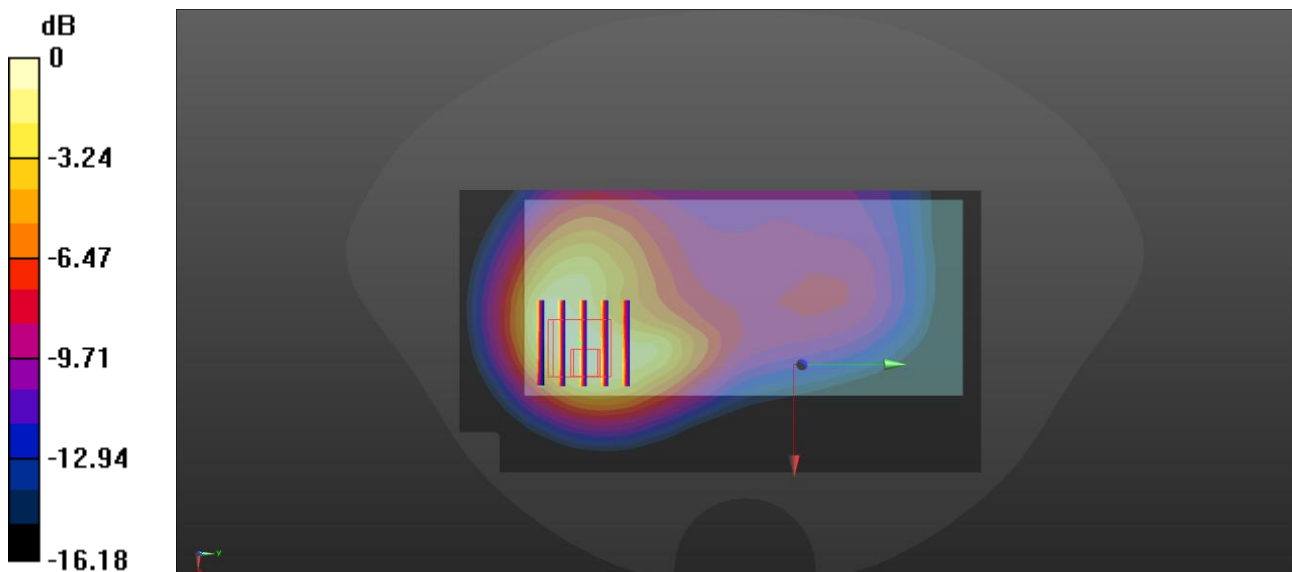

0 dB = 1.22 W/kg = 0.86 dBW/kg

Meas43.Hotspot Left side 10mm LTE B26 Ch26865 ANT1

Date: 2025/7/15

Communication System Band: Band26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.10 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.794 W/kg

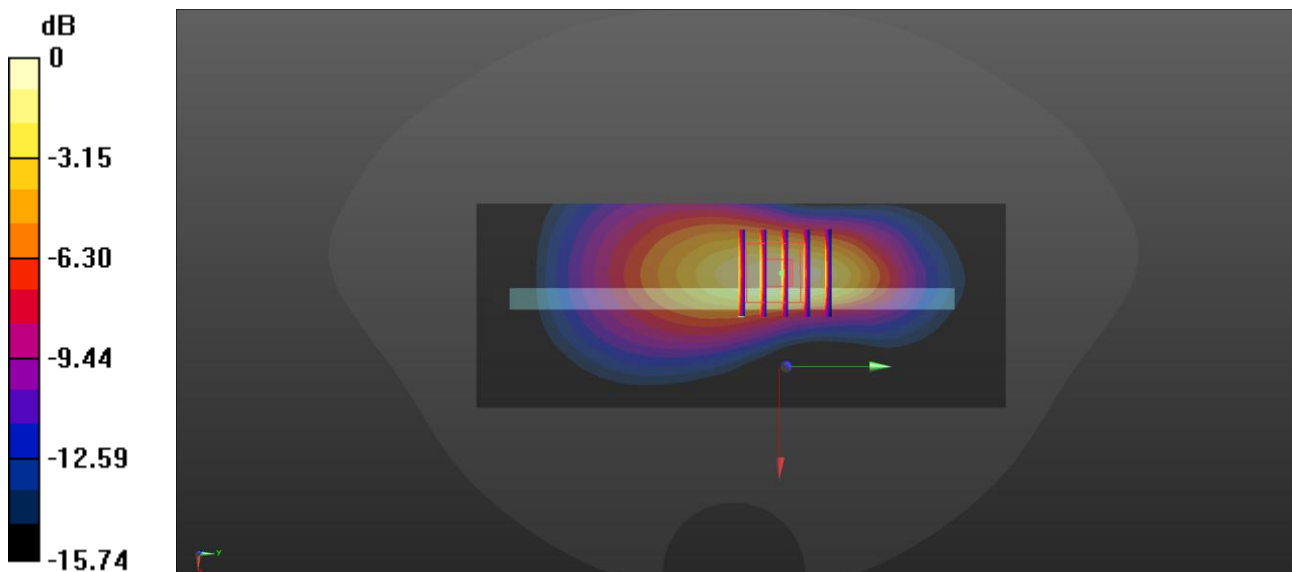

0 dB = 0.794 W/kg

Meas44.Head Right cheek LTE B66 Ch132572 ANT3

Date: 2025/7/23

Communication System Band: Band66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.771$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572 2/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Ch132572 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.518 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 1.36 W/kg

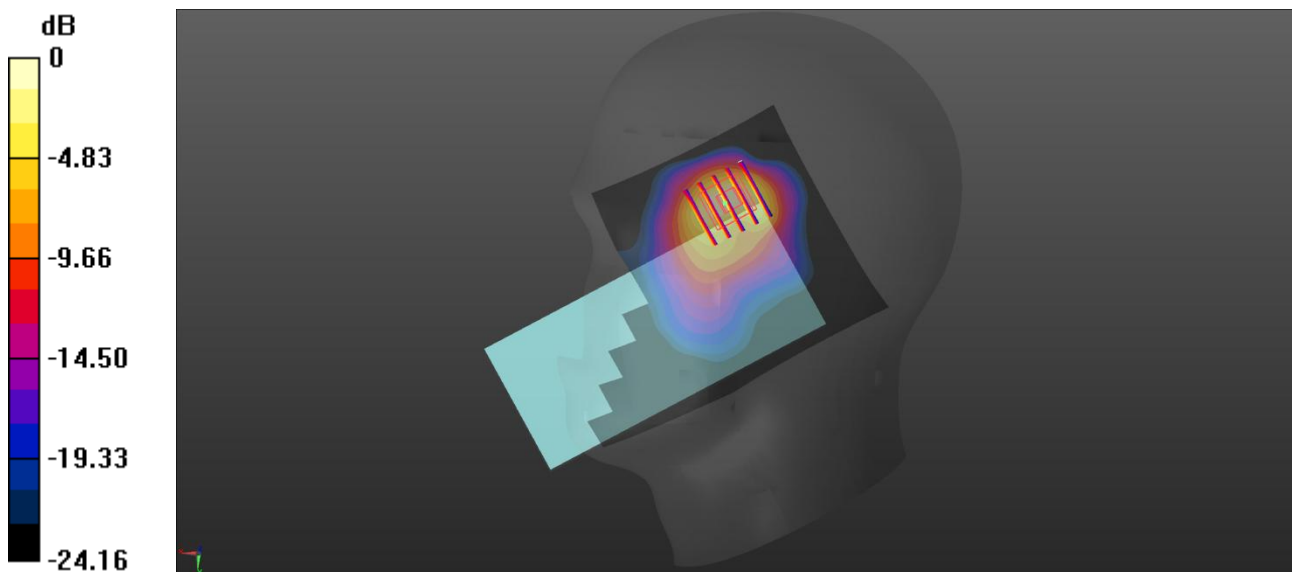

0 dB = 1.36 W/kg

Meas45.Body-worn Back side 5mm LTE B66 Ch132572 ANT3

Date: 2025/7/23

Communication System Band: Band66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.441 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 1.20 W/kg

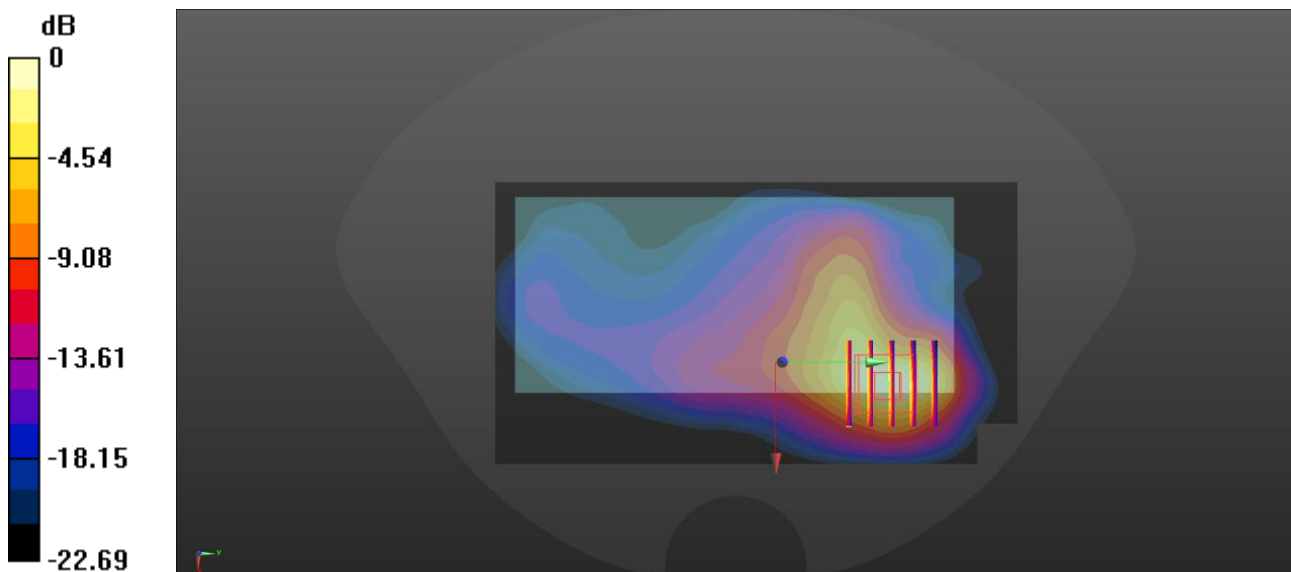

0 dB = 1.20 W/kg

Meas46.Hotspot Top side 10mm LTE B66 Ch132322 ANT4

Date: 2025/7/23

Communication System Band: Band66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.801 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.70 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.742 W/kg

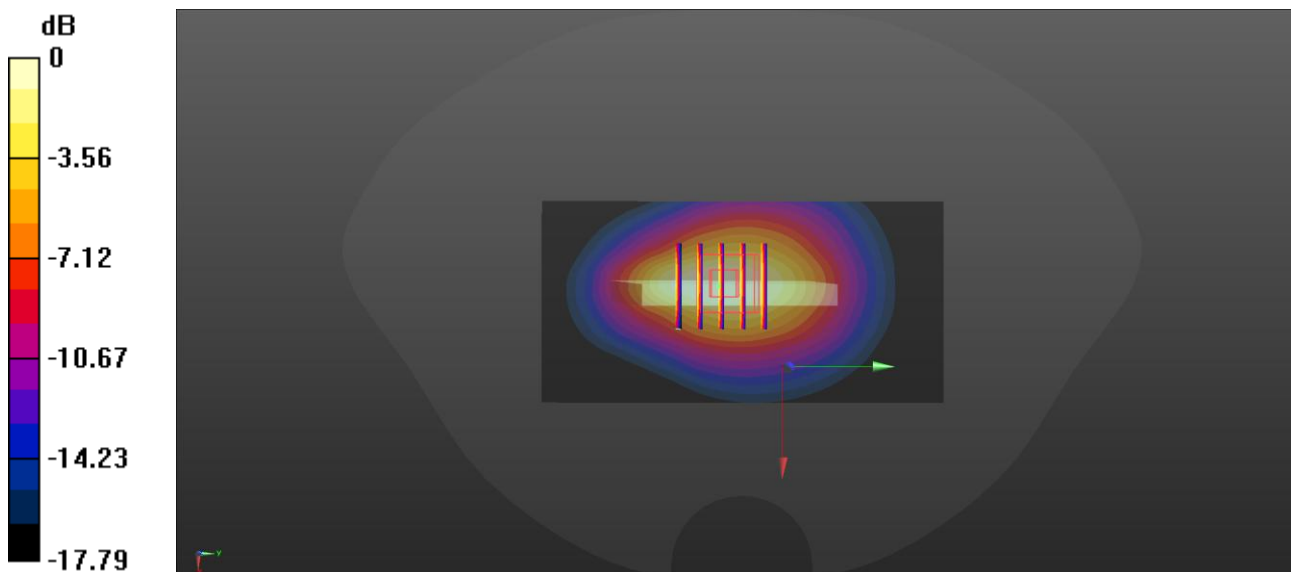

0 dB = 0.742 W/kg

Meas47.Extremity Top side 0mm LTE B66 Ch132572 ANT4

Date: 2025/7/24

Communication System Band: Band66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 39.498$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.11 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.80 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 8.56 W/kg

SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.23 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 30.6%

Maximum value of SAR (measured) = 6.24 W/kg

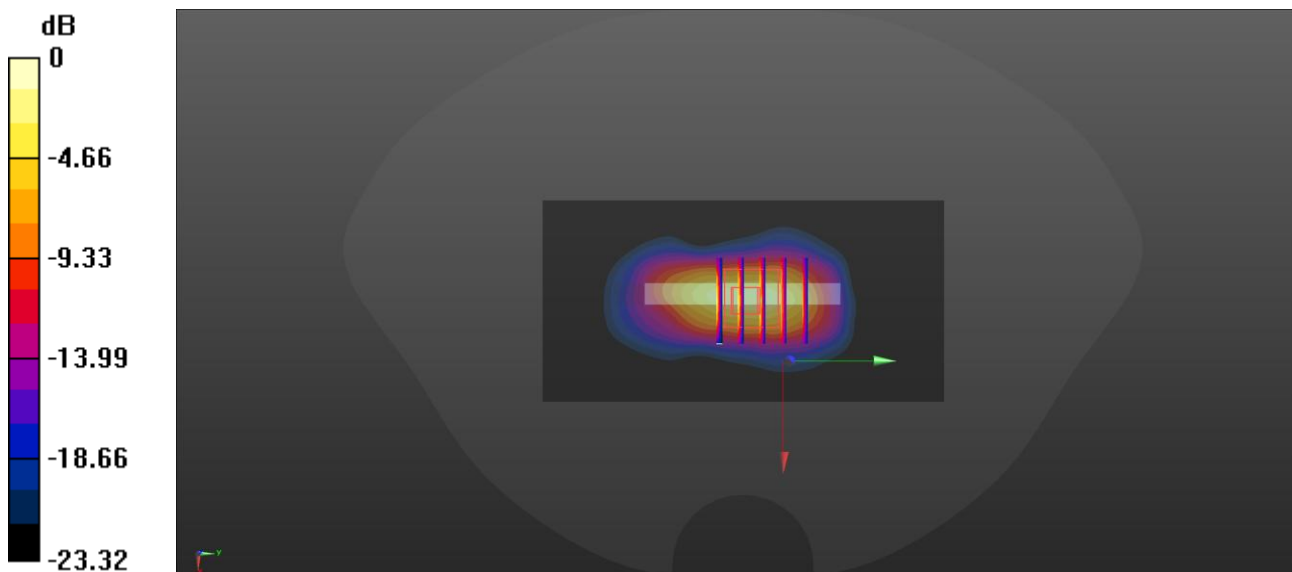

0 dB = 6.24 W/kg

Meas48.Head Right cheek LTE B38 Ch38150 ANT4

Date: 2025/8/24

Communication System Band: Band 38; Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 38.04$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.4°C Liquid Temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38150/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.88 W/kg

Ch38150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.74 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.389 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 1.60 W/kg

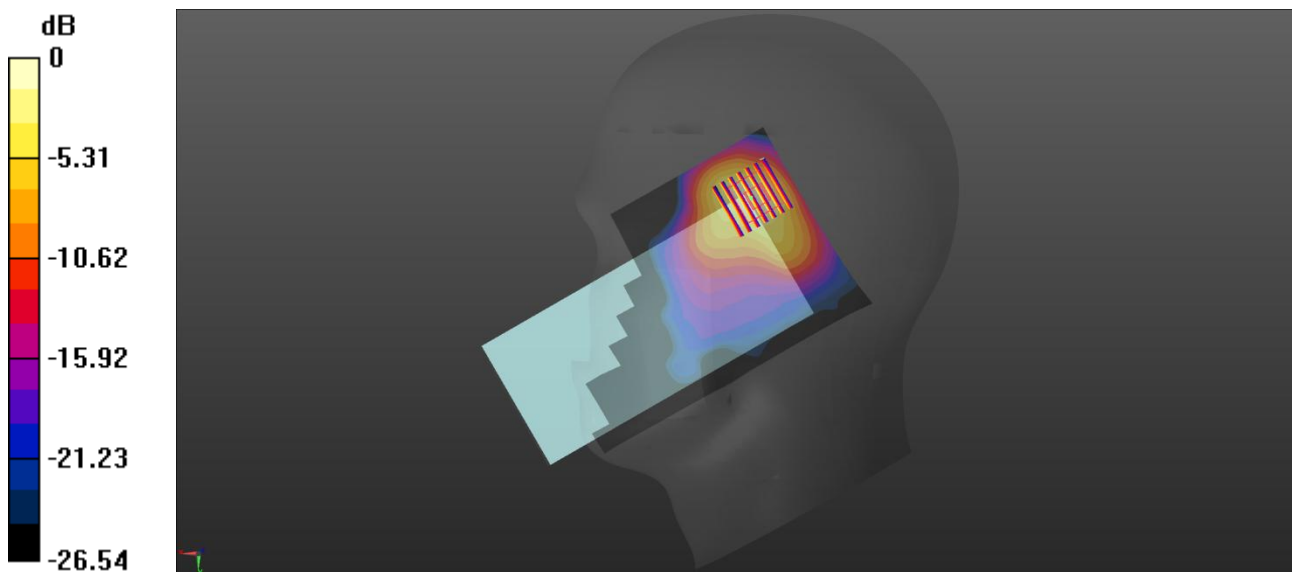

0 dB = 1.60 W/kg

Meas49.Body-worn Back side 5mm LTE B38 Ch38150 ANT3

Date: 2025/8/24

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 38.04$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.4°C Liquid Temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38150/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.60 W/kg


Ch38150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.602 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 1.56 W/kg

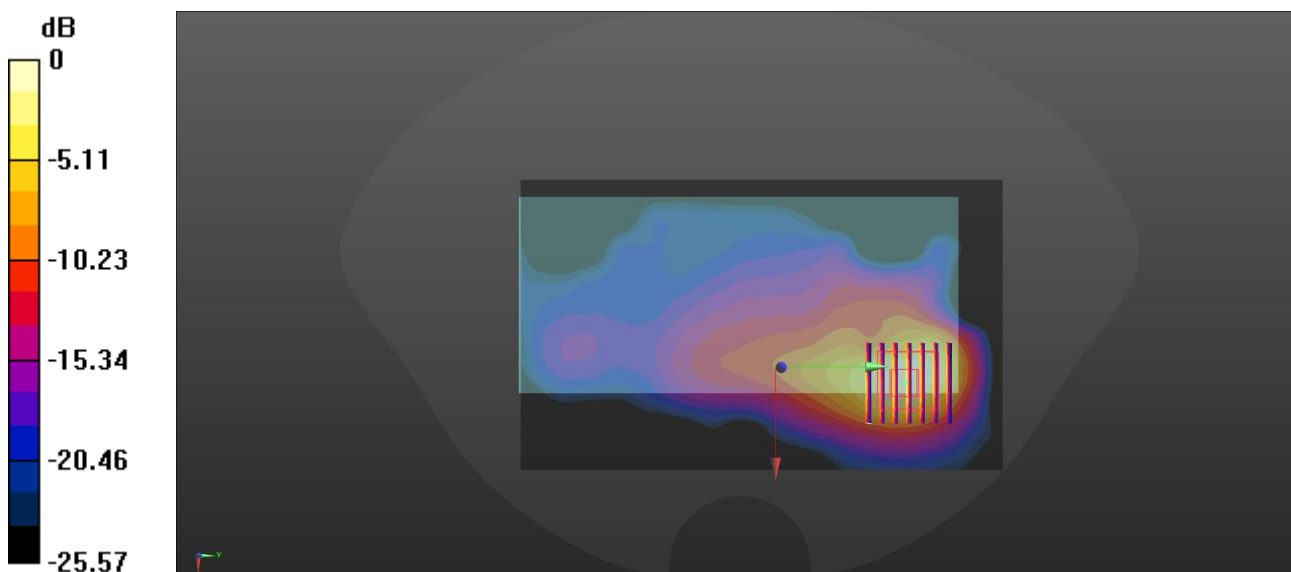

0 dB = 1.56 W/kg

Meas50.Hotspot Back side 10mm LTE B38 Ch38000 ANT2

Date: 2025/8/25

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38.622$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38000/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.916 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.843 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.906 W/kg

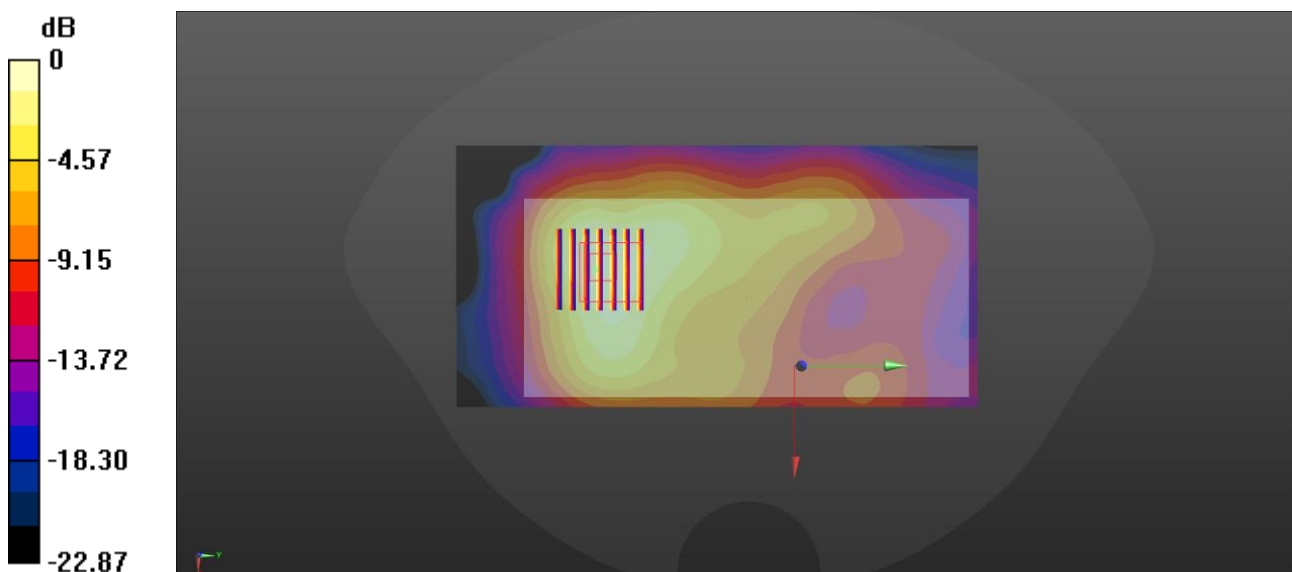

0 dB = 0.906 W/kg

Meas51.Extremity Top side 0mm LTE B38 Ch37850 ANT4

Date: 2025/8/25

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2580 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 38.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch37850/Area Scan (61x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 5.44 W/kg

Ch37850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.20 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 9.07 W/kg

SAR(1 g) = 2.81 W/kg; SAR(10 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 26.8%

Maximum value of SAR (measured) = 6.00 W/kg

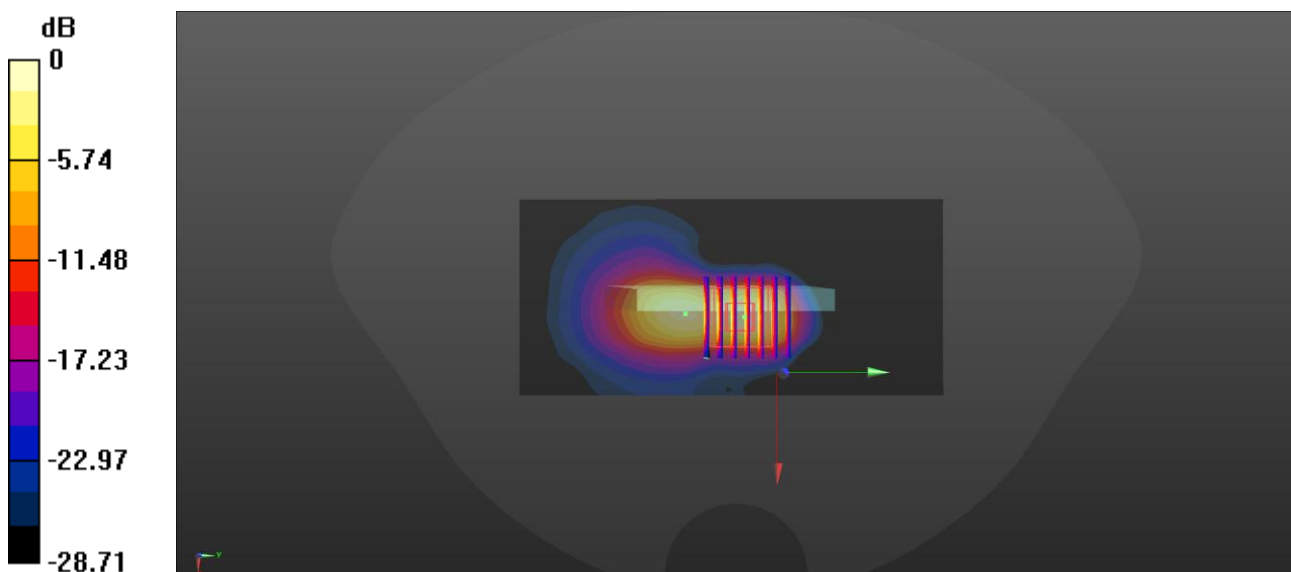

0 dB = 6.00 W/kg

Meas52.Head Right Tilt LTE B41 Ch39750 ANT4

Date: 2025/8/26

Communication System Band: Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 38.732$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Ch39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.24 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 1.52 W/kg

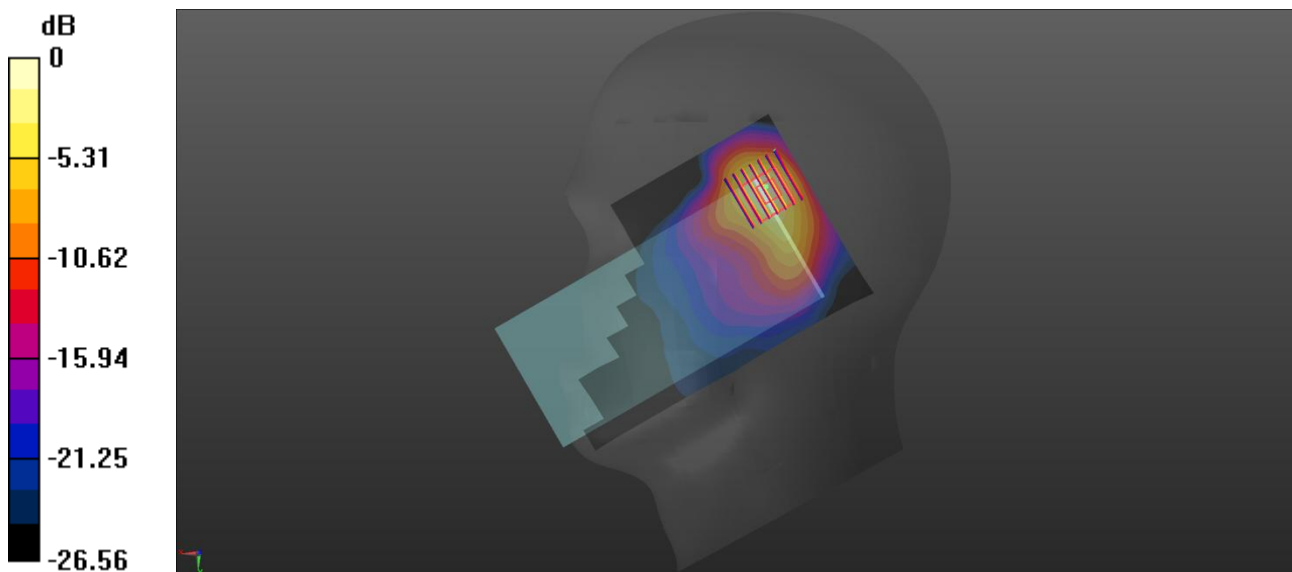

0 dB = 1.52 W/kg

Meas53.Body-worn Back side 5mm LTE B41 Ch41055 ANT3

Date: 2025/8/27

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2636.5 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2636.5$ MHz; $\sigma = 2.054$ S/m; $\epsilon_r = 38.273$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41055/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.51 W/kg

Ch41055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.691 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.51 W/kg

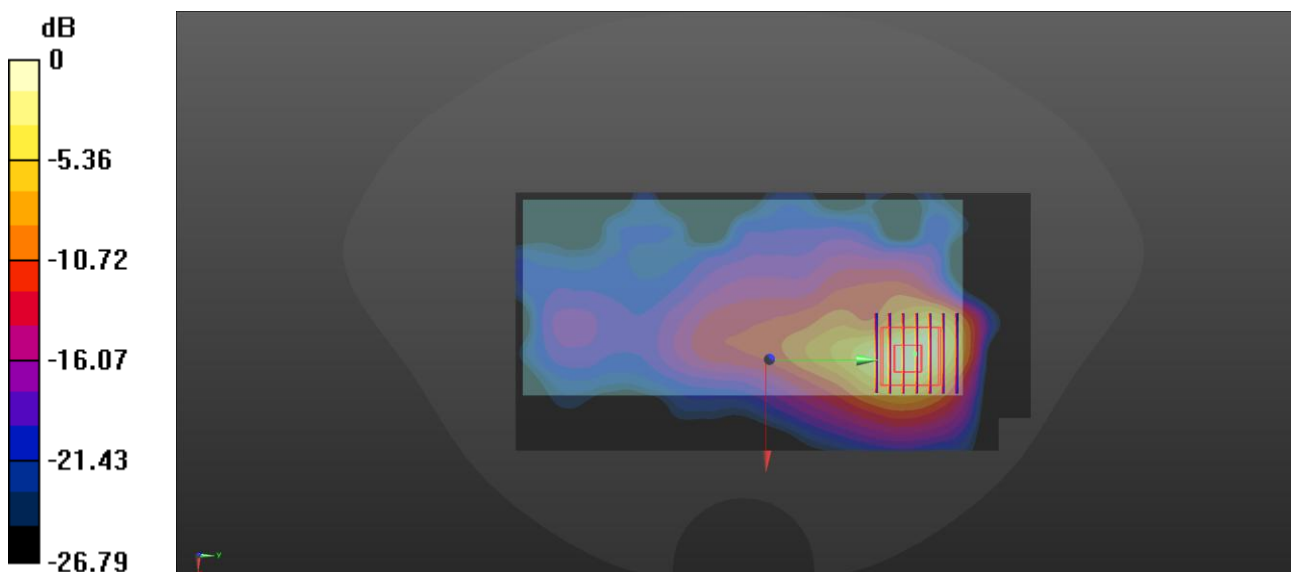

0 dB = 1.51 W/kg

Meas54.Hotspot Left side 10mm LTE B41 Ch40620 ANT3

Date: 2025/8/27

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 38.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.926 W/kg


Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 9.050 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 0.940 W/kg

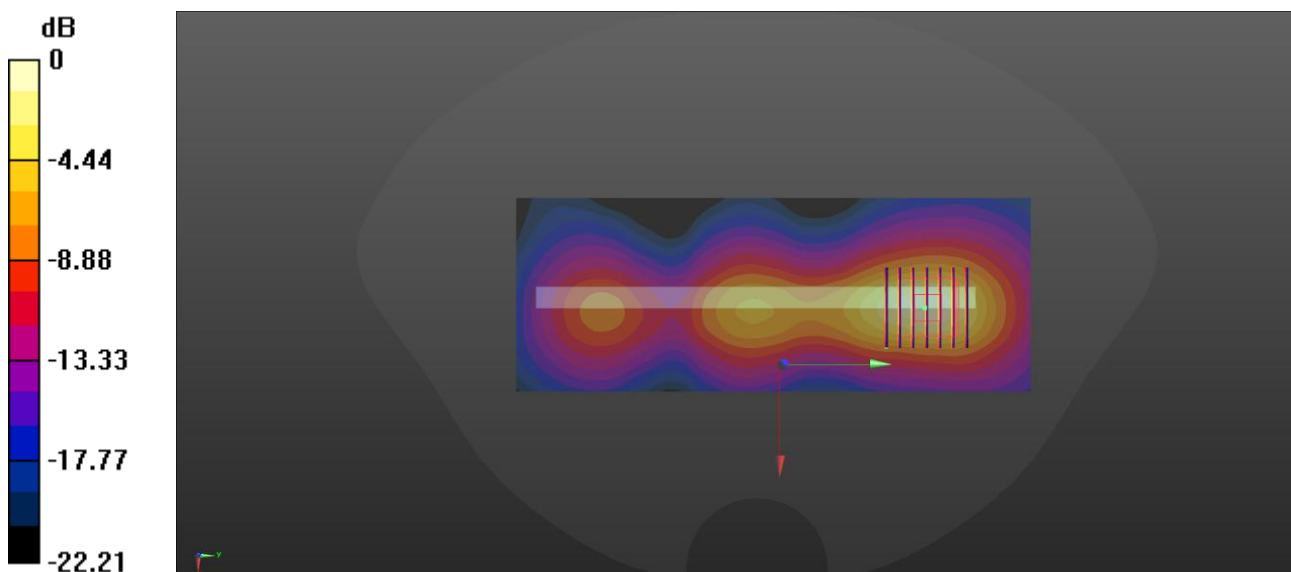

0 dB = 0.940 W/kg

Meas55.Extremity Top side 0mm LTE B41 Ch39750 ANT4

Date: 2025/8/27

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Area Scan (61x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 8.09 W/kg

Ch39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 39.85 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 3.37 W/kg; SAR(10 g) = 1.11 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 28.9%

Maximum value of SAR (measured) = 8.39 W/kg

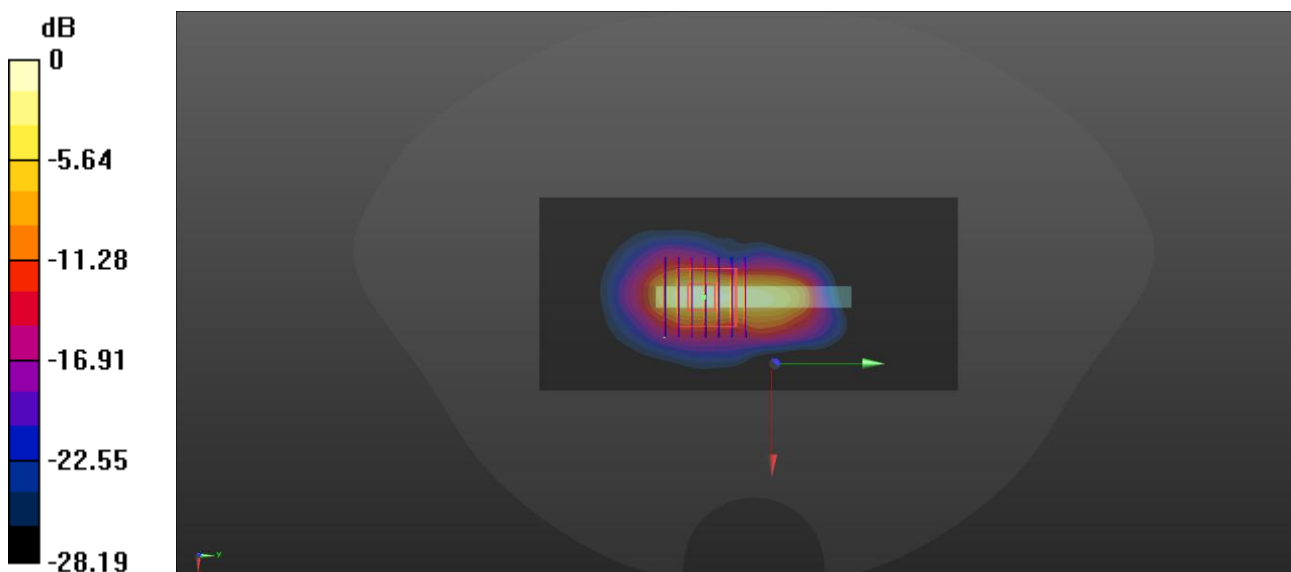

0 dB = 8.39 W/kg

Meas56.Head Right Tilt LTE B42 Ch42515 ANT4

Date: 2025/8/1

Communication System Band: Band 42, E-UTRA/TDD (3400.0 - 3600.0 MHz); Frequency: 3492.5 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3492.5$ MHz; $\sigma = 2.844$ S/m; $\epsilon_r = 38.307$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.73 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 9.534 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 1.87 W/kg

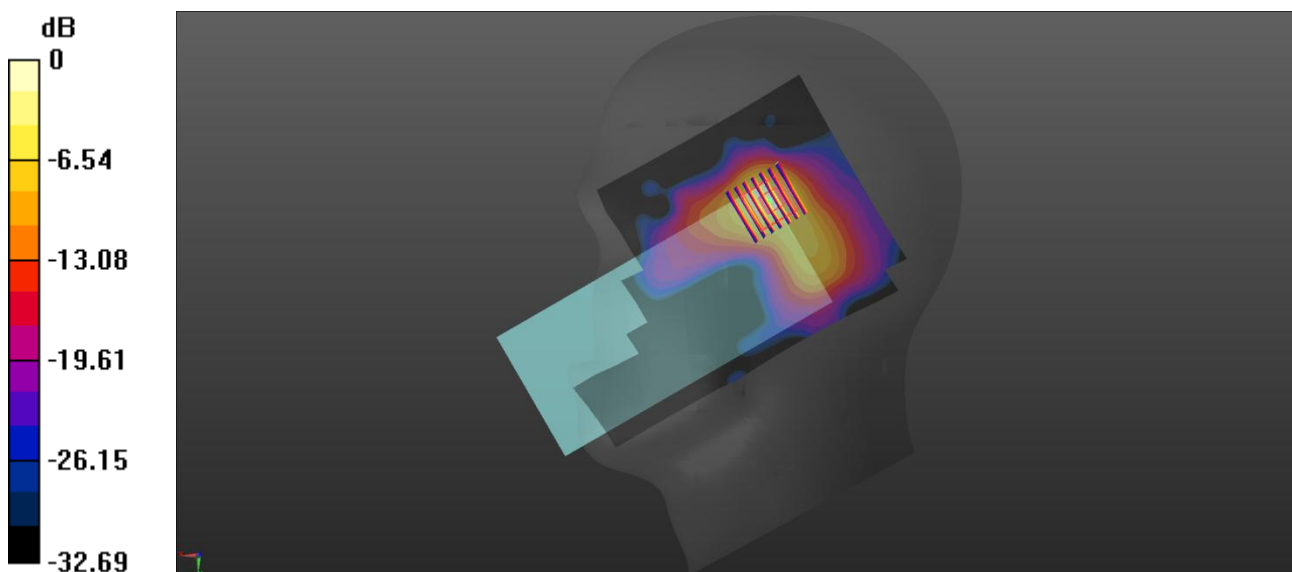

0 dB = 1.87 W/kg

Meas57.Body-worn Back side 5mm LTE B42 Ch43490 ANT3

Date: 2025/8/1

Communication System Band: Band 42, E-UTRA/TDD (3400.0 - 3600.0 MHz); Frequency: 3590 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3590$ MHz; $\sigma = 2.93$ S/m; $\epsilon_r = 38.128$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch43490/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.58 W/kg

Ch43490/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 2.825 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.43 W/kg

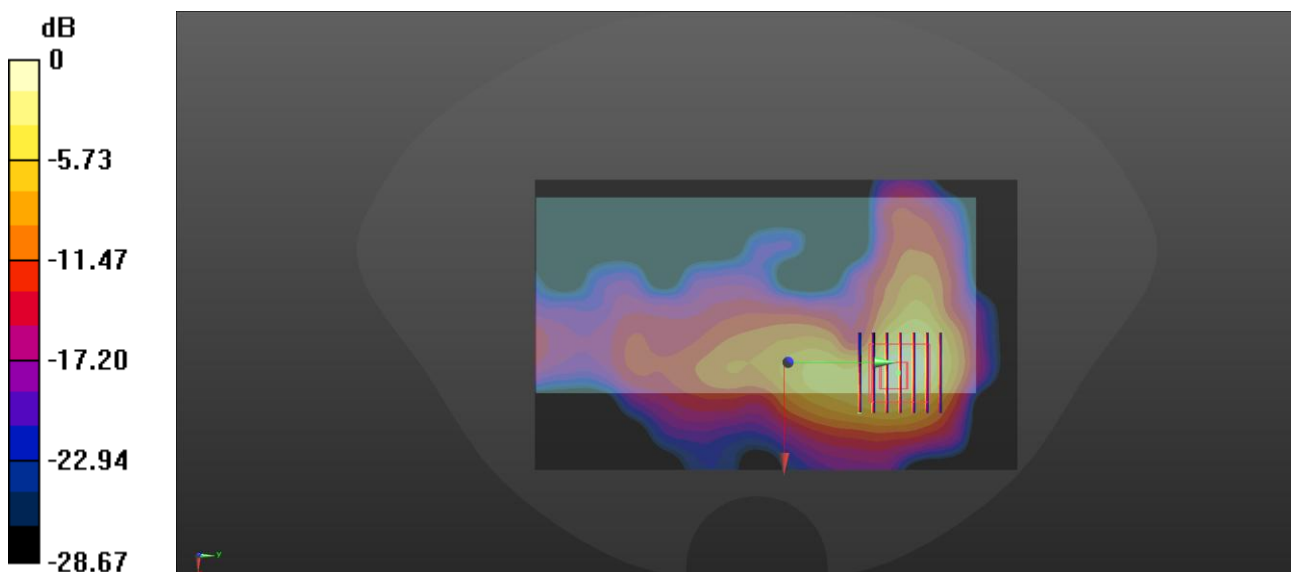

0 dB = 1.43 W/kg

Meas58.Hotspot Left side 10mm LTE B42 Ch42840 ANT3

Date: 2025/8/2

Communication System Band: Band 42; Frequency: 3525 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3525$ MHz; $\sigma = 2.868$ S/m; $\epsilon_r = 38.334$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42840/Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.981 W/kg

Ch42840/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 6.720 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 1.03 W/kg

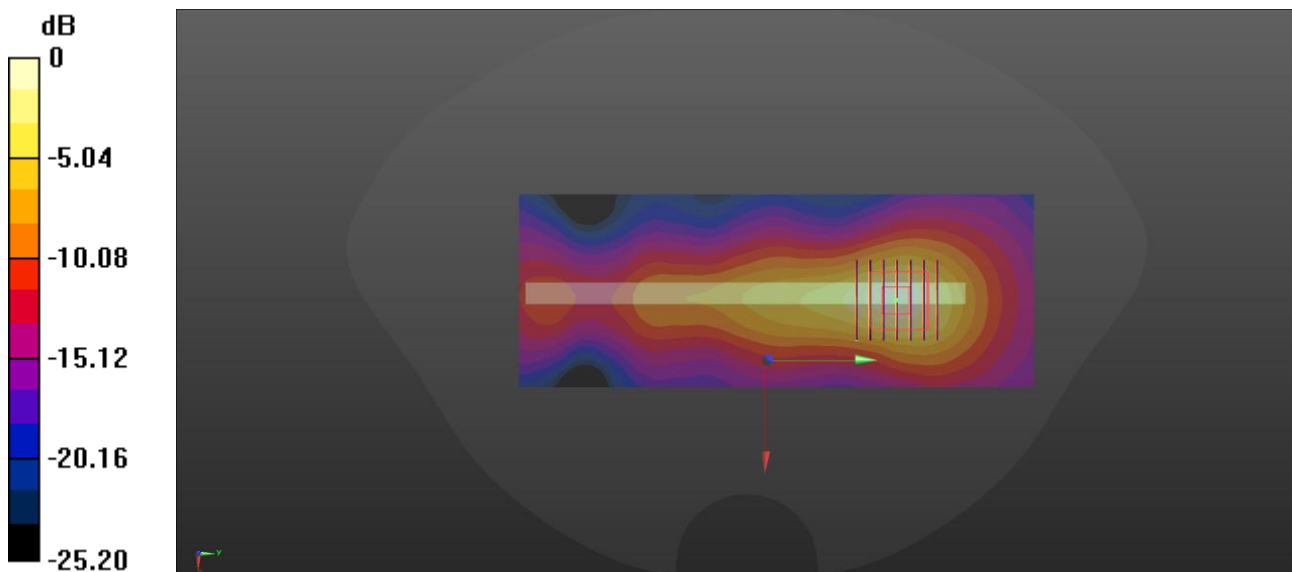

0 dB = 1.03 W/kg

Meas59.Extremity Back side 0mm LTE B42 Ch42190 ANT4

Date: 2025/8/2

Communication System Band: Band 42, E-UTRA/TDD (3400.0 - 3600.0 MHz); Frequency: 3460 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3460$ MHz; $\sigma = 2.829$ S/m; $\epsilon_r = 38.468$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42190/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 9.24 W/kg

Ch42190/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 0 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 4.75 W/kg; SAR(10 g) = 1.65 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 34.3%

Maximum value of SAR (measured) = 10.9 W/kg

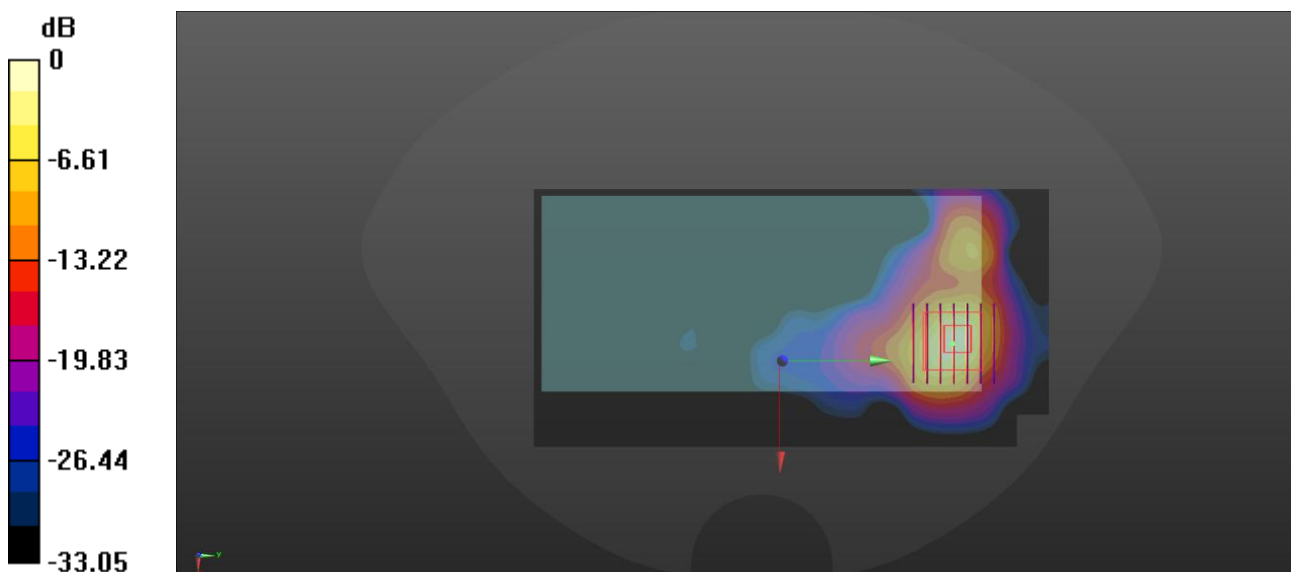

0 dB = 10.9 W/kg

Meas60.Head Right Cheek LTE B48 Ch55340 ANT3

Date: 2025/8/6

Communication System Band: Band 48; Frequency: 3560 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3560$ MHz; $\sigma = 2.995$ S/m; $\epsilon_r = 38.698$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55340/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Ch55340/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 4.255 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.298 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.51 W/kg

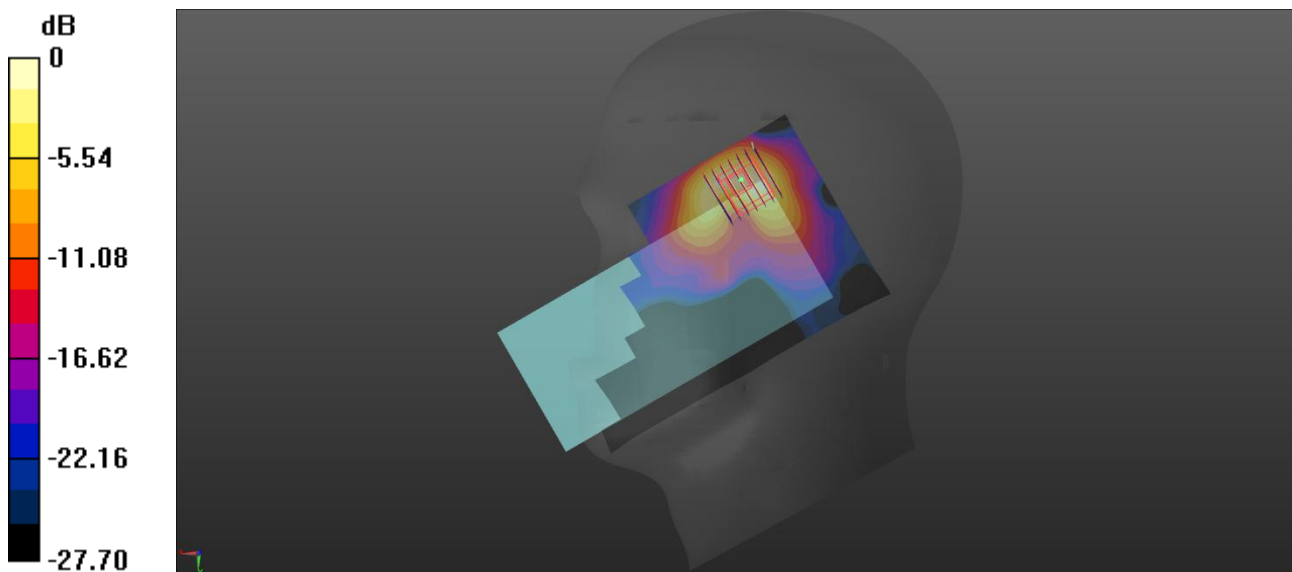

0 dB = 1.51 W/kg

Meas61.Body-worn Back side 5mm LTE B48 Ch55340 ANT4

Date: 2025/8/6

Communication System Band: Band 48; Frequency: 3560 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3560$ MHz; $\sigma = 2.995$ S/m; $\epsilon_r = 38.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55340/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Ch55340/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 2.357 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.38 W/kg

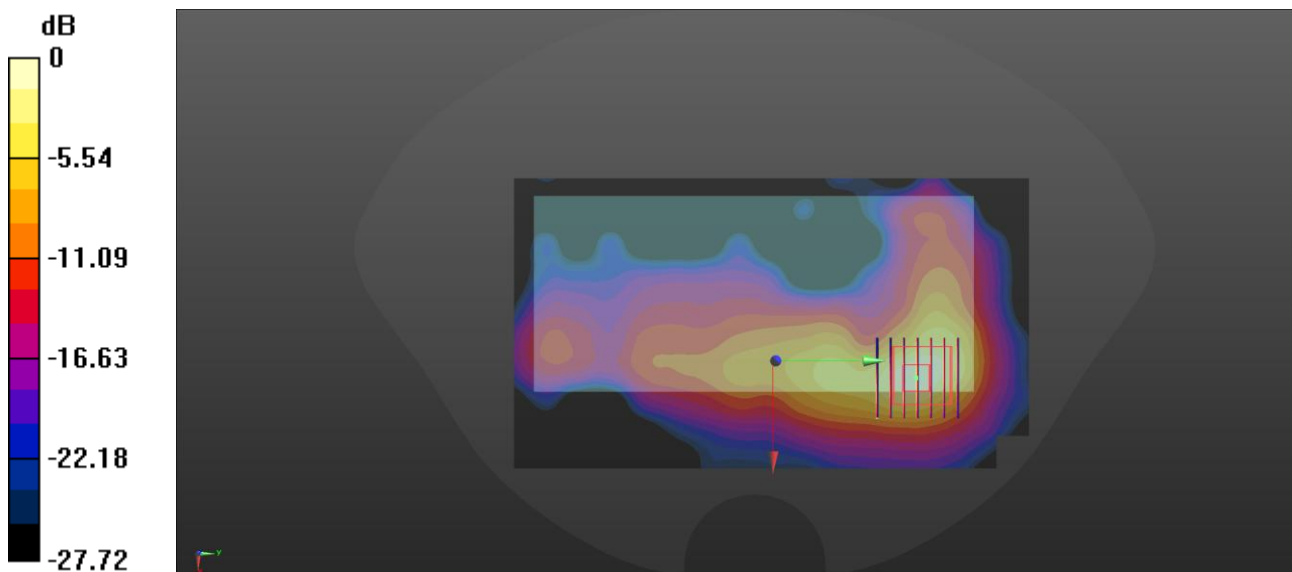

0 dB = 1.38 W/kg

Meas62.Hotspot Back side 10mm LTE B48 Ch55340 ANT4

Date: 2025/8/6

Communication System Band: Band 48; Frequency: 3560 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3560$ MHz; $\sigma = 2.995$ S/m; $\epsilon_r = 38.698$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55340/Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.873 W/kg

Ch55340/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 6.464 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.904 W/kg

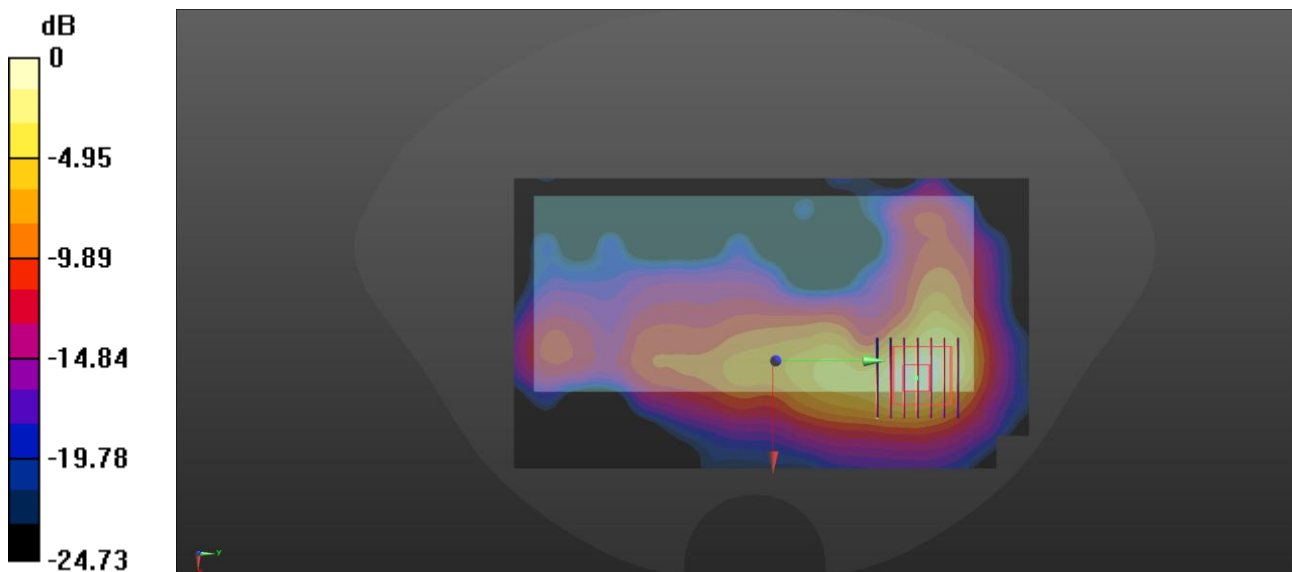

0 dB = 0.904 W/kg

Meas63.Extremity Left side 0mm LTE B48 Ch56315 ANT3

Date: 2025/8/4

Communication System Band: Band 48; Frequency: 3657.5 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3657.5$ MHz; $\sigma = 3.016$ S/m; $\epsilon_r = 38.236$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch56315/Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 10.2 W/kg

Ch56315/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 6.910 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 4.98 W/kg; SAR(10 g) = 1.47 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 31.6%

Maximum value of SAR (measured) = 12.5 W/kg

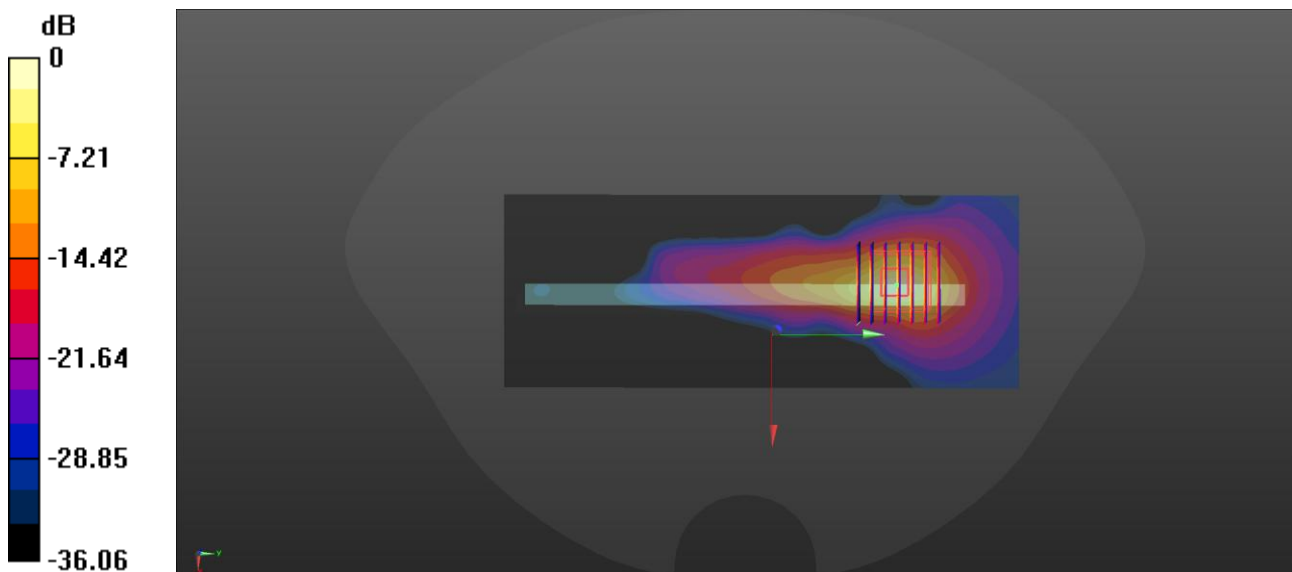

0 dB = 12.5 W/kg

Meas64.Head Right cheek NR n2 Ch372000 ANT3

Date: 2025/7/30

Communication System Band: N2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.632$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch372000/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.84 W/kg

Ch372000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.848 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 1.91 W/kg

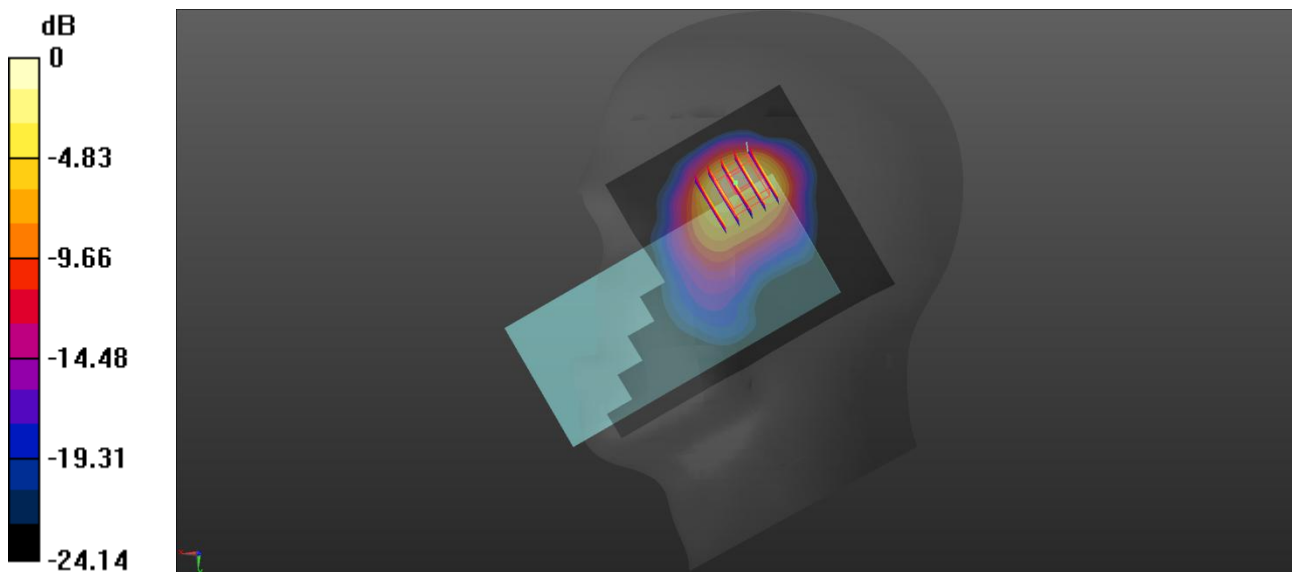

0 dB = 1.91 W/kg

Meas65.Body-worn Back side 5mm NR n2 Ch372000 ANT2

Date: 2025/7/30

Communication System Band: N2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.632$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch372000/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.997 W/kg

Ch372000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.221 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 1.30 W/kg

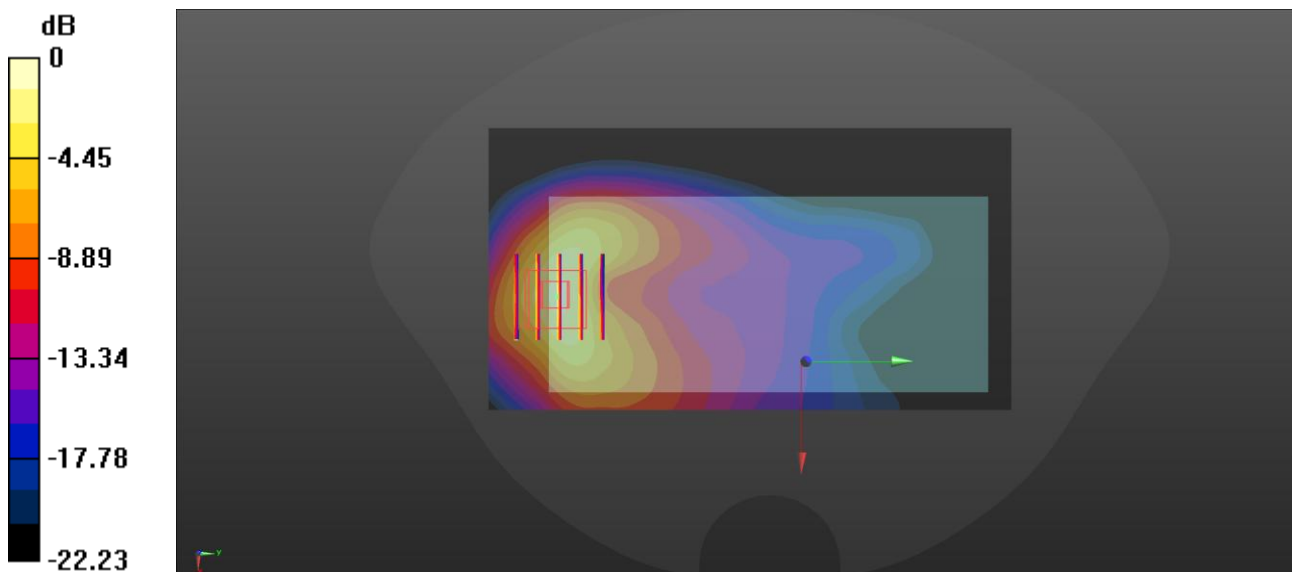

0 dB = 1.30 W/kg

Meas66.Hotspot Bottom side 10mm NR n2 Ch380000 ANT2

Date: 2025/7/31

Communication System Band: N2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.537$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch380000/Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch380000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.36 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 1.01 W/kg

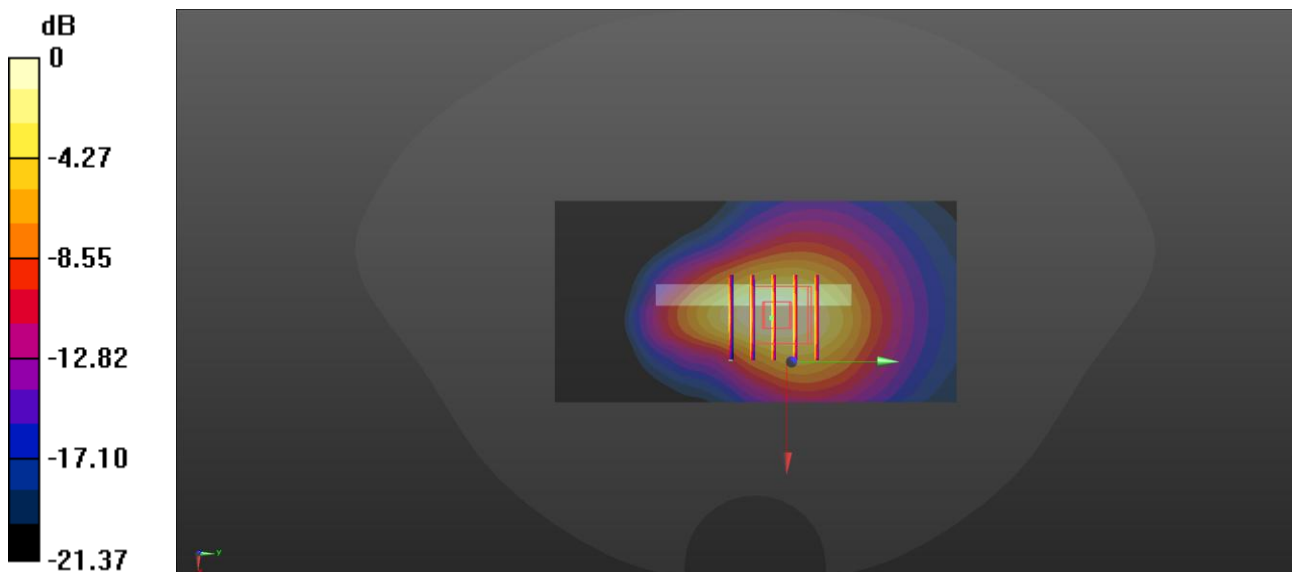

0 dB = 1.01 W/kg

Meas67.Extremity Top side 0mm NR n2 Ch372000 ANT4

Date: 2025/7/31

Communication System Band: N2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 39.645$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch372000/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.93 W/kg

Ch372000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.55 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 9.35 W/kg

SAR(1 g) = 2.93 W/kg; SAR(10 g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 31.2%

Maximum value of SAR (measured) = 7.04 W/kg

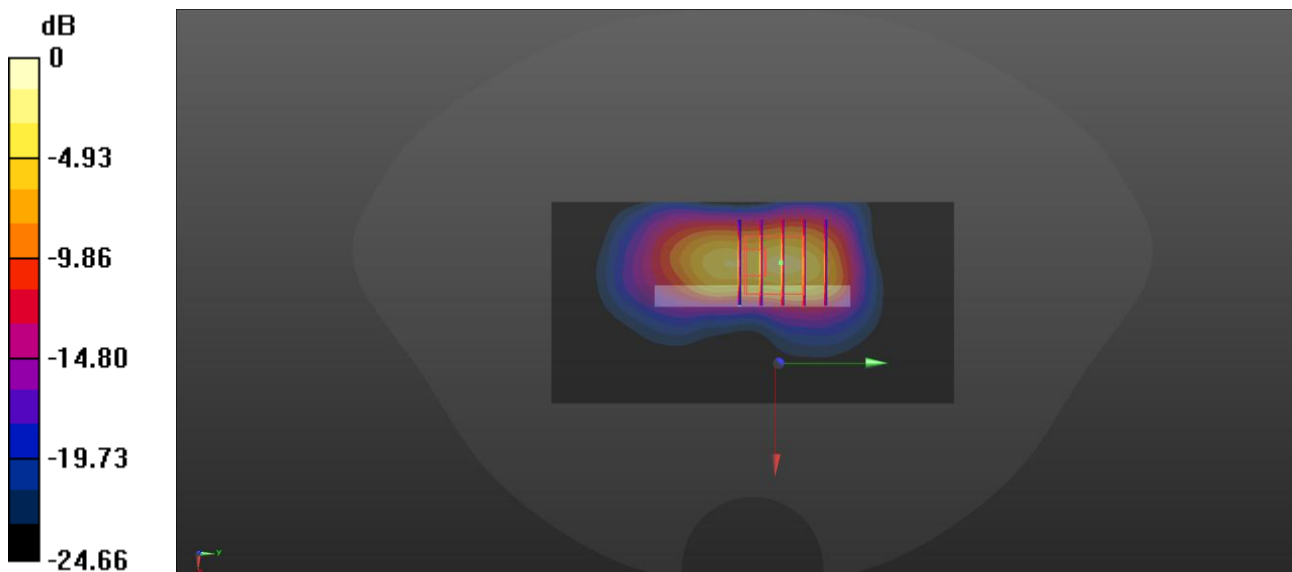

0 dB = 7.04 W/kg

Meas68.Head Left cheek NR n5 Ch167800 ANT1

Date: 2025/7/16

Communication System Band: n5; Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 839$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.896$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167800/Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch167800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.083 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 37.5%

Maximum value of SAR (measured) = 1.40 W/kg

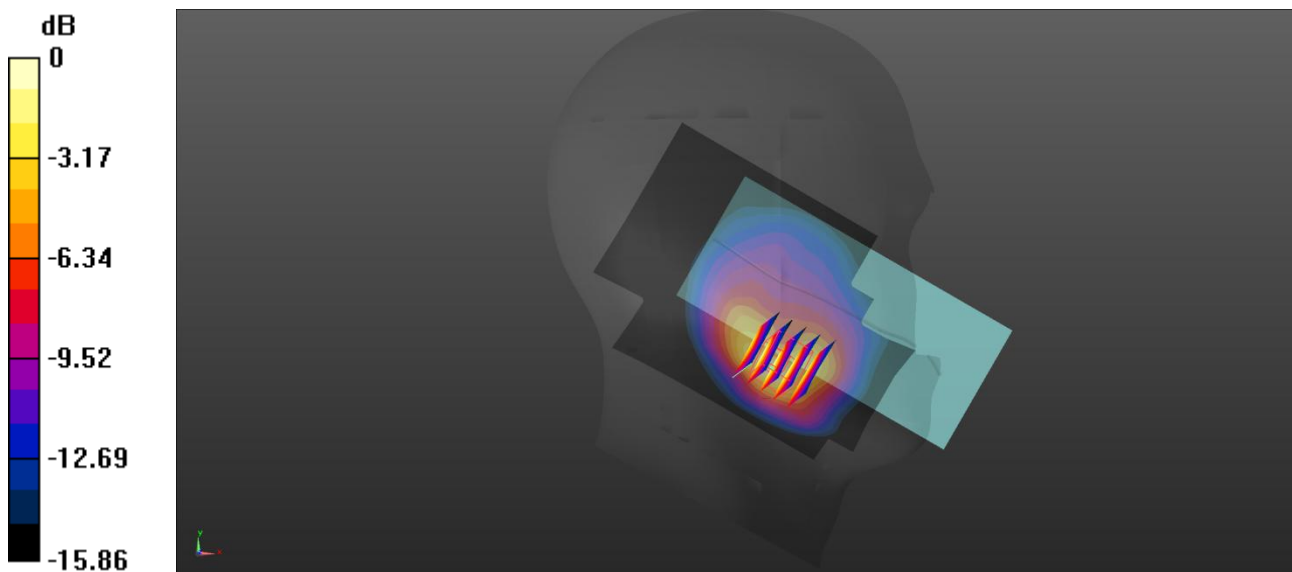

0 dB = 1.40 W/kg

Meas69.Body-worn Back side 5mm NR n5 Ch167300 ANT1

Date: 2025/7/16

Communication System Band: n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.833$ S/m; $\epsilon_r = 42.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.00 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.472 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 1.47 W/kg

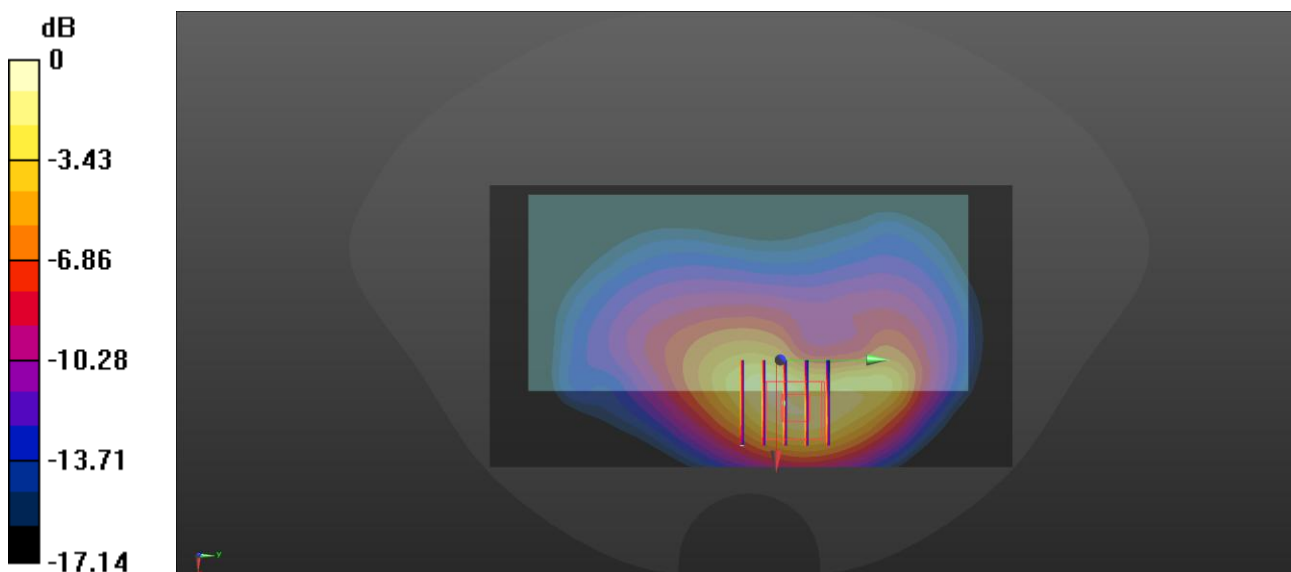

0 dB = 1.47 W/kg

Meas70.Hotspot Back side 10mm NR n5 Ch167800 ANT1

Date: 2025/7/16

Communication System Band: n5; Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 839$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167800/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.699 W/kg

Ch167800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.13 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.750 W/kg

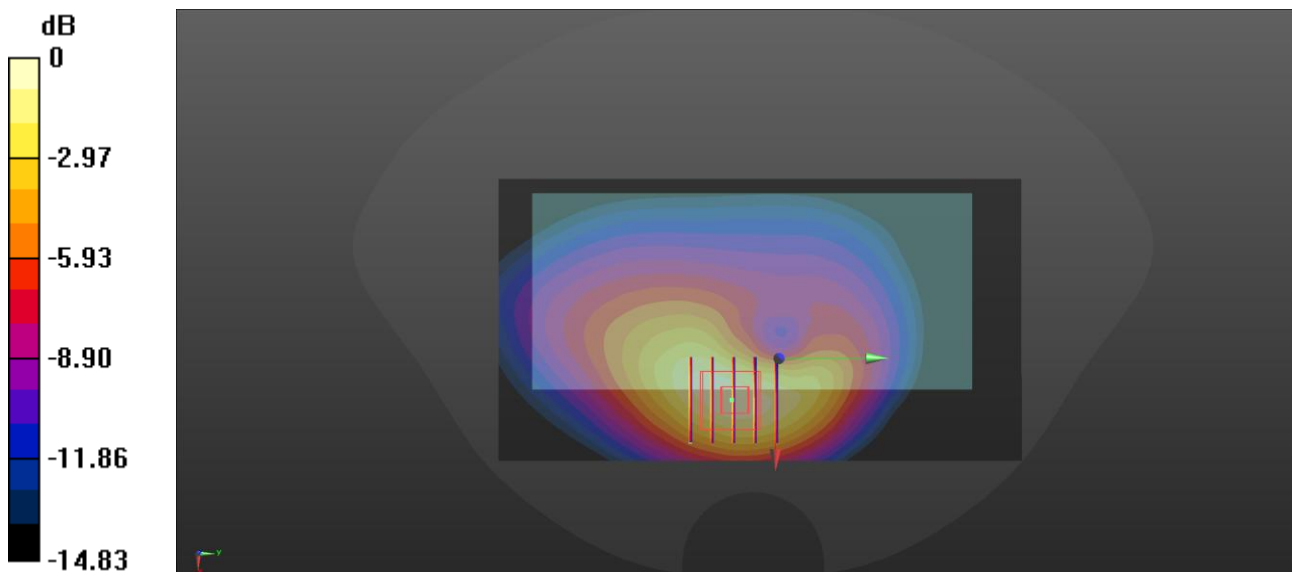

0 dB = 0.750 W/kg

Meas71.Head Right cheek NR n7 Ch50900 ANT4

Date: 2025/8/12

Communication System Band: n7; Frequency: 2545 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2545$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch50900/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Ch50900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.70 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 1.58 W/kg

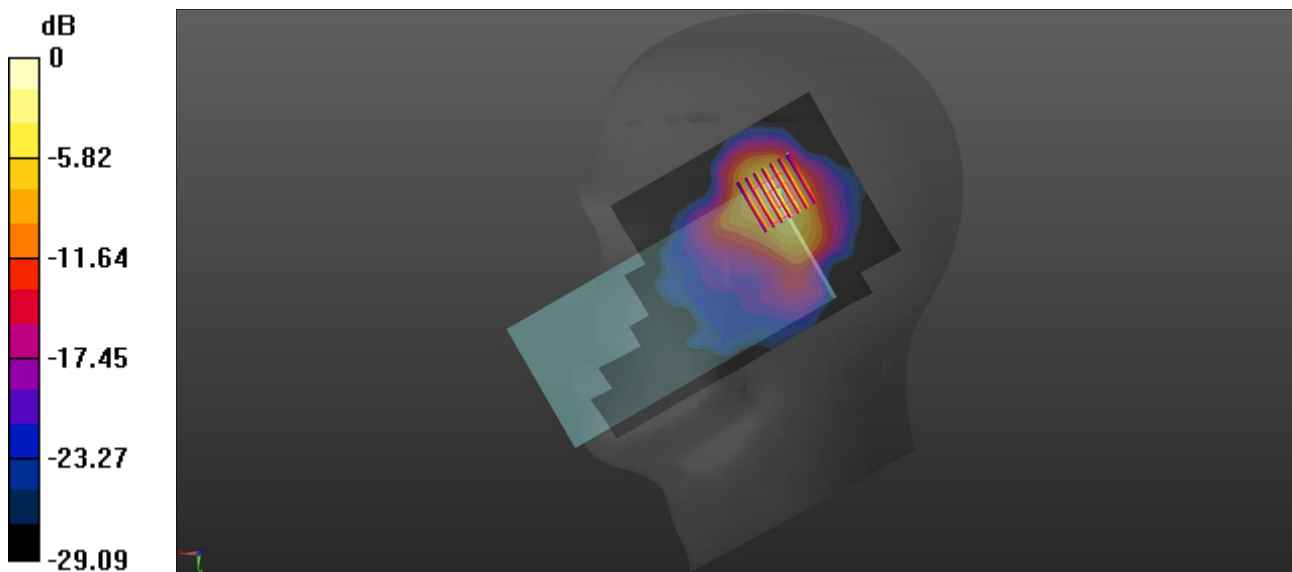

0 dB = 1.58 W/kg

Meas72.Body-worn Back side 5mm NR n7 Ch509000 ANT3

Date: 2025/8/12

Communication System Band: n7; Frequency: 2545 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2545$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch509000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Ch509000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.919 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.39 W/kg

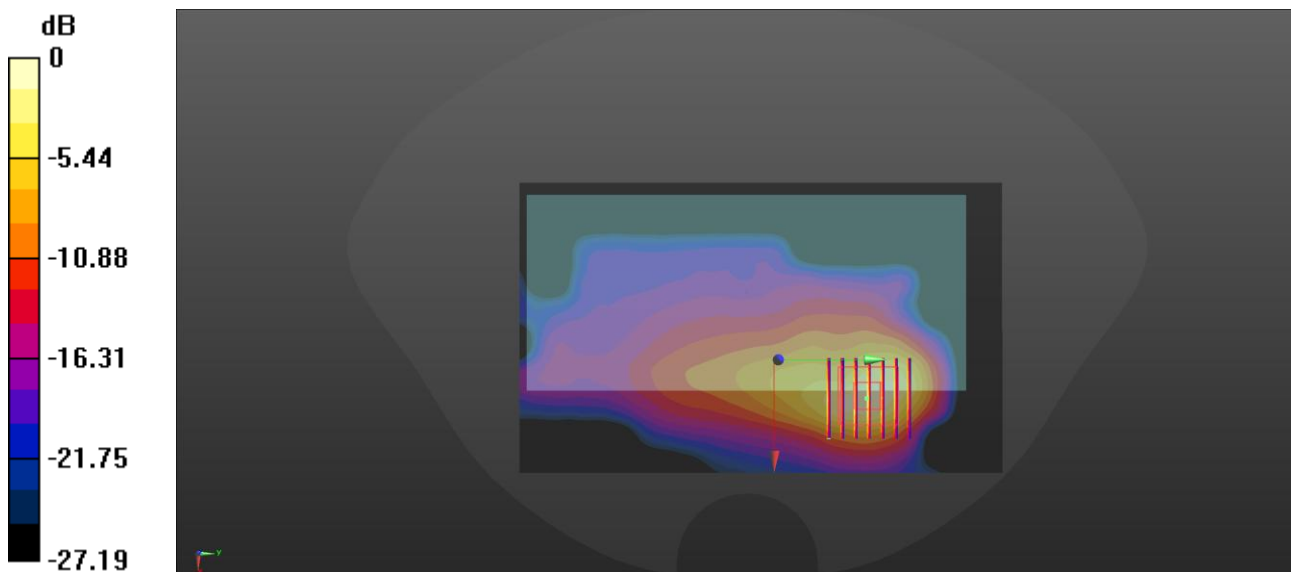

0 dB = 1.39 W/kg

Meas73.Hotspot Left side 10mm NR n7 Ch509000 ANT3

Date: 2025/8/13

Communication System Band: n7; Frequency: 2545 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2545$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch509000/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.810 W/kg

Ch509000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 8.413 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.839 W/kg

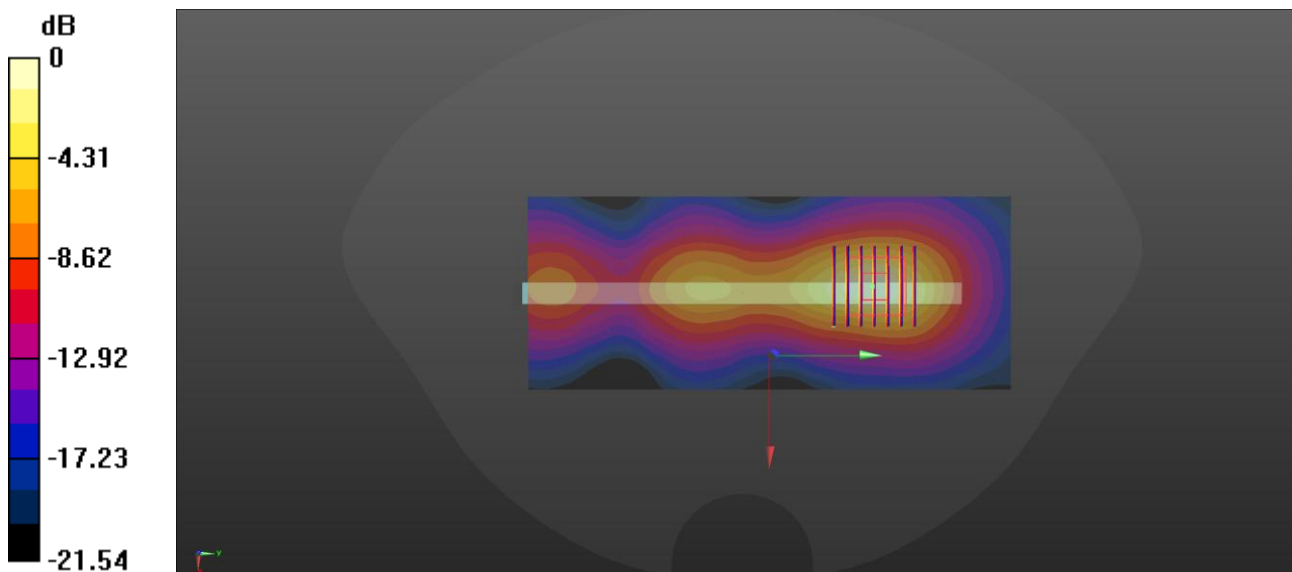

0 dB = 0.839 W/kg

Meas74.Extremity Back side 0mm NR n7 Ch509000 ANT2

Date: 2025/8/14

Communication System Band: n7; Frequency: 2545 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2545$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch509000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.8 W/kg

Ch509000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.510 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 5.94 W/kg; SAR(10 g) = 2.18 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 12.4 W/kg

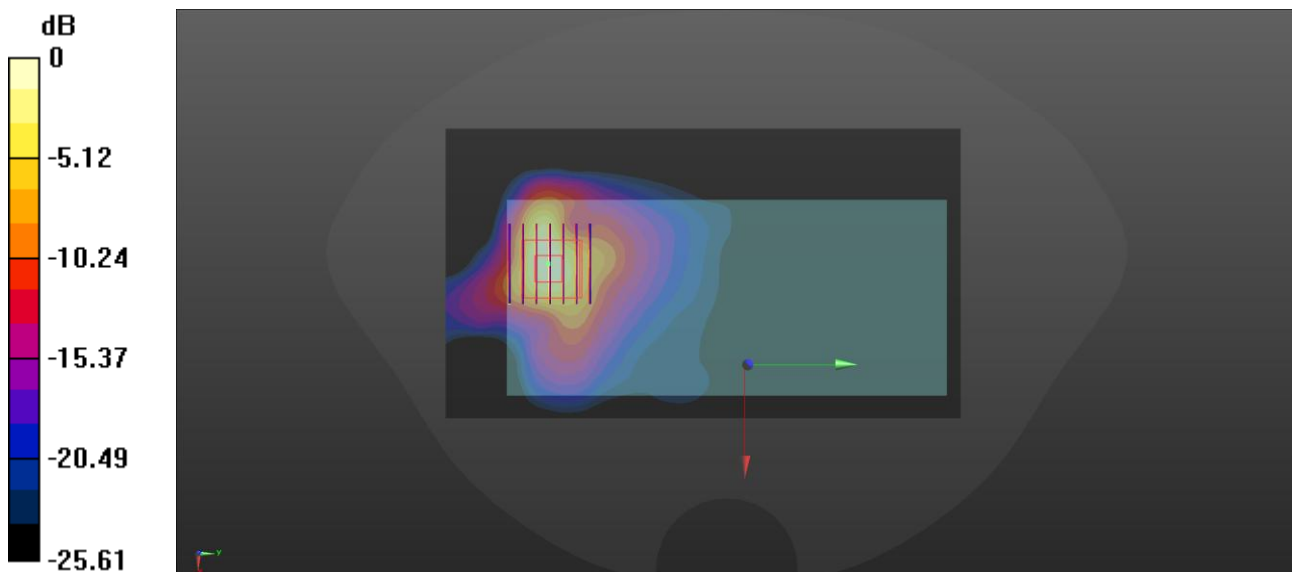

0 dB = 12.4 W/kg

Meas75.Head Left cheek NR n12 Ch142200 ANT1

Date: 2025/7/18

Communication System Band: N12; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.854$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch142200/Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Ch142200/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.833 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 1.16 W/kg

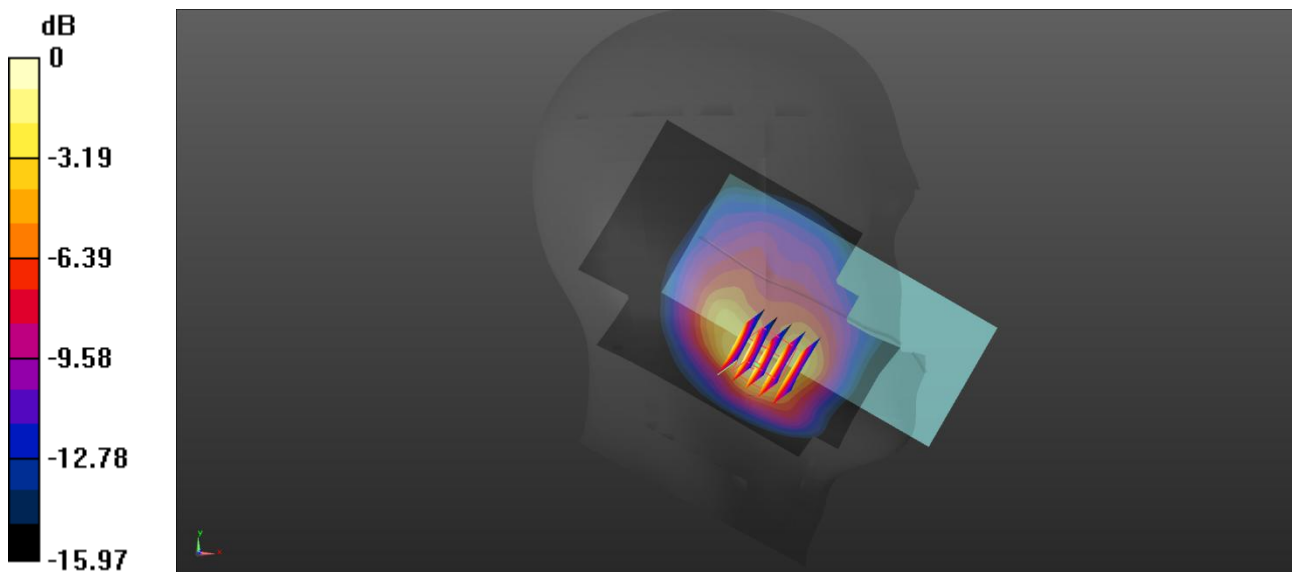

0 dB = 1.16 W/kg

Meas76.Body-worn Back side 5mm NR n12 Ch142200 ANT0

Date: 2025/7/18

Communication System Band: N12; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.854$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch142200/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Ch142200/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 1.46 W/kg

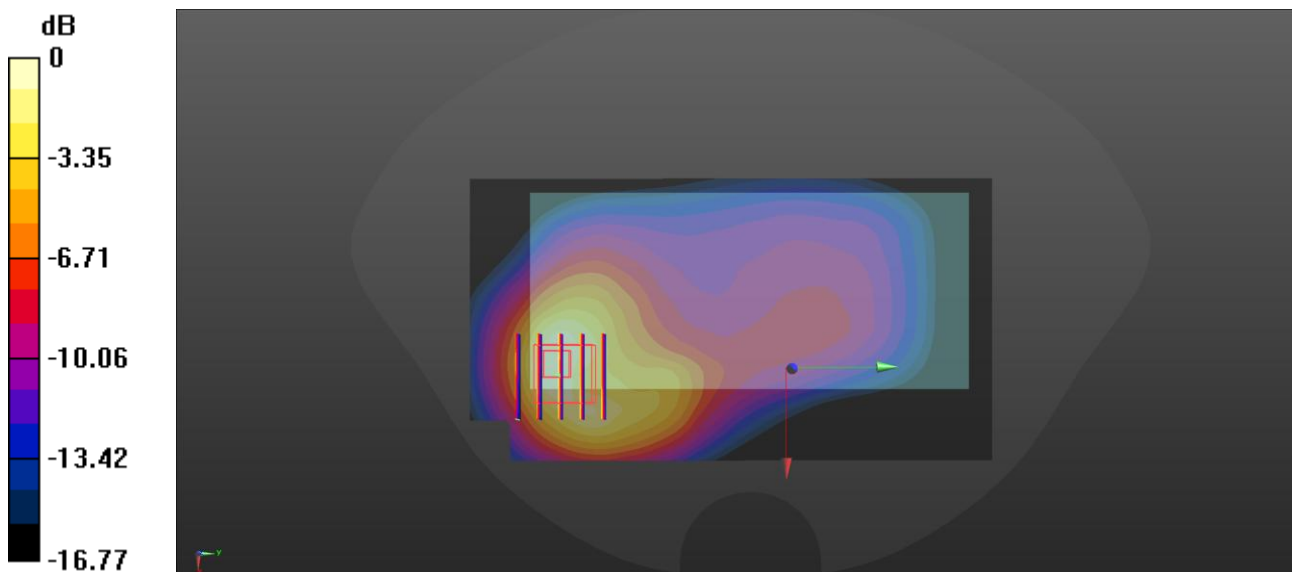

0 dB = 1.46 W/kg

Meas77.Hotspot Back side 10mm NR n12 Ch142200 ANT0

Date: 2025/7/18

Communication System Band: N12; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.868 \text{ S/m}$; $\epsilon_r = 42.854$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch142200/Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.737 W/kg

Ch142200/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.78 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.963 W/kg

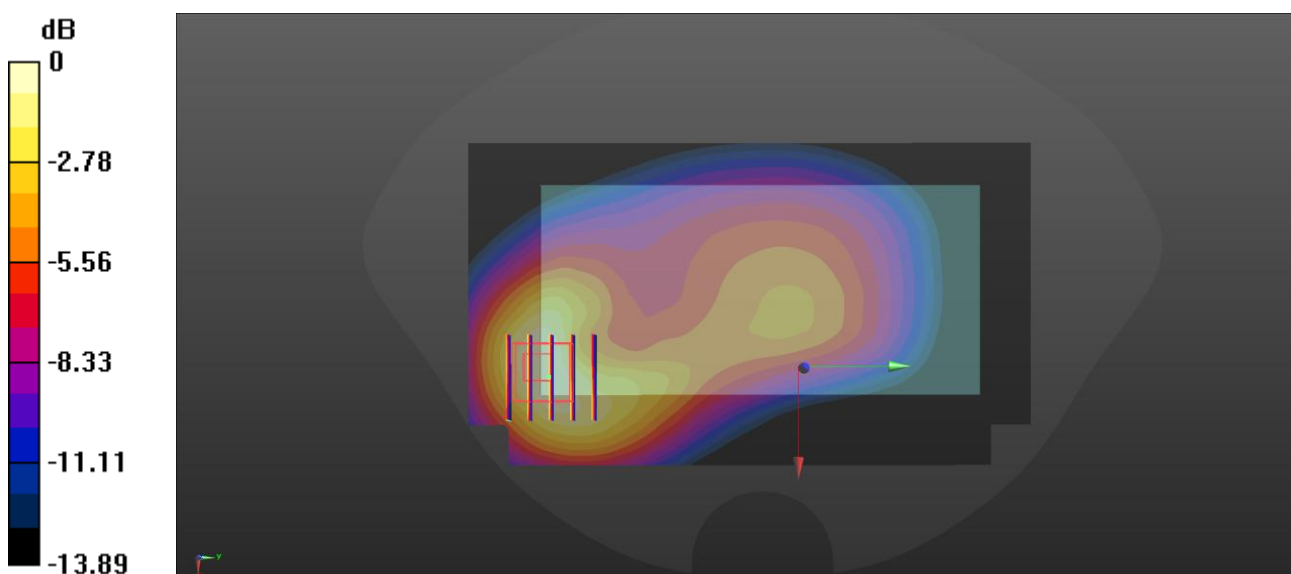

0 dB = 0.693 W/kg

Meas78.Head Right cheek NR n66 Ch352000 ANT4

Date: 2025/7/24

Communication System Band: n66; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch352000/Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

Ch352000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.06 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 1.39 W/kg

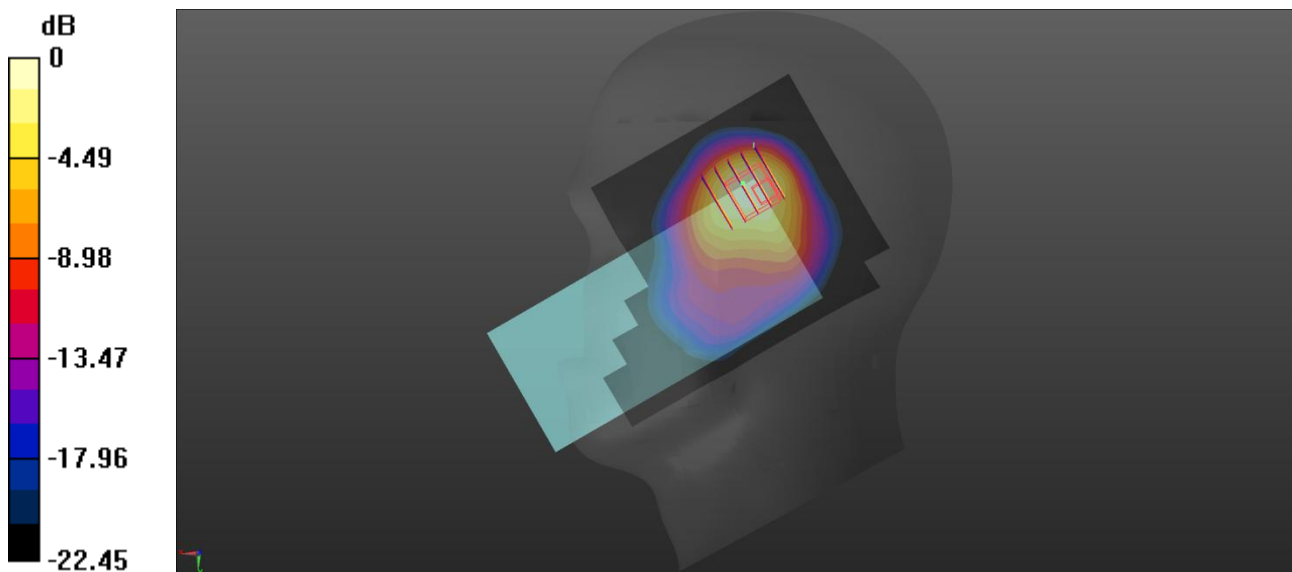

0 dB = 1.39 W/kg

Meas79.Body-worn Back side 5mm NR n66 Ch349000 ANT2

Date: 2025/7/25

Communication System Band: n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.405$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch349000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.644 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 1.15 W/kg

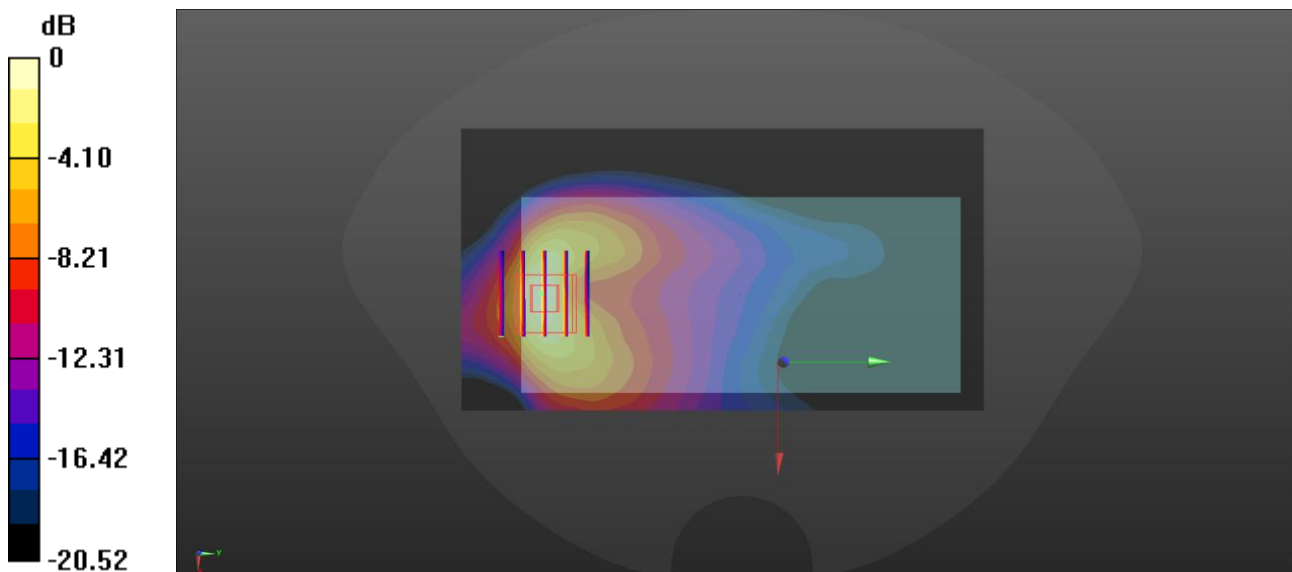

0 dB = 1.15 W/kg

Meas80.Hotspot Top side 10mm NR n66 Ch352000 ANT4

Date: 2025/7/25

Communication System Band: n66; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.391$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch352000/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.893 W/kg

Ch352000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.35 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.884 W/kg

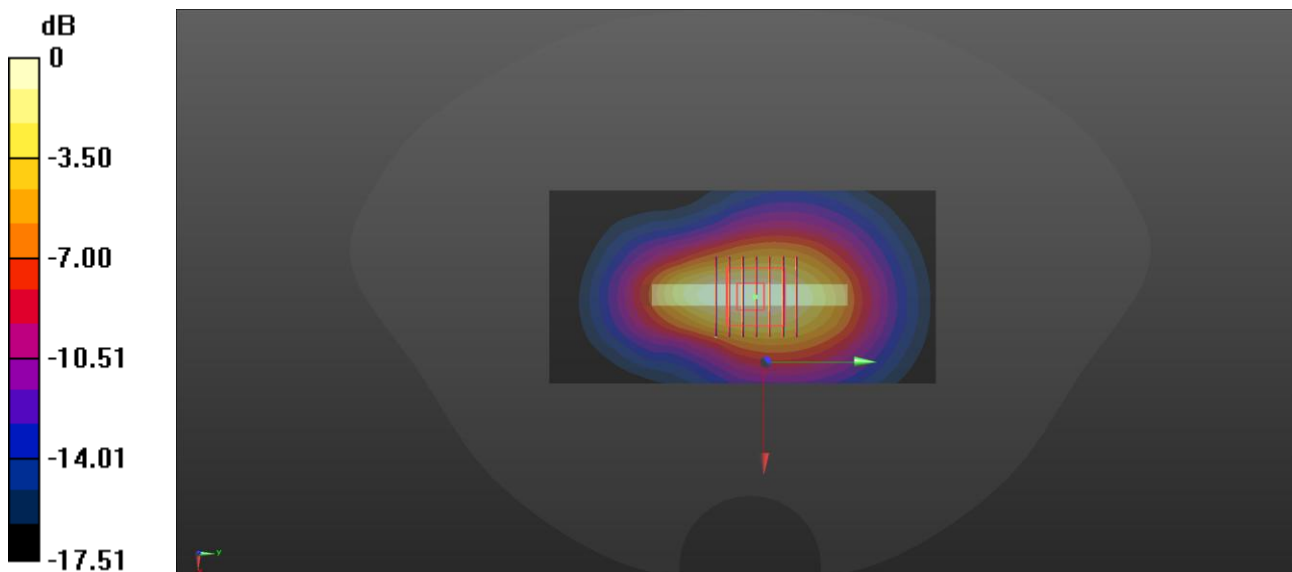

0 dB = 0.884 W/kg

Meas81.Extremity Top side 0mm NR n66 Ch352000 ANT4

Date: 2025/7/25

Communication System Band: n66; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.391$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch352000/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 7.98 W/kg

Ch352000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.60 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 3.64 W/kg; SAR(10 g) = 1.51 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 28.2%

Maximum value of SAR (measured) = 8.79 W/kg

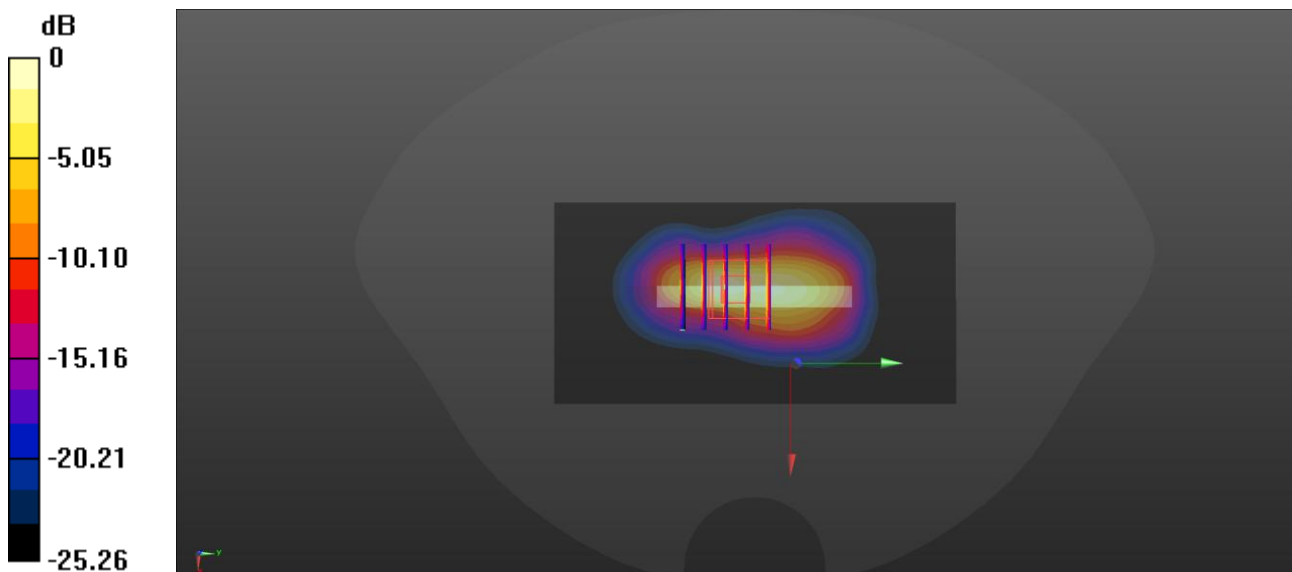

0 dB = 8.79 W/kg

Meas82.Head Right cheek NR n38 Ch519996 ANT3

Date: 2025/8/28

Communication System Band: n38; Frequency: 2599.98 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.002$ S/m; $\epsilon_r = 38.544$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.0°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch519996/Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Ch519996/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.399 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.289 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 38.1%

Maximum value of SAR (measured) = 1.36 W/kg

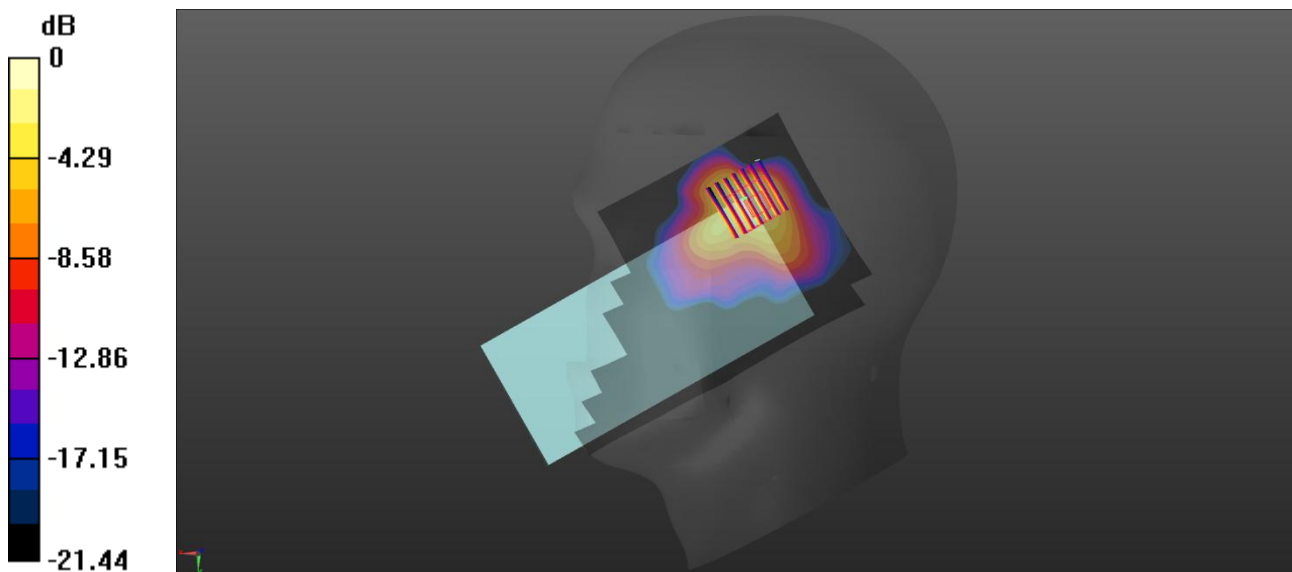

0 dB = 1.36 W/kg

Meas83.Body-worn Back side 5mm NR n38 Ch518004 ANT4

Date: 2025/8/29

Communication System Band: n38; Frequency: 2590.02 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2590.02$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 38.313$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518004/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Ch518004/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.963 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.27 W/kg

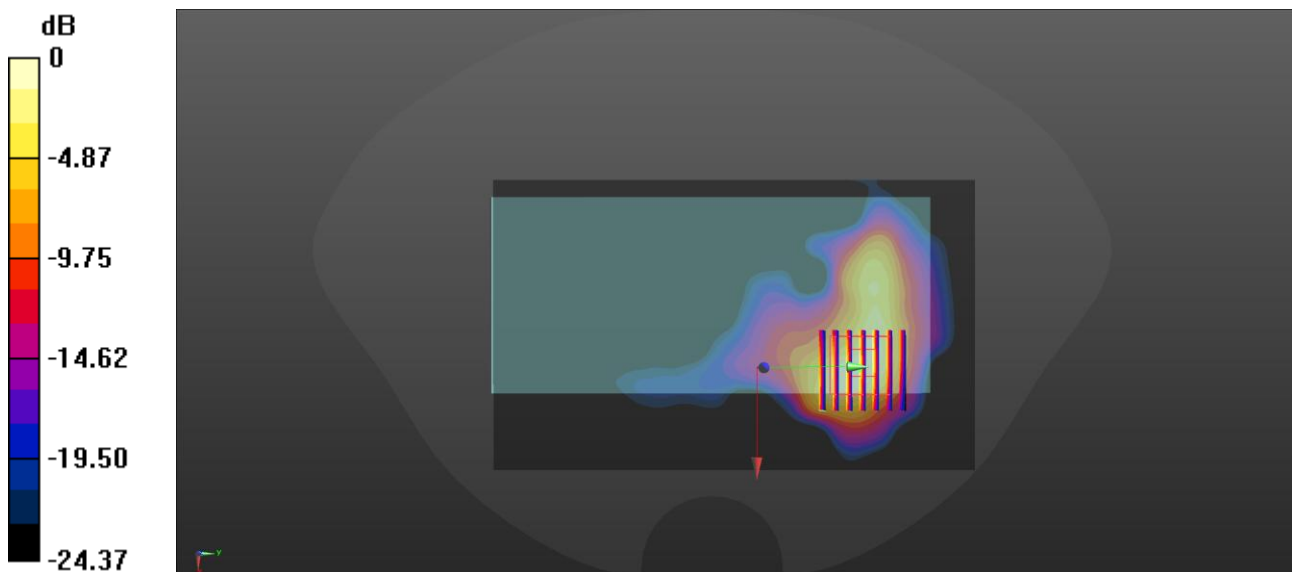

0 dB = 1.27 W/kg

Meas84.Hotspot Top side 10mm NR n38 Ch519996 ANT4

Date: 2025/8/29

Communication System Band: n38; Frequency: 2599.98 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 38.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch519996/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.774 W/kg

Ch519996/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.10 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.743 W/kg

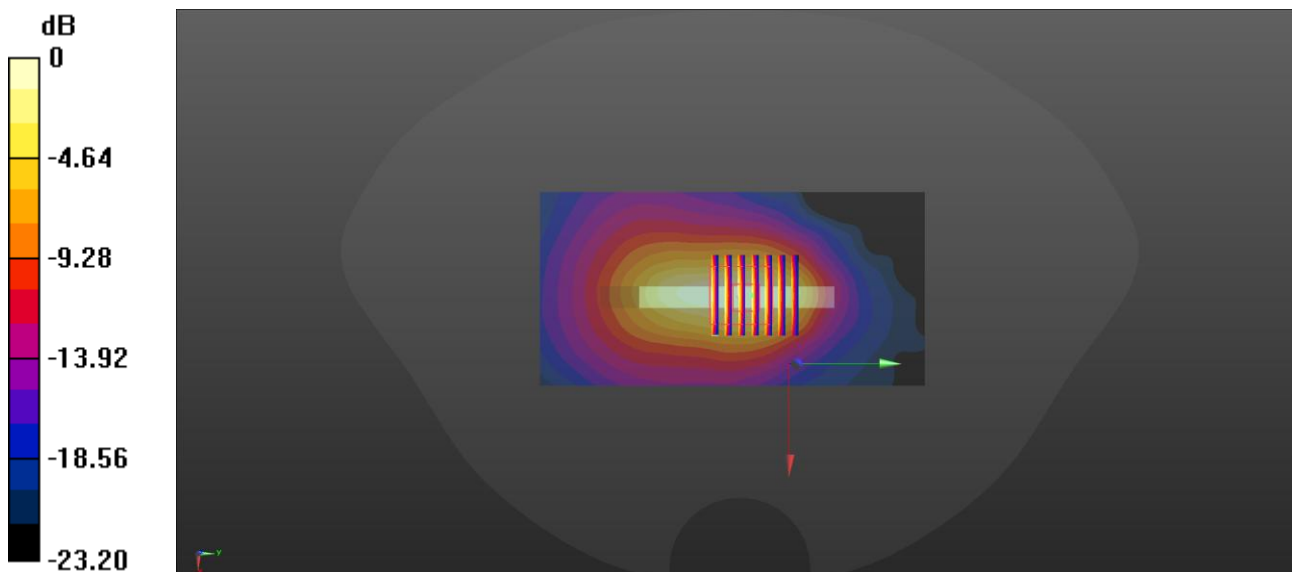

0 dB = 0.743 W/kg

Meas85.Extremity Top side 0mm NR n38 Ch519996 ANT4

Date: 2025/8/29

Communication System Band: n38; Frequency: 2599.98 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 38.292$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C Liquid Temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch519996/Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.98 W/kg

Ch519996/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.99 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 9.96 W/kg

SAR(1 g) = 3.89 W/kg; SAR(10 g) = 1.39 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.9%

Maximum value of SAR (measured) = 7.25 W/kg

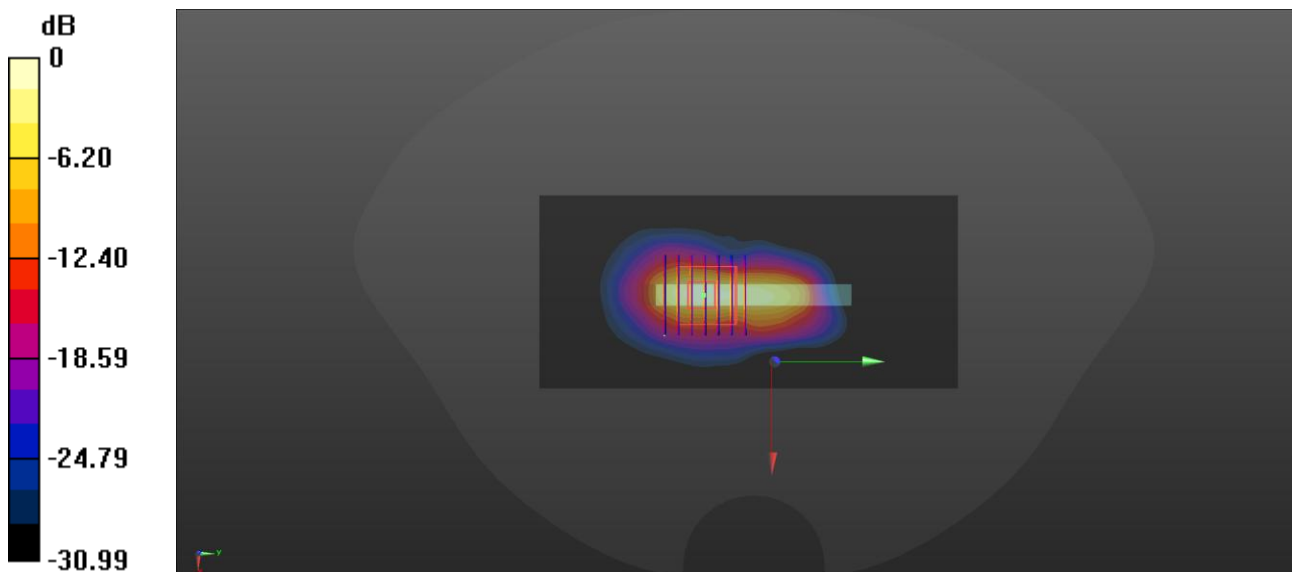

0 dB = 7.25 W/kg

Meas86.Head Right cheek NR n41 Ch528000 ANT3

Date: 2025/8/30

Communication System Band: n41; Frequency: 2640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.081$ S/m; $\epsilon_r = 37.823$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch528000/Area Scan (101x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.01 W/kg

Ch528000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.738 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 38.2%

Maximum value of SAR (measured) = 1.89 W/kg

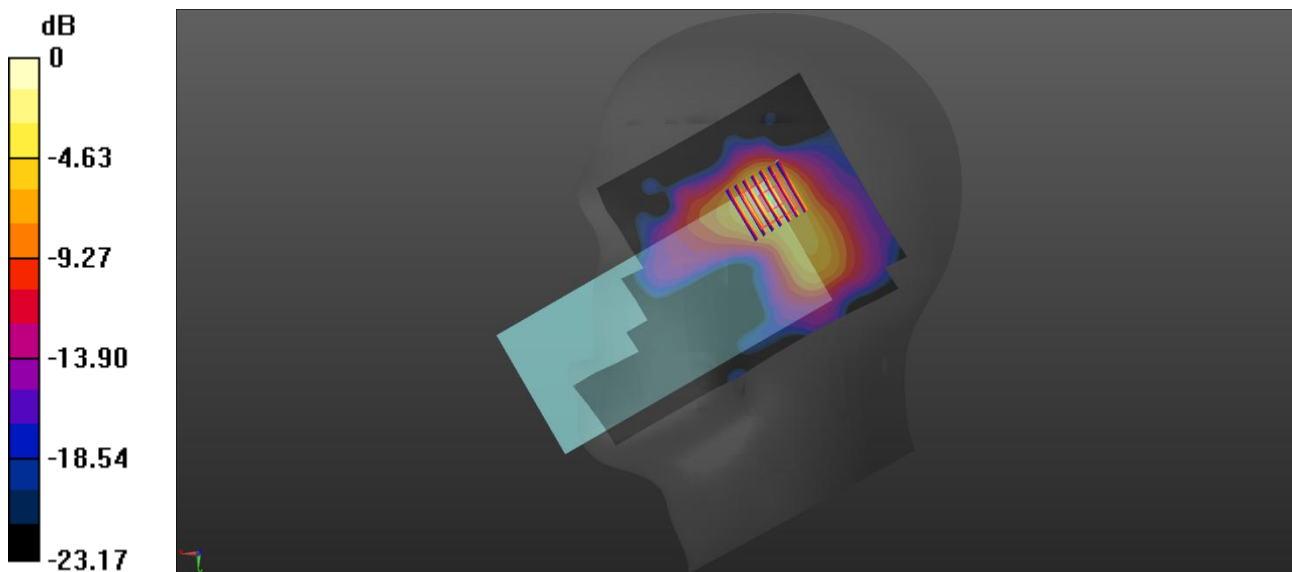

0 dB = 1.89 W/kg

Meas87.Body-worn Back side 5mm NR n41 Ch528000 ANT4

Date: 2025/8/31

Communication System Band: n41; Frequency: 2640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.037$ S/m; $\epsilon_r = 37.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch528000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Ch528000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.187 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 1.50 W/kg

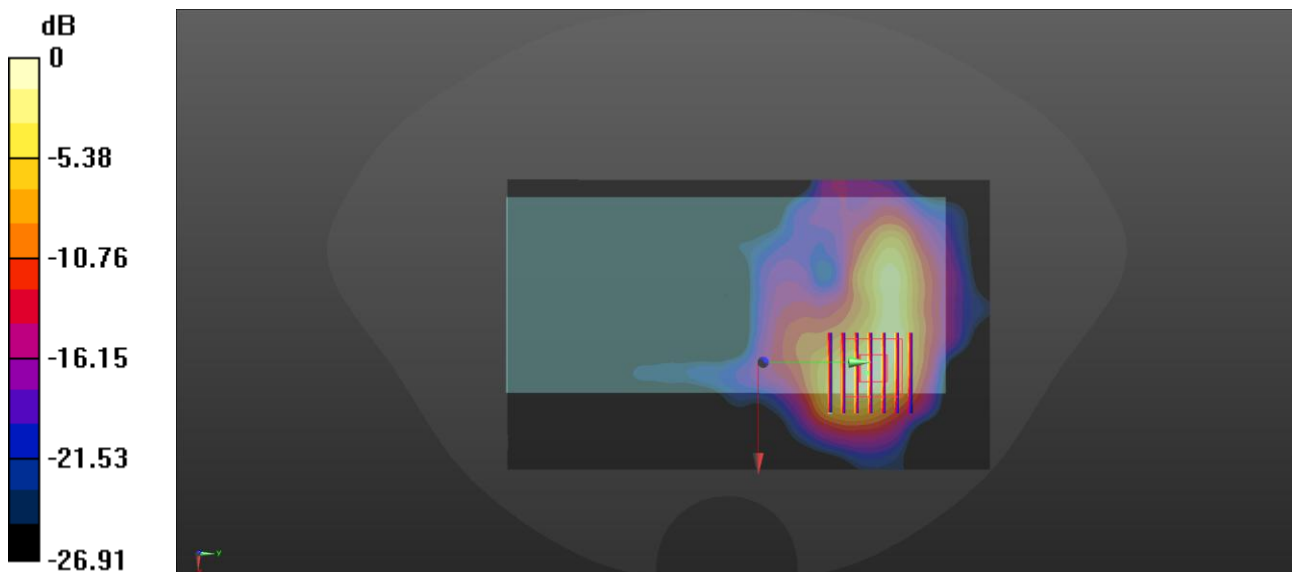

0 dB = 1.50 W/kg

Meas88.Hotspot Top side 10mm NR n41 Ch528000 ANT4

Date: 2025/8/31

Communication System Band: n41; Frequency: 2640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.037$ S/m; $\epsilon_r = 37.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch528000/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Ch528000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.14 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 1.13 W/kg

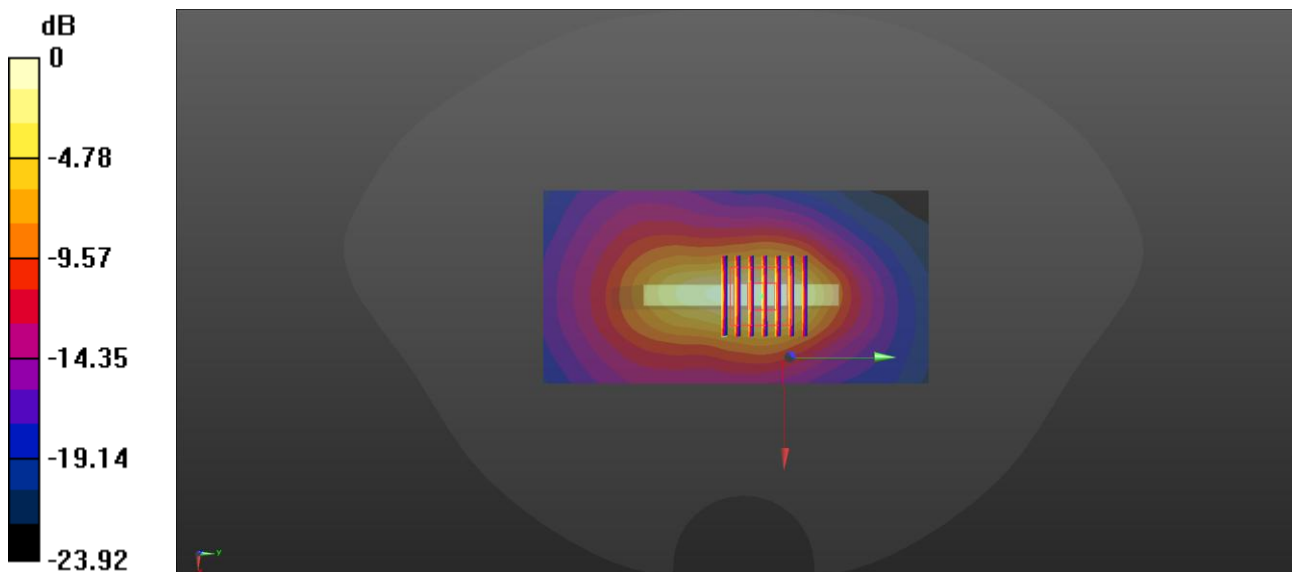

0 dB = 1.13 W/kg

Meas89.Extremity Top side 0mm NR n41 Ch509202 ANT4

Date: 2025/8/31

Communication System Band: n41; Frequency: 2546.01 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2546.01$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch509202/Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.35 W/kg

Ch509202/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.61 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 9.51 W/kg

SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.4 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 7.24 W/kg

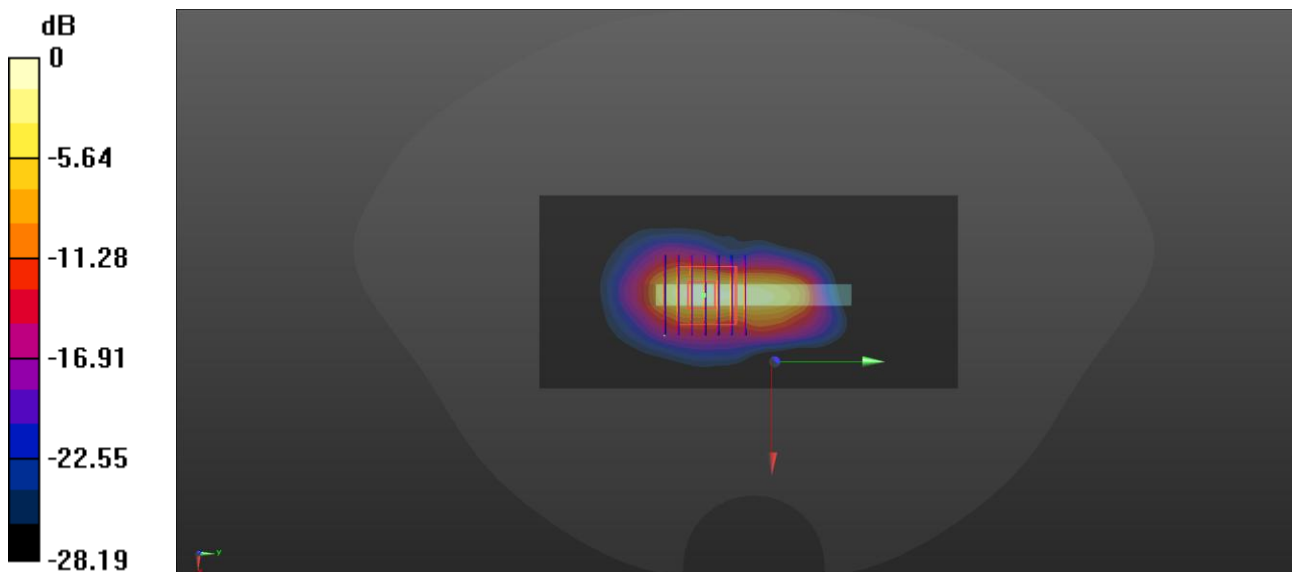

0 dB = 7.24 W/kg

Meas90.Head Left cheek NR n48 Ch638000 ANT6

Date: 2025/8/6

Communication System Band: n48; Frequency: 3570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3570$ MHz; $\sigma = 3.023$ S/m; $\epsilon_r = 38.702$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch638000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Ch638000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 5.157 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.320 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.77 W/kg

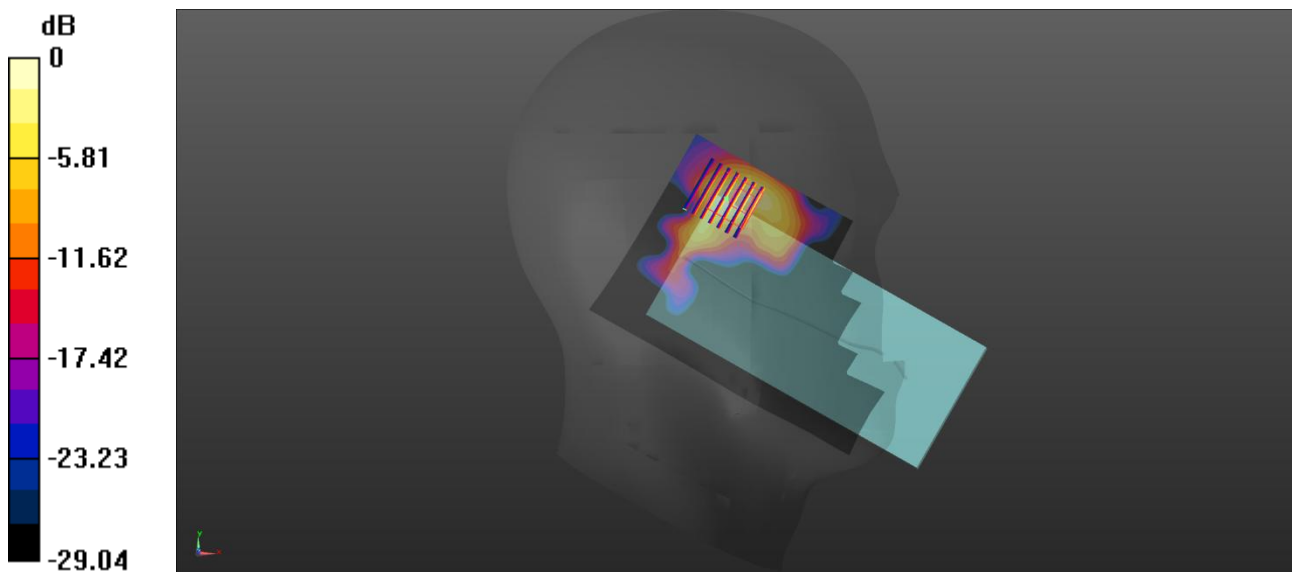

0 dB = 1.77 W/kg

Meas91.Body-worn Back side 5mm NR n48 Ch638000 ANT4

Date: 2025/8/6

Communication System Band: n48; Frequency: 3570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3570$ MHz; $\sigma = 3.023$ S/m; $\epsilon_r = 38.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch638000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.85 W/kg

Ch638000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.272 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 1.60 W/kg

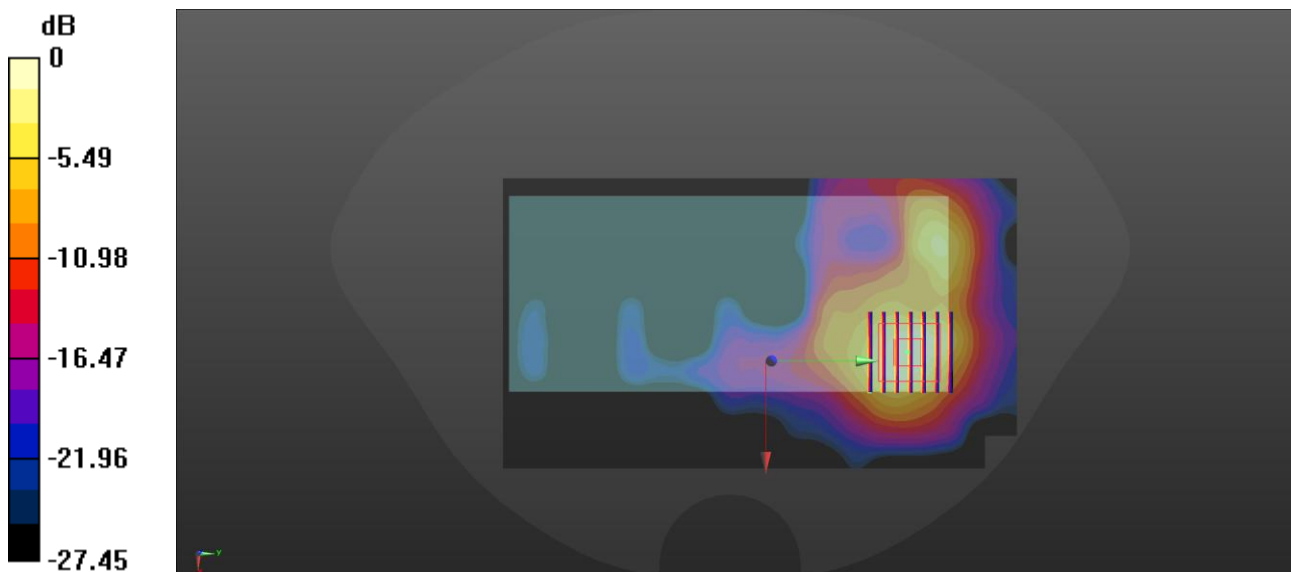

0 dB = 1.60 W/kg

Meas92.Hotspot Back side 10mm NR n48 Ch638000 ANT4

Date: 2025/8/6

Communication System Band: n48; Frequency: 3570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3570$ MHz; $\sigma = 3.023$ S/m; $\epsilon_r = 38.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch638000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.901 W/kg

Ch638000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.428 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.891 W/kg

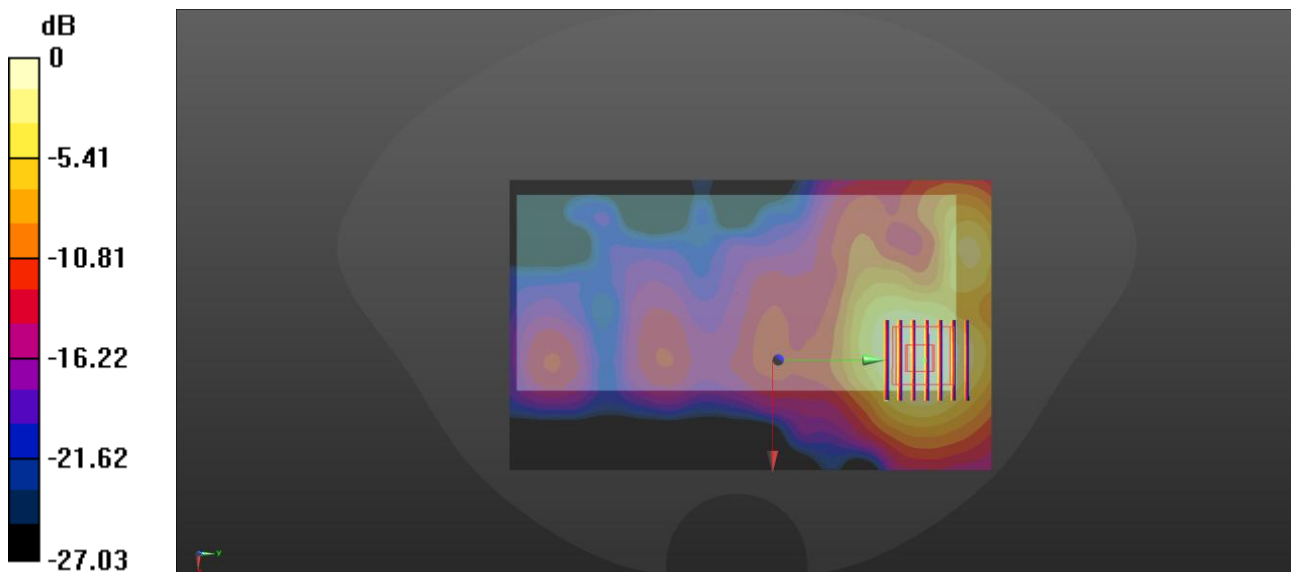

0 dB = 0.891 W/kg

Meas93.Extremity Top side 0mm NR n48 Ch638000 ANT4

Date: 2025/8/6

Communication System Band: n48; Frequency: 3570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3570$ MHz; $\sigma = 3.023$ S/m; $\epsilon_r = 38.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch638000/Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.31 W/kg

Ch638000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 50.16 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 6.3 W/kg; SAR(10 g) = 1.81 W/kg

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 25.4%

Maximum value of SAR (measured) = 18.2 W/kg

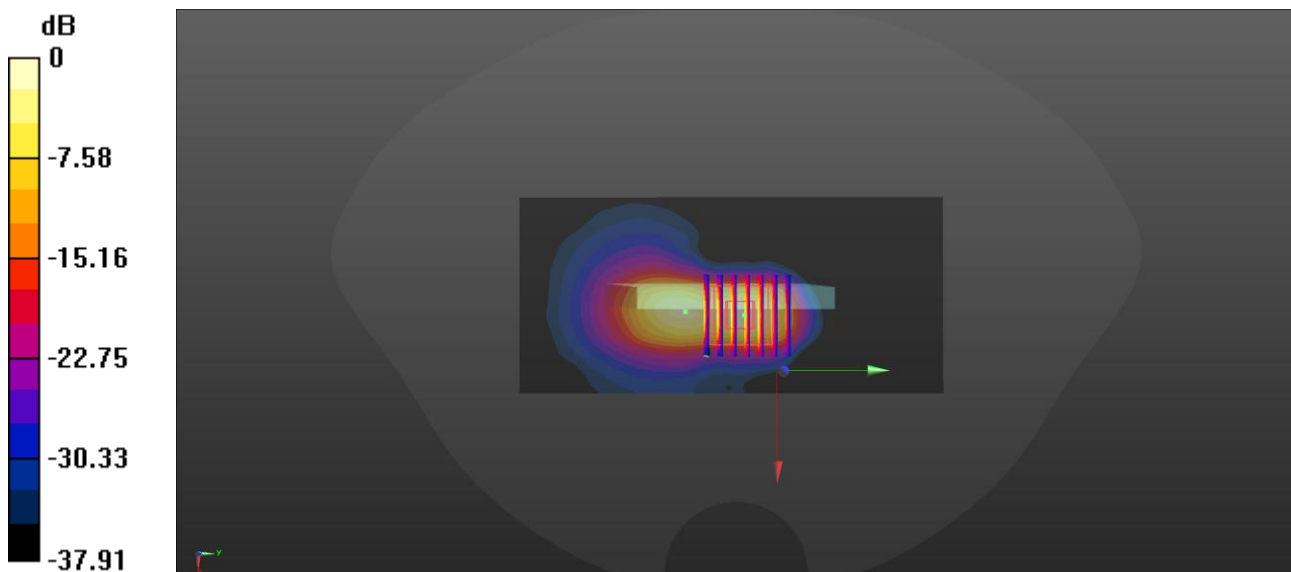

0 dB = 18.2 W/kg

Meas94.Head Left cheek NR n77 Ch640000 ANT6

Date: 2025/8/7

Communication System Band: n78; Frequency: 3600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3600$ MHz; $\sigma = 3.112$ S/m; $\epsilon_r = 38.709$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.6°C Liquid Temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch640000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Ch640000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.898 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 32.7%

Maximum value of SAR (measured) = 1.52 W/kg

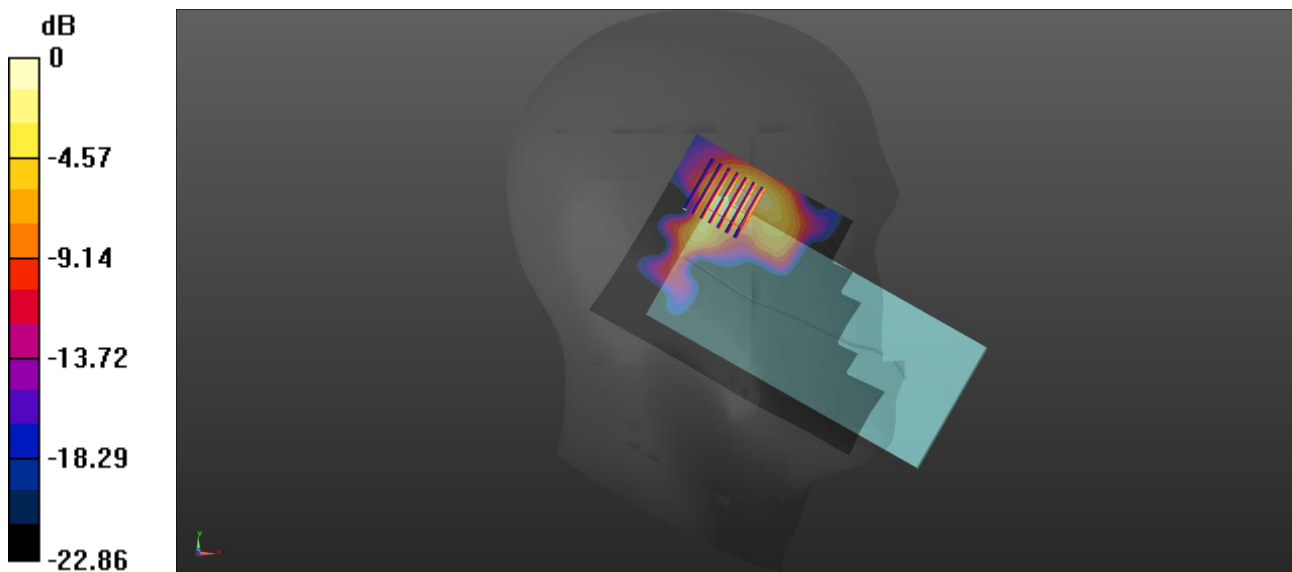

0 dB = 1.52 W/kg

Meas95.Body-worn Back side 5mm NR n77 Ch633334 ANT4

Date: 2025/8/7

Communication System Band: n77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.987$ S/m; $\epsilon_r = 38.869$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.6°C Liquid Temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch633334/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Ch633334/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0.2340 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.31 W/kg

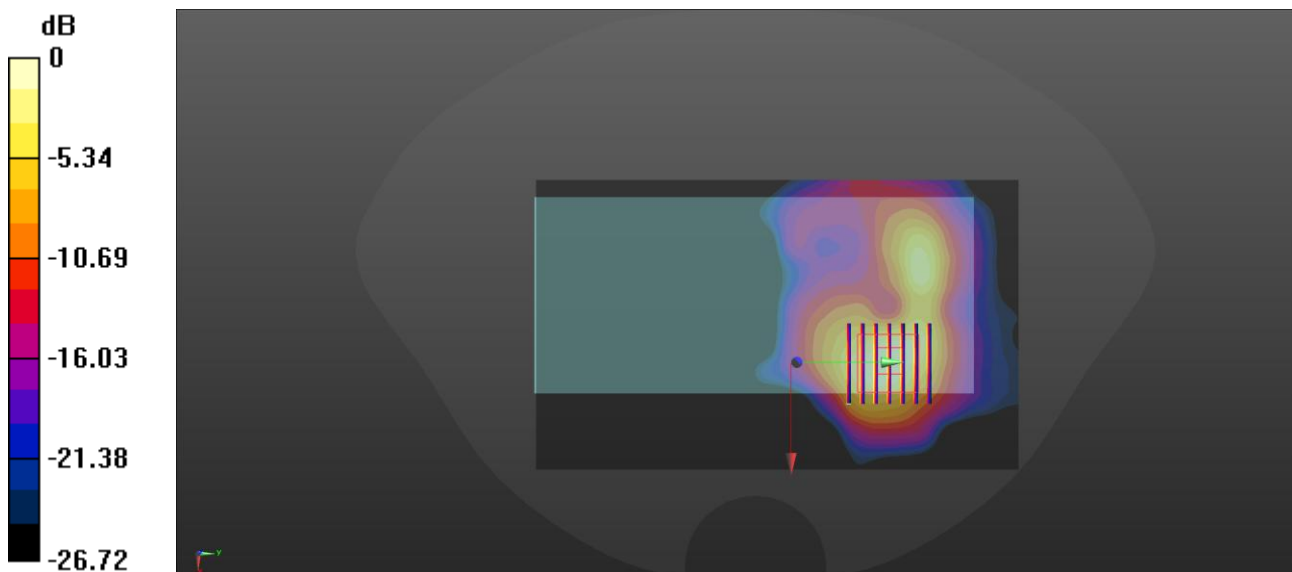

0 dB = 1.31 W/kg

Meas96.Hotspot Back side 10mm NR n77 Ch633334 ANT4

Date: 2025/8/8

Communication System Band: n77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.933$ S/m; $\epsilon_r = 38.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch633334/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Ch633334/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.251 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 1.19 W/kg

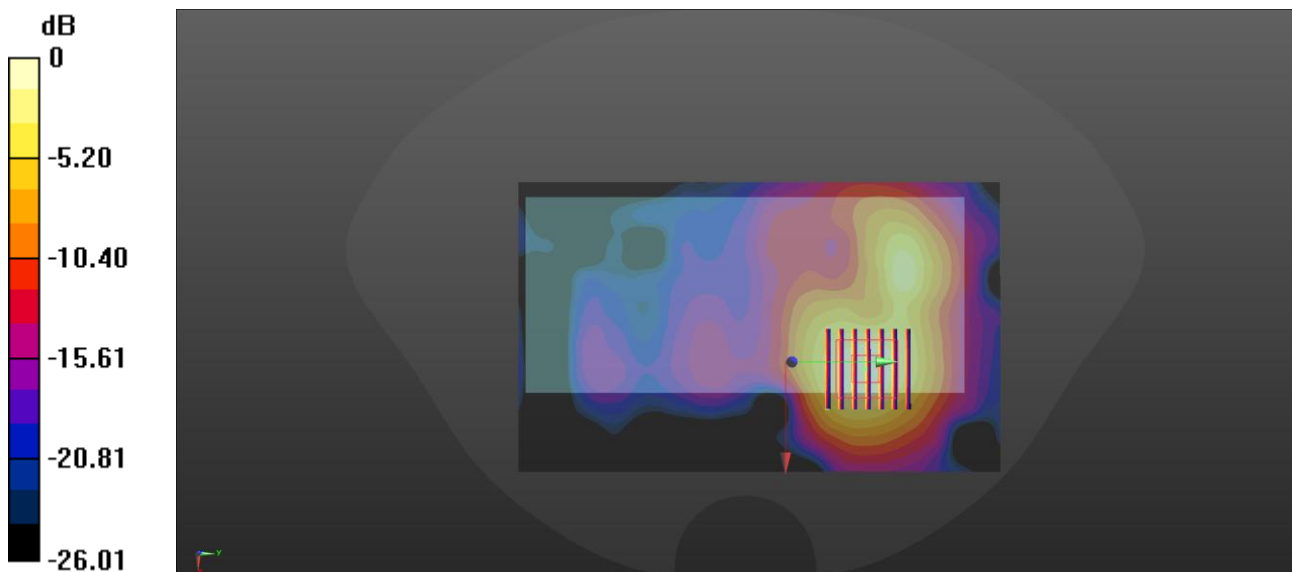

0 dB = 1.19 W/kg

Meas97.Extremity Top side 0mm NR n77 Ch636666 ANT4

Date: 2025/8/8

Communication System Band: n77; Frequency: 3549.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3550$ MHz; $\sigma = 2.987$ S/m; $\epsilon_r = 38.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch636666/Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.60 W/kg

Ch636666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 24.63 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 5.65 W/kg; SAR(10 g) = 1.67 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 24.1%

Maximum value of SAR (measured) = 14.0 W/kg

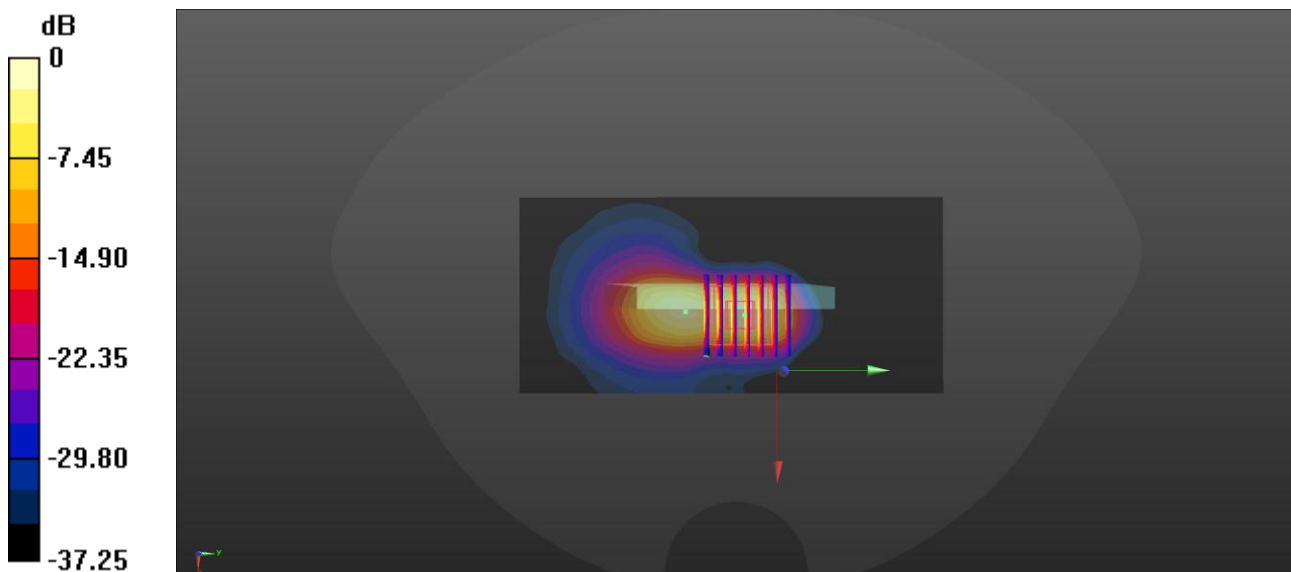

0 dB = 14.0 W/kg

Meas98.Head Left cheek NR n77 Ch650000 ANT6

Date: 2025/8/12

Communication System Band: n77; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.054$ S/m; $\epsilon_r = 37.34$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.724 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 27.7%

Maximum value of SAR (measured) = 1.41 W/kg

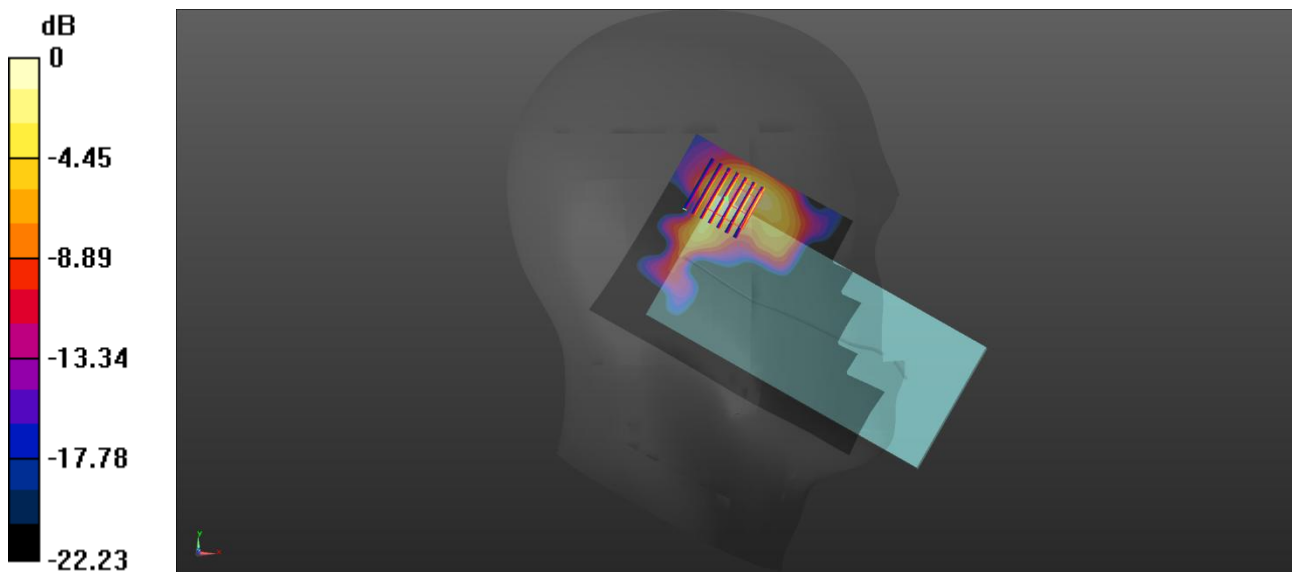

0 dB = 1.41 W/kg

Meas99.Body-worn Back side 5mm NR n77 Ch662000 ANT4

Date: 2025/8/13

Communication System Band: n77; Frequency: 3930 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3930$ MHz; $\sigma = 3.252$ S/m; $\epsilon_r = 37.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.98, 5.98, 5.98); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch662000/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.26 W/kg

Ch662000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 38.9%

Maximum value of SAR (measured) = 1.36 W/kg

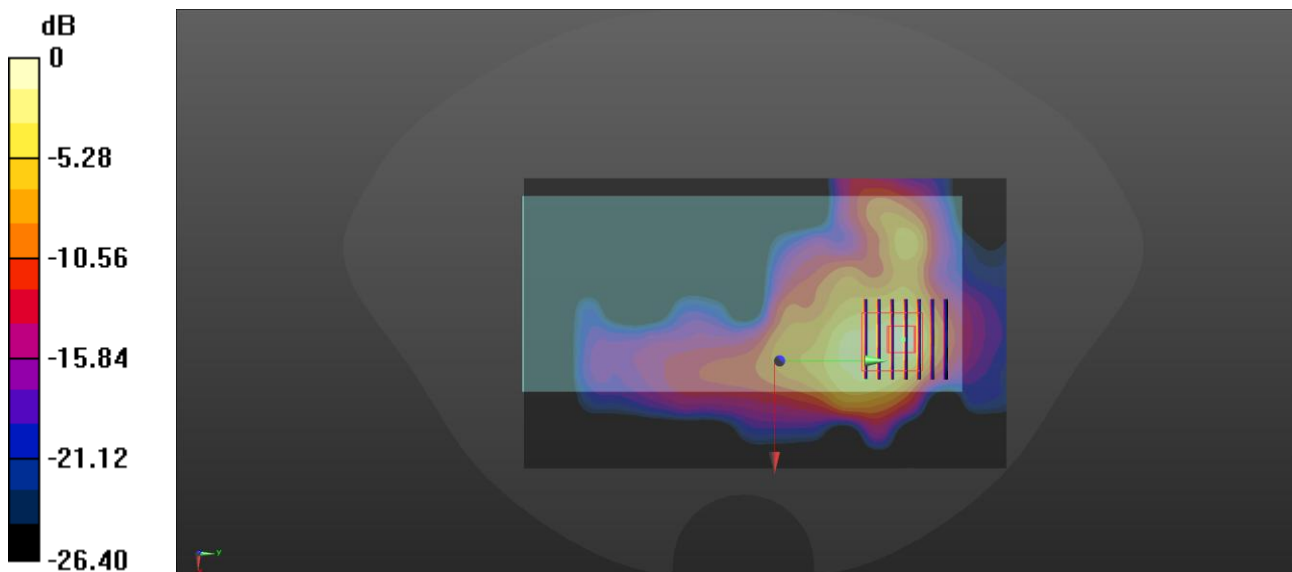

0 dB = 1.36 W/kg

Meas100.Hotspot Left side 10mm NR n77 Ch650000 ANT3

Date: 2025/8/12

Communication System Band: n77; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.054$ S/m; $\epsilon_r = 37.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 7.848 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.09 W/kg

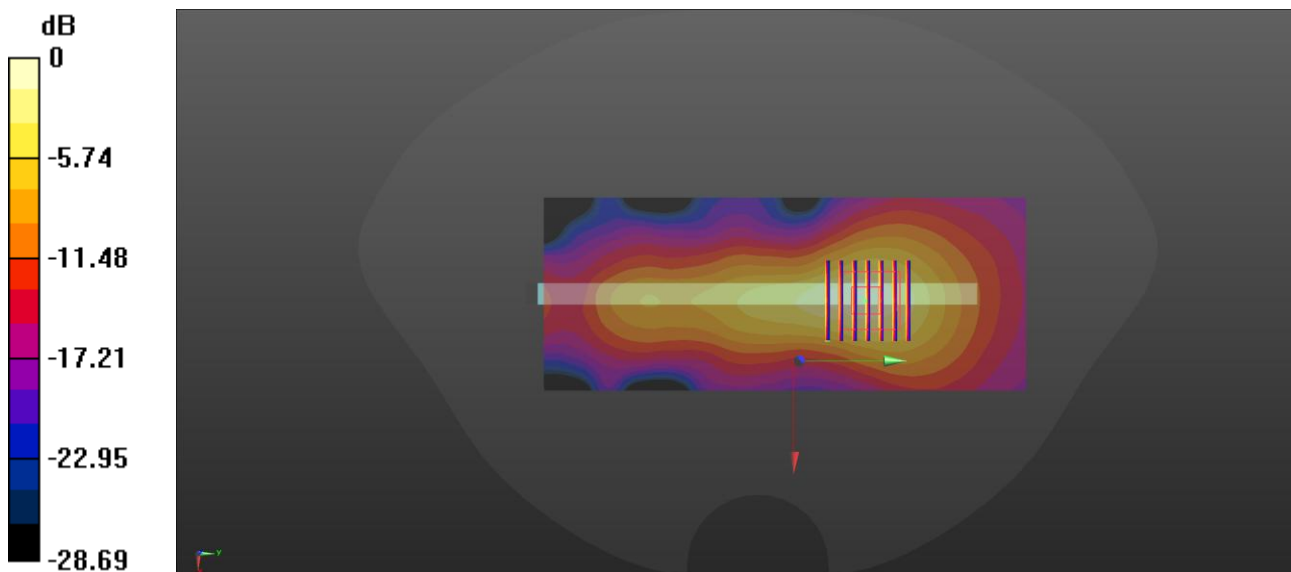

0 dB = 1.09 W/kg = 0.37 dBW/kg

Meas101.Extremity Top side 0mm NR n77 Ch650000 ANT5

Date: 2025/8/12

Communication System Band: n77; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.054$ S/m; $\epsilon_r = 37.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05) ; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.68 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 28.05 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 5.78 W/kg; SAR(10 g) = 1.66 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 26.6%

Maximum value of SAR (measured) = 15.1 W/kg

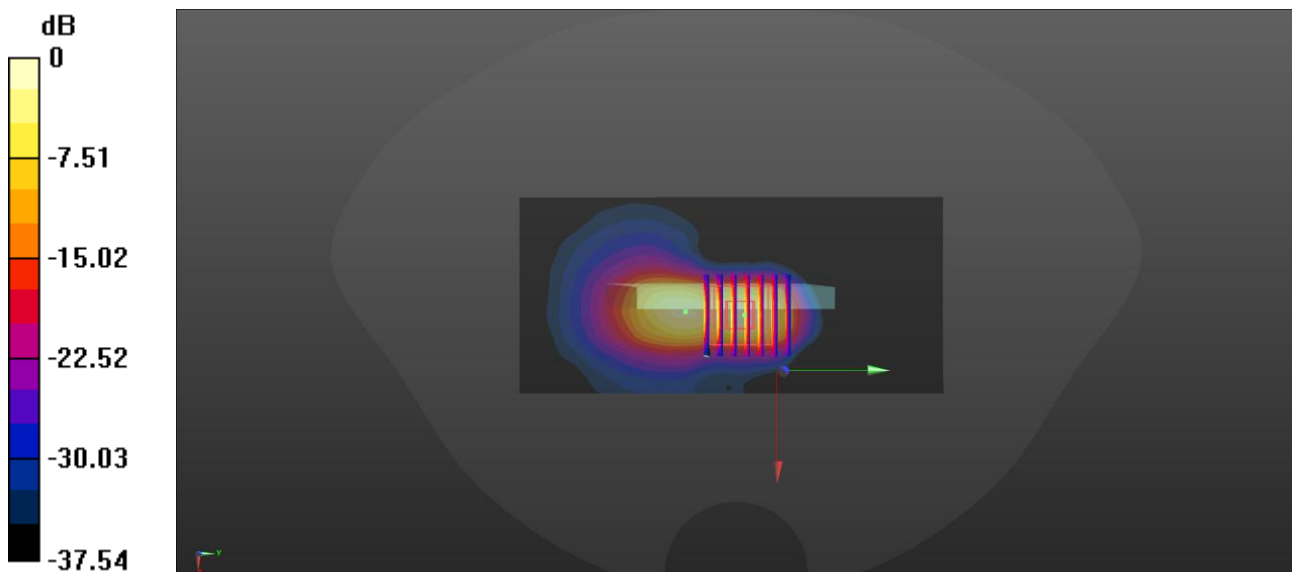

0 dB = 15.1 W/kg

Meas102.Head Right cheek NR n78 Ch640000 ANT3

Date: 2025/8/9

Communication System Band: n78; Frequency: 3600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3600$ MHz; $\sigma = 3.101$ S/m; $\epsilon_r = 37.936$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch640000/Area Scan (101x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Ch640000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 4.385 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 30.8%

Maximum value of SAR (measured) = 1.37 W/kg

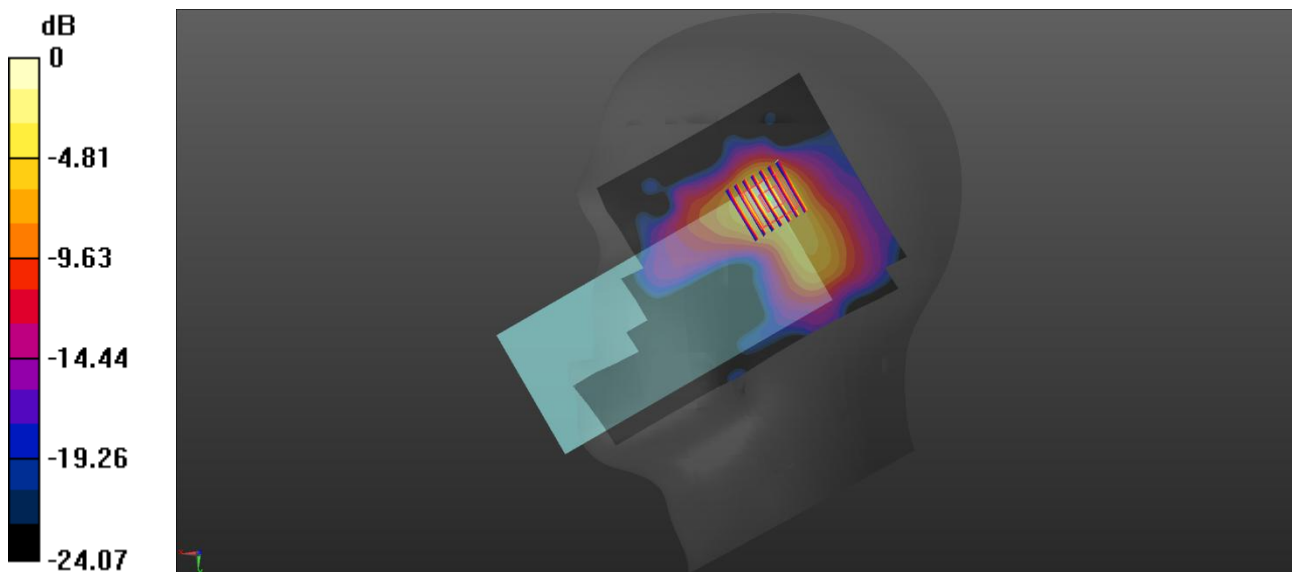

0 dB = 1.37 W/kg

Meas103.Body-worn Back side 5mm NR n78 Ch636666 ANT3

Date: 2025/8/9

Communication System Band: n78; Frequency: 3549.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3550$ MHz; $\sigma = 3.032$ S/m; $\epsilon_r = 38.035$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.1°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch636666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.56 W/kg

Ch636666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.847 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 1.52 W/kg

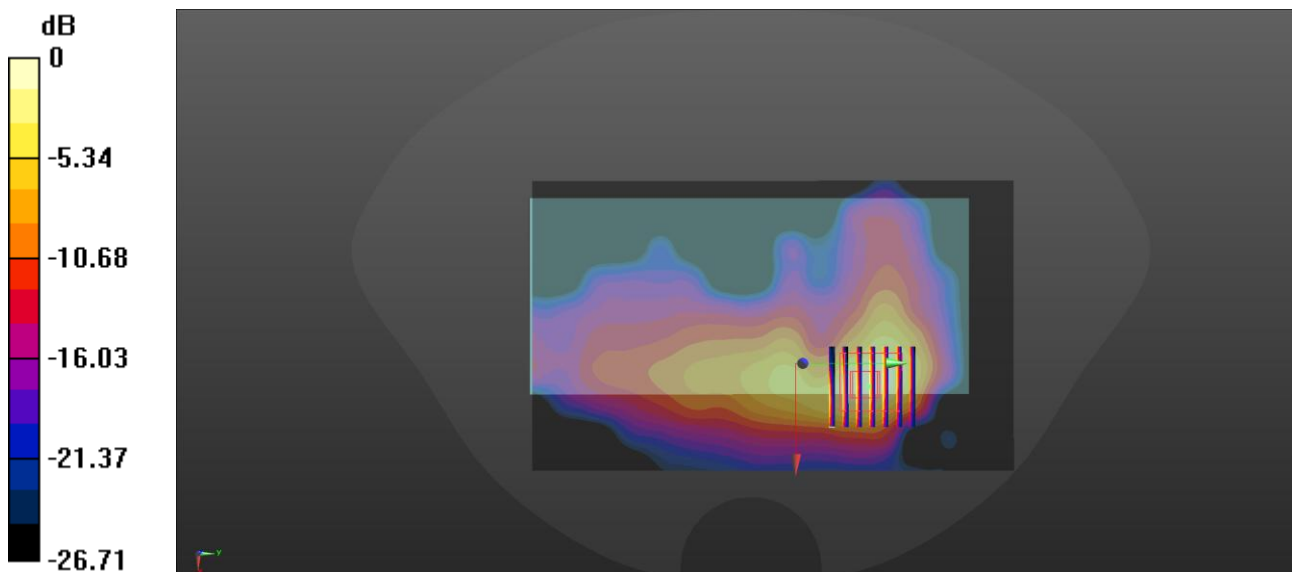

0 dB = 1.52 W/kg

Meas104.Hotspot Left side 10mm NR n78 Ch640000 ANT3

Date: 2025/8/10

Communication System Band: n78; Frequency: 3600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3600$ MHz; $\sigma = 3.076$ S/m; $\epsilon_r = 38.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch640000/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

Ch640000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 8.278 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 1.34 W/kg

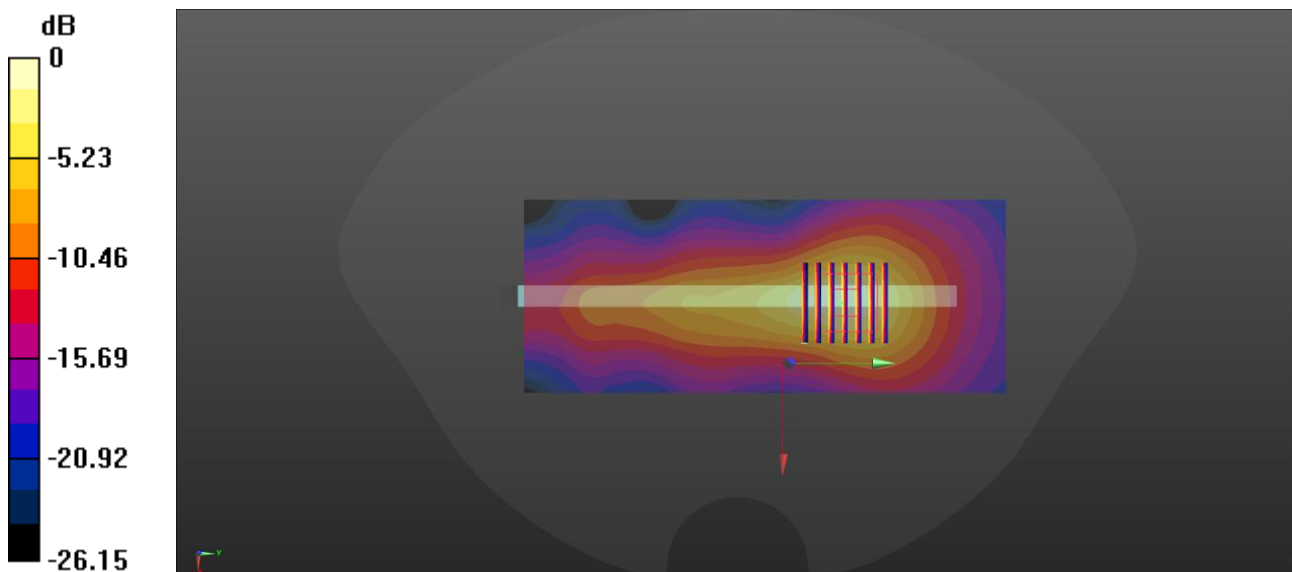

0 dB = 1.34 W/kg

Meas105.Extremity Back side 0mm NR n78 Ch633334 ANT4

Date: 2025/8/10

Communication System Band: n78; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 38.482$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch633334/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.60 W/kg

Ch633334/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0.4520 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 4.98 W/kg; SAR(10 g) = 1.81 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 34.1%

Maximum value of SAR (measured) = 11.8 W/kg

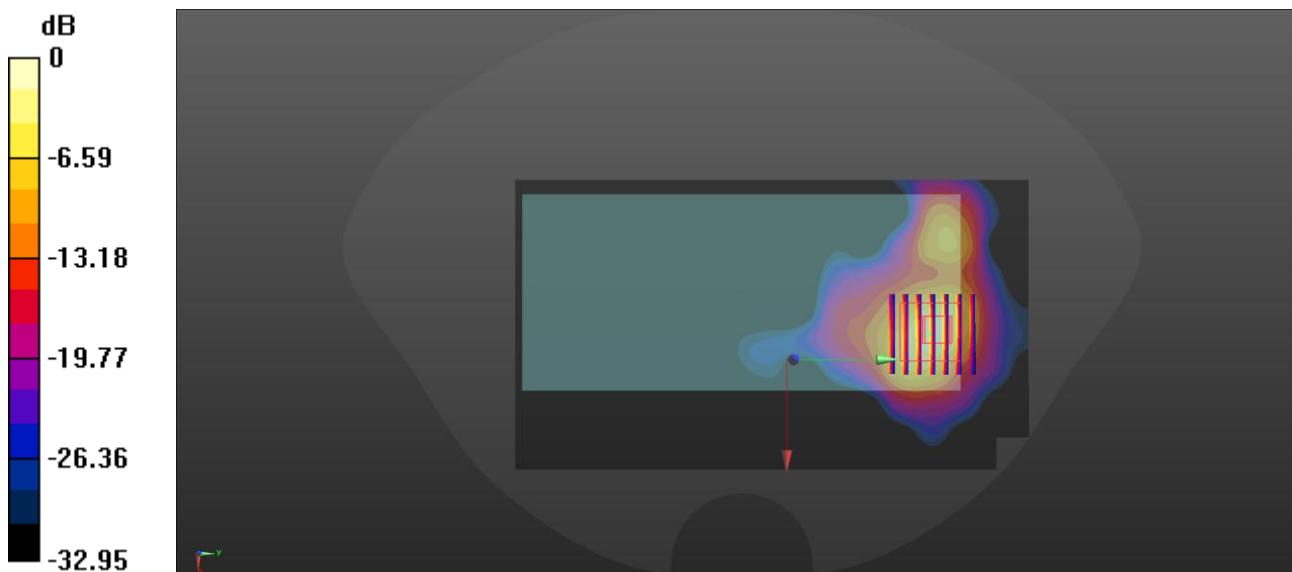

0 dB = 11.8 W/kg

Meas106.Head Right cheek NR n78 Ch650000 ANT4

Date: 2025/8/11

Communication System Band: n78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.143$ S/m; $\epsilon_r = 37.569$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.59 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 4.925 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 32%

Maximum value of SAR (measured) = 1.51 W/kg

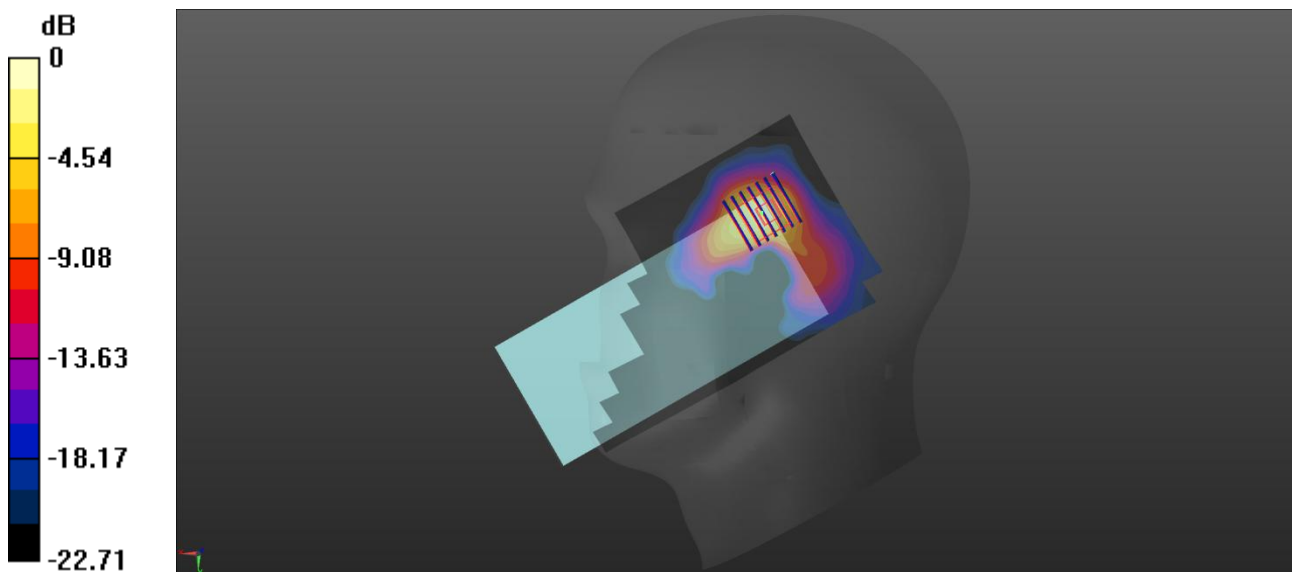

0 dB = 1.51 W/kg

Meas107.Body-worn Back side 5mm NR n78 Ch650000 ANT4

Date: 2025/8/11

Communication System Band: n78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.143$ S/m; $\epsilon_r = 37.569$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 1.194 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 38.6%

Maximum value of SAR (measured) = 1.37 W/kg

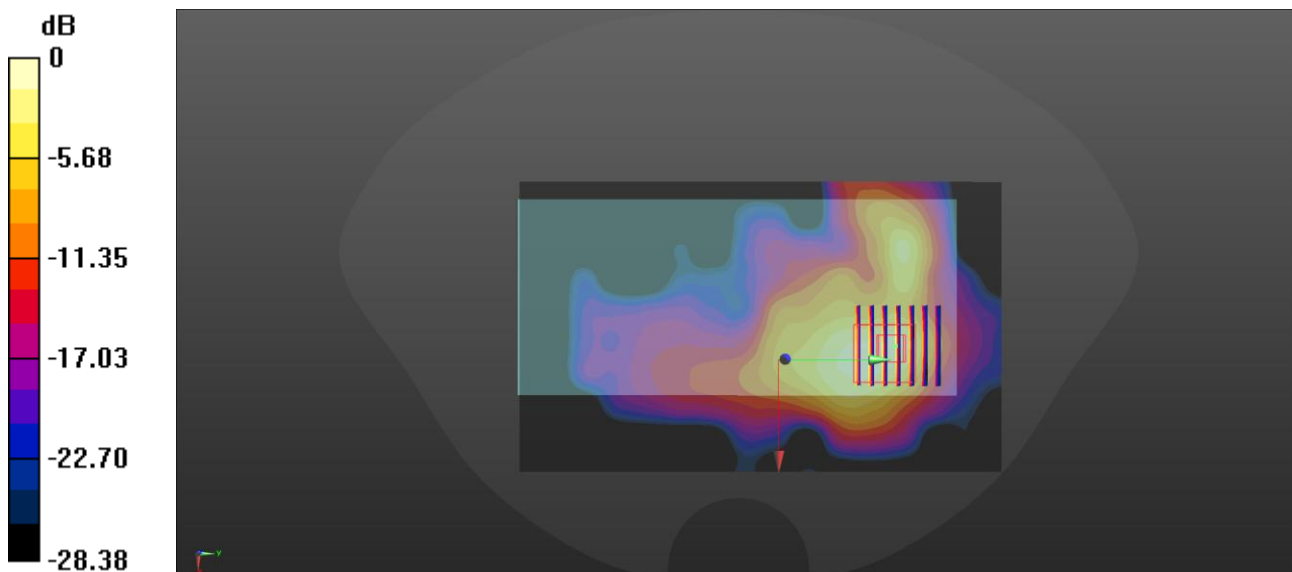

0 dB = 1.37 W/kg

Meas108.Hotspot Left side 10mm NR n78 Ch650000 ANT3

Date: 2025/8/11

Communication System Band: n78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.143$ S/m; $\epsilon_r = 37.569$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 8.094 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 1.12 W/kg

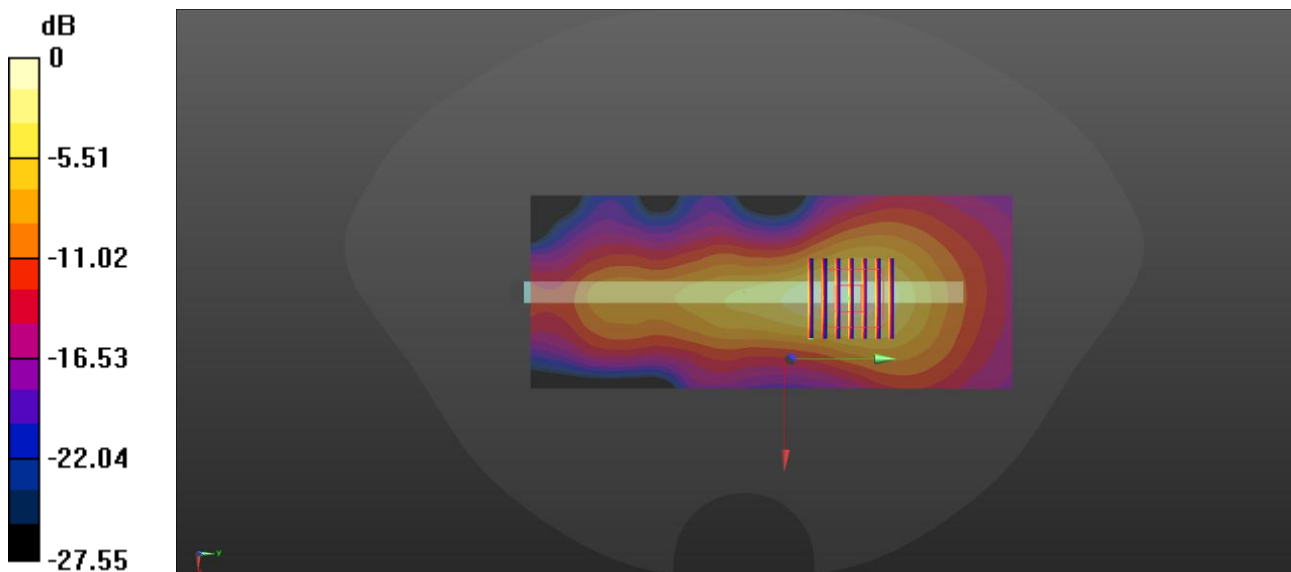

0 dB = 1.12 W/kg

Meas109.Extremity Left side 0mm NR n78 Ch650000 ANT3

Date: 2025/8/12

Communication System Band: n78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.054$ S/m; $\epsilon_r = 37.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.6 W/kg

Ch650000/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 7.395 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 25.1 W/kg

SAR(1 g) = 6.7 W/kg; SAR(10 g) = 2 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 32.3%

Maximum value of SAR (measured) = 15.6 W/kg

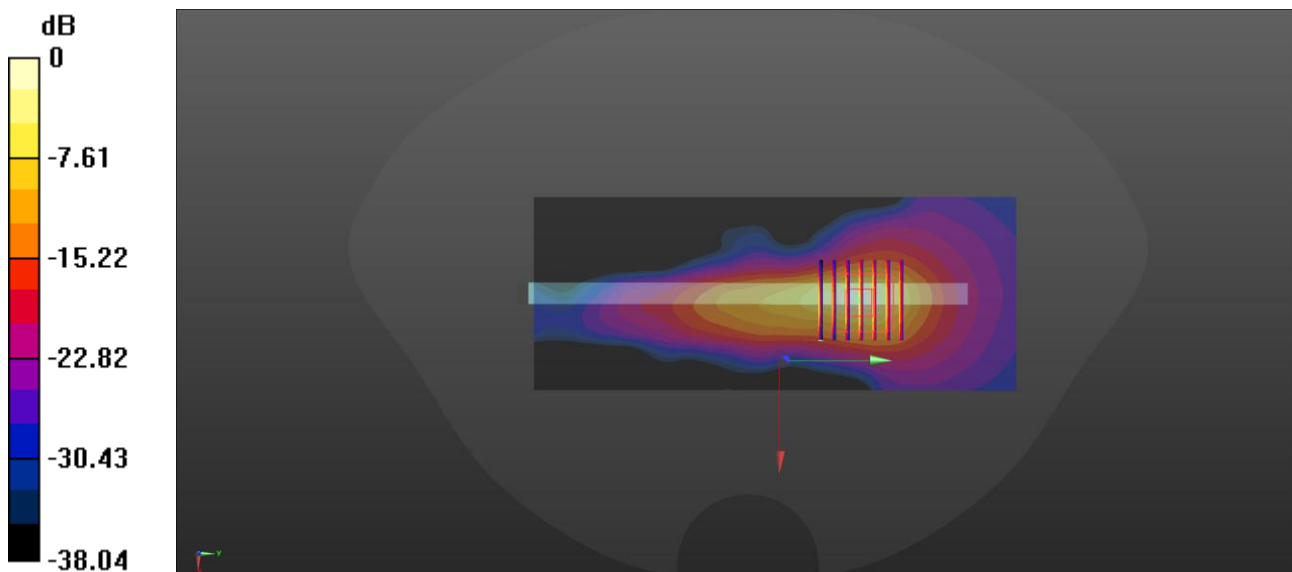

0 dB = 15.6 W/kg

Meas110.Head Left cheek BT Ch78 ANT7

Date: 2025/9/21

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.41$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.6°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.865 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.797 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 39.8%

Maximum value of SAR (measured) = 0.867 W/kg

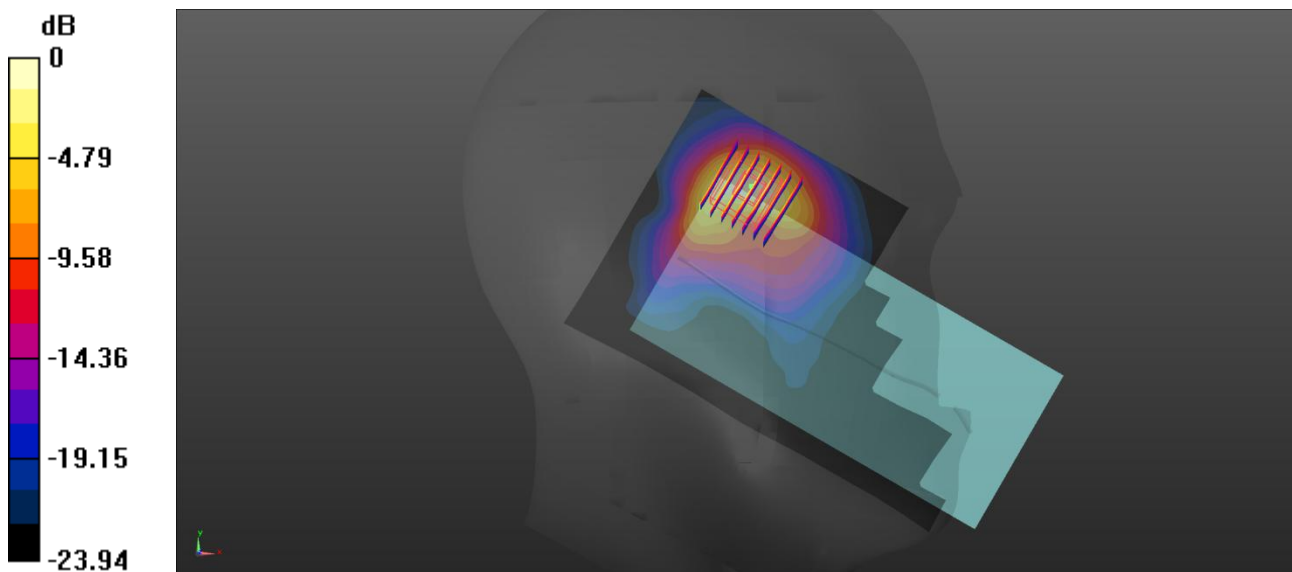

0 dB = 0.867 W/kg

Meas111.Body-worn Back side 5mm BT Ch78 ANT6

Date: 2025/9/21

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 38.301$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.6°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.677 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.939 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.684 W/kg

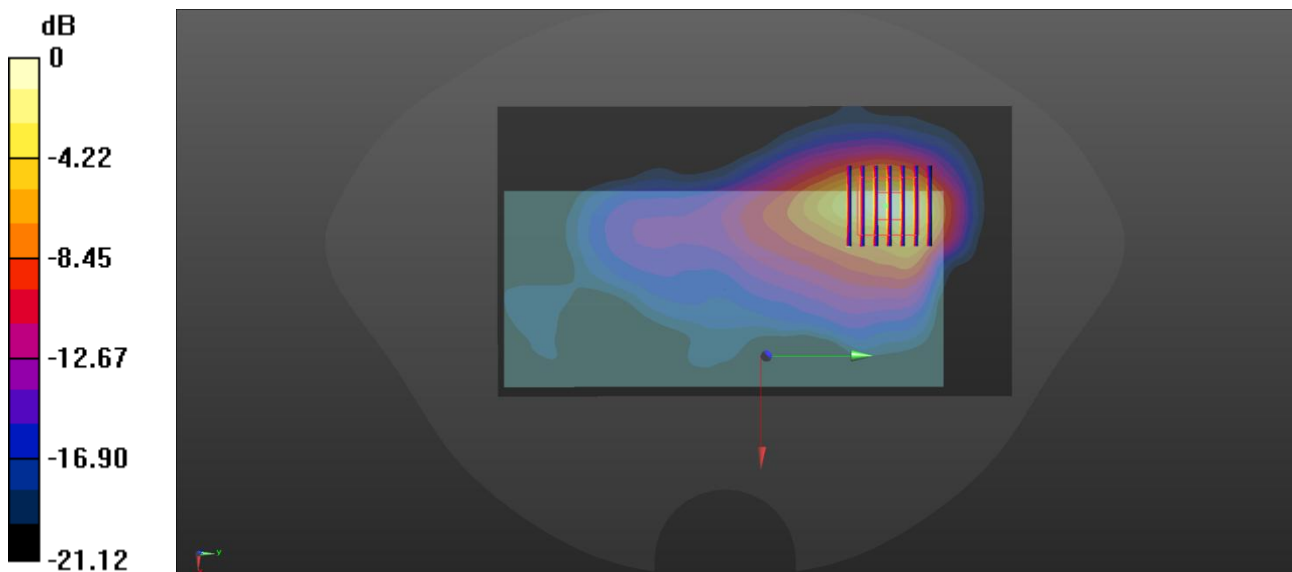

0 dB = 0.684 W/kg

Meas112.Hotspot Right side 10mm BT Ch39 ANT6

Date: 2025/9/21

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.6°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (51x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.402 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.154 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 0.397 W/kg

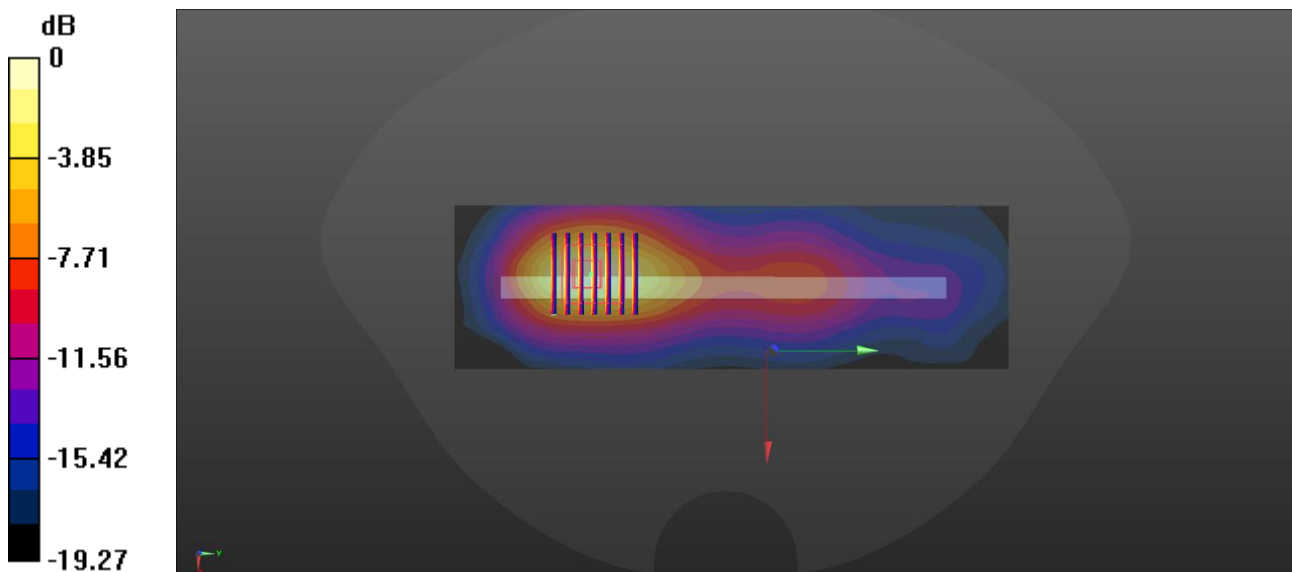

0 dB = 0.397 W/kg

Meas113.Head Left cheek WLAN 2.4G Ch1 MIMO

Date: 2025/9/22

Communication System Band: WLAN(b); Frequency: 2412 MHz;Duty Cycle: 1:1.02

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 38.806$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.3°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.86 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.18 W/kg

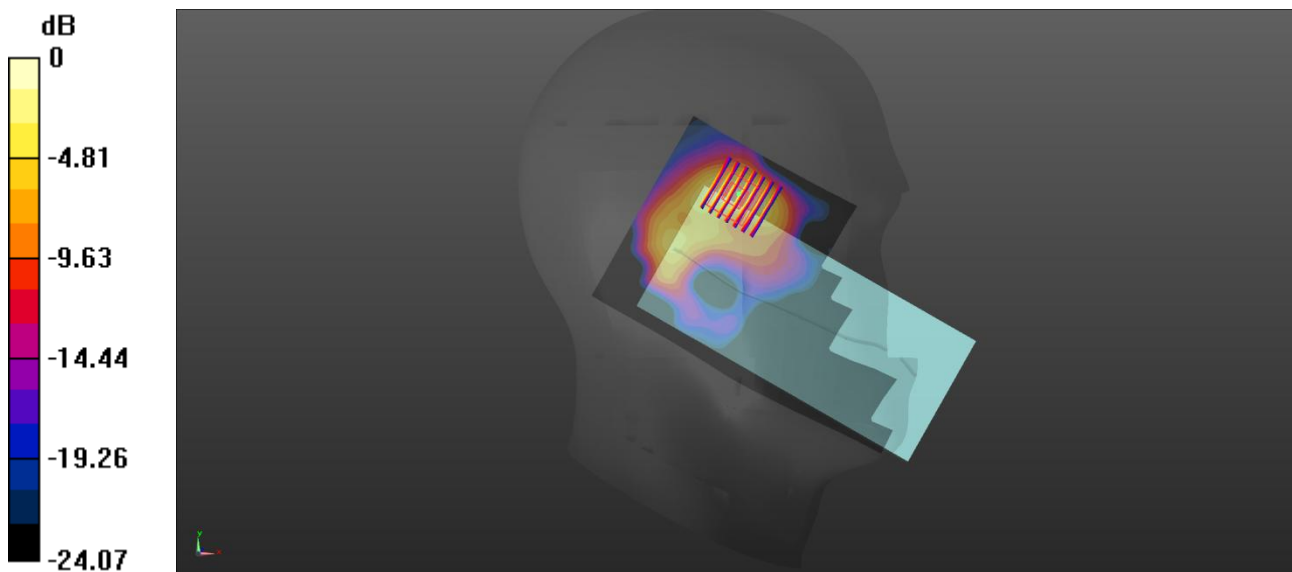

0 dB = 1.18 W/kg

Meas114.Body-worn Back side 5mm WIFI 2.4G Ch11 MIMO

Date: 2025/9/22

Communication System Band: WLAN(b); Frequency: 2462 MHz;Duty Cycle: 1:1.02

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 38.512$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.344 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.32 W/kg

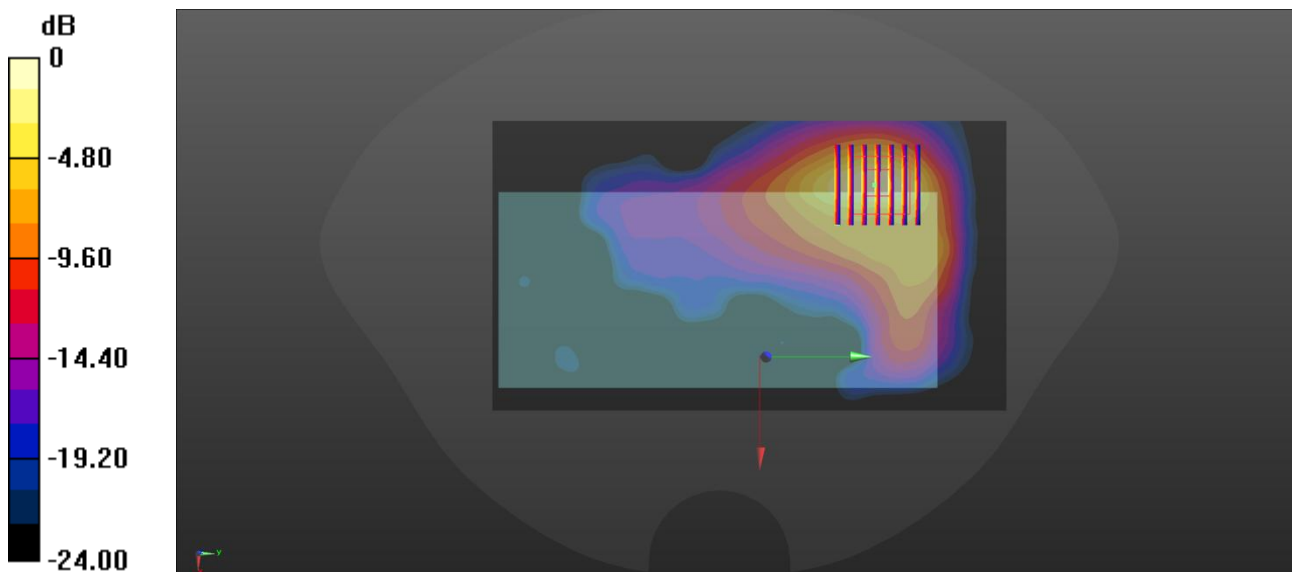

0 dB = 1.32 W/kg

Meas115.Hotspot Right side 10mm WIFI 2.4G Ch11 ANT6

Date: 2025/9/23

Communication System Band: WLAN(b); Frequency: 2462 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 38.609$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9; Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (51x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.300 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.036 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.305 W/kg

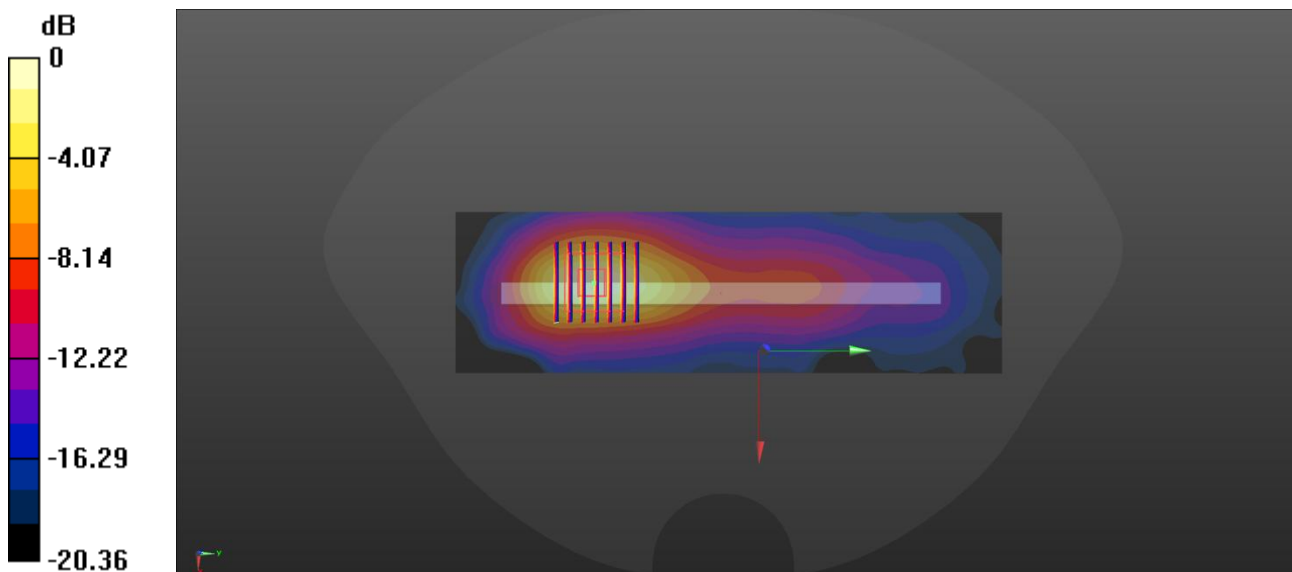

0 dB = 0.305 W/kg

Meas116.Head Left cheek WLAN 5.3G Ch50 ANT MIMO

Date: 2025/7/12

Communication System Band: WLAN(ac)160MHz; Frequency: 5250 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.588$ S/m; $\epsilon_r = 35.277$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch50/Area Scan (111x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Ch50/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.803 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 2.08 W/kg

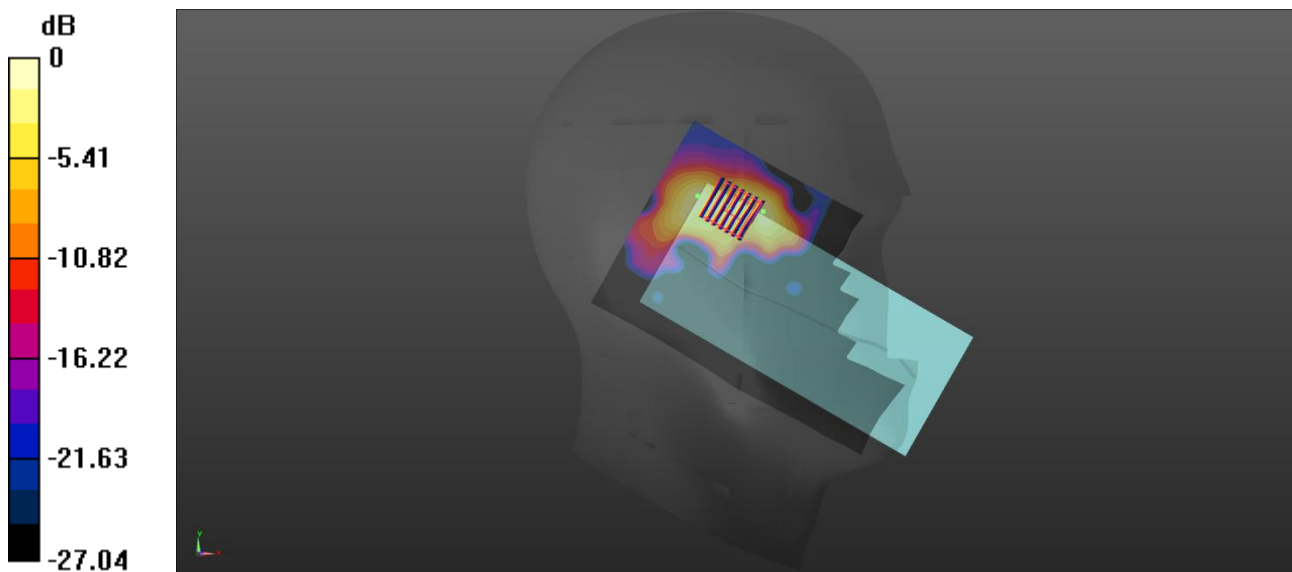

0 dB = 2.08 W/kg

Meas117.Head Left cheek WLAN 5.6G Ch114 ANT5

Date: 2025/7/14

Communication System Band: WLAN(ac)160MHz; Frequency: 5570 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5570$ MHz; $\sigma = 4.918$ S/m; $\epsilon_r = 34.62$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 23.0°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch114/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.877 W/kg

Ch114/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.856 W/kg

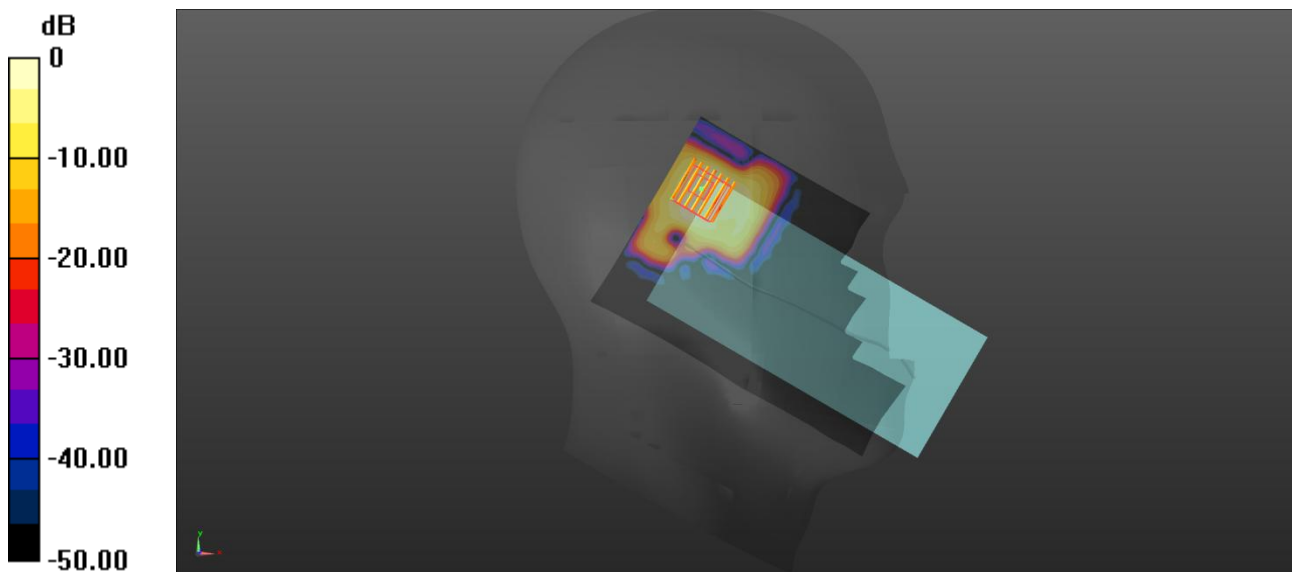

0 dB = 0.856 W/kg

Meas118.Head Left cheek WLAN 5.8G Ch155 ANT6

Date: 2025/7/16

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1.01

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.129$ S/m; $\epsilon_r = 34.212$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:23.3°C Liquid Temperature:22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch155/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.681 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 1.81 W/kg

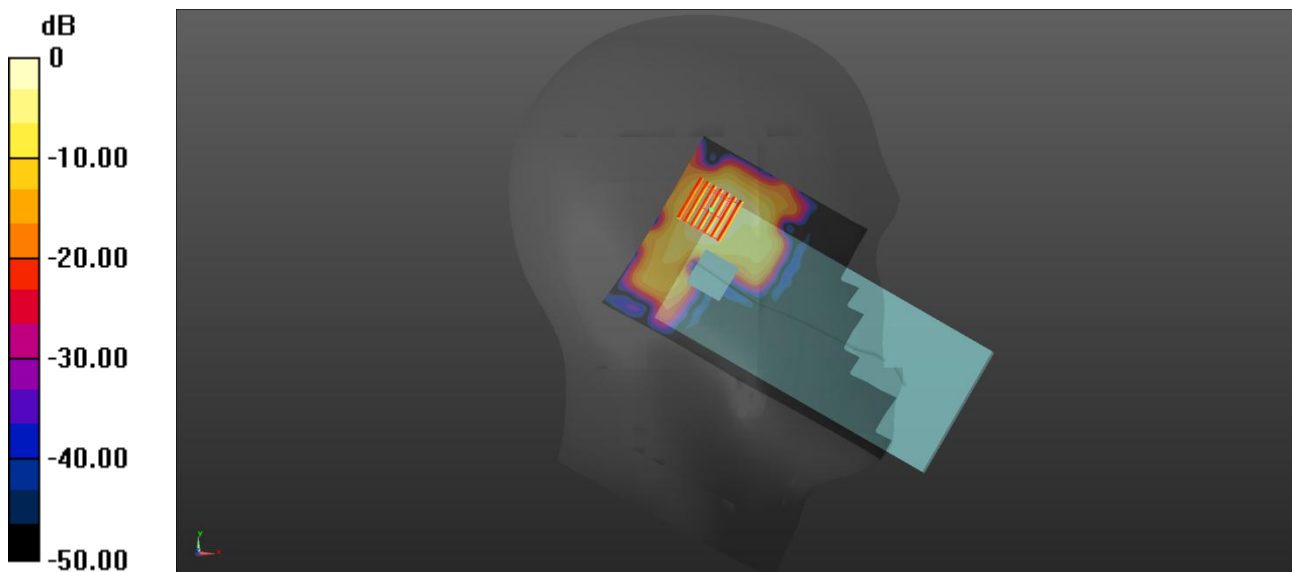

0 dB = 1.81 W/kg

Mea119.Body-worn Back side 5mm WIFI 5.3G Ch50 ANT6

Date: 2025/7/12

Communication System Band: WLAN(ac)160MHz; Frequency: 5250 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.588$ S/m; $\epsilon_r = 35.277$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch50/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.89 W/kg

Ch50/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 1.76 W/kg

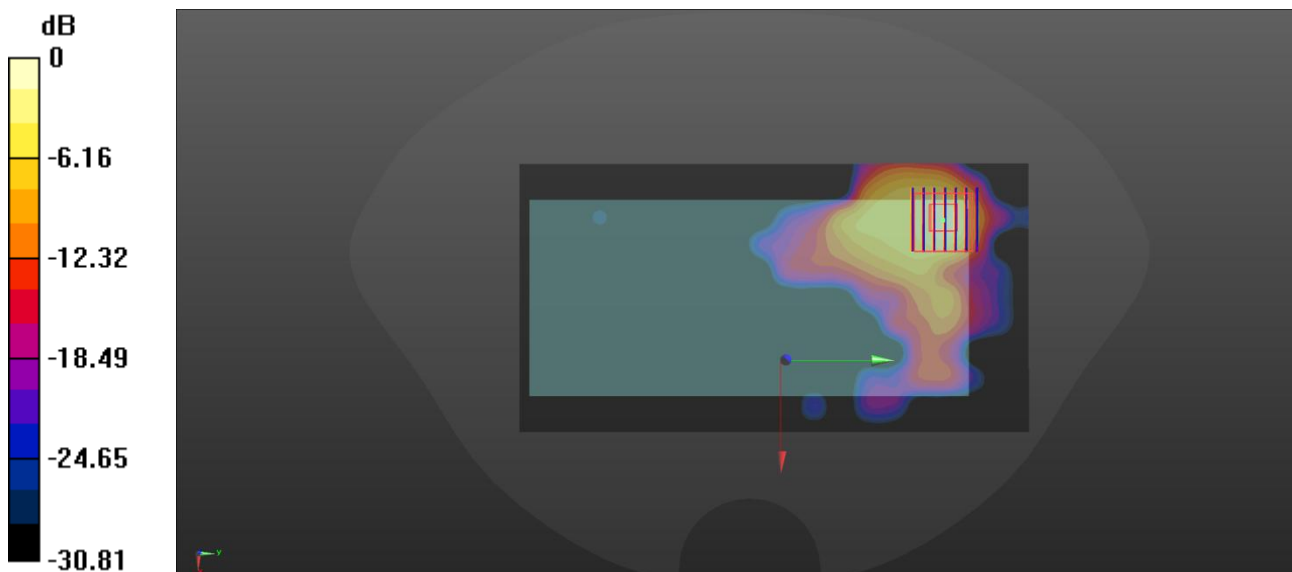

0 dB = 1.76 W/kg

Meas120.Body-worn Back side 5mm WIFI 5.6G Ch114 ANT5

Date: 2025/7/14

Communication System Band: WLAN(ac)160MHz; Frequency: 5570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5570$ MHz; $\sigma = 4.918$ S/m; $\epsilon_r = 34.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.0°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch114/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.53 W/kg

Ch114/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.51 W/kg

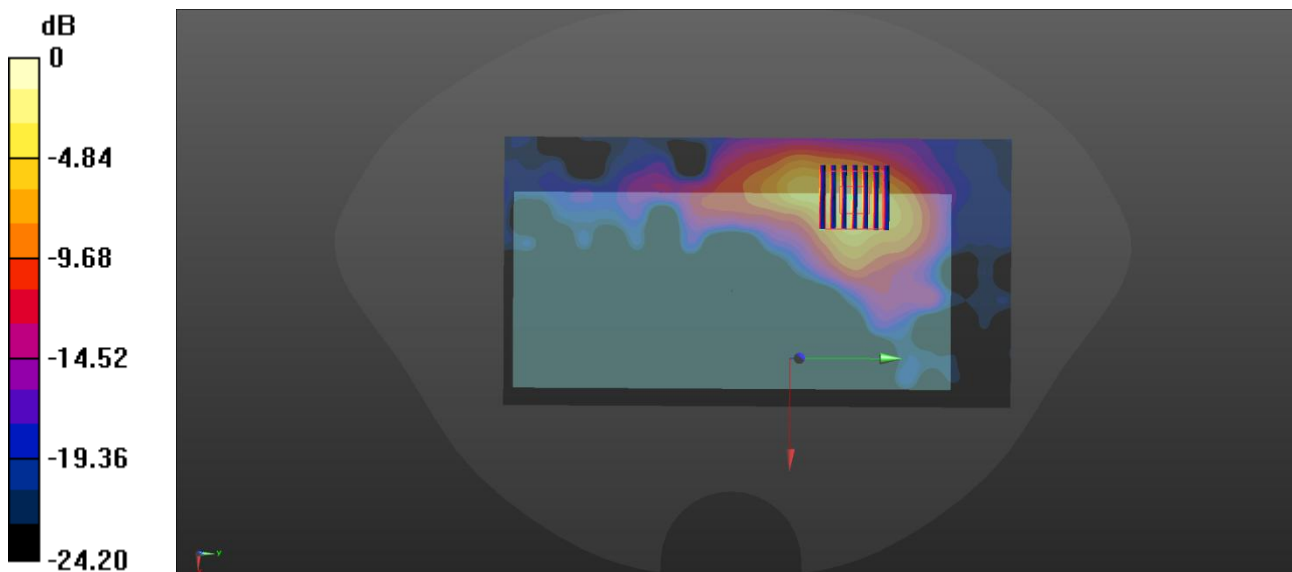

0 dB = 1.51 W/kg

Meas121.Body-worn Back side 5mm WIFI 5.8G Ch155 ANT0

Date: 2025/7/16

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1.01

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.129$ S/m; $\epsilon_r = 34.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:23.3°C Liquid Temperature:22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch155/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.04 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 2.11 W/kg

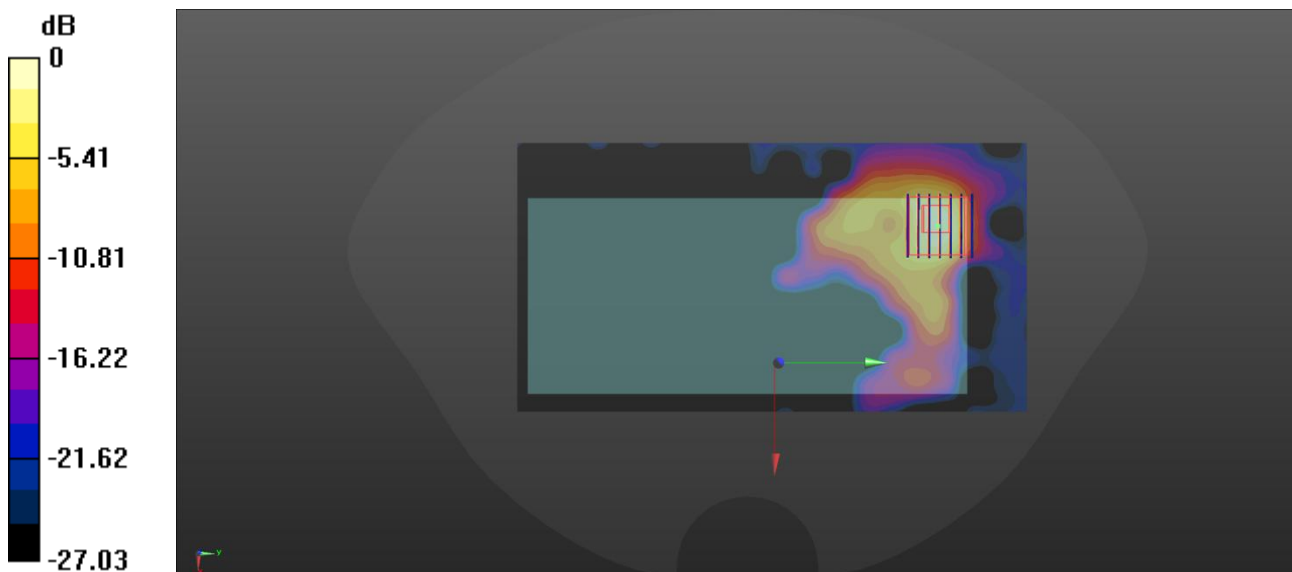

0 dB = 2.11 W/kg

Meas122.Hotspot Right side 10mm WLAN 5.2G Ch42 ANT6

Date: 2025/7/13

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.645$ S/m; $\epsilon_r = 35.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.4°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.76, 5.76, 5.76); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch5210/Area Scan (61x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.509 W/kg

Ch5210/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.393 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.504 W/kg

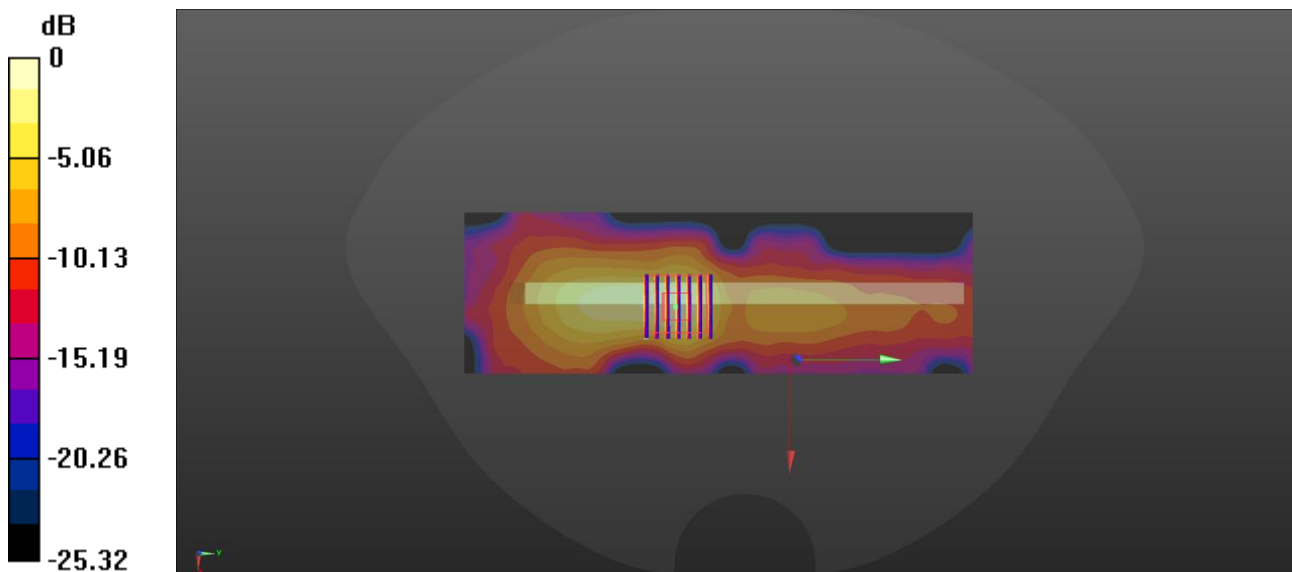

0 dB = 0.504 W/kg

Meas123.Hotspot Right side 10mm WLAN 5.8G Ch155 ANT6

Date: 2025/7/17

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.112$ S/m; $\epsilon_r = 34.306$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch155/Area Scan (61x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.561 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.893 V/m; Power Drift = 0.1 dB


Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.570 W/kg

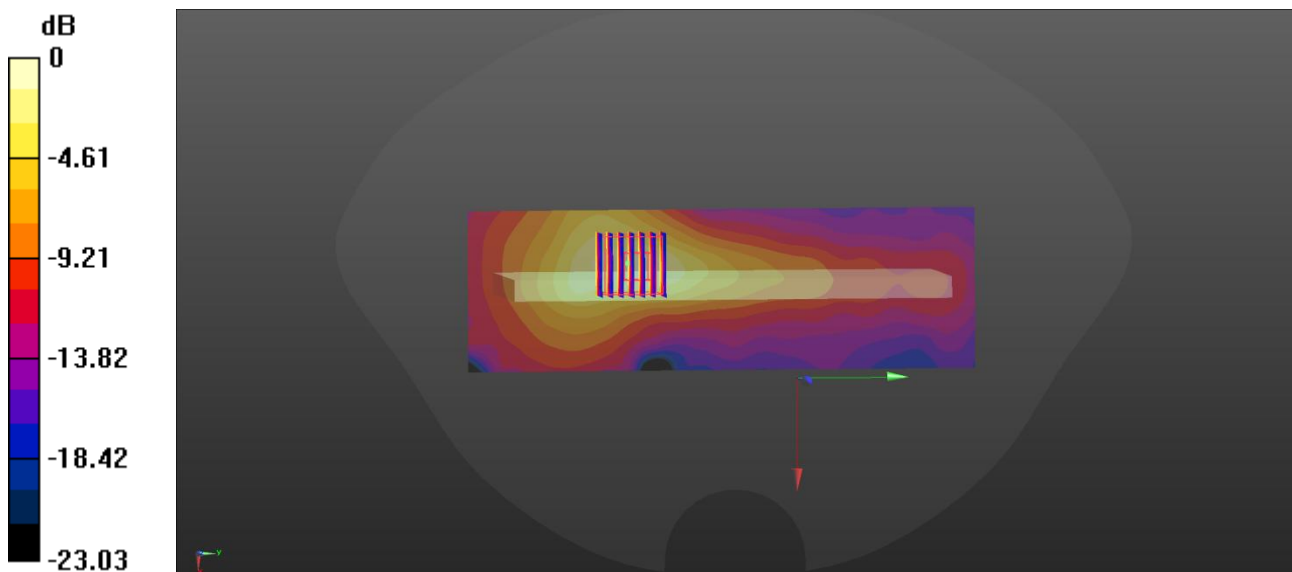

0 dB = 0.570 W/kg

Meas124.Extremity Right side 0mm WIFI 5.3G Ch50 ANT.MIMO

Date: 2025/7/13

Communication System Band: WLAN(ac)160MHz; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.673$ S/m; $\epsilon_r = 35.293$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.4°C Liquid Temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch50/Area Scan (61x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.40 W/kg

Ch50/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.117 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 2.63 W/kg; SAR(10 g) = 0.734 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 7.70 W/kg

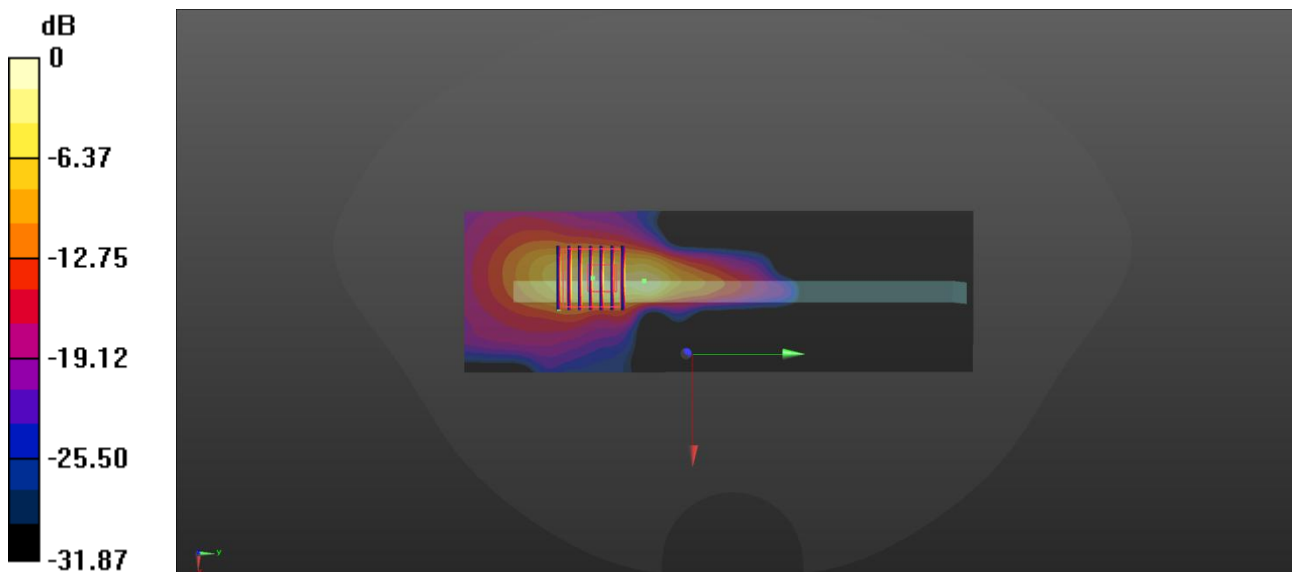

0 dB = 7.70 W/kg

Meas125. Extremity Top side 0mm WLAN 5.6G Ch114 MIMO

Date: 2025/7/15

Communication System Band: WLAN(ac)160MHz; Frequency: 5570 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5570$ MHz; $\sigma = 5.046$ S/m; $\epsilon_r = 35.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch114/Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.88 W/kg

Ch114/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.84 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 21.3 W/kg

SAR(1 g) = 3.22 W/kg; SAR(10 g) = 0.744 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 10.8 W/kg

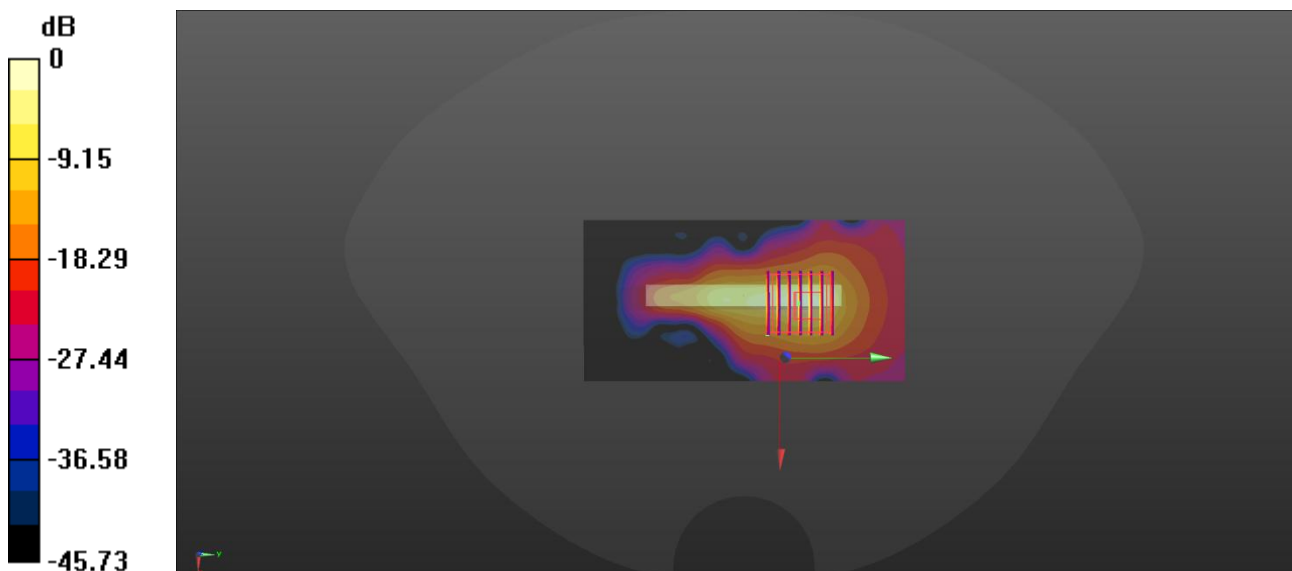

0 dB = 10.8 W/kg