



802.11be-EHT160 - Ant 1

Channel 15 (6025MHz)

The Reference Level

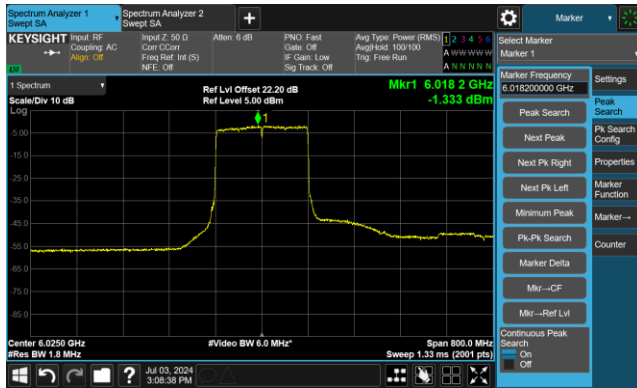


The Mask Data

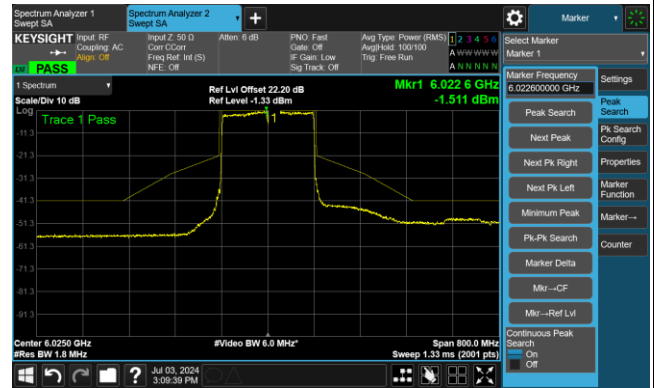


Channel 47 (6185MHz)

The Reference Level

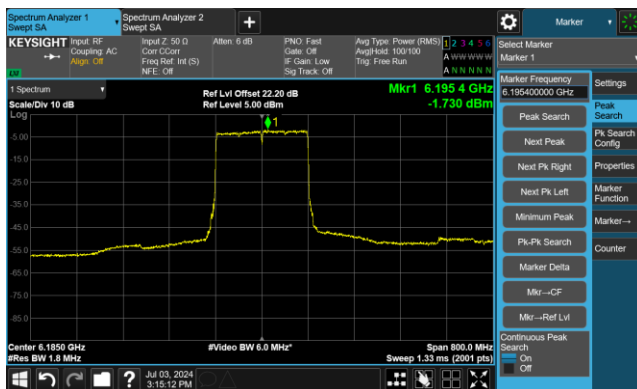


The Mask Data

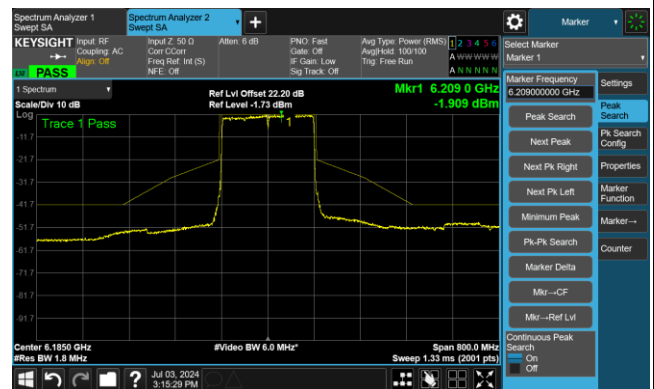


Channel 79 (6345MHz)

The Reference Level

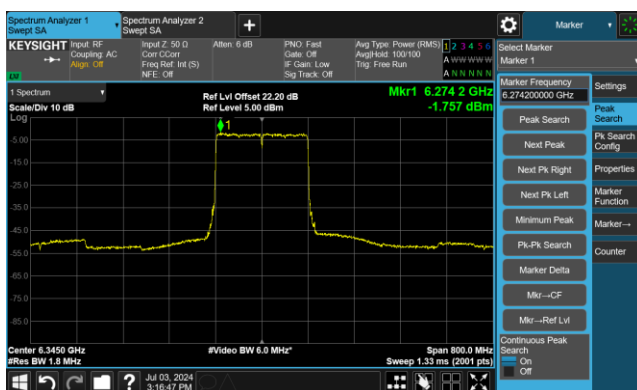


The Mask Data

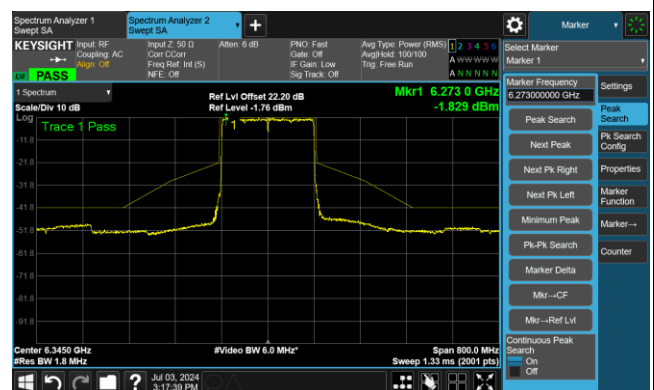


802.11be-EHT160 - Ant 1

Channel 111 (6505MHz)

The Reference Level

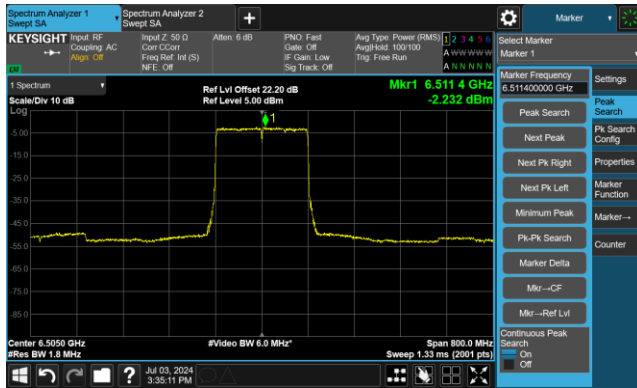


The Mask Data

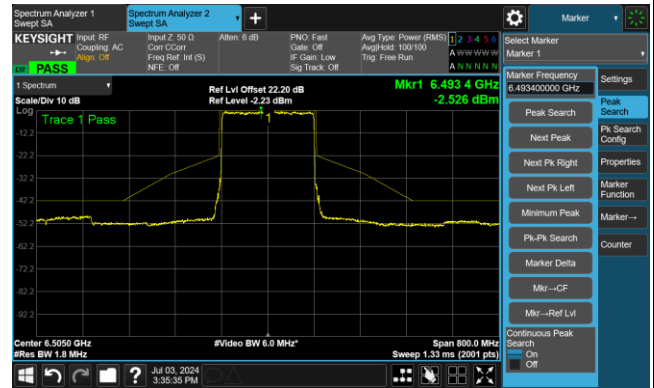


Channel 143 (6665MHz)

The Reference Level

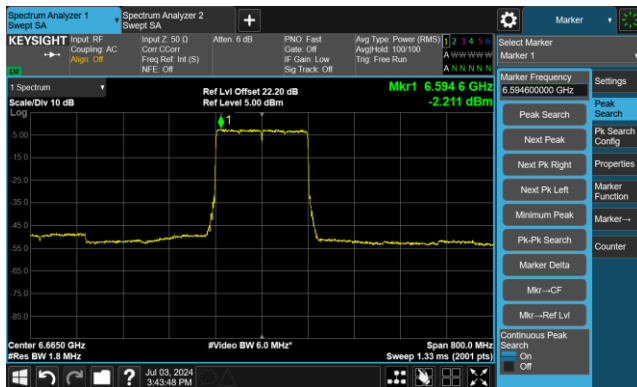


The Mask Data

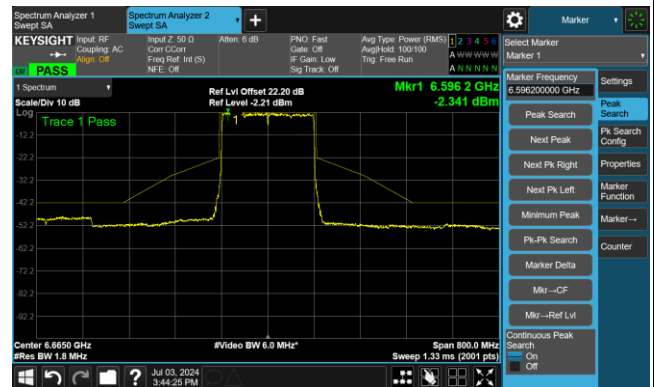


Channel 175 (6825MHz)

The Reference Level

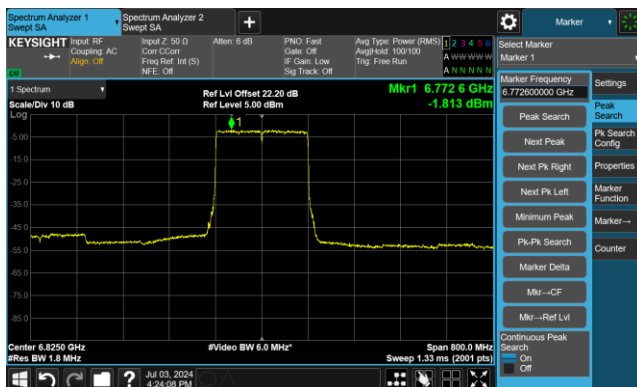


The Mask Data

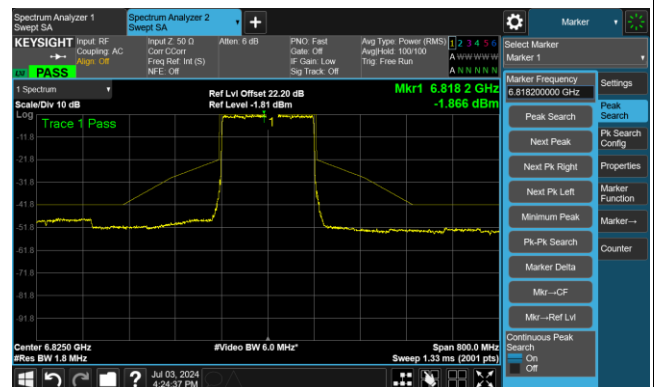


802.11be-EHT160 - Ant 1

Channel 207 (6985MHz)

The Reference Level

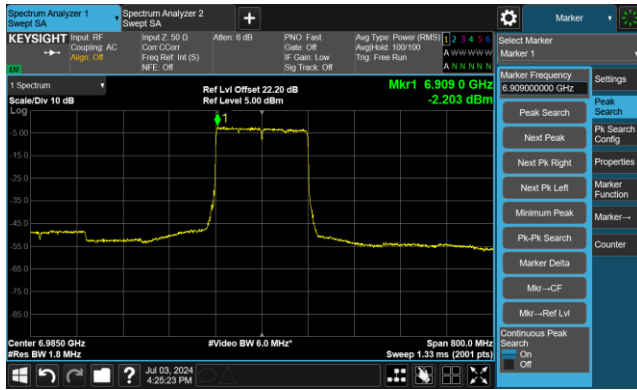


The Mask Data

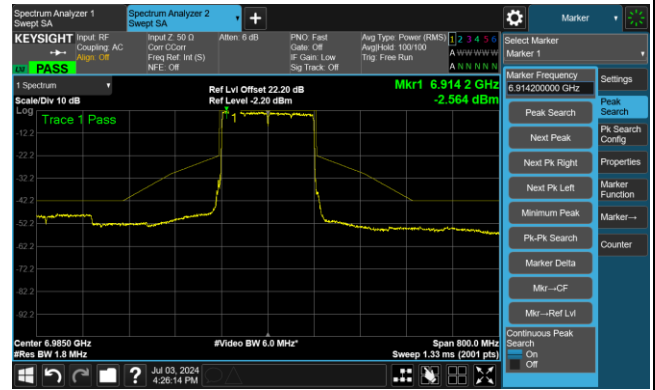


802.11be-EHT320 - Ant 1

Channel 31 (6105MHz)

The Reference Level

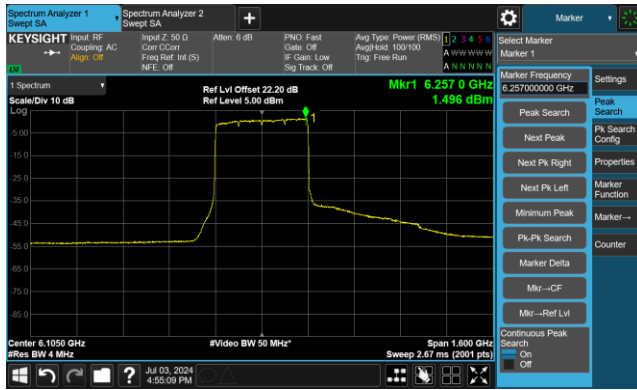


The Mask Data

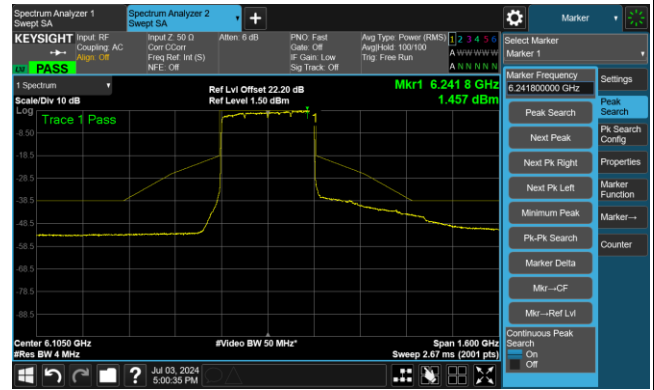


Channel 63 (6265MHz)

The Reference Level

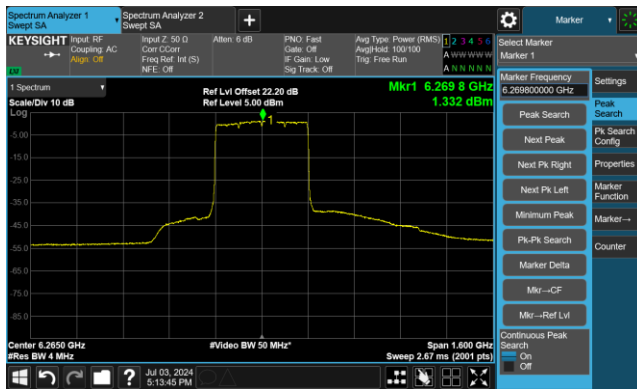


The Mask Data

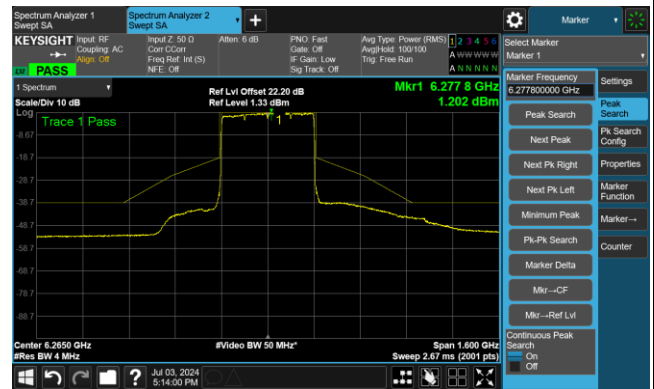


Channel 95 (6425MHz)

The Reference Level

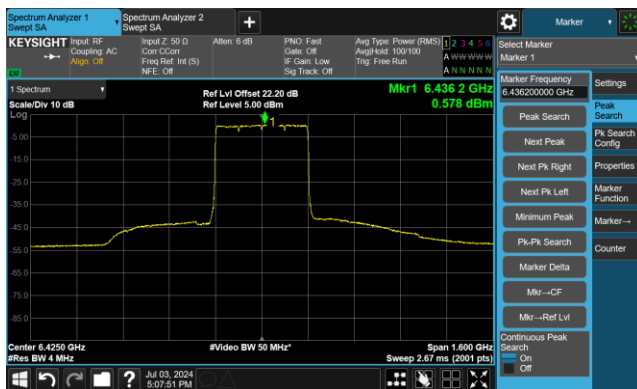


The Mask Data

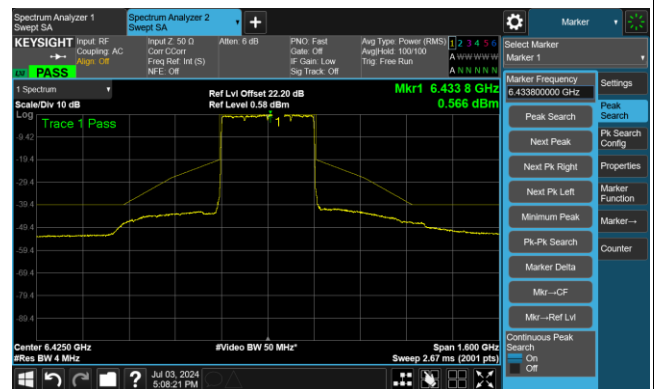


802.11be-EHT320 - Ant 1

Channel 127 (6585MHz)

The Reference Level

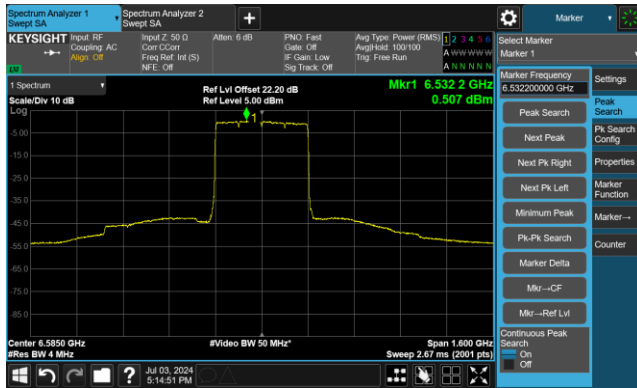


The Mask Data

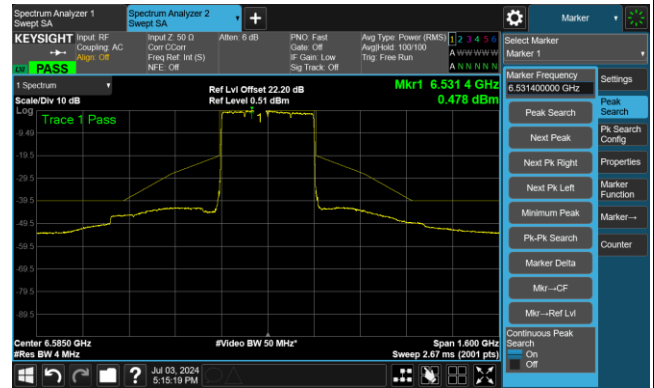


Channel 159 (6745MHz)

The Reference Level

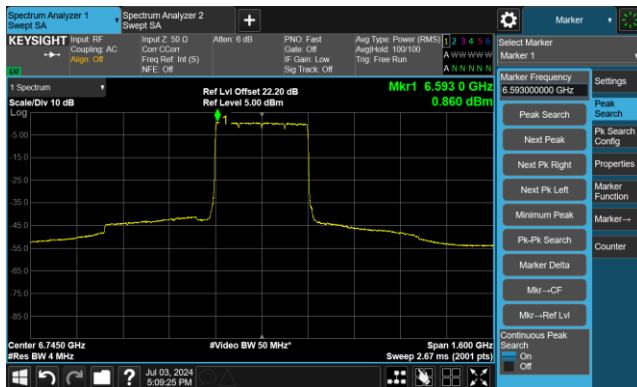


The Mask Data

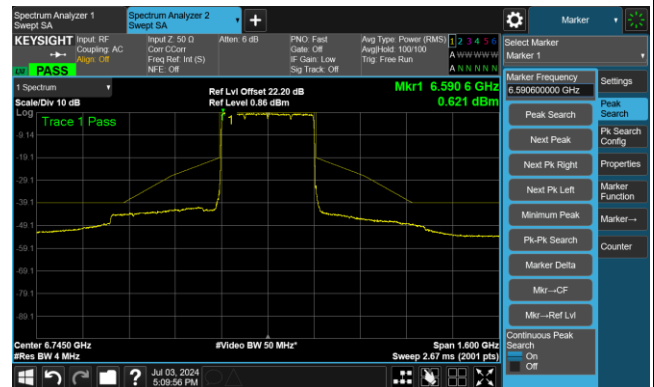


Channel 191 (6905MHz)

The Reference Level

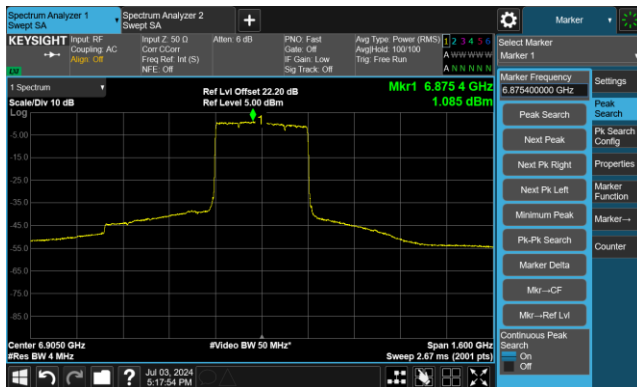

The Mask Data

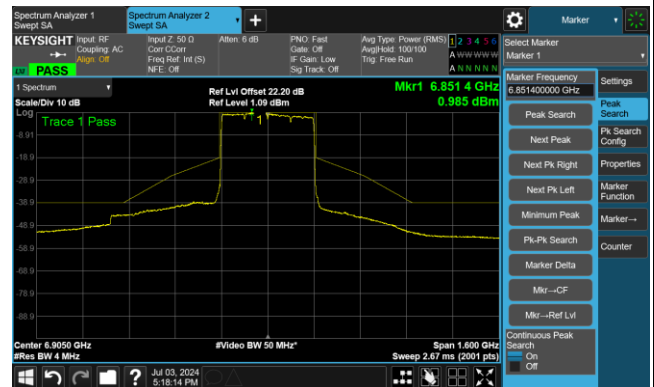

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2024-08-11		
Test Mode	5955MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	-0.97	-0.97	-0.97	-0.97
		- 20	-0.97	-0.97	-0.97	-0.97
		- 10	0.66	0.76	0.90	0.98
		0	3.86	3.83	3.81	3.79
		+ 10	3.76	3.74	3.73	3.73
		+ 20	3.69	3.68	3.63	3.61
		+ 30	3.59	3.59	3.58	3.56
		+ 40	3.51	3.52	3.51	3.49
		+ 50	3.47	3.47	3.46	3.44
115	138	+ 20	3.42	3.41	3.39	3.39
85	102	+ 20	3.36	3.36	3.34	3.32

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Contention Based Protocol Test Result

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2024-08-11		

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
37	20	6135	6135	-69	4.0	-73	≤ -62.0	10	100	90	Pass
63	320	6105	5950	-73	4.0	-77	≤ -62.0	10	100	90	Pass
63	320	6105	6105	-61	4.0	-65	≤ -62.0	10	100	90	Pass
63	320	6105	6260	-70	4.0	-74	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
101	20	6455	6455	-71	4.0	-75	≤ -62.0	10	100	90	Pass
95	320	6425	6270	-63	4.0	-67	≤ -62.0	10	100	90	Pass
95	320	6425	6425	-60	4.0	-64	≤ -62.0	10	100	90	Pass
95	320	6425	6580	-67	4.0	-71	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
165	20	6775	6775	-72	4.0	-76	≤ -62.0	10	100	90	Pass
159	320	6585	6430	-72	4.0	-76	≤ -62.0	10	100	90	Pass
159	320	6585	6585	-60	4.0	-64	≤ -62.0	10	100	90	Pass
159	320	6585	6740	-68	4.0	-72	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-71	4.0	-75	≤ -62.0	10	100	90	Pass
191	320	6905	6750	-74	4.0	-78	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-60	4.0	-64	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-66	4.0	-70	≤ -62.0	10	100	90	Pass

Note 1: The test was performed on the antenna port with the lowest antenna gain, and the lowest antenna gain is 4dBi according to antenna report.

Note 2: Adjust Power (dBm) = AWGN Power (dBm) – Antenna Gain (dBi).

Note 3: Conducted measurements are used.


Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2024-08-11		

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6135	6135	-77	ON
			-76	Minimal
			-73	OFF
320	6105	5950	-80	ON
			-79	Minimal
			-77	OFF
320	6105	6105	-72	ON
			-71	Minimal
			-65	OFF
320	6105	6260	-77	ON
			-76	Minimal
			-74	OFF
Operation Band: U-NII 6				
20	6435	6435	-78	ON
			-77	Minimal
			-75	OFF
320	6425	6270	-80	ON
			-79	Minimal
			-67	OFF
320	6425	6425	-71	ON
			-70	Minimal
			-64	OFF
320	6425	6580	-78	ON
			-77	Minimal
			-71	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6775	6775	-79	ON
			-78	Minimal
			-76	OFF
320	6585	6430	-79	ON
			-78	Minimal
			-76	OFF
320	6585	6585	-71	ON
			-70	Minimal
			-64	OFF
320	6585	6740	-76	ON
			-75	Minimal
			-72	OFF
Operation Band: U-NII 8				
20	7015	7015	-78	ON
			-77	Minimal
			-75	OFF
320	6905	6750	-80	ON
			-79	Minimal
			-78	OFF
320	6905	6905	-72	ON
			-71	Minimal
			-64	OFF
320	6905	7060	-74	ON
			-73	Minimal
			-70	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform


802.11be-EHT20 / CH37

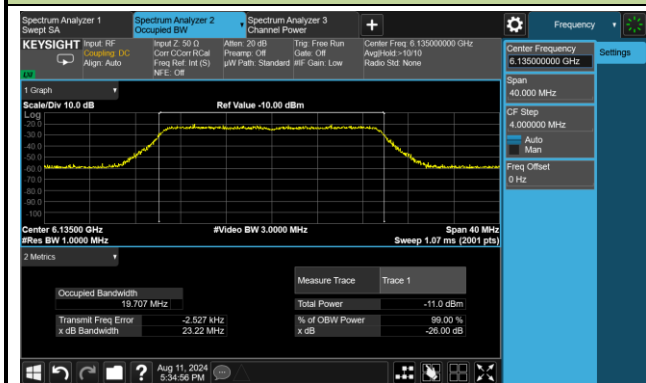


802.11be-EHT320 / CH63

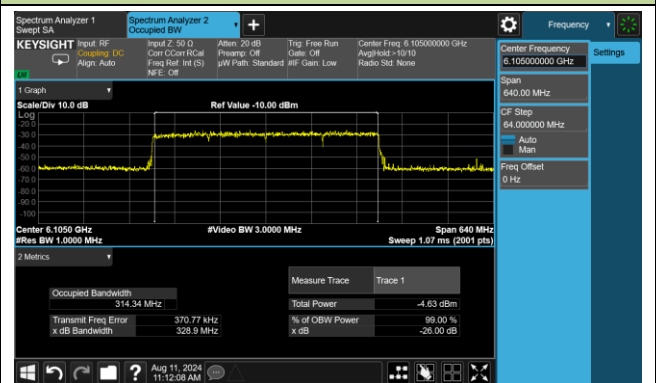


802.11be-EHT20 / CH101

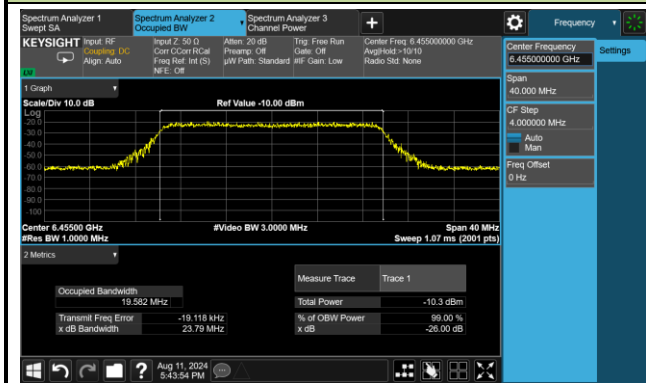


802.11be-EHT320 / CH95

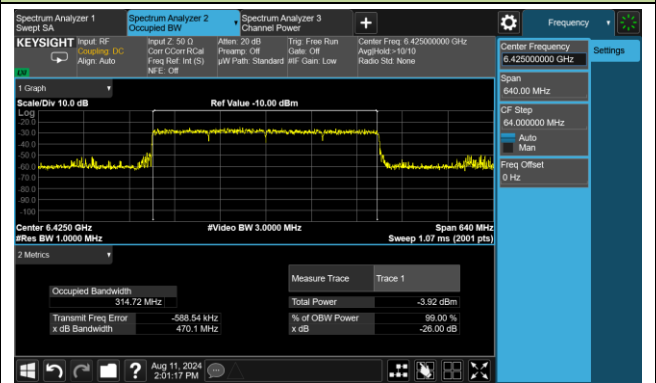


802.11be-EHT20 / CH165

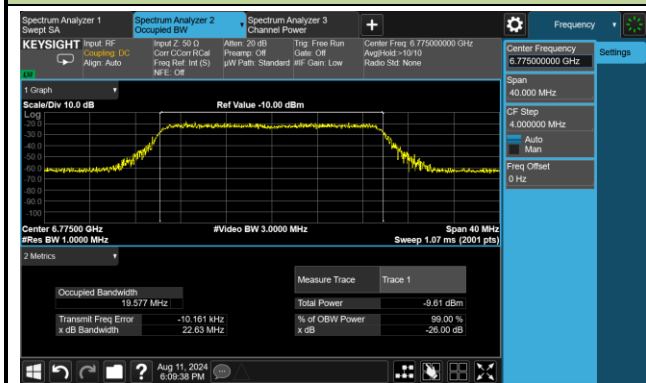


802.11be-EHT320 / CH159

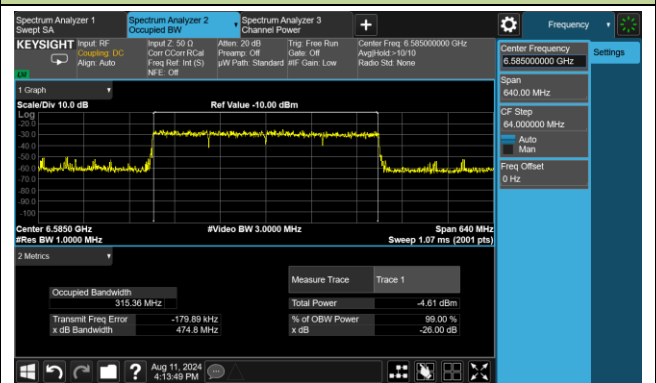

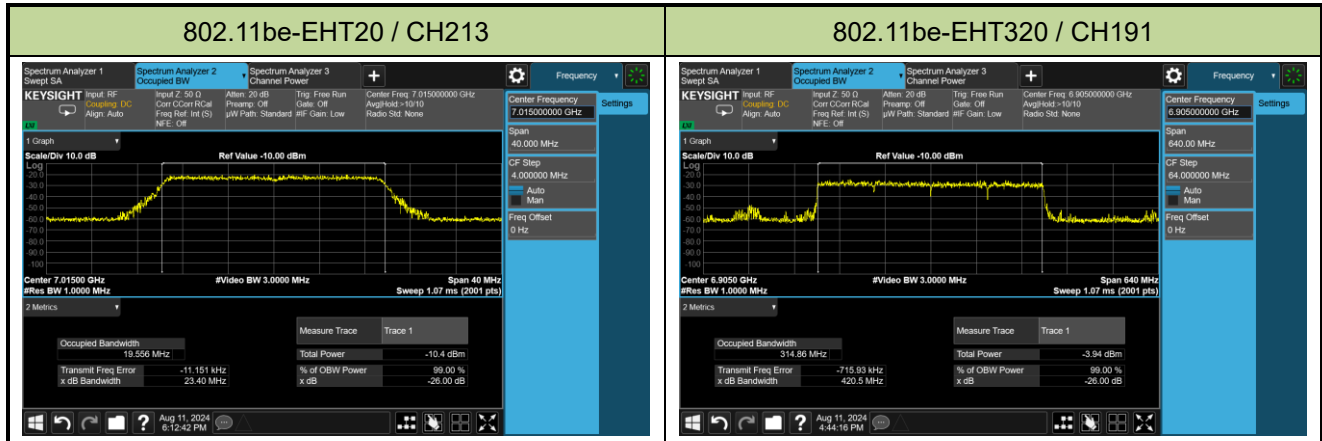


Incumbent Signal Calibration Plots (NII-5 Band)


802.11be-EHT20 / CH37

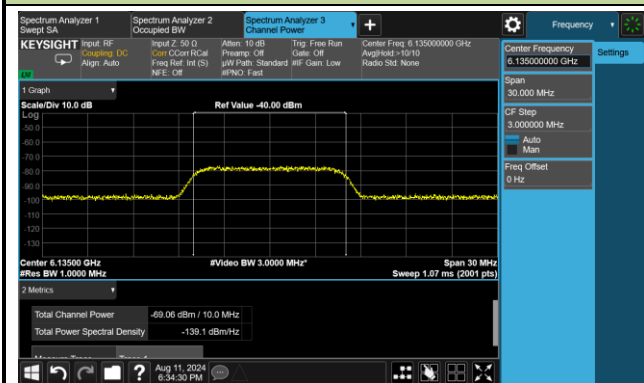


802.11be-EHT320 / CH63 (Low Edge)

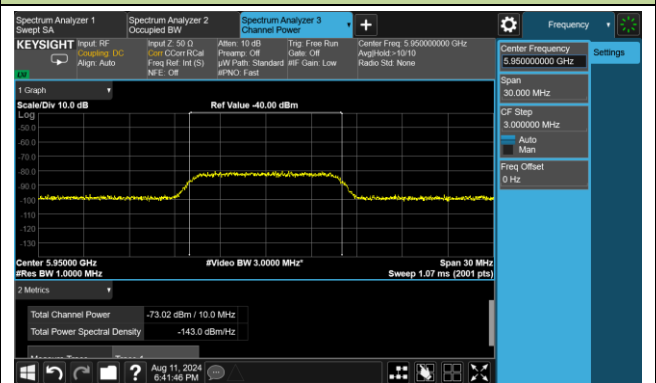

802.11be-EHT320 / CH63 (Middle)

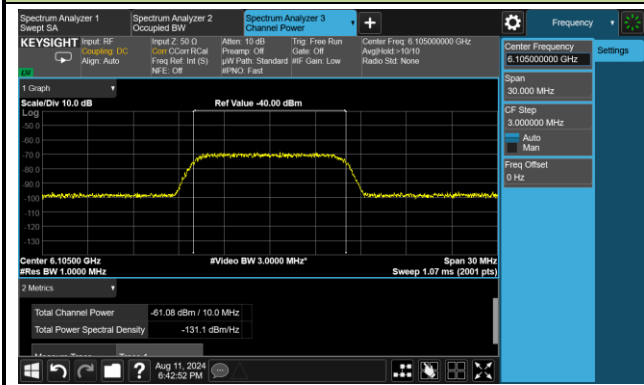


802.11be-EHT320 / CH63 (High Edge)

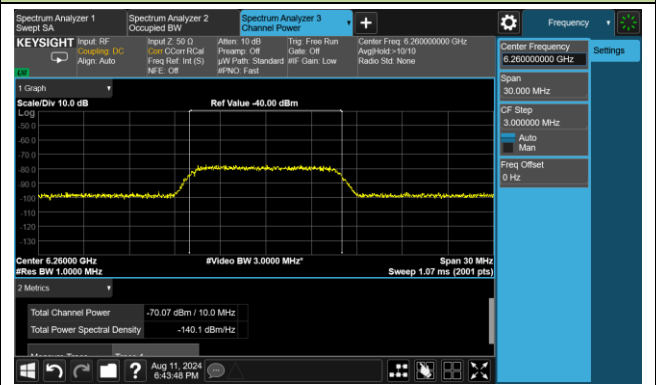


Incumbent Signal Calibration Plots (NII-6 Band)


802.11be-EHT20 / CH101

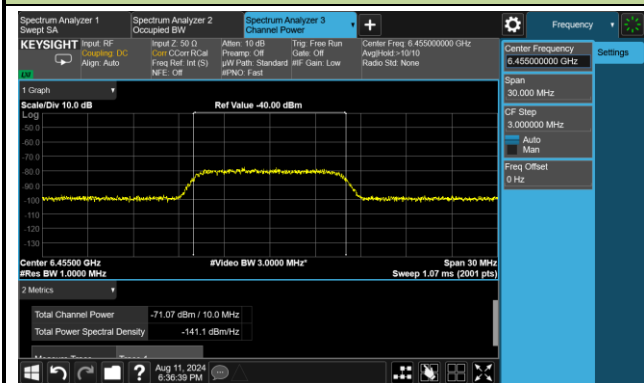


802.11be-EHT320 / CH95 (Low Edge)

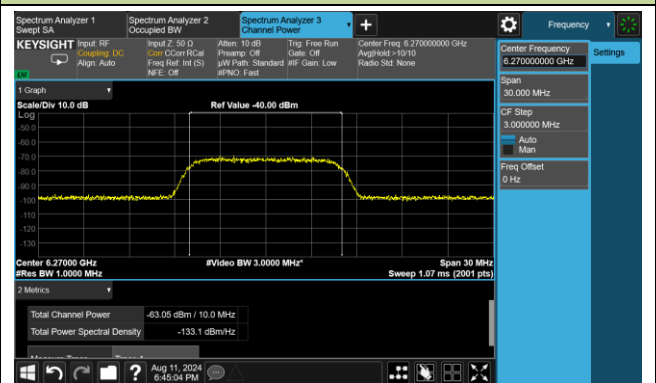

802.11be-EHT320 / CH95 (Middle)

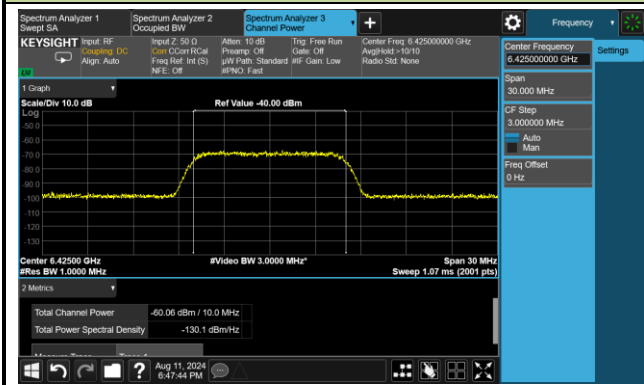


802.11be-EHT320 / CH95 (High Edge)

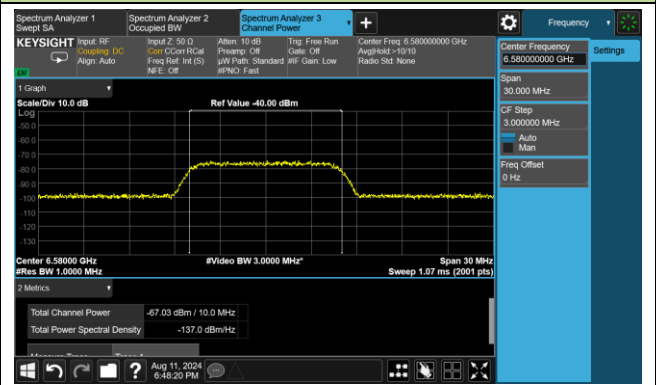


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH165

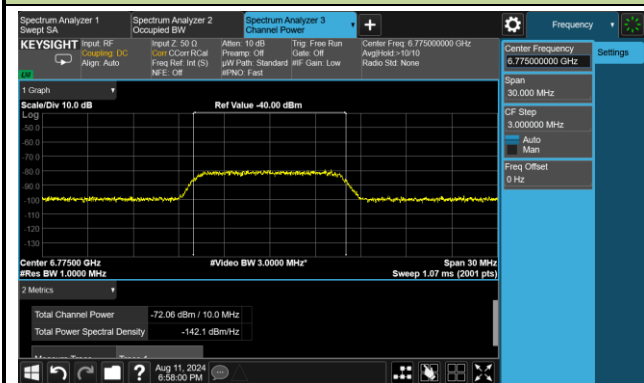


802.11be-EHT320 / CH159 (Low Edge)

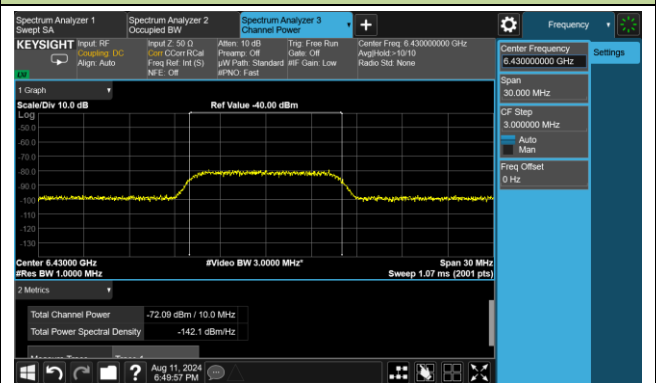

802.11be-EHT320 / CH159 (Middle)

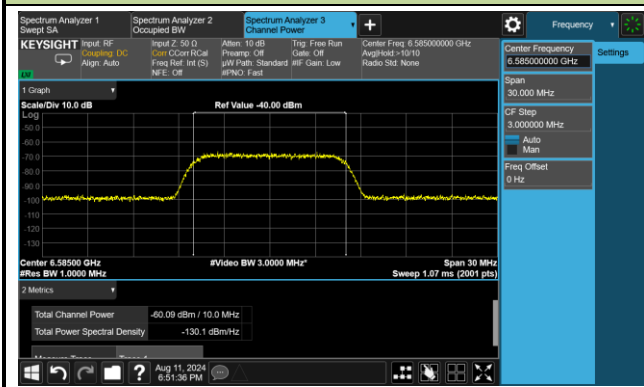


802.11be-EHT320 / CH159 (High Edge)

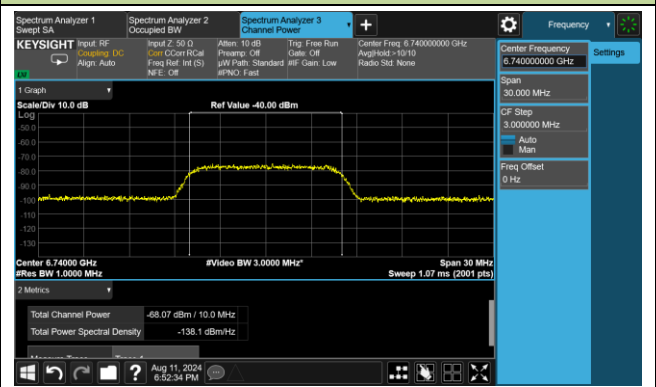


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH213

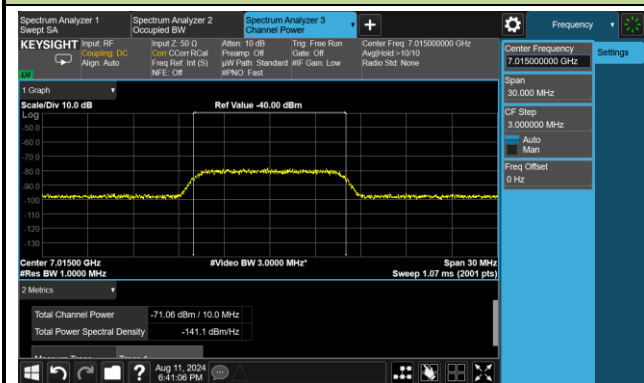


802.11be-EHT320 / CH191 (Low Edge)

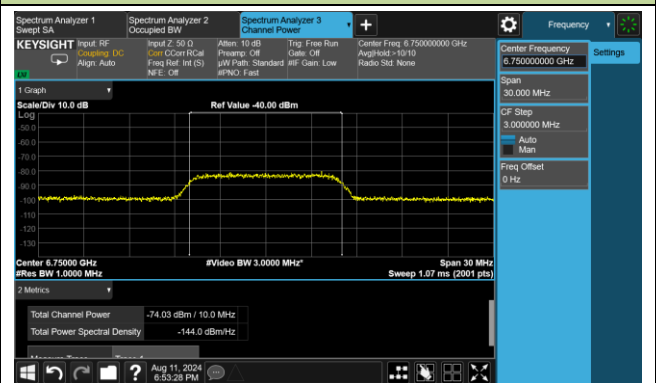

802.11be-EHT320 / CH191 (Middle)

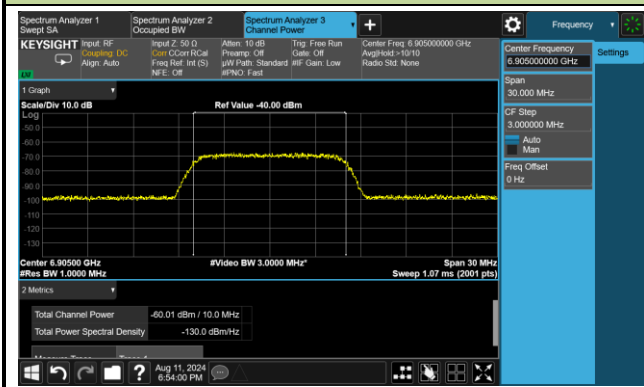


802.11be-EHT320 / CH191 (High Edge)

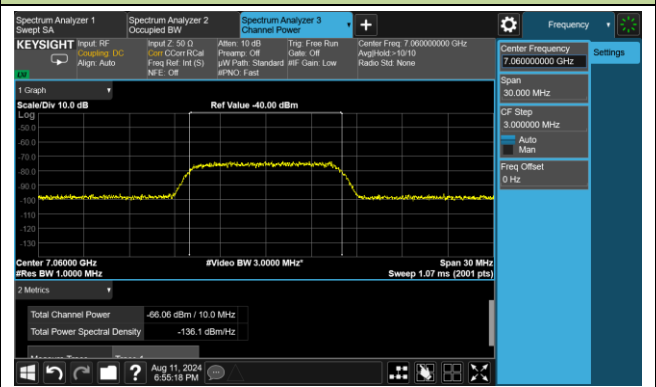


Test Result of EUT ceased transmission (NII-5 Band)


802.11be-EHT20 / CH37

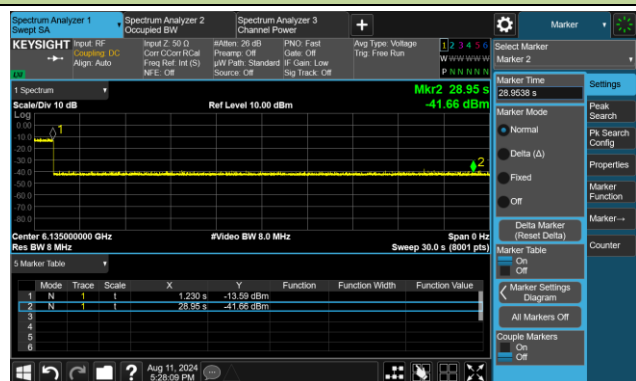


802.11be-EHT320 / CH63 (Low Edge)

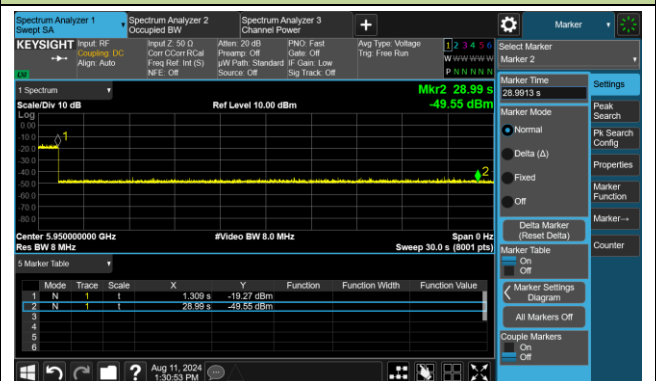

802.11be-EHT320 / CH63 (Middle)

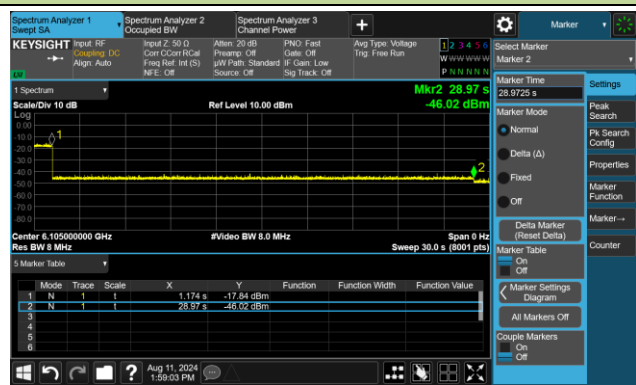


802.11be-EHT320 / CH63 (High Edge)

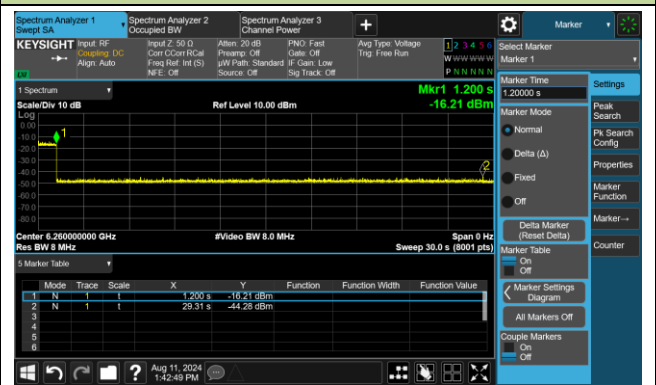


Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH101

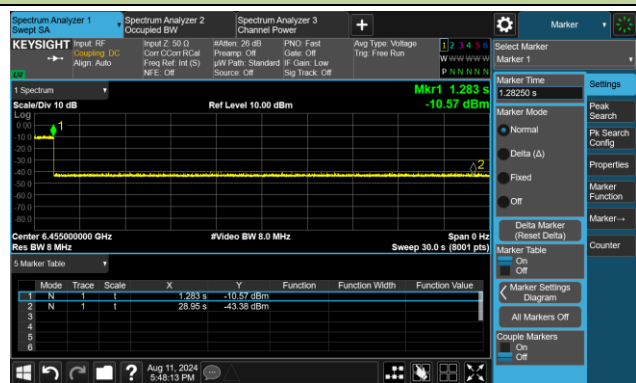


802.11be-EHT320 / CH95 (Low Edge)

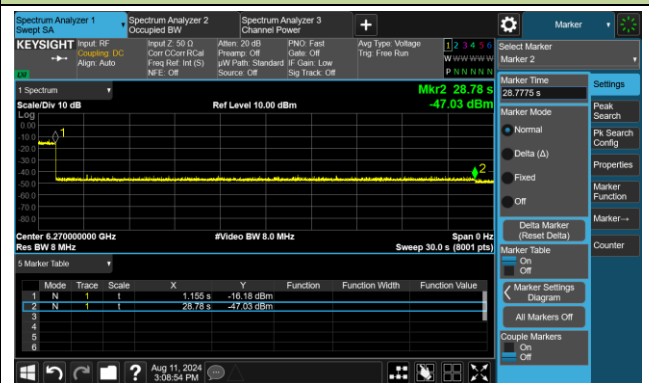

802.11be-EHT320 / CH95 (Middle)

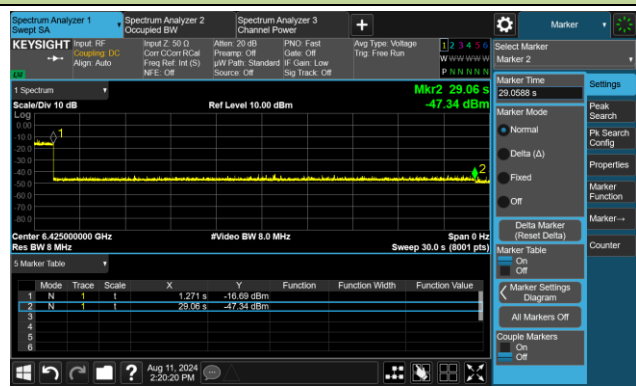


802.11be-EHT320 / CH95 (High Edge)

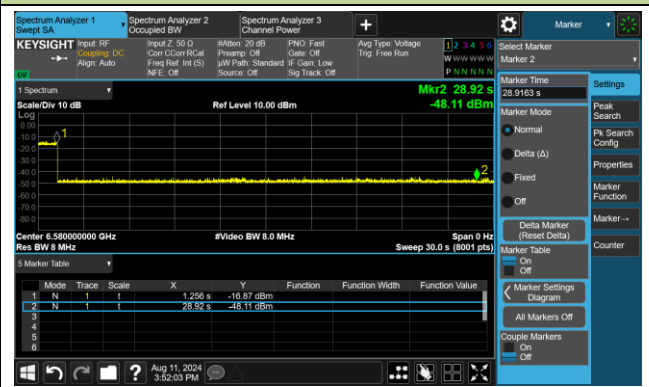


Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH165

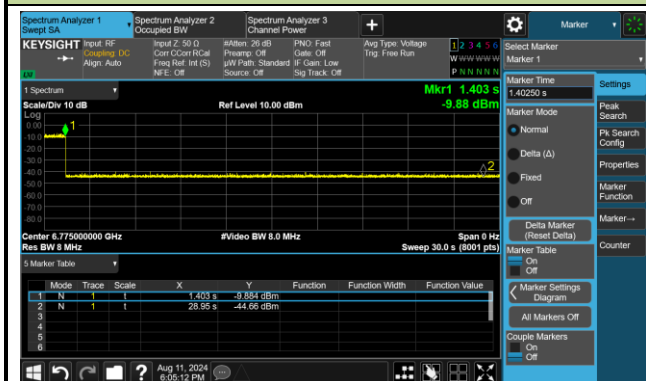


802.11be-EHT320 / CH159 (Low Edge)

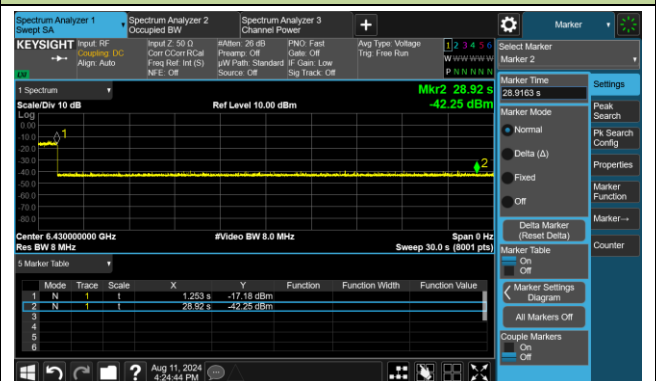

802.11be-EHT320 / CH159 (Middle)

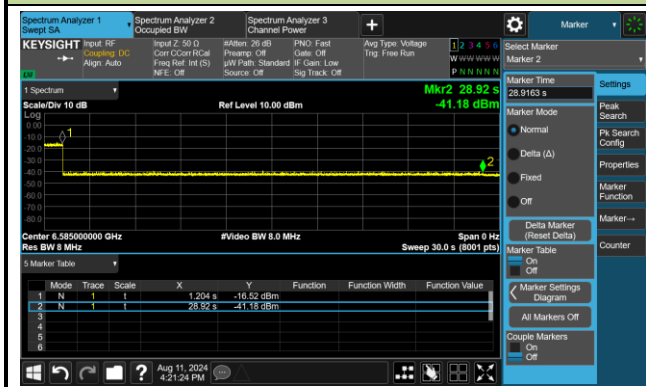


802.11be-EHT320 / CH159 (High Edge)

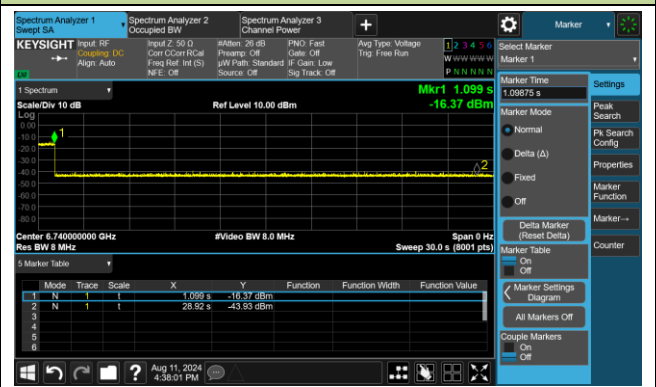


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH213

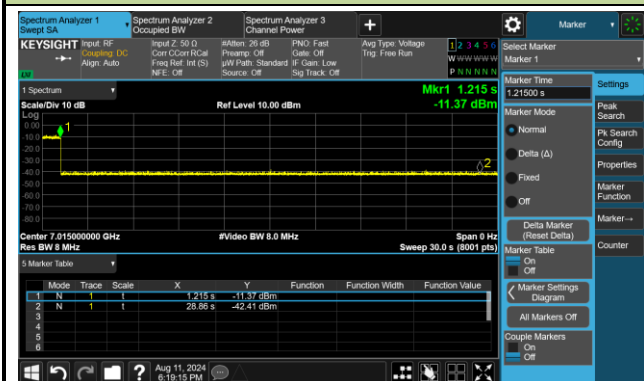


802.11be-EHT320 / CH191 (Low Edge)

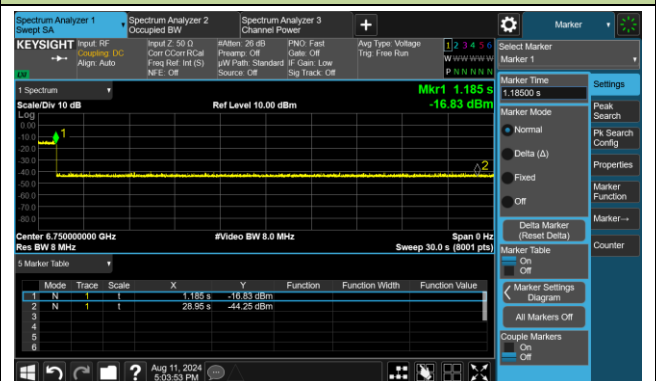

802.11be-EHT320 / CH191 (Middle)

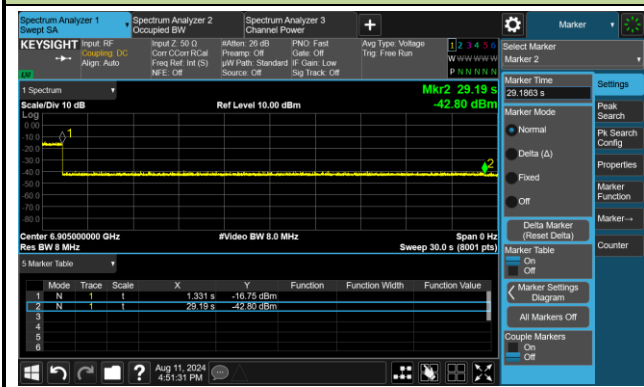

802.11be-EHT320 / CH191 (High Edge)

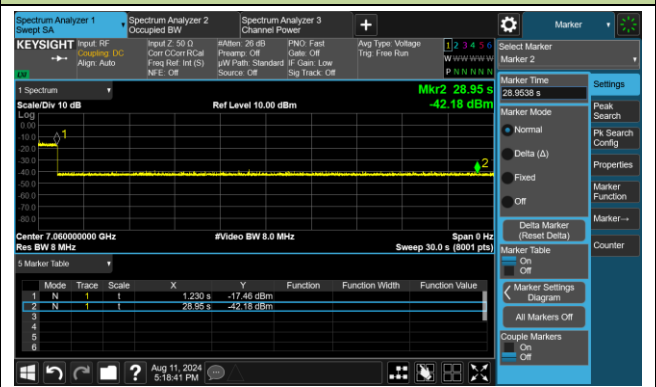

A.8 Radiated Spurious Emission Test Result

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-10
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10368.7	33.8	14.8	48.6	88.2	-39.6	Peak	Horizontal
	11060.6	33.7	16.1	49.8	74.0	-24.2	Peak	Horizontal
	11723.6	32.3	17.5	49.8	74.0	-24.2	Peak	Horizontal
*	14122.3	32.4	19.5	51.9	88.2	-36.3	Peak	Horizontal
*	10438.4	34.3	15.0	49.3	88.2	-38.9	Peak	Vertical
	11235.7	32.6	16.9	49.5	74.0	-24.5	Peak	Vertical
	11718.5	32.8	17.5	50.3	74.0	-23.7	Peak	Vertical
*	14142.7	32.7	19.8	52.5	88.2	-35.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10270.1	33.8	14.4	48.2	88.2	-40.0	Peak	Horizontal
	11621.6	34.5	17.3	51.8	74.0	-22.2	Peak	Horizontal
	12238.7	32.2	17.0	49.2	74.0	-24.8	Peak	Horizontal
*	14142.7	32.3	19.8	52.1	88.2	-36.1	Peak	Horizontal
*	10402.7	34.5	14.8	49.3	88.2	-38.9	Peak	Vertical
	11130.3	33.6	16.1	49.7	74.0	-24.3	Peak	Vertical
	11939.5	32.9	17.0	49.9	74.0	-24.1	Peak	Vertical
*	14173.3	33.2	19.4	52.6	88.2	-35.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10382.3	33.3	14.9	48.2	88.2	-40.0	Peak	Horizontal
	11490.7	33.7	17.5	51.2	74.0	-22.8	Peak	Horizontal
	12347.5	32.8	16.9	49.7	74.0	-24.3	Peak	Horizontal
*	14101.9	33.0	19.2	52.2	88.2	-36.0	Peak	Horizontal
*	10421.4	32.9	15.0	47.9	88.2	-40.3	Peak	Vertical
	11473.7	32.5	17.4	49.9	74.0	-24.1	Peak	Vertical
	11791.6	32.4	17.4	49.8	74.0	-24.2	Peak	Vertical
*	14135.9	33.1	19.7	52.8	88.2	-35.4	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9729.5	35.2	13.4	48.6	88.2	-39.6	Peak	Horizontal
	11490.7	32.9	17.5	50.4	74.0	-23.6	Peak	Horizontal
	12352.6	32.8	16.9	49.7	74.0	-24.3	Peak	Horizontal
*	14195.4	33.7	19.4	53.1	88.2	-35.1	Peak	Horizontal
*	10263.3	33.3	14.3	47.6	88.2	-40.6	Peak	Vertical
	11466.9	32.3	17.3	49.6	74.0	-24.4	Peak	Vertical
	11708.3	32.8	17.5	50.3	74.0	-23.7	Peak	Vertical
*	14125.7	33.6	19.5	53.1	88.2	-35.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10387.4	33.1	14.8	47.9	88.2	-40.3	Peak	Horizontal
	10996.0	32.9	16.5	49.4	74.0	-24.6	Peak	Horizontal
	12196.2	32.0	17.4	49.4	74.0	-24.6	Peak	Horizontal
*	14193.7	32.8	19.4	52.2	88.2	-36.0	Peak	Horizontal
*	10253.1	33.7	14.2	47.9	88.2	-40.3	Peak	Vertical
	11324.1	32.6	17.3	49.9	74.0	-24.1	Peak	Vertical
	11492.4	32.7	17.5	50.2	74.0	-23.8	Peak	Vertical
*	14176.7	32.8	19.4	52.2	88.2	-36.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10321.1	33.6	14.7	48.3	88.2	-39.9	Peak	Horizontal
	11461.8	32.6	17.3	49.9	74.0	-24.1	Peak	Horizontal
	11912.3	32.9	16.9	49.8	74.0	-24.2	Peak	Horizontal
*	14137.6	32.4	19.8	52.2	88.2	-36.0	Peak	Horizontal
*	10113.7	34.3	13.6	47.9	88.2	-40.3	Peak	Vertical
	11189.8	32.6	16.7	49.3	74.0	-24.7	Peak	Vertical
	11919.1	32.9	17.0	49.9	74.0	-24.1	Peak	Vertical
*	14175.0	32.8	19.4	52.2	88.2	-36.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10283.7	34.6	14.6	49.2	88.2	-39.0	Peak	Horizontal
	10912.7	33.2	16.4	49.6	74.0	-24.4	Peak	Horizontal
	11728.7	33.0	17.5	50.5	74.0	-23.5	Peak	Horizontal
*	14178.4	33.0	19.4	52.4	88.2	-35.8	Peak	Horizontal
*	10304.1	33.1	14.7	47.8	88.2	-40.4	Peak	Vertical
	11016.4	33.1	16.4	49.5	74.0	-24.5	Peak	Vertical
	11645.4	32.0	17.6	49.6	74.0	-24.4	Peak	Vertical
*	14039.0	32.6	19.4	52.0	88.2	-36.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10378.9	33.3	14.8	48.1	88.2	-40.1	Peak	Horizontal
	11324.1	33.4	17.3	50.7	74.0	-23.3	Peak	Horizontal
	11965.0	33.4	16.9	50.3	74.0	-23.7	Peak	Horizontal
*	14108.7	32.9	19.3	52.2	88.2	-36.0	Peak	Horizontal
*	9814.5	34.5	13.5	48.0	88.2	-40.2	Peak	Vertical
	11058.9	33.4	16.1	49.5	74.0	-24.5	Peak	Vertical
	11643.7	32.4	17.6	50.0	74.0	-24.0	Peak	Vertical
*	14192.0	33.5	19.4	52.9	88.2	-35.3	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10271.8	33.5	14.4	47.9	88.2	-40.3	Peak	Horizontal
	11419.3	32.7	17.2	49.9	74.0	-24.1	Peak	Horizontal
	11670.9	32.4	17.4	49.8	74.0	-24.2	Peak	Horizontal
*	14169.9	32.5	19.4	51.9	88.2	-36.3	Peak	Horizontal
*	10168.1	34.3	13.7	48.0	88.2	-40.2	Peak	Vertical
	11031.7	33.5	16.1	49.6	74.0	-24.4	Peak	Vertical
	11592.7	33.8	17.0	50.8	74.0	-23.2	Peak	Vertical
*	14254.9	32.9	19.4	52.3	88.2	-35.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9664.9	35.2	13.0	48.2	88.2	-40.0	Peak	Horizontal
	11128.6	33.7	16.2	49.9	74.0	-24.1	Peak	Horizontal
	11652.2	32.0	17.6	49.6	74.0	-24.4	Peak	Horizontal
*	14132.5	32.7	19.7	52.4	88.2	-35.8	Peak	Horizontal
*	9710.8	34.2	13.3	47.5	88.2	-40.7	Peak	Vertical
	11096.3	33.0	16.7	49.7	74.0	-24.3	Peak	Vertical
	11699.8	32.9	17.4	50.3	74.0	-23.7	Peak	Vertical
*	14163.1	32.5	19.4	51.9	88.2	-36.3	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10251.4	33.5	14.2	47.7	88.2	-40.5	Peak	Horizontal
	10854.9	34.1	16.0	50.1	74.0	-23.9	Peak	Horizontal
	11424.4	32.9	17.2	50.1	74.0	-23.9	Peak	Horizontal
*	14190.3	32.7	19.4	52.1	88.2	-36.1	Peak	Horizontal
*	10385.7	33.8	14.9	48.7	88.2	-39.5	Peak	Vertical
	11069.1	33.7	16.3	50.0	74.0	-24.0	Peak	Vertical
	11949.7	33.3	17.0	50.3	74.0	-23.7	Peak	Vertical
*	14052.6	33.0	19.3	52.3	88.2	-35.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10280.3	33.5	14.5	48.0	88.2	-40.2	Peak	Horizontal
	11466.9	32.6	17.3	49.9	74.0	-24.1	Peak	Horizontal
	12369.6	32.9	16.9	49.8	74.0	-24.2	Peak	Horizontal
*	14236.2	33.6	19.4	53.0	88.2	-35.2	Peak	Horizontal
*	10290.5	33.5	14.6	48.1	88.2	-40.1	Peak	Vertical
	11383.6	32.5	17.2	49.7	74.0	-24.3	Peak	Vertical
	11553.6	33.4	17.4	50.8	74.0	-23.2	Peak	Vertical
*	14152.9	33.0	19.5	52.5	88.2	-35.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10273.5	33.6	14.4	48.0	88.2	-40.2	Peak	Horizontal
	10929.7	33.2	16.3	49.5	74.0	-24.5	Peak	Horizontal
	11727.0	32.7	17.6	50.3	74.0	-23.7	Peak	Horizontal
*	14130.8	32.3	19.6	51.9	88.2	-36.3	Peak	Horizontal
*	10038.9	34.6	13.6	48.2	88.2	-40.0	Peak	Vertical
	11084.4	33.4	16.7	50.1	74.0	-23.9	Peak	Vertical
	12070.4	34.1	16.8	50.9	74.0	-23.1	Peak	Vertical
*	14141.0	32.7	19.8	52.5	88.2	-35.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9743.1	34.9	13.4	48.3	88.2	-39.9	Peak	Horizontal
	11106.5	33.5	16.5	50.0	74.0	-24.0	Peak	Horizontal
	11499.2	33.3	17.4	50.7	74.0	-23.3	Peak	Horizontal
*	13962.5	33.4	19.0	52.4	88.2	-35.8	Peak	Horizontal
*	10367.0	33.8	14.7	48.5	88.2	-39.7	Peak	Vertical
	10902.5	32.8	16.3	49.1	74.0	-24.9	Peak	Vertical
	11941.2	32.6	17.0	49.6	74.0	-24.4	Peak	Vertical
*	14064.5	33.6	19.1	52.7	88.2	-35.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10198.7	33.6	14.1	47.7	88.2	-40.5	Peak	Horizontal
	10984.1	33.6	16.3	49.9	74.0	-24.1	Peak	Horizontal
	12284.6	34.0	17.0	51.0	74.0	-23.0	Peak	Horizontal
*	14192.0	32.9	19.4	52.3	88.2	-35.9	Peak	Horizontal
*	10078.0	34.3	13.4	47.7	88.2	-40.5	Peak	Vertical
	10647.5	34.4	15.4	49.8	74.0	-24.2	Peak	Vertical
	11400.6	33.0	17.3	50.3	74.0	-23.7	Peak	Vertical
*	14278.7	34.1	19.5	53.6	88.2	-34.6	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10191.9	34.5	14.0	48.5	88.2	-39.7	Peak	Horizontal
	11315.6	32.5	17.2	49.7	74.0	-24.3	Peak	Horizontal
	12209.8	32.4	17.3	49.7	74.0	-24.3	Peak	Horizontal
*	14217.5	33.4	19.4	52.8	88.2	-35.4	Peak	Horizontal
*	10256.5	33.7	14.2	47.9	88.2	-40.3	Peak	Vertical
	11092.9	32.9	16.7	49.6	74.0	-24.4	Peak	Vertical
	12237.0	33.6	17.0	50.6	74.0	-23.4	Peak	Vertical
*	14263.4	33.5	19.4	52.9	88.2	-35.3	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9734.6	35.0	13.5	48.5	88.2	-39.7	Peak	Horizontal
	11356.4	32.5	17.1	49.6	74.0	-24.4	Peak	Horizontal
	11698.1	33.6	17.3	50.9	74.0	-23.1	Peak	Horizontal
*	14117.2	33.4	19.4	52.8	88.2	-35.4	Peak	Horizontal
*	10293.9	33.5	14.6	48.1	88.2	-40.1	Peak	Vertical
	11574.0	32.8	17.3	50.1	74.0	-23.9	Peak	Vertical
	12277.8	32.9	17.0	49.9	74.0	-24.1	Peak	Vertical
*	14059.4	32.5	19.2	51.7	88.2	-36.5	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10351.7	33.7	14.7	48.4	88.2	-39.8	Peak	Horizontal
	11084.4	33.3	16.7	50.0	74.0	-24.0	Peak	Horizontal
	11698.1	33.1	17.3	50.4	74.0	-23.6	Peak	Horizontal
*	14129.1	33.7	19.6	53.3	88.2	-34.9	Peak	Horizontal
*	10384.0	33.9	14.9	48.8	88.2	-39.4	Peak	Vertical
	11087.8	33.4	16.7	50.1	74.0	-23.9	Peak	Vertical
	11801.8	32.5	17.4	49.9	74.0	-24.1	Peak	Vertical
*	14134.2	32.3	19.7	52.0	88.2	-36.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10248.0	34.0	14.1	48.1	88.2	-40.1	Peak	Horizontal
	11422.7	33.6	17.2	50.8	74.0	-23.2	Peak	Horizontal
	11699.8	33.0	17.4	50.4	74.0	-23.6	Peak	Horizontal
*	14118.9	33.3	19.4	52.7	88.2	-35.5	Peak	Horizontal
*	10263.3	34.0	14.3	48.3	88.2	-39.9	Peak	Vertical
	11077.6	33.6	16.6	50.2	74.0	-23.8	Peak	Vertical
	11670.9	32.7	17.4	50.1	74.0	-23.9	Peak	Vertical
*	14197.1	32.9	19.4	52.3	88.2	-35.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9953.9	35.1	13.5	48.6	88.2	-39.6	Peak	Horizontal
	11082.7	33.8	16.7	50.5	74.0	-23.5	Peak	Horizontal
	11653.9	33.2	17.6	50.8	74.0	-23.2	Peak	Horizontal
*	14207.3	33.2	19.4	52.6	88.2	-35.6	Peak	Horizontal
*	10278.6	34.1	14.5	48.6	88.2	-39.6	Peak	Vertical
	11259.5	32.9	17.0	49.9	74.0	-24.1	Peak	Vertical
	11667.5	33.4	17.4	50.8	74.0	-23.2	Peak	Vertical
*	14008.4	33.1	18.9	52.0	88.2	-36.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10278.6	34.1	14.5	48.6	88.2	-39.6	Peak	Horizontal
	11259.5	32.9	17.0	49.9	74.0	-24.1	Peak	Horizontal
	11667.5	33.4	17.4	50.8	74.0	-23.2	Peak	Horizontal
*	14064.5	33.5	19.1	52.6	88.2	-35.6	Peak	Horizontal
*	9734.6	34.9	13.5	48.4	88.2	-39.8	Peak	Vertical
	11317.3	32.4	17.2	49.6	74.0	-24.4	Peak	Vertical
	12274.4	32.5	17.0	49.5	74.0	-24.5	Peak	Vertical
*	14146.1	33.0	19.7	52.7	88.2	-35.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10300.7	33.9	14.6	48.5	88.2	-39.7	Peak	Horizontal
	11419.3	33.5	17.2	50.7	74.0	-23.3	Peak	Horizontal
	12087.4	32.9	17.0	49.9	74.0	-24.1	Peak	Horizontal
*	14164.8	32.9	19.4	52.3	88.2	-35.9	Peak	Horizontal
*	10278.6	33.6	14.5	48.1	88.2	-40.1	Peak	Vertical
	11480.5	32.6	17.4	50.0	74.0	-24.0	Peak	Vertical
	11812.0	33.2	17.5	50.7	74.0	-23.3	Peak	Vertical
*	13858.8	33.7	18.7	52.4	88.2	-35.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9731.2	35.1	13.5	48.6	88.2	-39.6	Peak	Horizontal
	11103.1	32.9	16.6	49.5	74.0	-24.5	Peak	Horizontal
	11551.9	32.5	17.4	49.9	74.0	-24.1	Peak	Horizontal
*	14173.3	33.5	19.4	52.9	88.2	-35.3	Peak	Horizontal
*	10334.7	33.8	14.7	48.5	88.2	-39.7	Peak	Vertical
	11171.1	33.0	16.9	49.9	74.0	-24.1	Peak	Vertical
	11682.8	33.1	17.3	50.4	74.0	-23.6	Peak	Vertical
*	13977.8	33.8	18.9	52.7	88.2	-35.5	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9724.4	35.5	13.4	48.9	88.2	-39.3	Peak	Horizontal
	11179.6	33.9	16.9	50.8	74.0	-23.2	Peak	Horizontal
	11713.4	32.9	17.5	50.4	74.0	-23.6	Peak	Horizontal
*	14314.4	34.2	19.7	53.9	88.2	-34.3	Peak	Horizontal
*	10200.4	34.2	14.1	48.3	88.2	-39.9	Peak	Vertical
	11421.0	32.8	17.2	50.0	74.0	-24.0	Peak	Vertical
	11900.4	34.2	17.0	51.2	74.0	-22.8	Peak	Vertical
*	14192.0	33.0	19.4	52.4	88.2	-35.8	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9724.4	35.4	13.4	48.8	88.2	-39.4	Peak	Horizontal
	11465.2	33.2	17.3	50.5	74.0	-23.5	Peak	Horizontal
	11864.7	32.8	16.9	49.7	74.0	-24.3	Peak	Horizontal
*	14146.1	33.3	19.7	53.0	88.2	-35.2	Peak	Horizontal
*	10038.9	34.8	13.6	48.4	88.2	-39.8	Peak	Vertical
	11109.9	33.4	16.4	49.8	74.0	-24.2	Peak	Vertical
	11567.2	33.7	17.3	51.0	74.0	-23.0	Peak	Vertical
*	14219.2	33.6	19.4	53.0	88.2	-35.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10355.1	33.3	14.7	48.0	88.2	-40.2	Peak	Horizontal
	11109.9	33.3	16.4	49.7	74.0	-24.3	Peak	Horizontal
	12131.6	32.8	17.1	49.9	74.0	-24.1	Peak	Horizontal
*	14101.9	33.1	19.2	52.3	88.2	-35.9	Peak	Horizontal
*	10059.3	34.6	13.5	48.1	88.2	-40.1	Peak	Vertical
	11164.3	32.8	16.9	49.7	74.0	-24.3	Peak	Vertical
	11670.9	32.9	17.4	50.3	74.0	-23.7	Peak	Vertical
*	14030.5	33.0	19.3	52.3	88.2	-35.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10183.4	34.5	13.8	48.3	88.2	-39.9	Peak	Horizontal
	10868.5	34.3	16.0	50.3	74.0	-23.7	Peak	Horizontal
	11735.5	33.4	17.4	50.8	74.0	-23.2	Peak	Horizontal
*	14185.2	33.6	19.4	53.0	88.2	-35.2	Peak	Horizontal
*	9787.3	35.1	13.3	48.4	88.2	-39.8	Peak	Vertical
	11400.6	32.7	17.3	50.0	74.0	-24.0	Peak	Vertical
	11925.9	33.0	17.0	50.0	74.0	-24.0	Peak	Vertical
*	14039.0	33.3	19.4	52.7	88.2	-35.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10037.2	34.2	13.6	47.8	88.2	-40.4	Peak	Horizontal
	11334.3	33.0	17.3	50.3	74.0	-23.7	Peak	Horizontal
	11728.7	33.2	17.5	50.7	74.0	-23.3	Peak	Horizontal
*	14200.5	33.7	19.4	53.1	88.2	-35.1	Peak	Horizontal
*	10346.6	33.6	14.7	48.3	88.2	-39.9	Peak	Vertical
	11155.8	34.9	16.6	51.5	74.0	-22.5	Peak	Vertical
	12191.1	32.8	17.3	50.1	74.0	-23.9	Peak	Vertical
*	14033.9	32.7	19.4	52.1	88.2	-36.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9673.4	33.1	13.0	46.1	88.2	-42.1	Peak	Horizontal
*	10208.9	32.0	14.1	46.1	88.2	-42.1	Peak	Horizontal
	11223.8	30.3	16.6	46.9	74.0	-27.1	Peak	Horizontal
	11568.9	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
*	9906.3	31.7	13.4	45.1	88.2	-43.1	Peak	Vertical
*	10431.6	31.9	15.0	46.9	88.2	-41.3	Peak	Vertical
	11395.5	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
	11795.0	29.9	17.4	47.3	74.0	-26.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10219.1	33.7	14.1	47.8	88.2	-40.4	Peak	Horizontal
	11125.2	33.5	16.2	49.7	74.0	-24.3	Peak	Horizontal
	11652.2	32.5	17.6	50.1	74.0	-23.9	Peak	Horizontal
*	13724.5	33.3	18.5	51.8	88.2	-36.4	Peak	Horizontal
*	10129.0	33.6	13.8	47.4	88.2	-40.8	Peak	Vertical
	10945.0	33.8	16.1	49.9	74.0	-24.1	Peak	Vertical
	11650.5	32.2	17.6	49.8	74.0	-24.2	Peak	Vertical
*	14022.0	32.5	19.3	51.8	88.2	-36.4	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10353.4	33.4	14.7	48.1	88.2	-40.1	Peak	Horizontal
	11514.5	33.1	17.2	50.3	74.0	-23.7	Peak	Horizontal
	11813.7	32.3	17.5	49.8	74.0	-24.2	Peak	Horizontal
*	14129.1	33.6	19.6	53.2	88.2	-35.0	Peak	Horizontal
*	10494.5	33.4	15.0	48.4	88.2	-39.8	Peak	Vertical
	10997.7	32.9	16.5	49.4	74.0	-24.6	Peak	Vertical
	11490.7	32.7	17.5	50.2	74.0	-23.8	Peak	Vertical
*	14210.7	34.6	19.4	54.0	88.2	-34.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10394.2	33.8	14.8	48.6	88.2	-39.6	Peak	Horizontal
	11417.6	32.8	17.2	50.0	74.0	-24.0	Peak	Horizontal
	11948.0	32.9	17.0	49.9	74.0	-24.1	Peak	Horizontal
*	14144.4	32.8	19.7	52.5	88.2	-35.7	Peak	Horizontal
*	10530.2	32.9	15.0	47.9	88.2	-40.3	Peak	Vertical
	10892.3	34.4	16.2	50.6	74.0	-23.4	Peak	Vertical
	11640.3	32.4	17.6	50.0	74.0	-24.0	Peak	Vertical
*	13964.2	33.6	19.0	52.6	88.2	-35.6	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10445.2	33.9	15.0	48.9	88.2	-39.3	Peak	Horizontal
	10984.1	33.4	16.3	49.7	74.0	-24.3	Peak	Horizontal
	12388.3	33.3	16.7	50.0	74.0	-24.0	Peak	Horizontal
*	14147.8	33.1	19.6	52.7	88.2	-35.5	Peak	Horizontal
*	9714.2	34.7	13.4	48.1	88.2	-40.1	Peak	Vertical
	11507.7	33.1	17.3	50.4	74.0	-23.6	Peak	Vertical
	11885.1	33.0	17.0	50.0	74.0	-24.0	Peak	Vertical
*	14154.6	32.9	19.4	52.3	88.2	-35.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10035.5	34.6	13.6	48.2	88.2	-40.0	Peak	Horizontal
	11385.3	33.5	17.2	50.7	74.0	-23.3	Peak	Horizontal
	12138.4	33.1	17.0	50.1	74.0	-23.9	Peak	Horizontal
*	14112.1	33.4	19.3	52.7	88.2	-35.5	Peak	Horizontal
*	9821.3	34.1	13.4	47.5	88.2	-40.7	Peak	Vertical
*	10353.4	33.9	14.7	48.6	88.2	-39.6	Peak	Vertical
	11395.5	32.7	17.3	50.0	74.0	-24.0	Peak	Vertical
	12192.8	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10135.8	34.2	13.7	47.9	88.2	-40.3	Peak	Horizontal
	11334.3	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	11699.8	32.5	17.4	49.9	74.0	-24.1	Peak	Horizontal
*	14035.6	32.4	19.4	51.8	88.2	-36.4	Peak	Horizontal
*	10013.4	34.6	13.4	48.0	88.2	-40.2	Peak	Vertical
	11154.1	33.2	16.6	49.8	74.0	-24.2	Peak	Vertical
	12233.6	32.8	17.1	49.9	74.0	-24.1	Peak	Vertical
*	13625.9	33.7	18.5	52.2	88.2	-36.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9880.8	33.8	13.5	47.3	88.2	-40.9	Peak	Horizontal
	11268.0	32.1	16.9	49.0	74.0	-25.0	Peak	Horizontal
	12048.3	32.8	16.8	49.6	74.0	-24.4	Peak	Horizontal
*	13960.8	34.2	18.9	53.1	88.2	-35.1	Peak	Horizontal
*	10268.4	33.6	14.3	47.9	88.2	-40.3	Peak	Vertical
	11516.2	33.2	17.2	50.4	74.0	-23.6	Peak	Vertical
	11970.1	32.9	16.8	49.7	74.0	-24.3	Peak	Vertical
*	14214.1	32.8	19.4	52.2	88.2	-36.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9367.4	37.4	13.3	50.7	74.0	-23.3	Peak	Horizontal
*	10443.5	33.8	15.0	48.8	88.2	-39.4	Peak	Horizontal
	11701.5	32.9	17.4	50.3	74.0	-23.7	Peak	Horizontal
*	14278.7	33.4	19.5	52.9	88.2	-35.3	Peak	Horizontal
*	10445.2	32.9	15.0	47.9	88.2	-40.3	Peak	Vertical
	11400.6	32.8	17.3	50.1	74.0	-23.9	Peak	Vertical
	11660.7	31.8	17.6	49.4	74.0	-24.6	Peak	Vertical
*	14142.7	32.0	19.8	51.8	88.2	-36.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10455.4	31.4	15.0	46.4	88.2	-41.8	Peak	Horizontal
	11103.1	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	12376.4	31.5	16.9	48.4	74.0	-25.6	Peak	Horizontal
*	14142.7	30.8	19.8	50.6	88.2	-37.6	Peak	Horizontal
*	10440.1	32.2	15.0	47.2	88.2	-41.0	Peak	Vertical
	11400.6	29.9	17.3	47.2	74.0	-26.8	Peak	Vertical
	11602.9	31.8	16.9	48.7	74.0	-25.3	Peak	Vertical
*	14141.0	30.7	19.8	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9647.9	32.8	13.0	45.8	88.2	-42.4	Peak	Horizontal
	11371.7	30.6	17.1	47.7	74.0	-26.3	Peak	Horizontal
	11813.7	30.9	17.5	48.4	74.0	-25.6	Peak	Horizontal
*	14282.1	31.1	19.5	50.6	88.2	-37.6	Peak	Horizontal
*	10273.5	32.0	14.4	46.4	88.2	-41.8	Peak	Vertical
	11478.8	31.1	17.4	48.5	74.0	-25.5	Peak	Vertical
	11536.6	31.4	17.3	48.7	74.0	-25.3	Peak	Vertical
*	14134.2	30.9	19.7	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10385.7	32.0	14.9	46.9	88.2	-41.3	Peak	Horizontal
	11623.3	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	11704.9	30.5	17.4	47.9	74.0	-26.1	Peak	Horizontal
*	14013.5	28.5	19.0	47.5	88.2	-40.7	Peak	Horizontal
*	9848.5	32.5	13.3	45.8	88.2	-42.4	Peak	Vertical
	11106.5	30.9	16.5	47.4	74.0	-26.6	Peak	Vertical
	11662.4	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical
*	14124.0	30.7	19.5	50.2	88.2	-38.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10394.2	31.7	14.8	46.5	88.2	-41.7	Peak	Horizontal
	11626.7	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	12418.9	32.7	16.2	48.9	74.0	-25.1	Peak	Horizontal
*	14260.0	31.5	19.4	50.9	88.2	-37.3	Peak	Horizontal
*	10190.2	31.9	14.0	45.9	88.2	-42.3	Peak	Vertical
	11653.9	30.6	17.6	48.2	74.0	-25.8	Peak	Vertical
	12233.6	31.2	17.1	48.3	74.0	-25.7	Peak	Vertical
*	14144.4	30.5	19.7	50.2	88.2	-38.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10411.2	31.9	14.9	46.8	88.2	-41.4	Peak	Horizontal
	10882.1	31.9	16.1	48.0	74.0	-26.0	Peak	Horizontal
	11740.6	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
*	14159.7	30.4	19.4	49.8	88.2	-38.4	Peak	Horizontal
*	10429.9	31.4	15.0	46.4	88.2	-41.8	Peak	Vertical
	11392.1	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
	11574.0	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
*	14193.7	30.8	19.4	50.2	88.2	-38.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10360.2	31.8	14.7	46.5	88.2	-41.7	Peak	Horizontal
	11567.2	30.2	17.3	47.5	74.0	-26.5	Peak	Horizontal
	12026.2	31.2	16.6	47.8	74.0	-26.2	Peak	Horizontal
*	14135.9	30.4	19.7	50.1	88.2	-38.1	Peak	Horizontal
*	10304.1	31.6	14.7	46.3	88.2	-41.9	Peak	Vertical
	11482.2	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical
	11727.0	30.5	17.6	48.1	74.0	-25.9	Peak	Vertical
*	14151.2	30.5	19.5	50.0	88.2	-38.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10321.1	31.8	14.7	46.5	88.2	-41.7	Peak	Horizontal
	11096.3	31.3	16.7	48.0	74.0	-26.0	Peak	Horizontal
	11613.1	32.0	17.1	49.1	74.0	-24.9	Peak	Horizontal
*	14268.5	32.3	19.5	51.8	88.2	-36.4	Peak	Horizontal
*	10377.2	31.7	14.8	46.5	88.2	-41.7	Peak	Vertical
	11461.8	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
	11771.2	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical
*	13566.4	31.9	18.4	50.3	88.2	-37.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-10
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10127.3	32.4	13.7	46.1	88.2	-42.1	Peak	Horizontal
	11242.5	30.7	17.0	47.7	74.0	-26.3	Peak	Horizontal
	11691.3	30.6	17.3	47.9	74.0	-26.1	Peak	Horizontal
*	13962.5	31.0	19.0	50.0	88.2	-38.2	Peak	Horizontal
*	10278.6	31.9	14.5	46.4	88.2	-41.8	Peak	Vertical
	11370.0	30.1	17.1	47.2	74.0	-26.8	Peak	Vertical
	12196.2	29.9	17.4	47.3	74.0	-26.7	Peak	Vertical
*	13979.5	31.0	18.9	49.9	88.2	-38.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10103.5	31.9	13.5	45.4	88.2	-42.8	Peak	Horizontal
	11240.8	30.2	16.9	47.1	74.0	-26.9	Peak	Horizontal
	11653.9	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
*	13744.9	30.4	18.2	48.6	88.2	-39.6	Peak	Horizontal
*	9977.7	32.6	13.5	46.1	88.2	-42.1	Peak	Vertical
	11266.3	29.5	16.9	46.4	74.0	-27.6	Peak	Vertical
	11971.8	30.3	16.8	47.1	74.0	-26.9	Peak	Vertical
*	14056.0	30.1	19.3	49.4	88.2	-38.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10219.1	31.2	14.1	45.3	88.2	-42.9	Peak	Horizontal
	11291.8	30.1	16.7	46.8	74.0	-27.2	Peak	Horizontal
	11864.7	30.3	16.9	47.2	74.0	-26.8	Peak	Horizontal
*	13785.7	30.8	18.3	49.1	88.2	-39.1	Peak	Horizontal
*	10134.1	32.3	13.7	46.0	88.2	-42.2	Peak	Vertical
	10989.2	32.1	16.4	48.5	74.0	-25.5	Peak	Vertical
	12039.8	30.6	16.7	47.3	74.0	-26.7	Peak	Vertical
*	13872.4	31.3	19.0	50.3	88.2	-37.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9952.2	32.5	13.5	46.0	88.2	-42.2	Peak	Horizontal
	11400.6	30.3	17.3	47.6	74.0	-26.4	Peak	Horizontal
	12356.0	29.9	17.0	46.9	74.0	-27.1	Peak	Horizontal
*	14107.0	30.1	19.3	49.4	88.2	-38.8	Peak	Horizontal
*	9734.6	32.7	13.5	46.2	88.2	-42.0	Peak	Vertical
*	10144.3	31.5	13.6	45.1	88.2	-43.1	Peak	Vertical
	11077.6	31.2	16.6	47.8	74.0	-26.2	Peak	Vertical
	11886.8	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10011.7	32.7	13.4	46.1	88.2	-42.1	Peak	Horizontal
	11240.8	31.0	16.9	47.9	74.0	-26.1	Peak	Horizontal
	12141.8	30.2	16.9	47.1	74.0	-26.9	Peak	Horizontal
*	13790.8	30.6	18.2	48.8	88.2	-39.4	Peak	Horizontal
*	9993.0	32.2	13.3	45.5	88.2	-42.7	Peak	Vertical
	11247.6	30.0	17.1	47.1	74.0	-26.9	Peak	Vertical
	12271.0	30.1	17.0	47.1	74.0	-26.9	Peak	Vertical
*	13029.2	30.3	17.2	47.5	88.2	-40.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9940.3	32.6	13.4	46.0	88.2	-42.2	Peak	Horizontal
*	10191.9	32.0	14.0	46.0	88.2	-42.2	Peak	Horizontal
	11390.4	30.0	17.3	47.3	74.0	-26.7	Peak	Horizontal
	12048.3	30.6	16.8	47.4	74.0	-26.6	Peak	Horizontal
*	9831.5	32.3	13.3	45.6	88.2	-42.6	Peak	Vertical
	10792.0	31.0	15.7	46.7	74.0	-27.3	Peak	Vertical
	11687.9	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
*	13724.5	30.1	18.5	48.6	88.2	-39.6	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9736.3	33.0	13.5	46.5	88.2	-41.7	Peak	Horizontal
*	10271.8	31.6	14.4	46.0	88.2	-42.2	Peak	Horizontal
	11506.0	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
	11939.5	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
*	9930.1	33.0	13.4	46.4	88.2	-41.8	Peak	Vertical
	11308.8	30.1	17.0	47.1	74.0	-26.9	Peak	Vertical
	11902.1	29.7	17.0	46.7	74.0	-27.3	Peak	Vertical
*	13891.1	30.3	18.8	49.1	88.2	-39.1	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9904.6	32.1	13.4	45.5	88.2	-42.7	Peak	Horizontal
*	10297.3	31.0	14.6	45.6	88.2	-42.6	Peak	Horizontal
	11256.1	29.9	17.0	46.9	74.0	-27.1	Peak	Horizontal
	11798.4	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
*	9721.0	32.8	13.4	46.2	88.2	-42.0	Peak	Vertical
*	10288.8	32.4	14.6	47.0	88.2	-41.2	Peak	Vertical
	11099.7	30.8	16.6	47.4	74.0	-26.6	Peak	Vertical
	11640.3	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10030.4	32.6	13.5	46.1	88.2	-42.1	Peak	Horizontal
*	10285.4	31.9	14.6	46.5	88.2	-41.7	Peak	Horizontal
	11482.2	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
	12187.7	31.5	17.3	48.8	74.0	-25.2	Peak	Horizontal
*	9664.9	33.1	13.0	46.1	88.2	-42.1	Peak	Vertical
*	10122.2	32.1	13.7	45.8	88.2	-42.4	Peak	Vertical
	11245.9	31.2	17.0	48.2	74.0	-25.8	Peak	Vertical
	11728.7	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9998.1	32.7	13.3	46.0	88.2	-42.2	Peak	Horizontal
	11336.0	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
	11827.3	30.3	17.4	47.7	74.0	-26.3	Peak	Horizontal
*	13880.9	30.4	19.0	49.4	88.2	-38.8	Peak	Horizontal
*	10028.7	33.2	13.5	46.7	88.2	-41.5	Peak	Vertical
	11183.0	30.3	16.9	47.2	74.0	-26.8	Peak	Vertical
	12104.4	30.3	17.2	47.5	74.0	-26.5	Peak	Vertical
*	14084.9	32.9	19.0	51.9	88.2	-36.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10055.9	32.3	13.5	45.8	88.2	-42.4	Peak	Horizontal
	11060.6	32.0	16.1	48.1	74.0	-25.9	Peak	Horizontal
	12136.7	31.6	17.0	48.6	74.0	-25.4	Peak	Horizontal
*	14067.9	31.7	19.1	50.8	88.2	-37.4	Peak	Horizontal
*	10006.6	32.9	13.3	46.2	88.2	-42.0	Peak	Vertical
	11217.0	31.1	16.5	47.6	74.0	-26.4	Peak	Vertical
	12133.3	31.0	17.1	48.1	74.0	-25.9	Peak	Vertical
*	13865.6	30.8	18.9	49.7	88.2	-38.5	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10265.0	31.9	14.3	46.2	88.2	-42.0	Peak	Horizontal
	11239.1	31.4	16.9	48.3	74.0	-25.7	Peak	Horizontal
	11735.5	30.3	17.4	47.7	74.0	-26.3	Peak	Horizontal
*	13904.7	30.6	18.4	49.0	88.2	-39.2	Peak	Horizontal
*	9936.9	32.9	13.4	46.3	88.2	-41.9	Peak	Vertical
	11235.7	30.8	16.9	47.7	74.0	-26.3	Peak	Vertical
	11660.7	30.5	17.6	48.1	74.0	-25.9	Peak	Vertical
*	14008.4	31.5	18.9	50.4	88.2	-37.8	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9935.2	33.4	13.4	46.8	88.2	-41.4	Peak	Horizontal
	11079.3	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	11657.3	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	14047.5	31.0	19.4	50.4	88.2	-37.8	Peak	Horizontal
*	9919.9	32.7	13.4	46.1	88.2	-42.1	Peak	Vertical
	11086.1	30.8	16.7	47.5	74.0	-26.5	Peak	Vertical
	11805.2	29.0	17.5	46.5	74.0	-27.5	Peak	Vertical
*	13892.8	30.1	18.7	48.8	88.2	-39.4	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9999.8	33.1	13.3	46.4	88.2	-41.8	Peak	Horizontal
	11332.6	30.3	17.3	47.6	74.0	-26.4	Peak	Horizontal
	11961.6	30.4	16.9	47.3	74.0	-26.7	Peak	Horizontal
*	13923.4	31.7	18.3	50.0	88.2	-38.2	Peak	Horizontal
*	10018.5	32.4	13.4	45.8	88.2	-42.4	Peak	Vertical
	11262.9	30.9	17.0	47.9	74.0	-26.1	Peak	Vertical
	11791.6	30.0	17.4	47.4	74.0	-26.6	Peak	Vertical
*	13799.3	30.9	18.1	49.0	88.2	-39.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9948.8	33.5	13.5	47.0	88.2	-41.2	Peak	Horizontal
	11540.0	30.3	17.3	47.6	74.0	-26.4	Peak	Horizontal
	12221.7	30.2	17.2	47.4	74.0	-26.6	Peak	Horizontal
*	13948.9	30.6	18.8	49.4	88.2	-38.8	Peak	Horizontal
*	10064.4	32.6	13.5	46.1	88.2	-42.1	Peak	Vertical
	11201.7	30.8	16.4	47.2	74.0	-26.8	Peak	Vertical
	11689.6	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
*	14045.8	30.7	19.4	50.1	88.2	-38.1	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9955.6	32.9	13.5	46.4	88.2	-41.8	Peak	Horizontal
	11053.8	31.8	16.0	47.8	74.0	-26.2	Peak	Horizontal
	11660.7	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	14052.6	29.9	19.3	49.2	88.2	-39.0	Peak	Horizontal
*	9879.1	32.8	13.5	46.3	88.2	-41.9	Peak	Vertical
	11099.7	31.2	16.6	47.8	74.0	-26.2	Peak	Vertical
	11902.1	30.5	17.0	47.5	74.0	-26.5	Peak	Vertical
*	14006.7	30.3	18.9	49.2	88.2	-39.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

EUT ID	20240604Sample#02	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2024-07-31
Test Mode	802.11be-EHT40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9913.1	32.4	13.4	45.8	88.2	-42.4	Peak	Horizontal
	11160.9	31.3	16.8	48.1	74.0	-25.9	Peak	Horizontal
	12141.8	30.3	16.9	47.2	74.0	-26.8	Peak	Horizontal
*	13736.4	31.0	18.4	49.4	88.2	-38.8	Peak	Horizontal
*	10023.6	33.5	13.5	47.0	88.2	-41.2	Peak	Vertical
	11240.8	31.5	16.9	48.4	74.0	-25.6	Peak	Vertical
	11946.3	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical
*	14112.1	31.0	19.3	50.3	88.2	-37.9	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								