



FCC Test Report

Report No: FCS202509105W01

Issued for

Applicant:	Shanghai Sishun International Trade Co., Ltd
Address:	Room JT2388, 4th Floor, Building 2, No. 599, Wanzhen Road, Zhenxin New Village Sub-district, Jiading District, Shanghai
Product Name:	Handheld Thermal Imager
Brand Name:	VEVOR
Model Name:	SC240M PRO
Series Model:	N/A
FCC ID:	2BQTU-SC240M-PRO
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: Shanghai Sishun International Trade Co., Ltd
Address.....: Room JT2388, 4th Floor, Building 2, No. 599, Wanzhen Road, Zhenxin New Village Sub-district, Jiading District, Shanghai
Manufacture's Name: Shanghai Sishun International Trade Co., Ltd
Address.....: Room JT2388, 4th Floor, Building 2, No. 599, Wanzhen Road, Zhenxin New Village Sub-district, Jiading District, Shanghai

Product Description

Product Name: Handheld Thermal Imager
Brand Name: VEVOR
Model Name.....: SC240M PRO
Series Model: N/A
Test Standards: CFR 47 FCC Part15E section 15.407
ANSI C63.10:2020
Test Procedure.....: KDB 789033 D02 General UNII Test procedures New Rules 02

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test

Date (s) of performance of tests : Sep 05. 2025 ~ Oct 10. 2025

Date of Issue.....: Oct 10. 2025

Test Result: Pass

Tested by

:

Mike Tan

(Mike Tan)

Reviewed by

:

Nels Wang

(Nels Wang)

Approved by

:

Jack Wang

(Jack Wang)



Table of contents

Revision History	4
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST Radiation Test equipment	12
3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth	14
3.1 Limit	14
3.2 Test Procedure	14
3.3 3.3 Test setup	14
3.4 Test results	15
3.4 Original Test Data	16
4 CONDUCTED OUTPUT POWER	30
4.1 limit	30
4.2 test procedure	30
4.3 TEST SETUP	30
4.4 test results	31
5. POWER SPECTRAL DENSITY	32
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 TEST SETUP	33
5.4 TEST RESULTS	33
5.5 original test data	34
6. FREQUENCY STABILITY MEASUREMENT	41
6.1 LIMIT	41
6.2 TEST PROCEDURE	41
6.3 TEST SETUP	41
6.4 TEST RESULTS	42
7. Conducted spurious emission and Band edge	43
7.1 LIMIT	43
7.2 TEST PROCEDURE	43
7.3 TEST SETUP	43
7.4 TEST RESULTS	44



8. Duty Cycle	57
8.1 TEST REQUIREMENT	57
8.2 TEST PROCEDURE	57
8.3 TEST SETUP	57
8.4 TEST RESULTS	58
9 RADIATED EMISSION MEASUREMENT	59
9.1 RADIATED EMISSION LIMITS	59
9.2 TEST PROCEDURE	60
9.3 TESTSETUP	61
9.4. TEST RESULTS	63
10 CONDUCTED EMISSION TEST	91
10.1POWER LINE CONDUCTED EMISSION LIMITS	91
10.2 TEST PROCEDURE	92
10.3 TEST SETUP	92
10 .4 TEST RESULT	93
11. ANTENNA REQUIREMENT	95
11.1 STANDARD REQUIREMENT	95
11.2 RESULT	95

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	Oct 10. 2025	FCS202509105W01	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(9)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
26dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
99%Occupied bandwidth	\	PASS
6dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407(e)	N/A
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407(a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407(g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407(b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407(b)	PASS
Remark:		

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 9KHz-30MHz	± 5.2 dB
6	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions, radiated 1GHz -18GHz	± 4.66 dB
8	All emissions, radiated 18GHz -40GHz	± 4.31 dB
9	PSD	± 1.24 dB
10	Occupied bandwidth	± 0.3 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Handheld Thermal Imager
Trade Name	VEVOR
Model Name	SC240M PRO
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Operation frequency	IEEE 802.11a/n/ac(HT20),n/ac(HT40),ac(HT80) U-NII-1 5150MHz ~5250MHZ
Number of channel	5150MHz ~5250MHZ (7CH)
Modulation:	BRSK/QPSK/16QAM/64QAM/256QAM
Power supply	DC 5V/3A
Battery	DC 3.6V
Hardware version number	V1.0
Software version number	V1.0
Sample type	mobile device
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		


Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	P04	FPC Antenna	N/A	4.35	5G Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Block diagram of EUT configuration for test



Test software: sscom5.13.1

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

For 802.11a/n/ac(HT20)
U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

For 802.11n/ac(HT40)
U-NII-1

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

For 802.11ac(HT80)

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	Xiaomi	AD652G	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2025.08.25	2026.08.24
Signal Analyzer	R&S	FSV40-N	FCS-E012	2025.08.25	2026.08.24
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2025.08.25	2026.08.24
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2025.08.25	2026.08.24
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2025.08.25	2026.08.24
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2025.08.25	2026.08.24
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2025.08.25	2026.08.24
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2025.08.25	2026.08.24
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E005	2025.08.25	2026.08.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2025.08.25	2026.08.24
LISN	R&S	ENV216	FCS-E007	2025.08.25	2026.08.24
LISN	ETS	3810/2NM	FCS-E009	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E008	2025.08.25	2026.08.24

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2025.08.25	2026.08.24
Spectrum Analyzer	Agilent	E4447A	MY50180039	2025.08.25	2026.08.24
Spectrum Analyzer	R&S	FSV-40	101499	2025.08.25	2026.08.24
Power Sensor	Agilent	UX2021XA	FCS-E021	2025.08.25	2026.08.24

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2025.08.25	2026.08.24
Signal Analyzer	R&S	FSV40-N	FCS-E012	2025.08.25	2026.08.24
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2025.08.25	2026.08.24
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2025.08.25	2026.08.24
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2025.08.25	2026.08.24
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2025.08.25	2026.08.24
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2025.08.25	2026.08.24
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2025.08.25	2026.08.24
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E005	2025.08.25	2026.08.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2025.08.25	2026.08.24
LISN	R&S	ENV216	FCS-E007	2025.08.25	2026.08.24
LISN	ETS	3810/2NM	FCS-E009	2025.08.25	2026.08.24
Temperature & Humidity	HTC-1	victor	FCS-E008	2025.08.25	2026.08.24

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2025.08.25	2026.08.24
Spectrum Analyzer	Agilent	E4447A	MY50180039	2025.08.25	2026.08.24
Spectrum Analyzer	R&S	FSV-40	101499	2025.08.25	2026.08.24
Power Sensor	Agilent	UX2021XA	FCS-E021	2025.08.25	2026.08.24

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth

3.1 Limit


FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850

3.2 Test Procedure

The procedure for this method is as follows:

- Set RBW= shall be in the range of 1% to 5% of the emission bandwidth.a)
- Set the VBW>RBW.
- Detector = peak.
- Trace mode= max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission.Compare this with the RBW setting of the instrument, Readjust RBW and repeat measurement asneeded until the RBW/EBW ratio is in the range of 1% to 5%.

- Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB and 6dB relative to the maximum level measured in the fundamental emission.

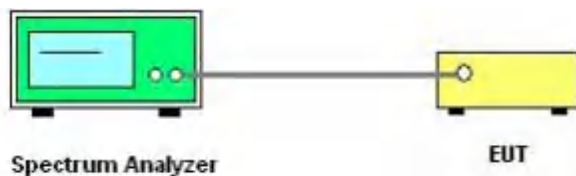


3.3 Test setup

3.4 Test results


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	22.290	25.140	23.910	16.562	16.583	16.520
	802.11n(HT20)	27.990	24.600	24.270	17.623	17.652	17.638
	802.11n(HT40)	43.020	/	42.840	36.265	/	36.148
	802.11ac(HT20)	25.110	25.320	25.110	17.609	17.580	17.542
	802.11ac(HT40)	45.360	/	43.740	36.163	/	36.143
	802.11ac(HT80)	86.040	/	/	75.711	/	/

3.4 Original Test Data


-26dB Bandwidth U-NII-1 11a Low CH 5180MHZ

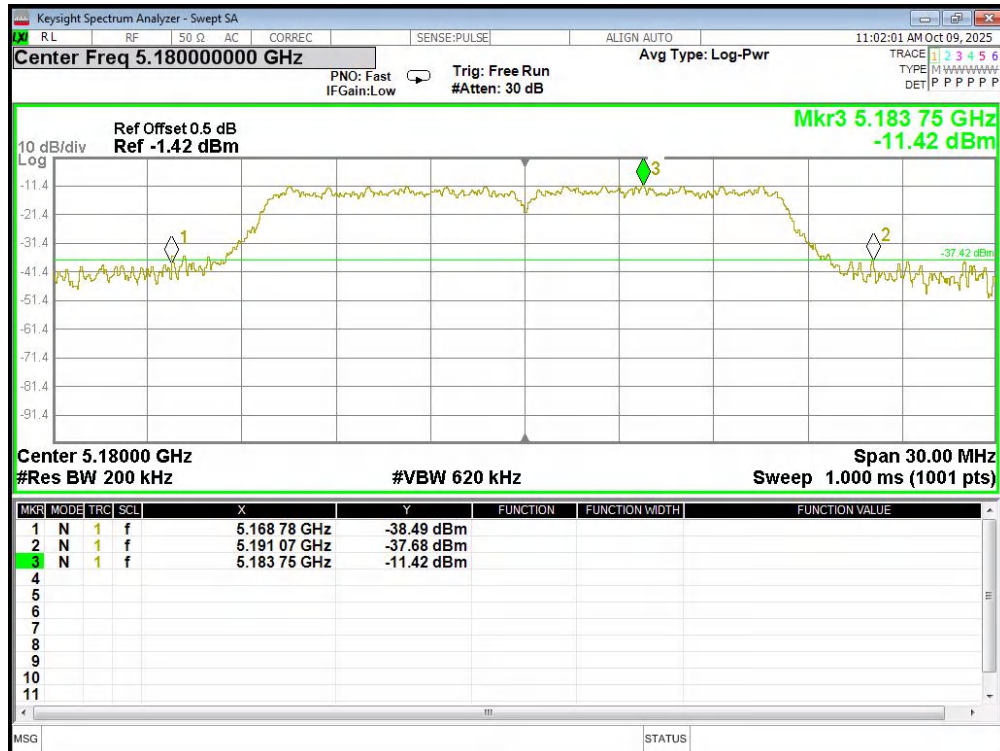


99%OBW Bandwidth U-NII-1 11a Low CH 5180MHZ

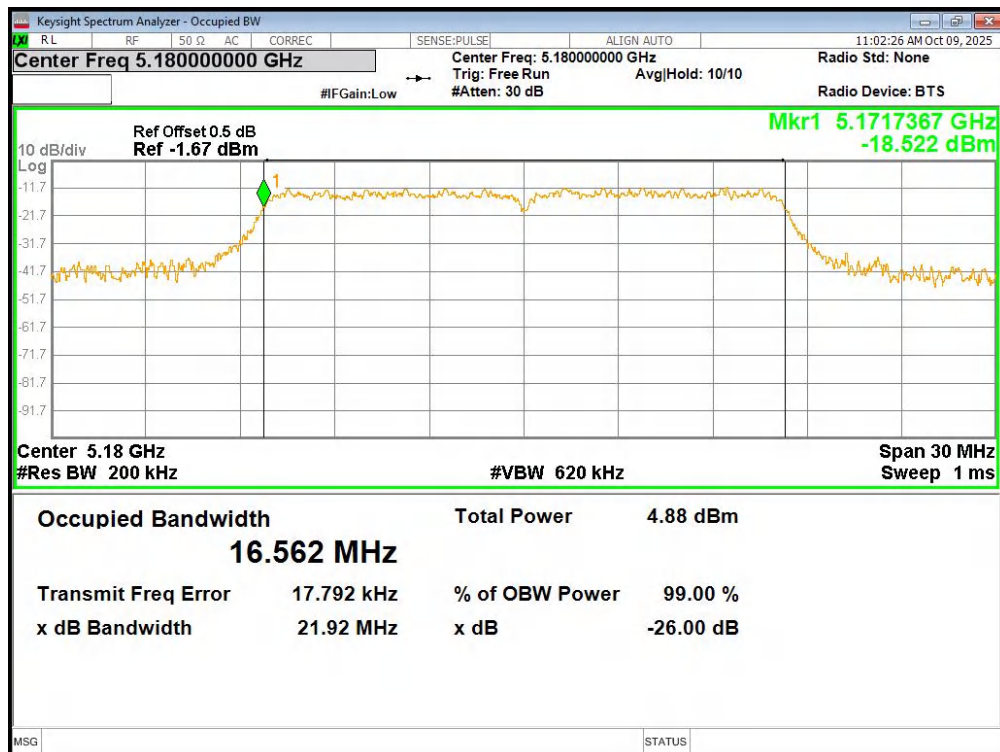


-26dB Bandwidth
U-NII-1 11a Middle CH 5200MHZ

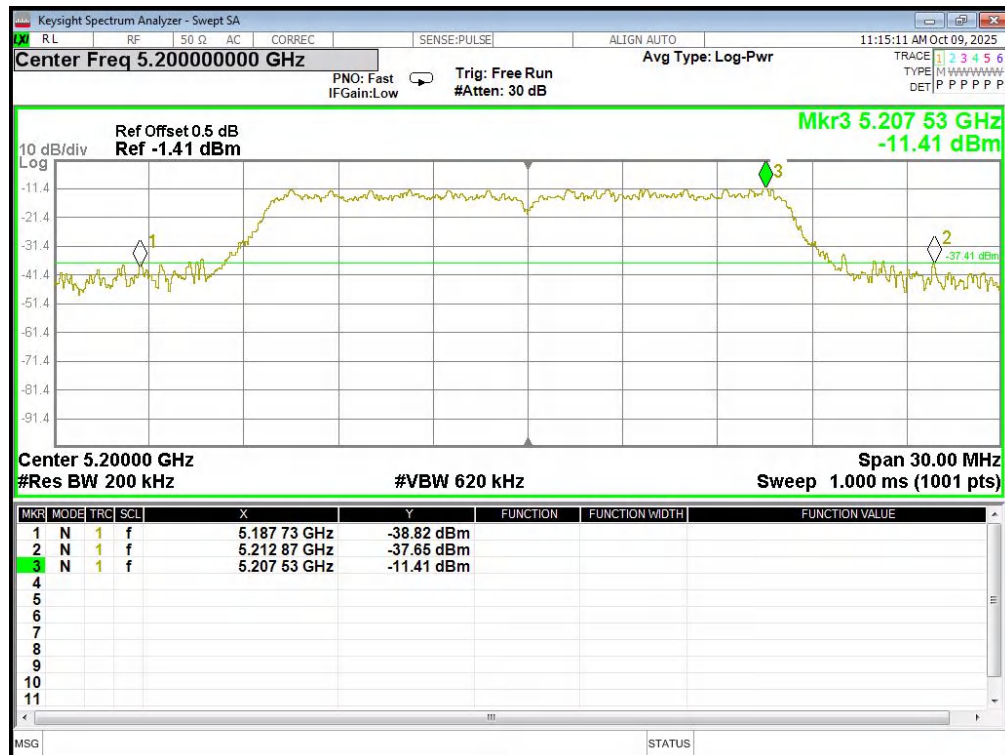


99%OBW Bandwidth
U-NII-1 11a Middle CH 5200MHZ

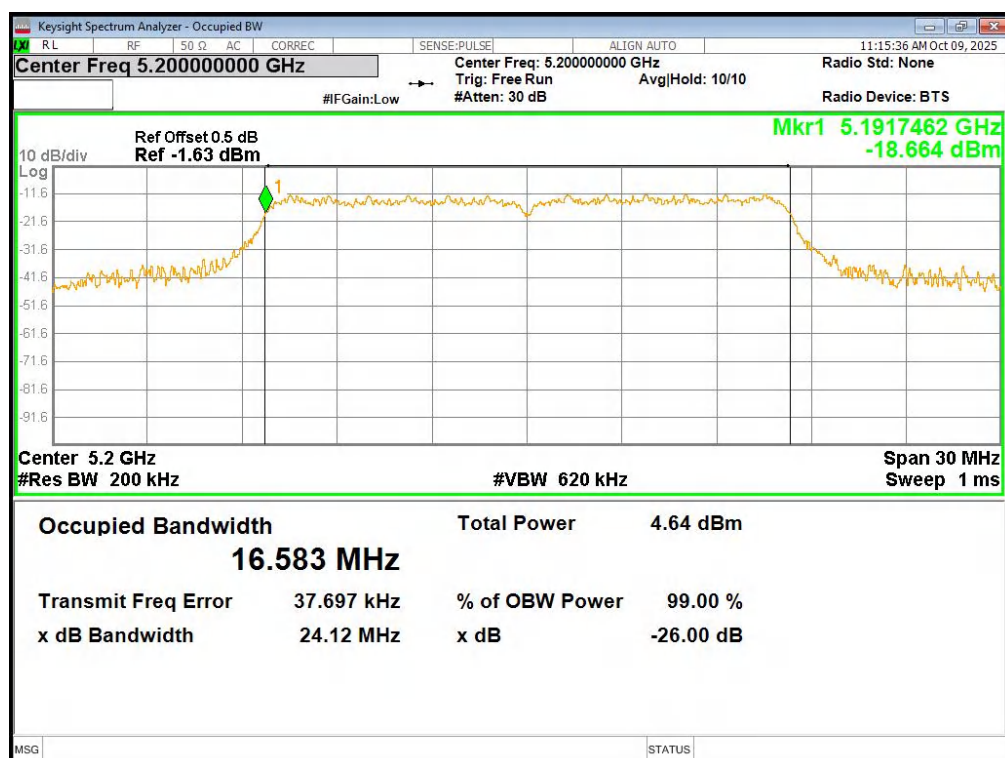


-26dB Bandwidth U-NII-1 11a High CH 5240MHZ

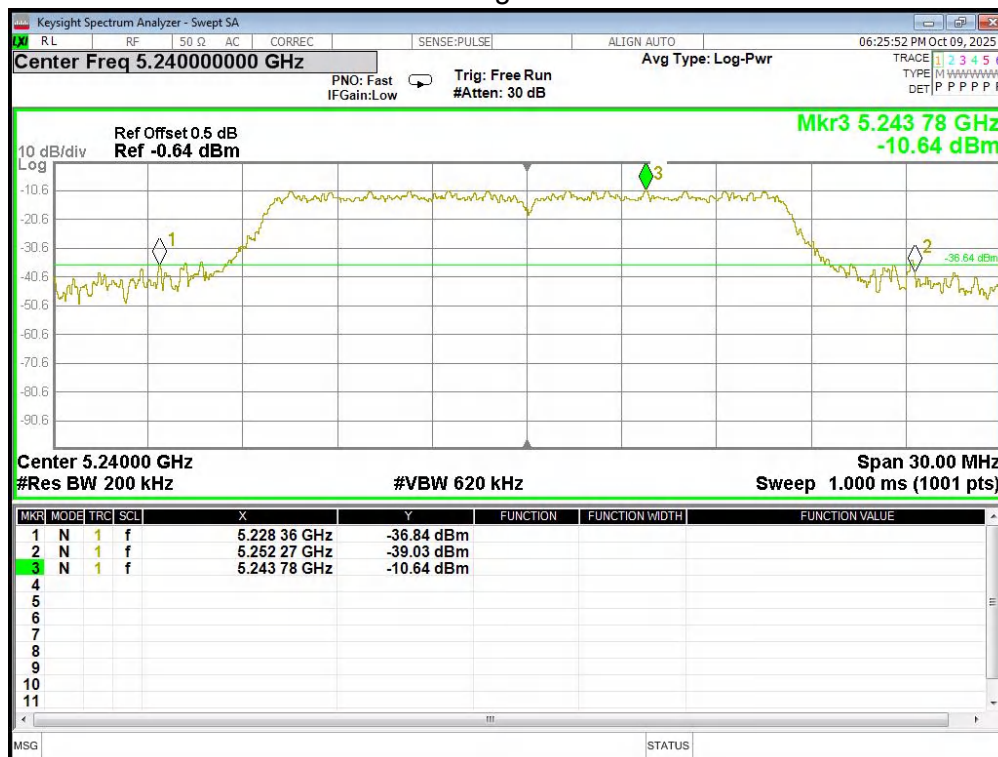


99%OBW Bandwidth U-NII-1 11a High CH 5240MHZ

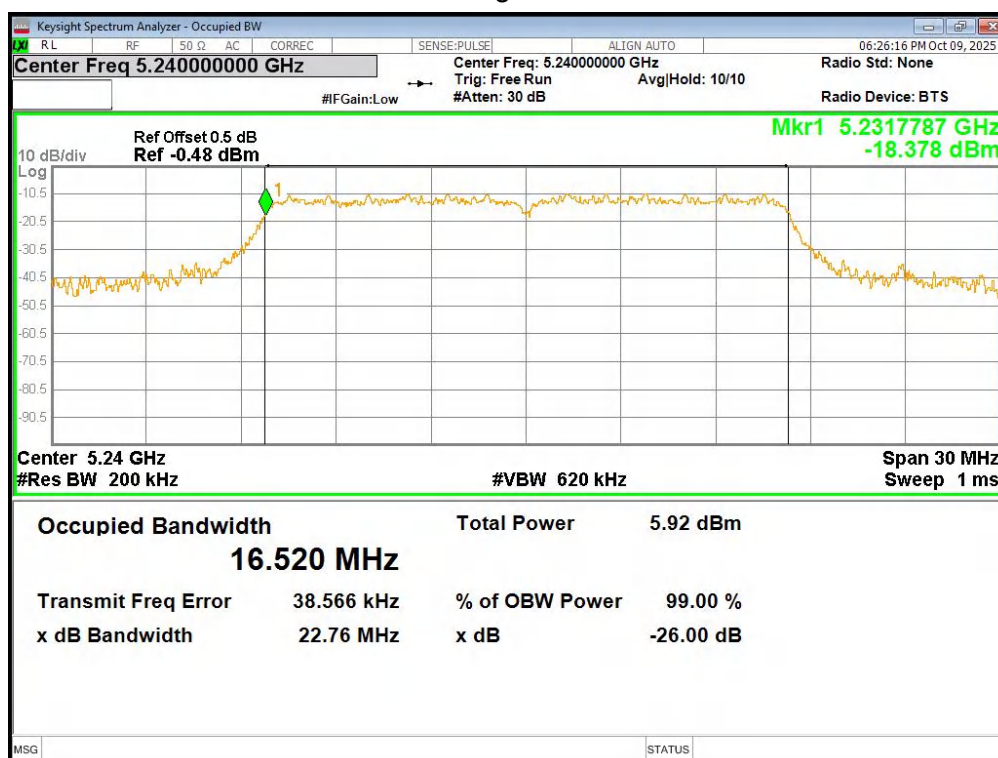


-26dB Bandwidth U-NII-1 11n(HT20) Low CH 5180MHz

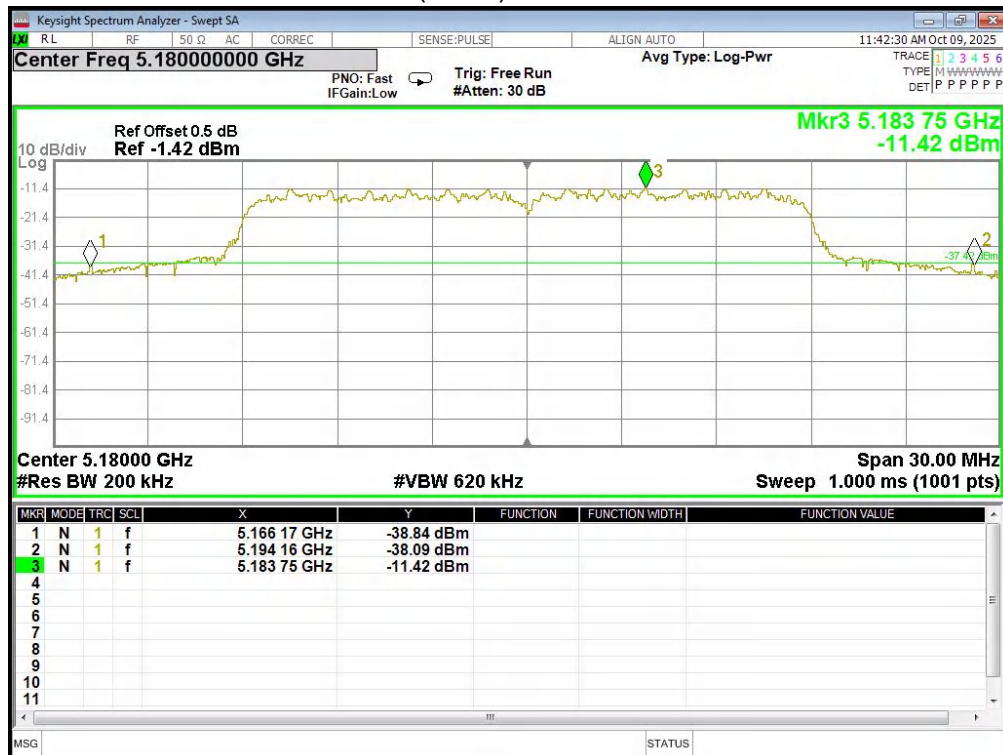


99%OBW Bandwidth U-NII-1 11n(HT20) Low CH 5180MHz

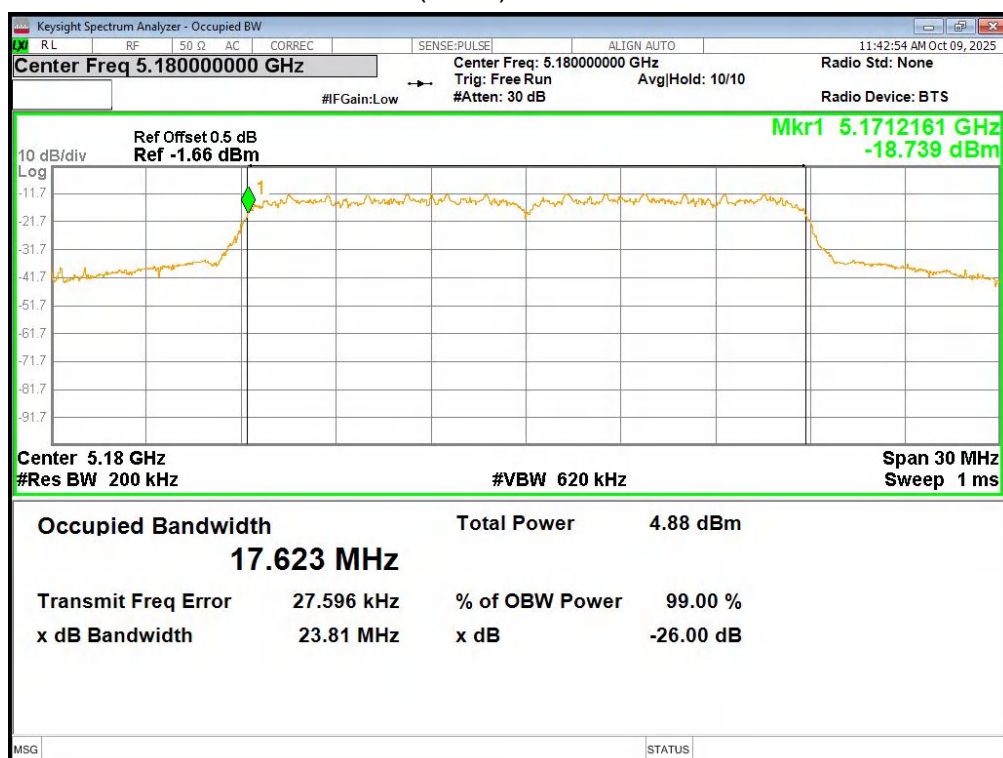


-26dB Bandwidth
U-NII-1 11n(HT20) Middle CH 5200MHZ

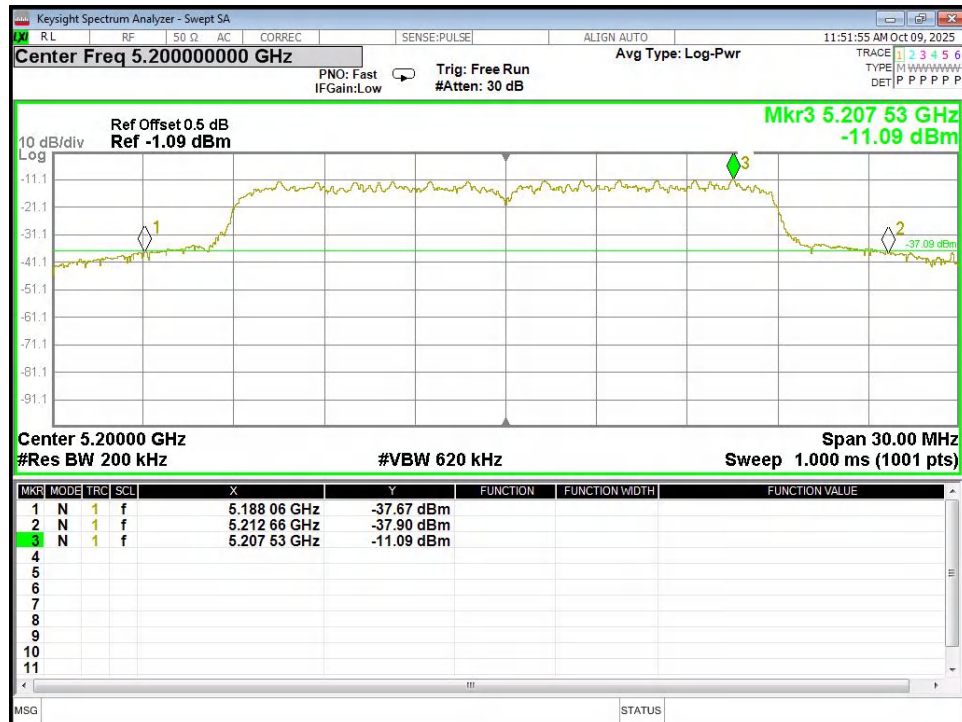


99%OBW Bandwidth
U-NII-1 11n(HT20) Middle CH 5200MHZ

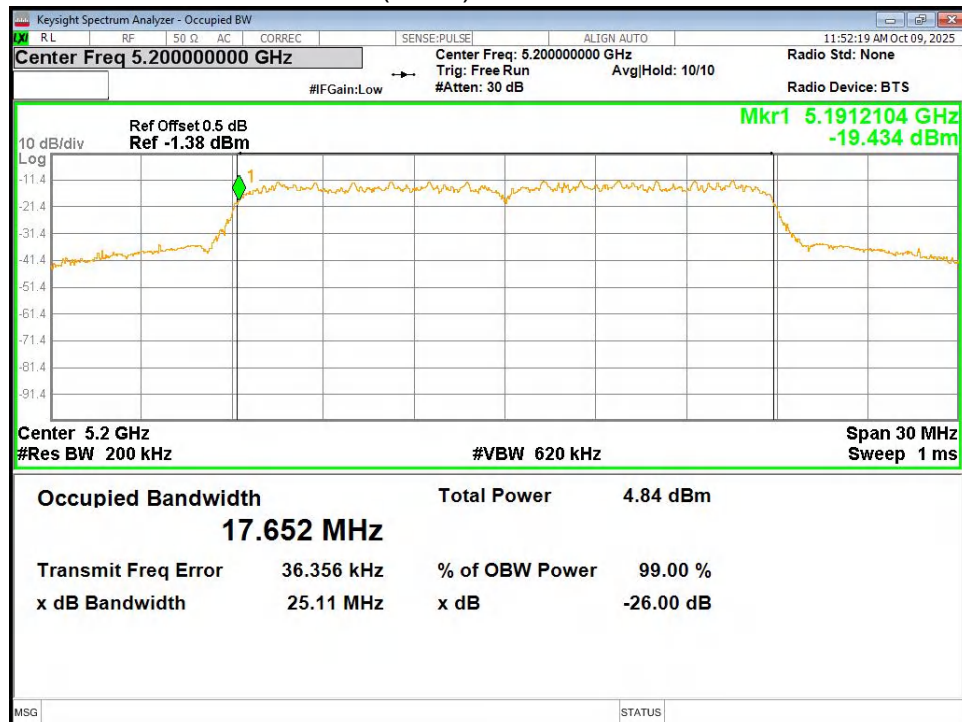


-26dB Bandwidth
U-NII-1 11n(HT20) High CH 5240MHZ

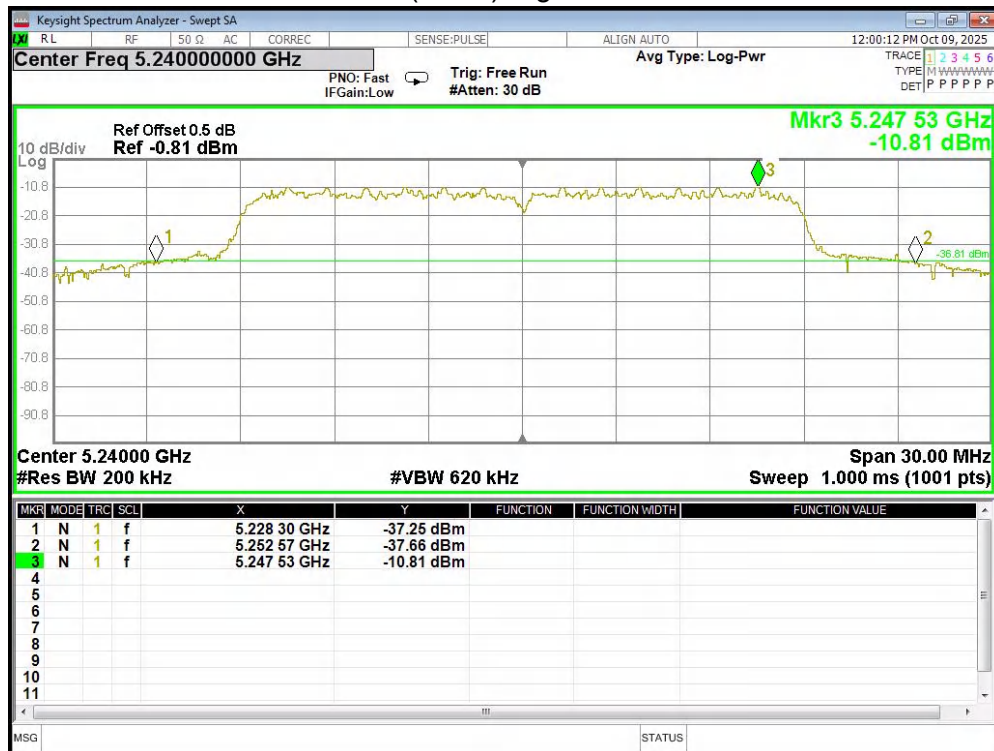


99%OBW Bandwidth
U-NII-1 11n(HT20) High CH 5240MHZ

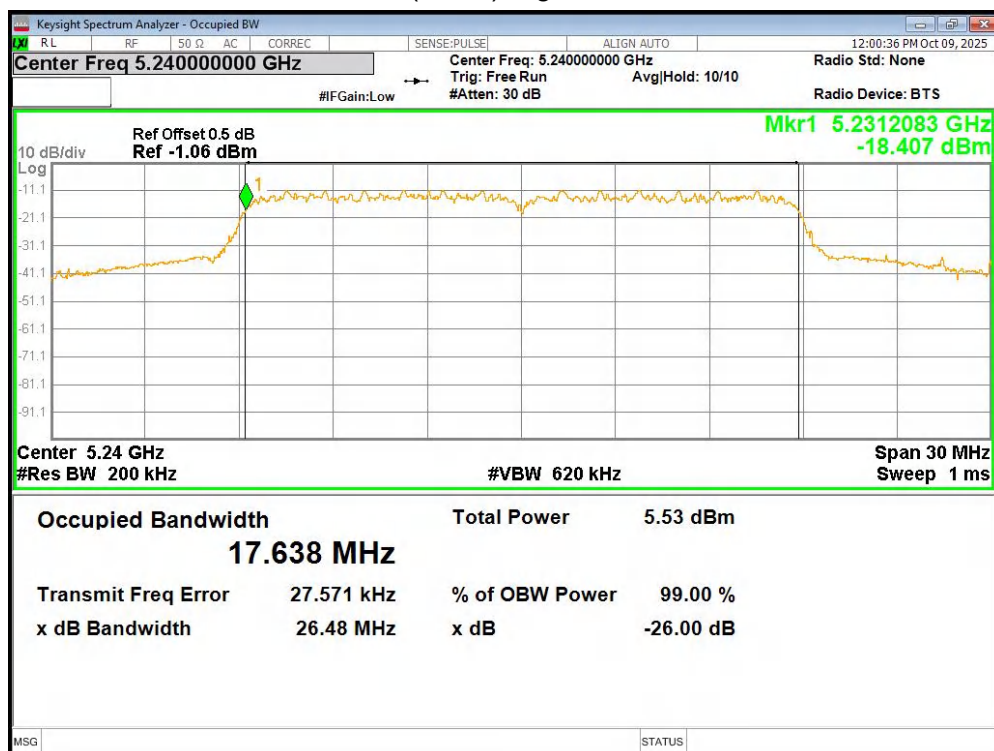

-26dB Bandwidth
U-NII-1 11n(HT40) Low CH 5190MHZ

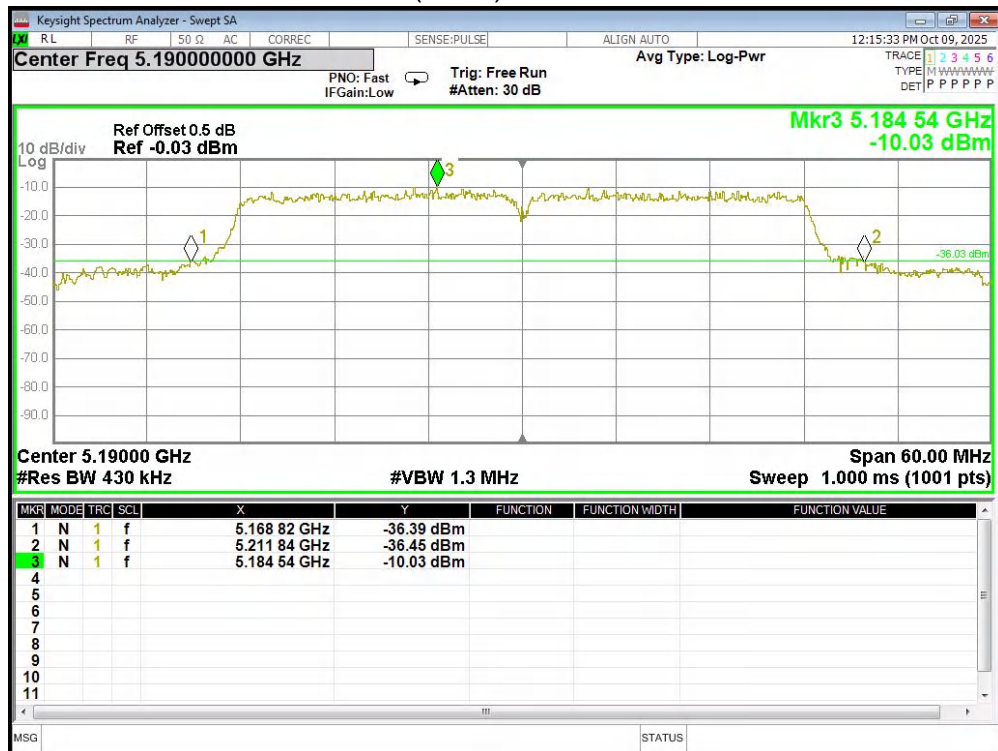


99%OBW Bandwidth
U-NII-1 11n(HT40) Low CH 5190MHZ

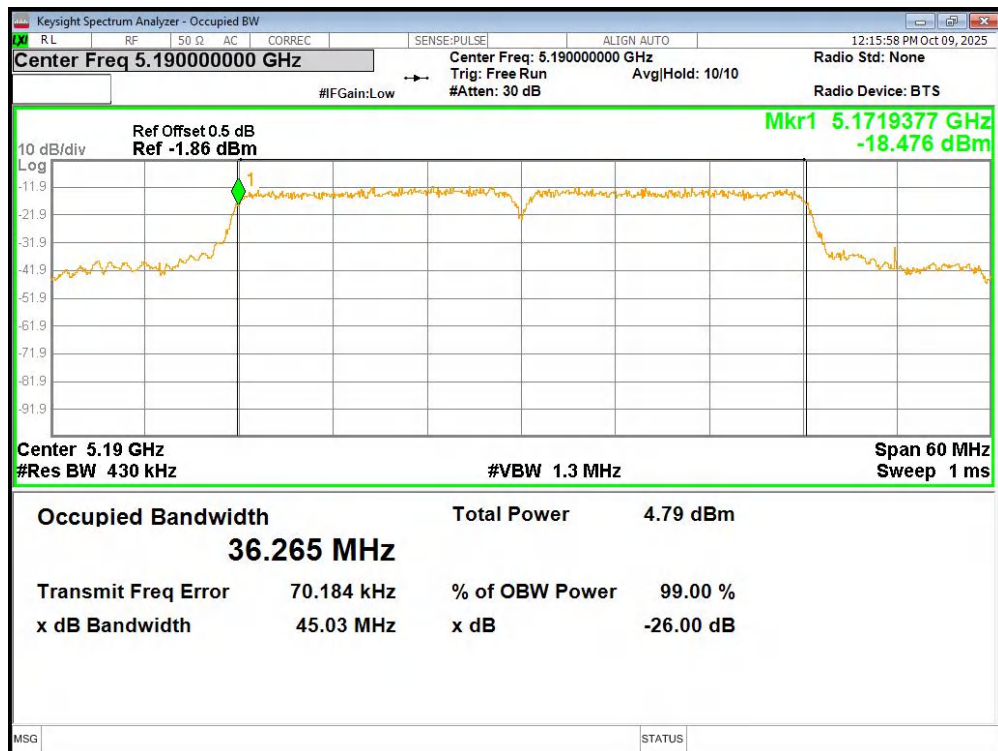


-26dB Bandwidth U-NII-1 11n(HT40) High CH 5230MHZ




99%OBW Bandwidth U-NII-1 11n(HT40) High CH 5230MHZ

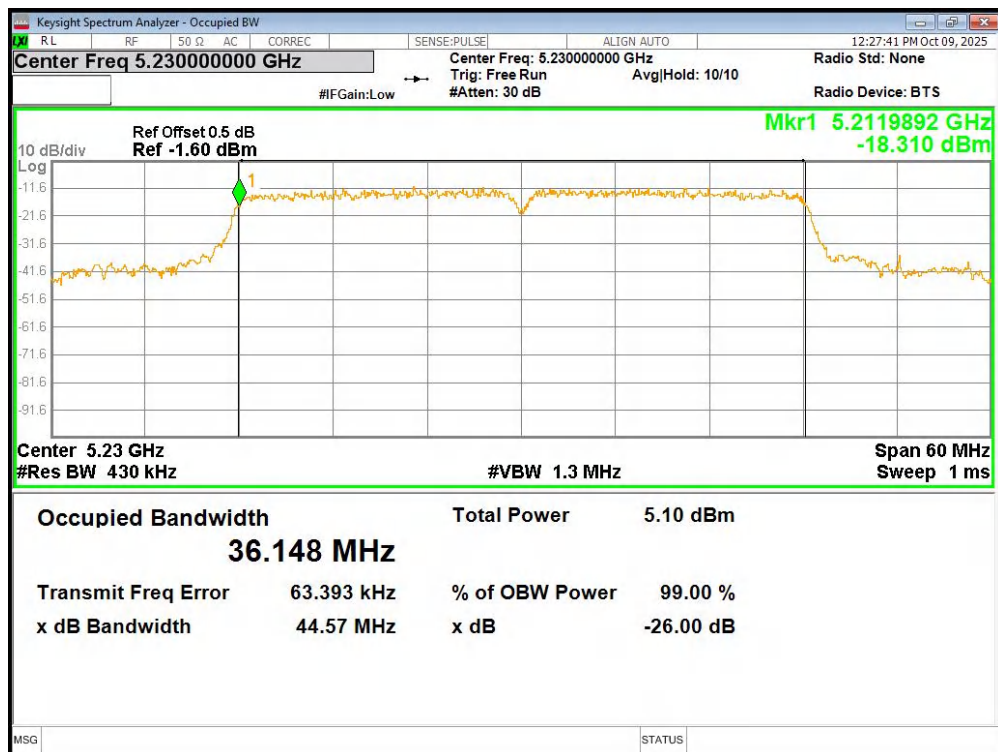


-26dB Bandwidth
U-NII-1 11ac(HT20) Low CH 5180MHZ

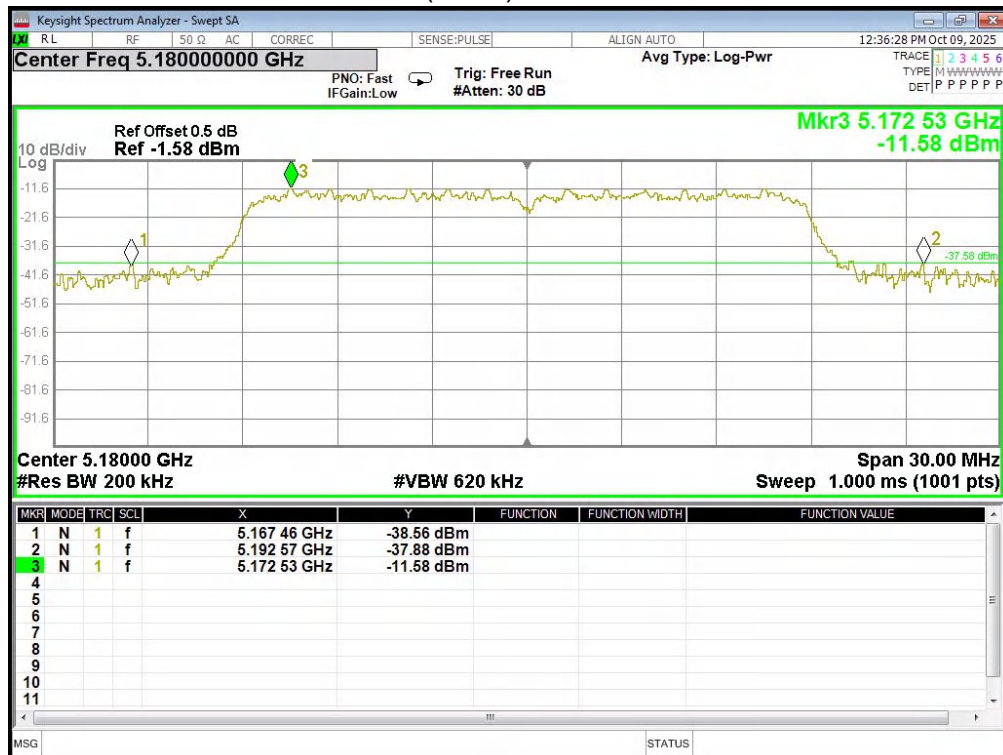


99%OBW Bandwidth
U-NII-1 11ac(HT20) Low CH 5180MHZ

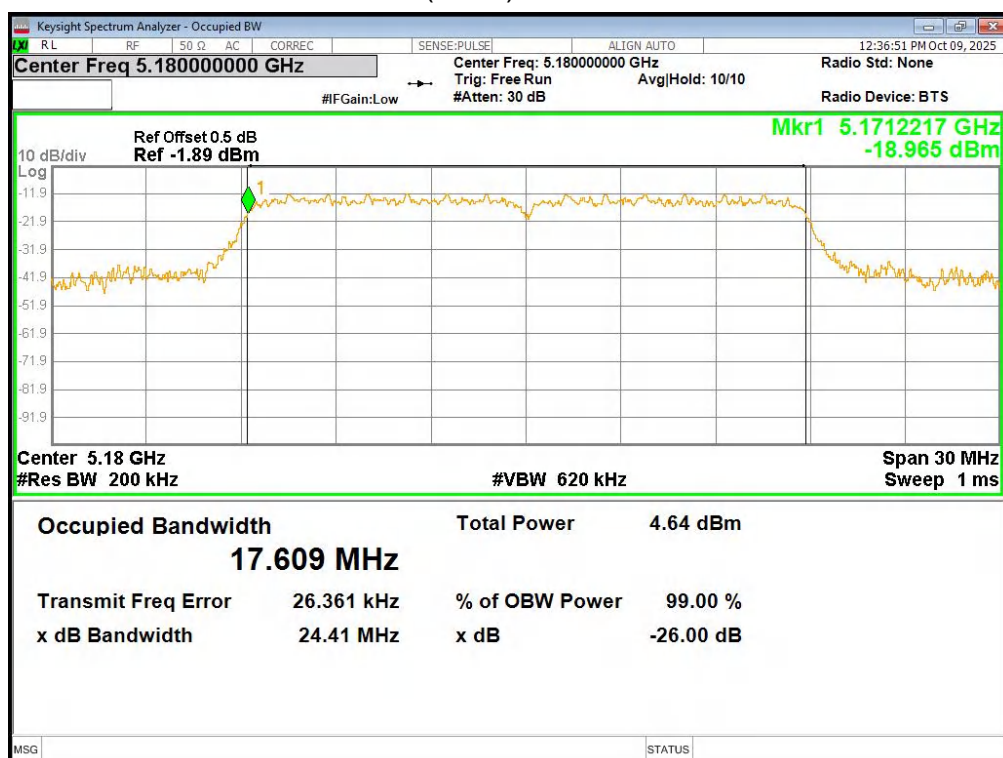


-26dB Bandwidth
U-NII-1 11ac(HT20) Middle CH 5200MHZ

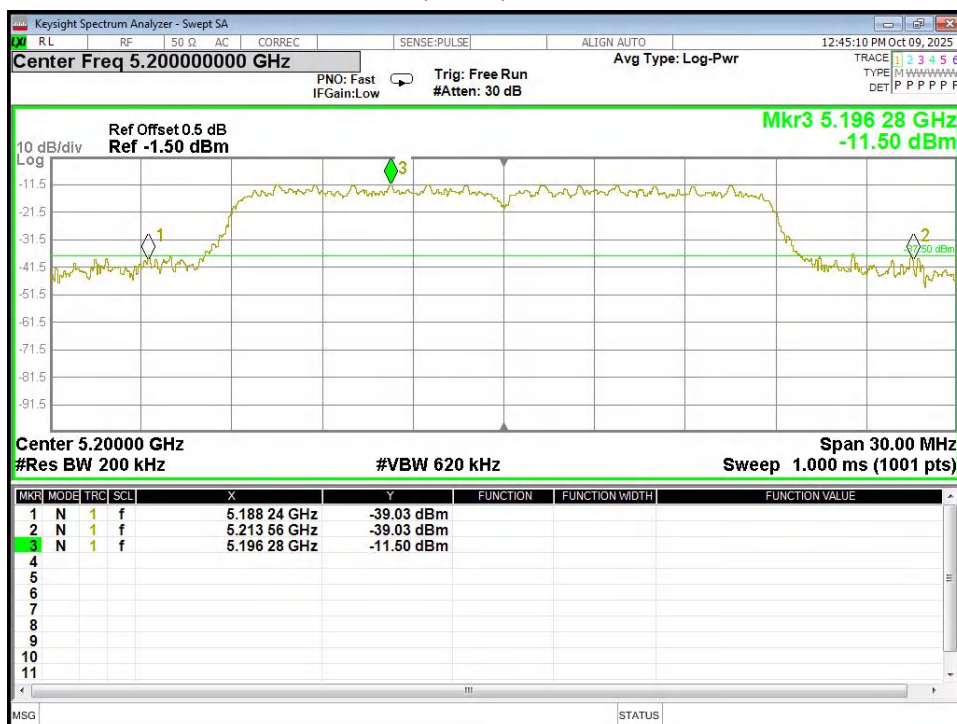


99%OBW Bandwidth
U-NII-1 11ac(HT20) Middle CH 5200MHZ

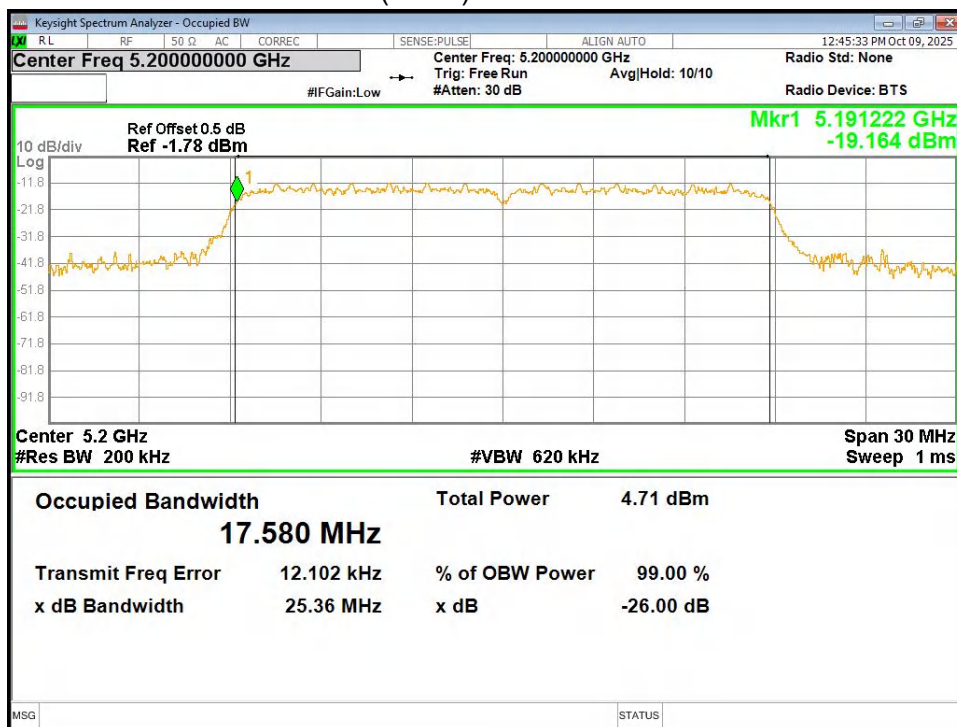


-26dB Bandwidth U-NII-1 11ac(HT20) High CH 5240MHz

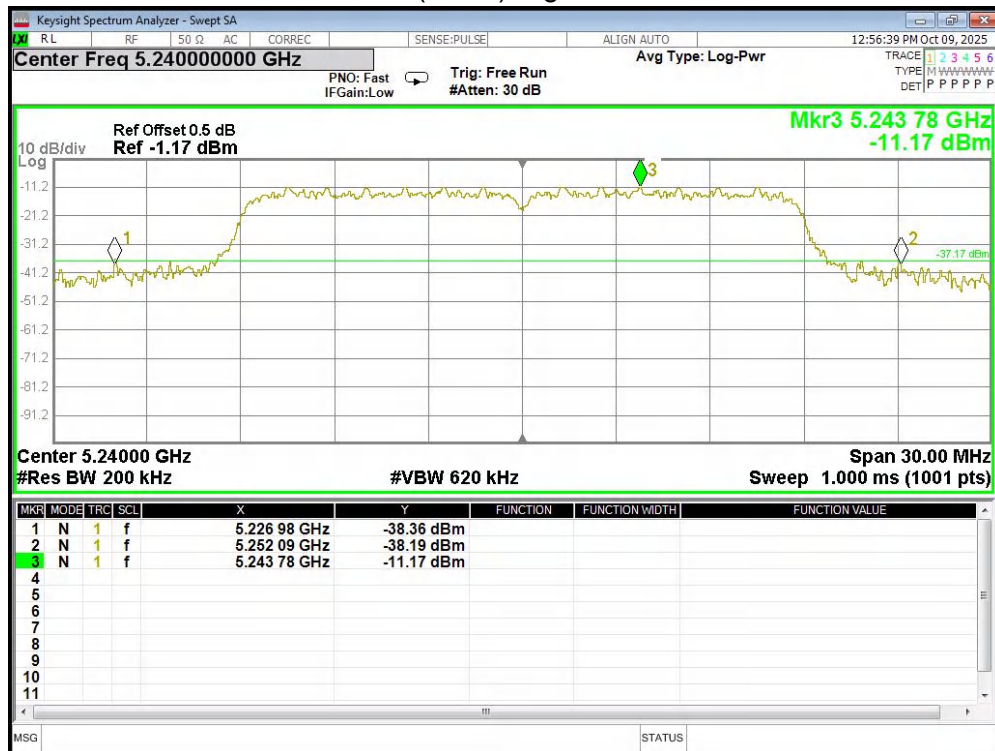


99%OBW Bandwidth U-NII-1 11ac(HT20) High CH 5240MHz

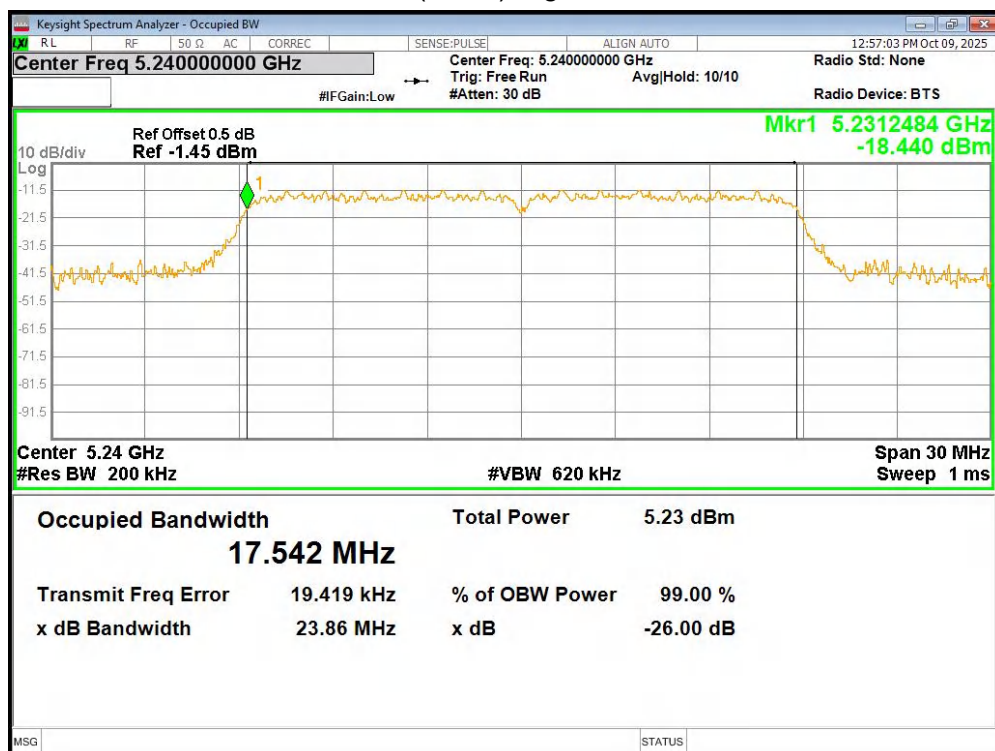

-26dB Bandwidth U-NII-1 11ac(HT40) Low CH 5190MHZ

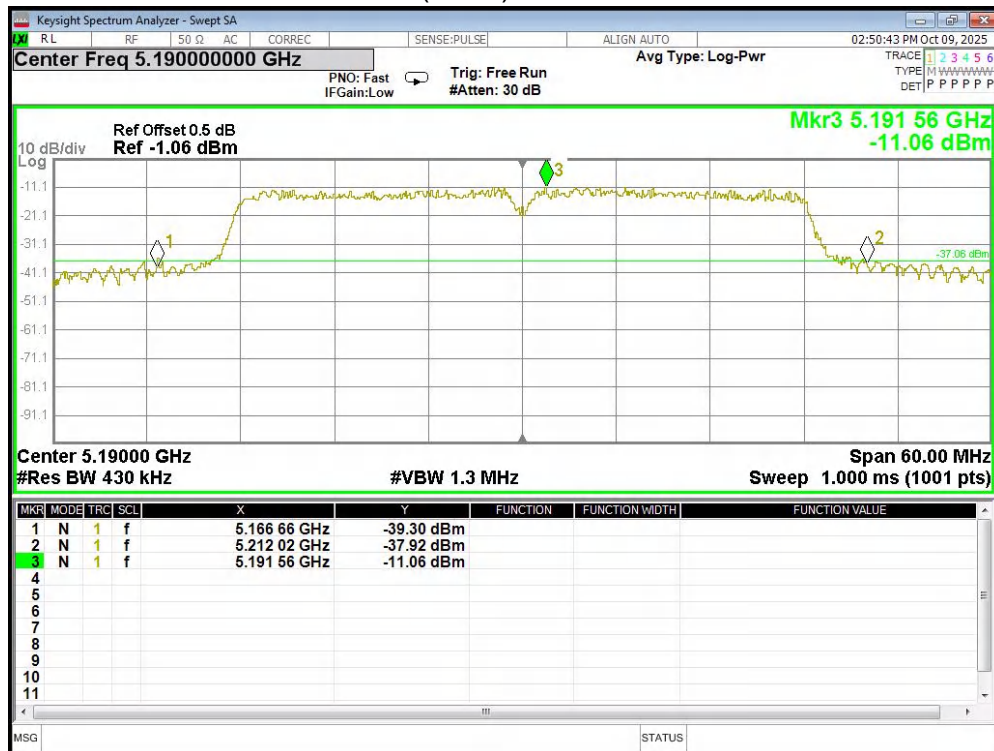


99%OBW Bandwidth U-NII-1 11ac(HT40) Low CH 5190MHZ

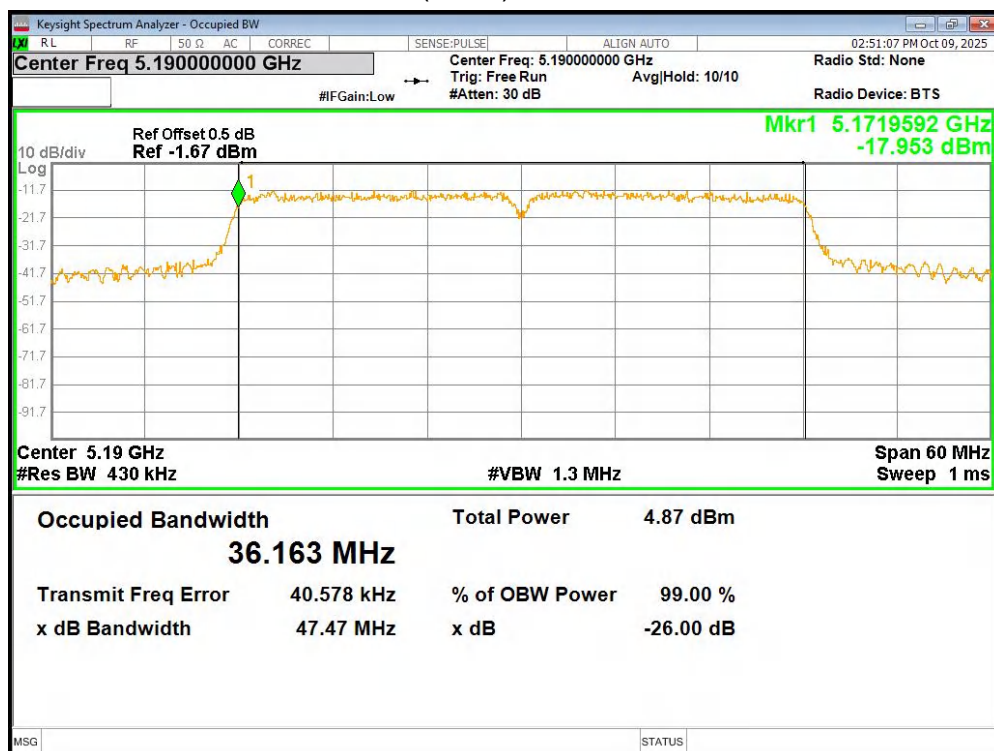


-26dB Bandwidth
U-NII-1 11ac(HT40) High CH 5230MHZ




99%OBW Bandwidth
U-NII-1 11ac(HT40) High CH 5230MHZ

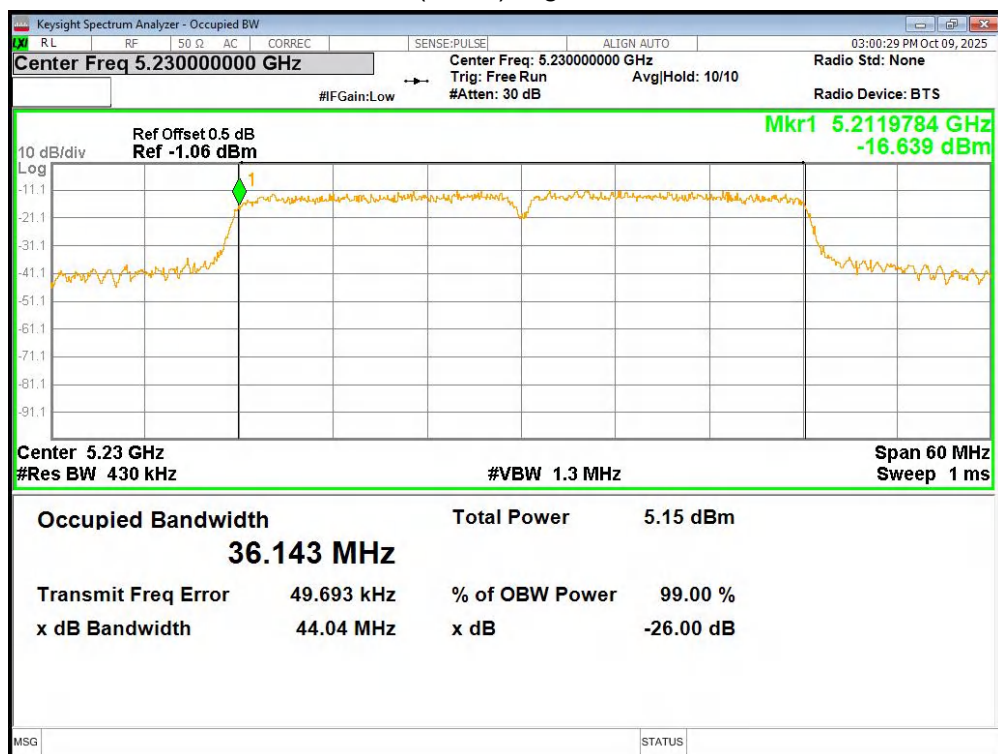

-26dB Bandwidth U-NII-1 11ac(HT80) High CH 5210MHZ

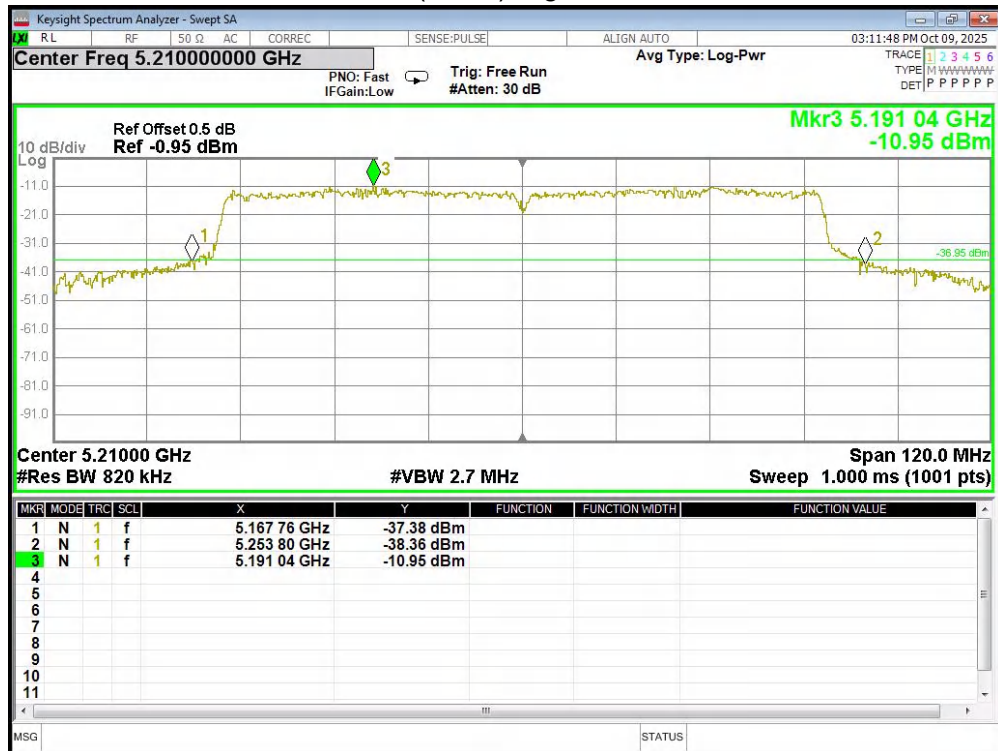

99%OBW Bandwidth U-NII-1 11ac(HT80) High CH 5210MHZ

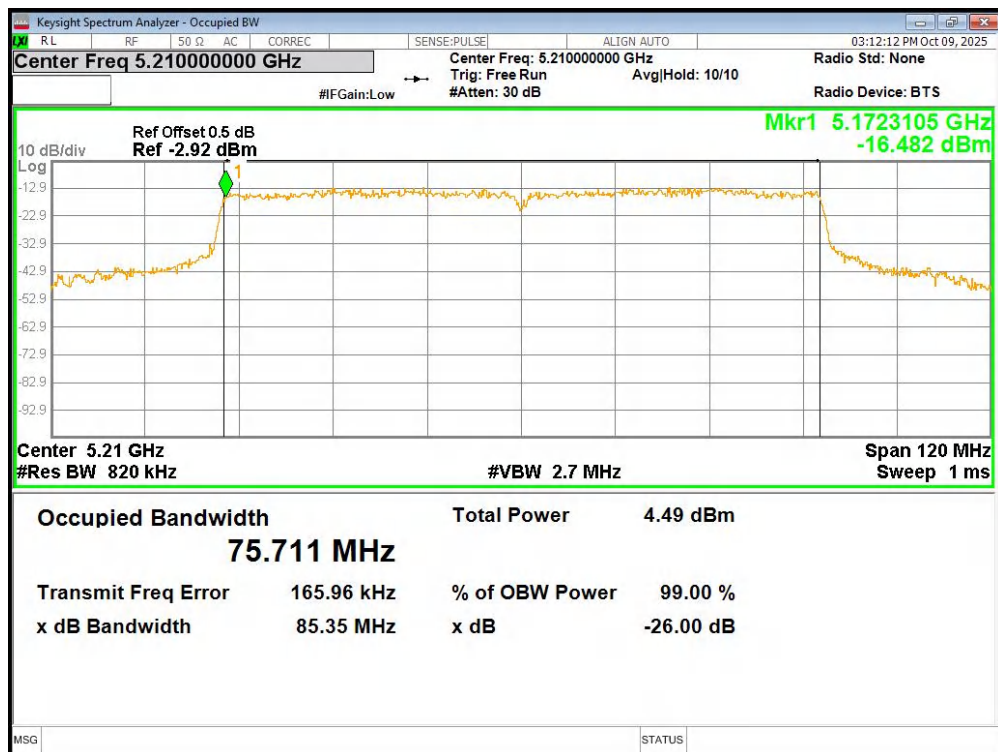

4 CONDUCTED OUTPUT POWER

4.1 limit

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250mW (24dBm)	5150-5250
	For RSS: e.i.r.p. power: not exceed 200 mW(23dBm) or $10 + 10 \log_{10} B$	
	250mW (24dBm) or $11 + 10 \log_{10} B$	5250-5350
	250mW (24dBm) or $11 + 10 \log_{10} B$	For FCC:5470-5725 For IC:5470-5600 5650-5725
	1 Watt (30dBm)	5725-5850
Note: For ISCED: B=99% bandwidth.		

4.2 test procedure

Refer to ANSI C63.10:2020 12.4.3.1

- Connect each EUT's antenna output to power meter by RF cable and attenuator
- Get each antenna port's output power of EUT.

4.3 TEST SETUP



4.4 test results

ANT 1

Band	Operation mode	Coneucted Output Power(dBm)		
		Low	Middle	High
U-NII-1	802.11a	6.22	6.07	6.80
	802.11 n(HT20)	6.35	6.40	7.04
	802.11 n(HT40)	6.65	/	6.90
	802.11ac(HT20)	6.32	6.19	6.65
	802.11ac(HT40)	6.40	/	6.57
	802.11ac(HT80)	6.47	/	/

5. POWER SPECTRAL DENSITY

5.1 LIMIT

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250
	For RSS eirp:10dBm/MHz	
	11dBm/MHz	5250-5350
	11dBm/MHz	For FCC:5470-5725 For IC:5470-5600 5650-5725
	30dBm/500kHz	5725-5850

5.2 TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5150MHz-5250MHz

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

5.3 TEST SETUP




5.4 TEST RESULTS

Band	Operation mode	Power Spectral Density(dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	-6.47	-7.28	-5.71
	802.11 n(HT20)	-5.64	-5.87	-5.28
	802.11 n(HT40)	-7.95	/	-7.95
	802.11ac(HT20)	-5.65	-5.84	-5.43
	802.11ac(HT40)	-8.67	/	-7.73
	802.11ac(HT80)	-11.40	/	/

5.5 original test data

U-NII-1 802.11a Low CH

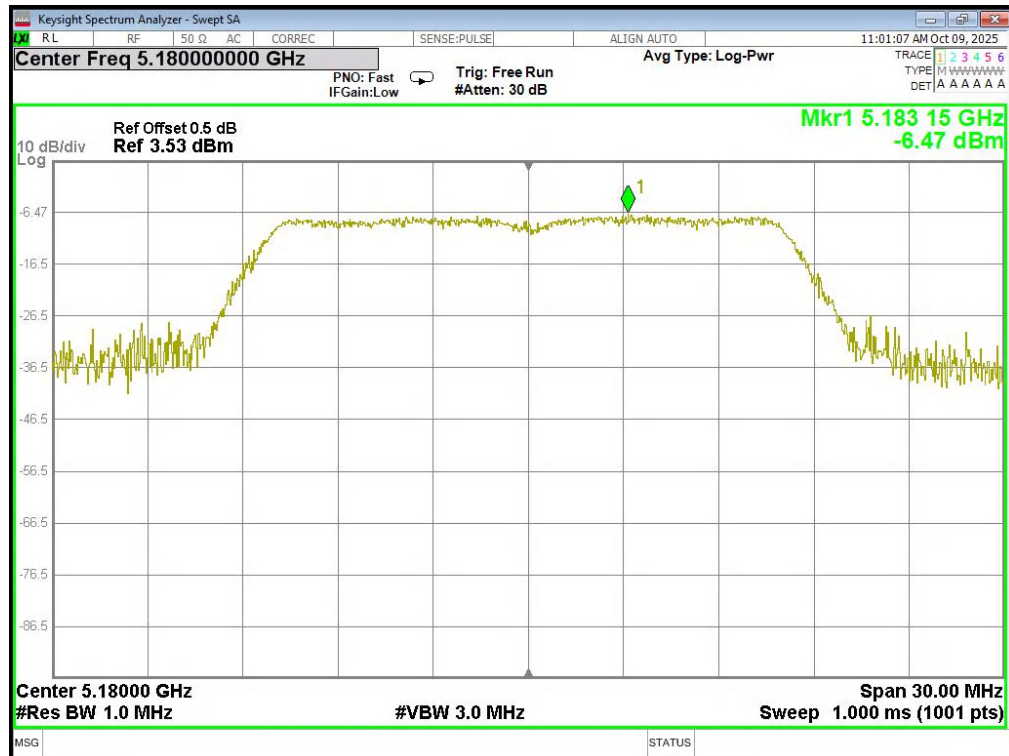


U-NII-1 802.11a Middle CH



U-NII-1 802.11a High CH



U-NII-1 802.11n(HT20) Low CH

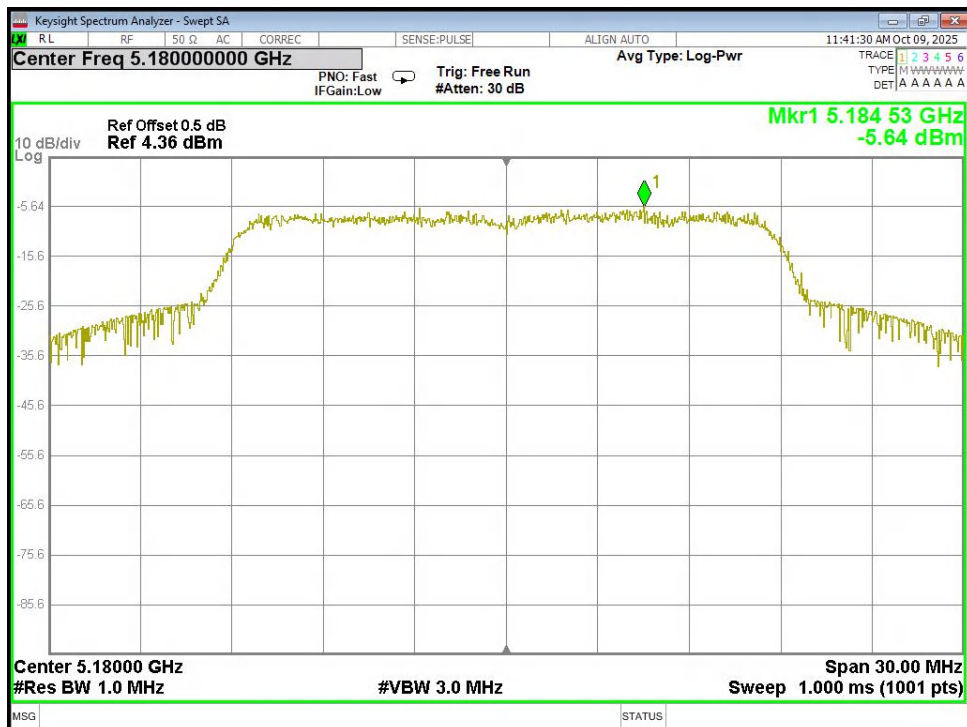


U-NII-1 802.11n(HT20) Middle CH




U-NII-1 802.11n(HT20) High CH




U-NII-1 802.11n(HT40) Low CH

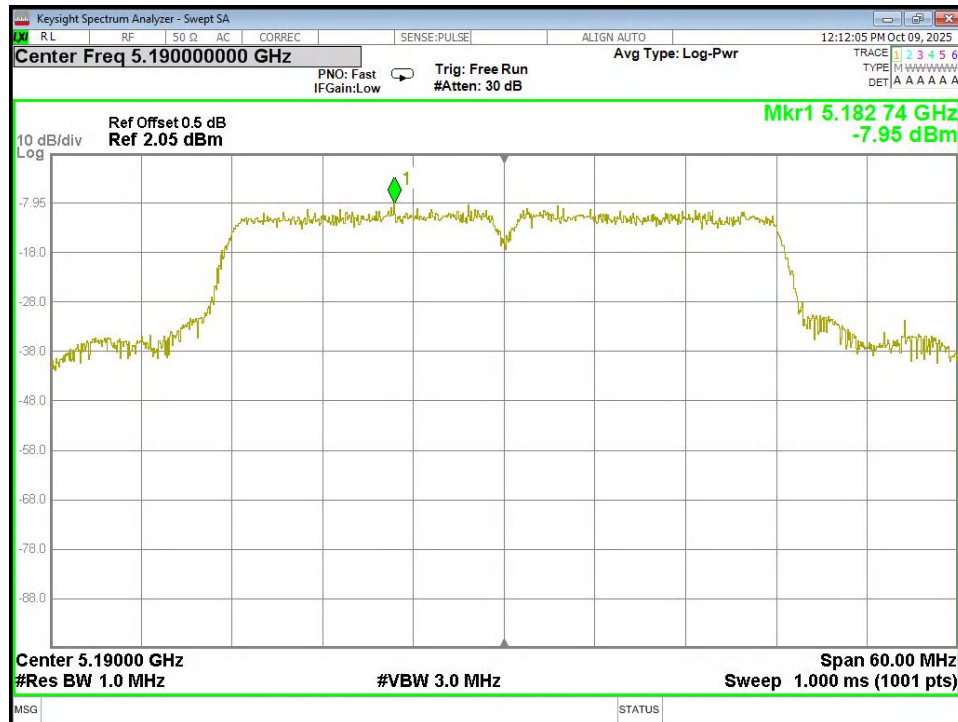


U-NII-1 802.11n(HT40) High CH

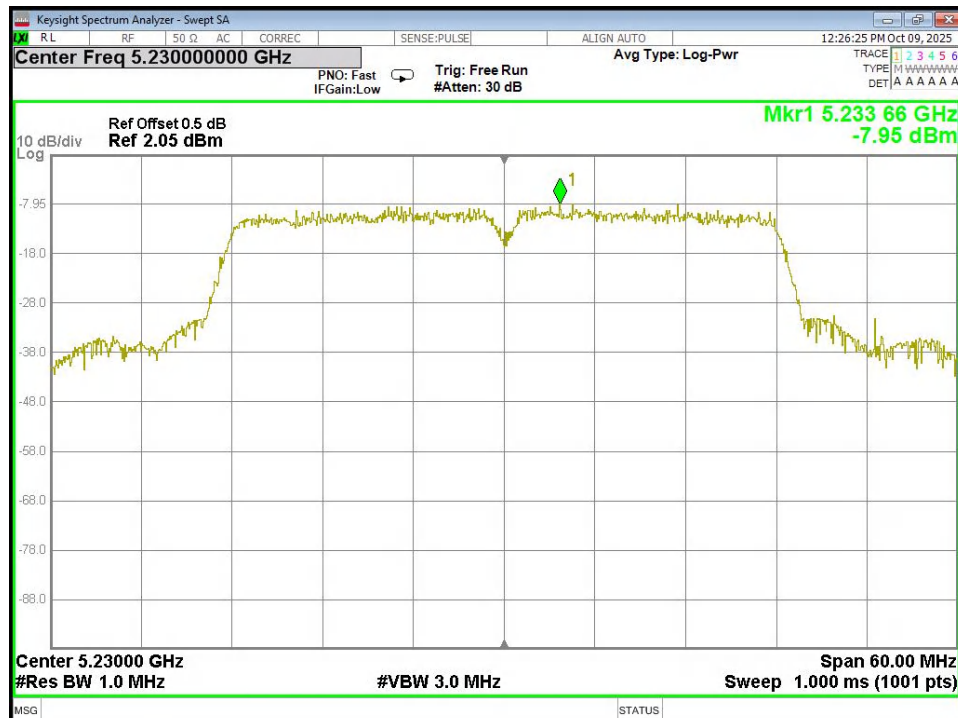


U-NII-1 802.11ac(HT20) Low CH

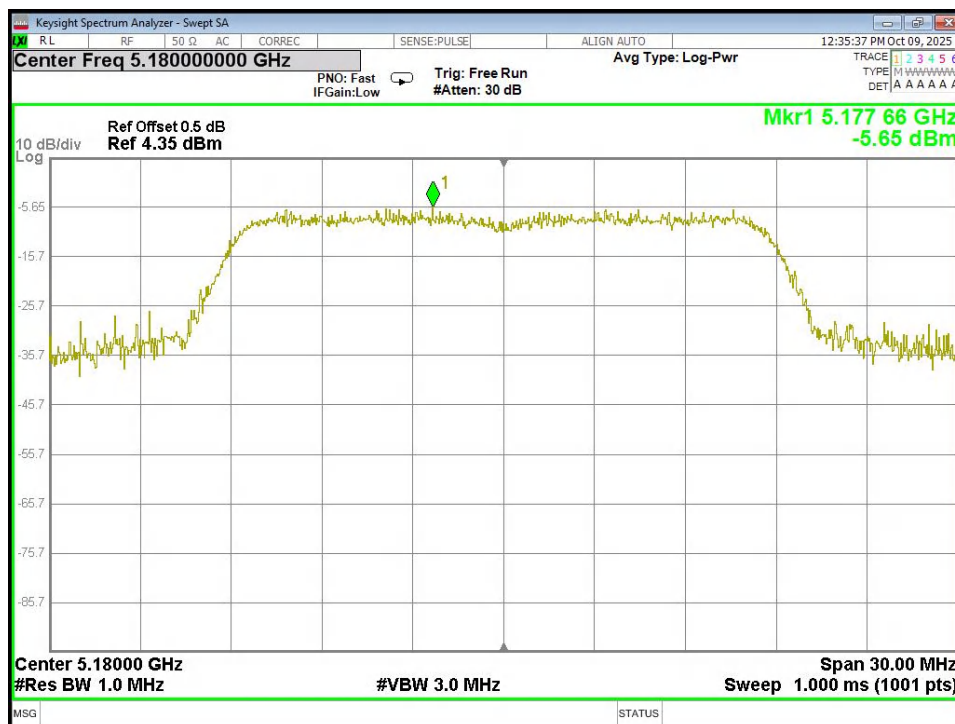

U-NII-1 802.11ac(HT20) Middle CH

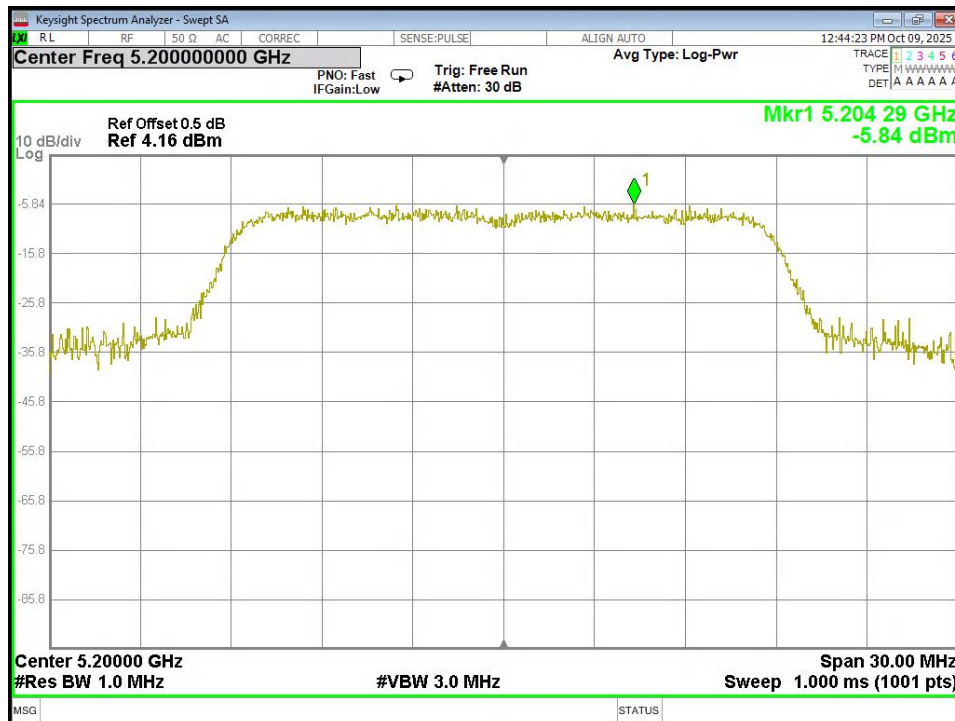


U-NII-1 802.11ac(HT20) High CH

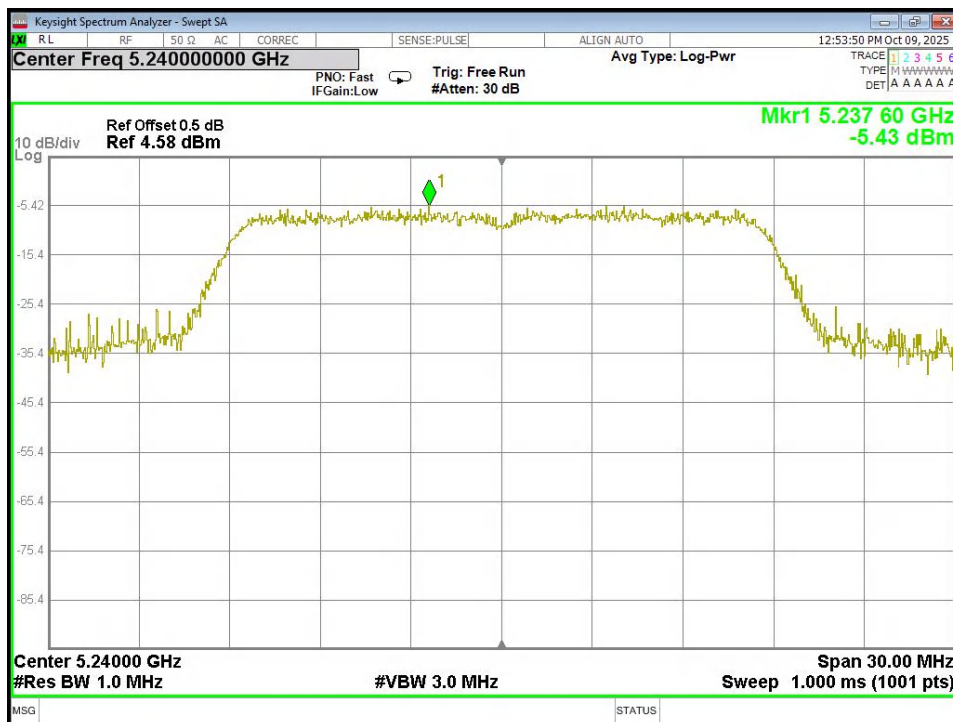

U-NII-1 802.11ac(HT40) Low CH



U-NII-1 802.11ac(HT40) High CH

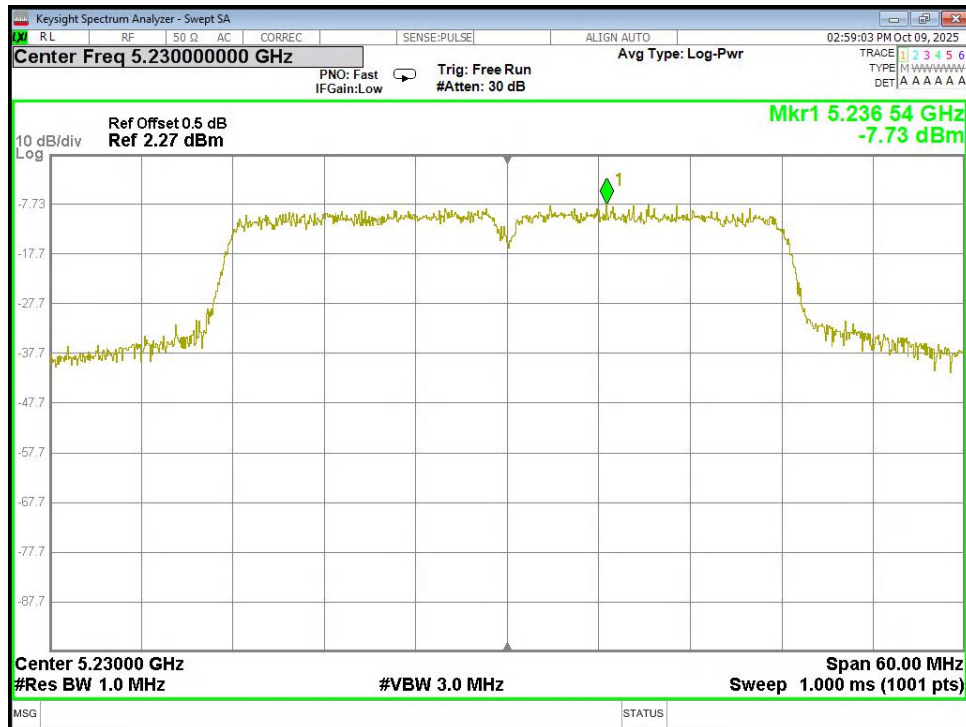

U-NII-1 802.11ac(HT80) Low CH



6. FREQUENCY STABILITY MEASUREMENT


6.1 LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual

6.2 TEST PROCEDURE

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

6.3 TEST SETUP

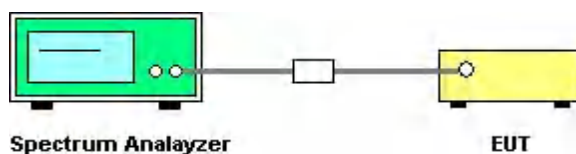

6.4 TEST RESULTS

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (DC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	5V	/		within the band of operation
45		1807	2.1599	
30		1800	2.1516	
20		1806	2.1587	
10		1800	2.1516	
0		1803	2.1552	
-10		1800	2.1516	
-15		1809	2.1623	
-30		/	/	
20	4.5V	1810	2.1635	
20	5.5V	1798	2.1492	

7. Conducted spurious emission and Band edge

7.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

Frequency Band (MHz)	Limit
5150-5250	Outside of the 5.15-5.35 GHz band:EIRP-27 dBm/MHz
5250-5350	Outside of the 5.15-5.35 GHz band:EIRP-27 dBm/MHz
5350-5460	emissions shall be limited to 74 dBuV/m@3m, which is -21.2 dBm
5470-5725	Outside of the 5.47-5.725 GHz band:EIRP-27 dBm/MHz
5725-5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge,and from 25 MHz above or below the band edge increasing lineany to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge,and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

7.2 TEST PROCEDURE

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz


VBW = 3 MHz

Sweep = auto

Detector function = peak Trace = max hold


Allow the trace to stabilize

7.3 TEST SETUP

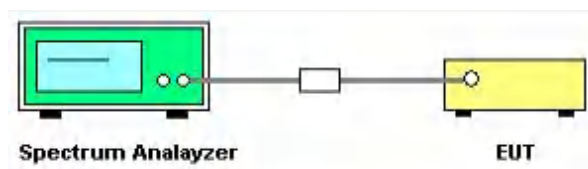


7.4 TEST RESULTS


U-NII-1 802.11a Low

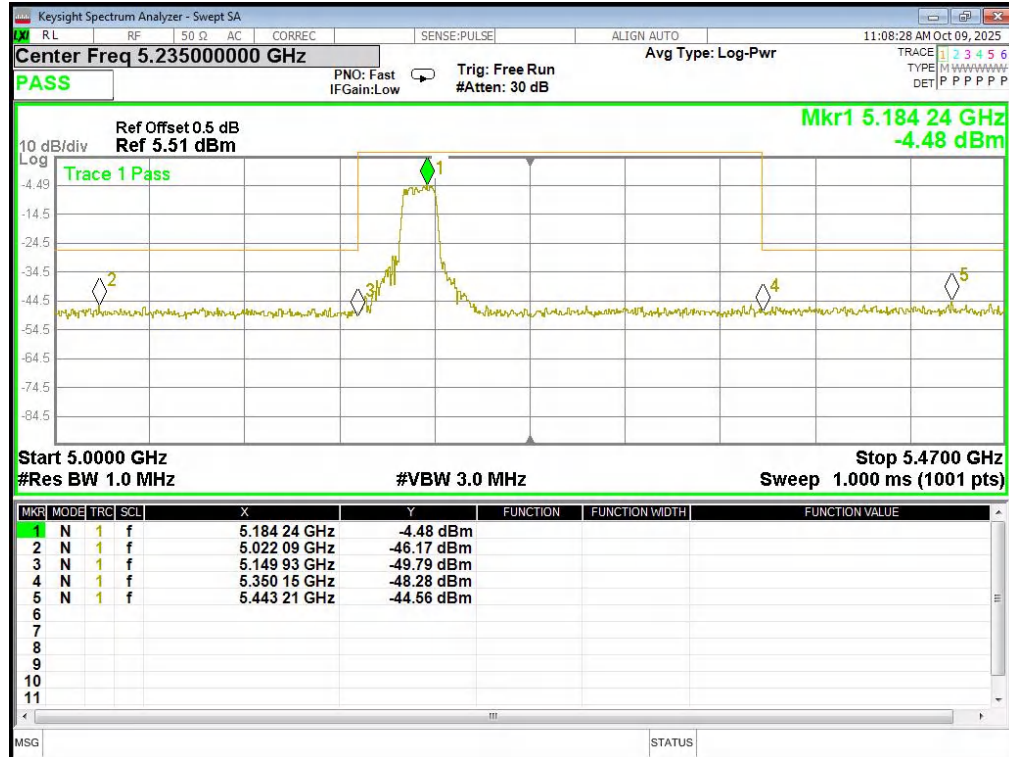

U-NII-1 802.11a High

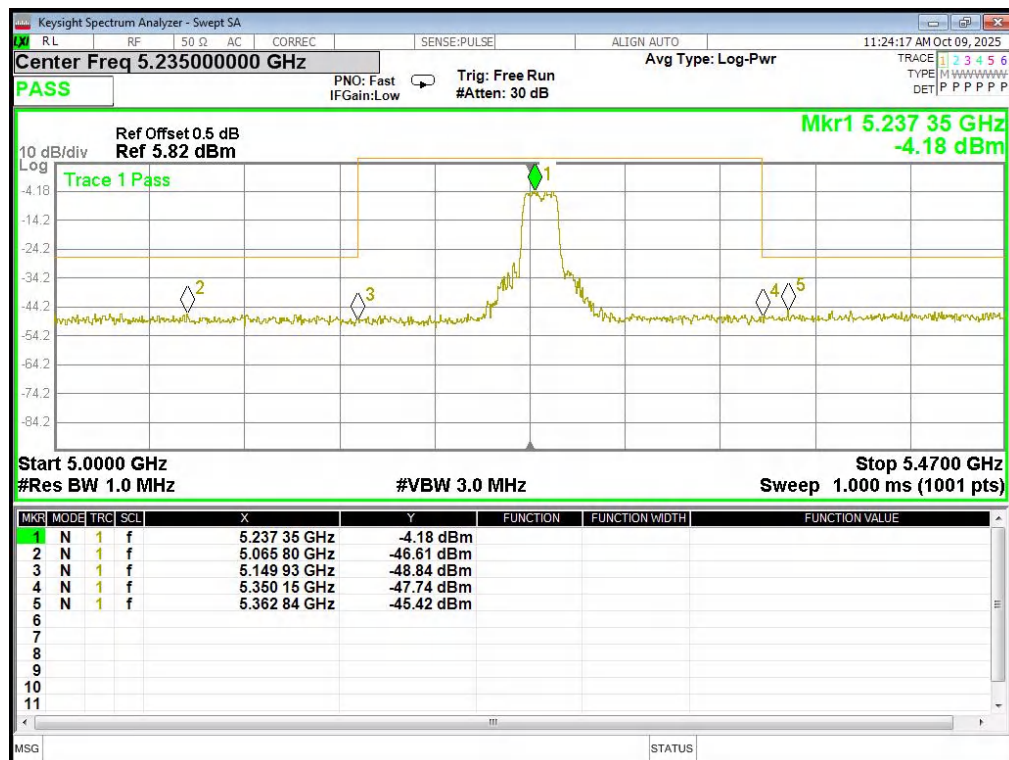


U-NII-1 802.11n(HT20) Low

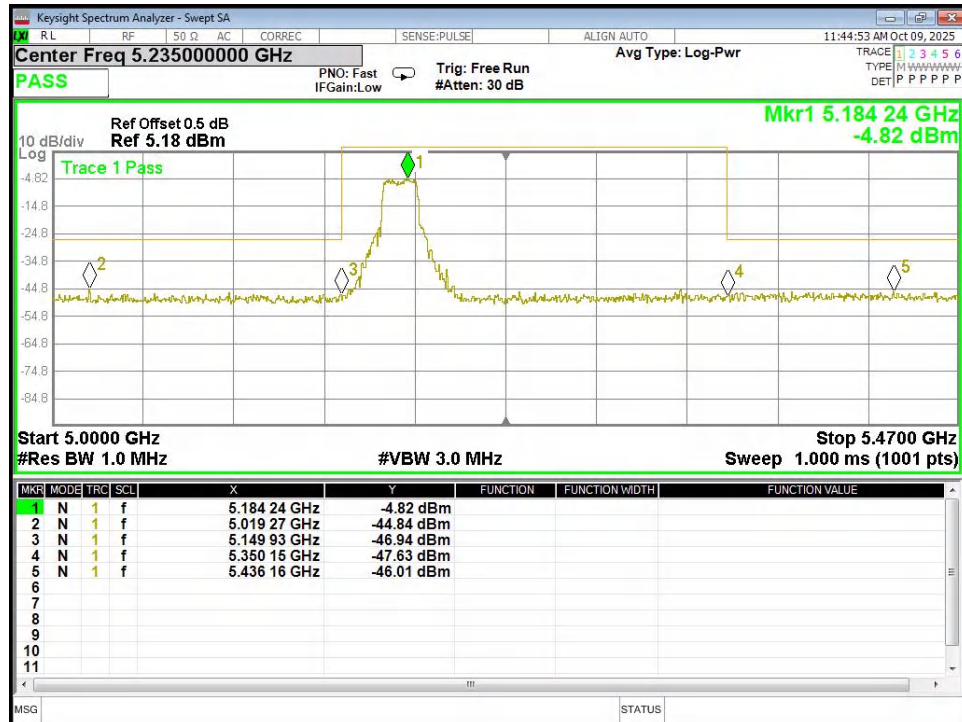


U-NII-1 802.11n(HT20) High




U-NII-1 802.11n(HT40) Low

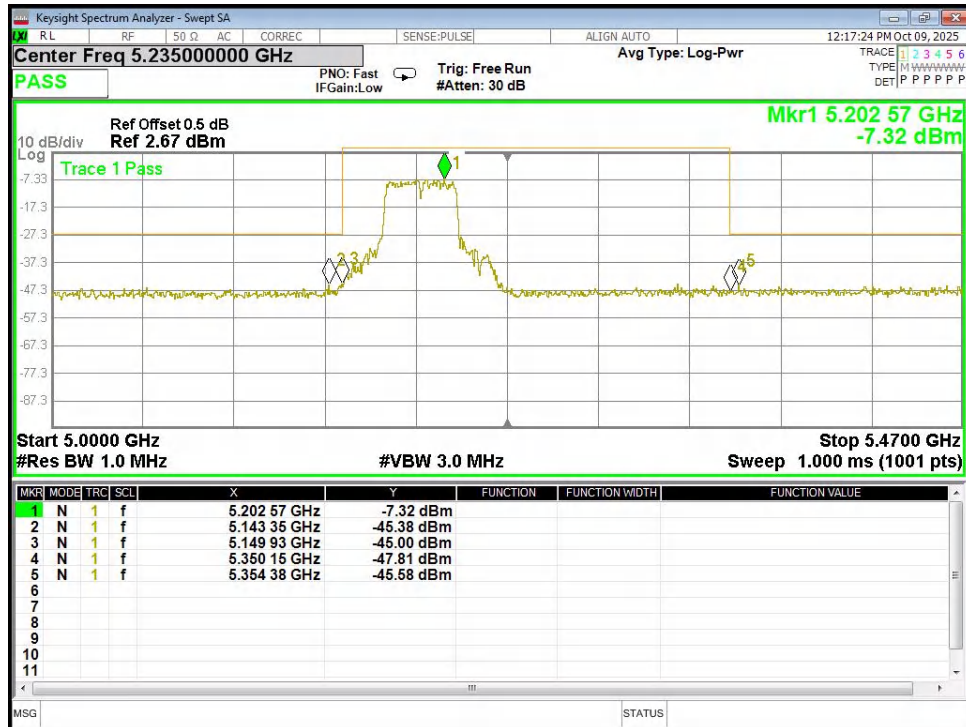


U-NII-1 802.11n(HT40) High

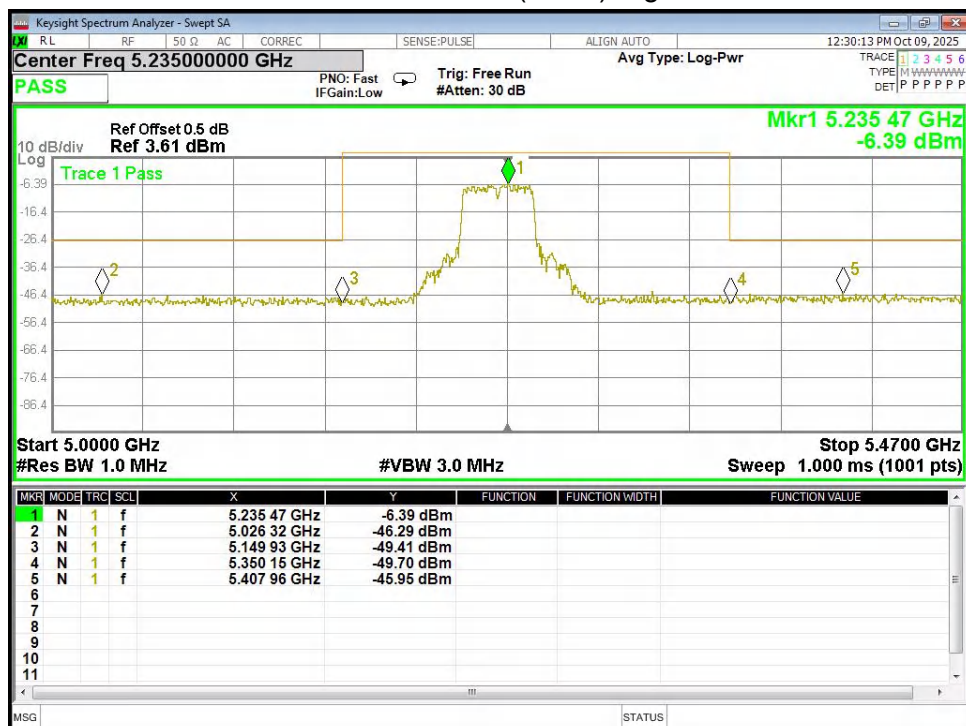


U-NII-1 802.11ac(HT20) Low

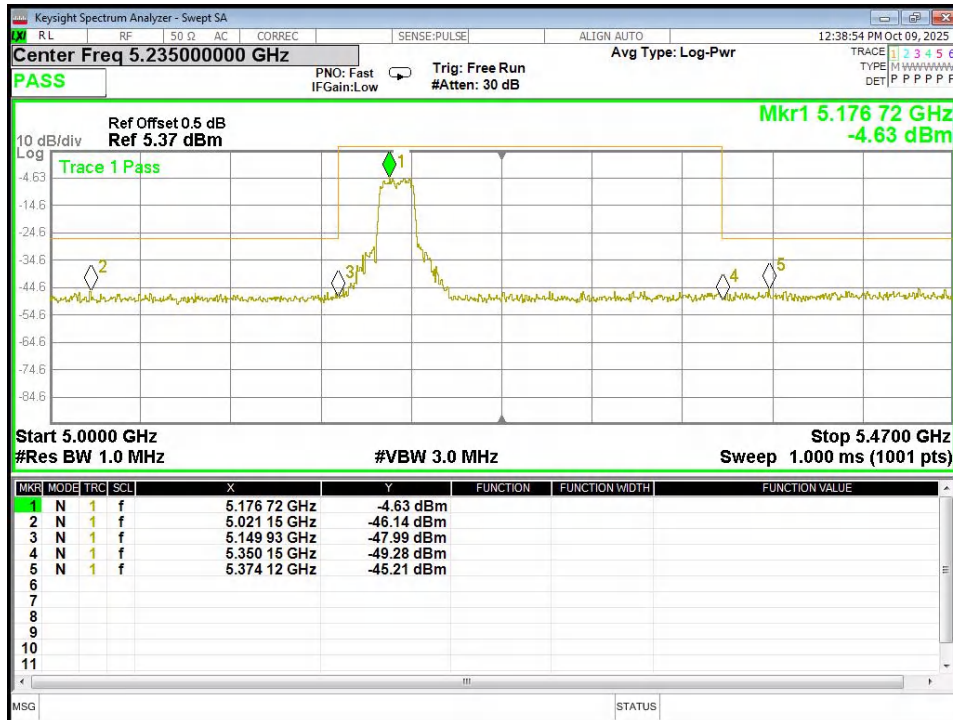

U-NII-1 802.11ac(HT20) High

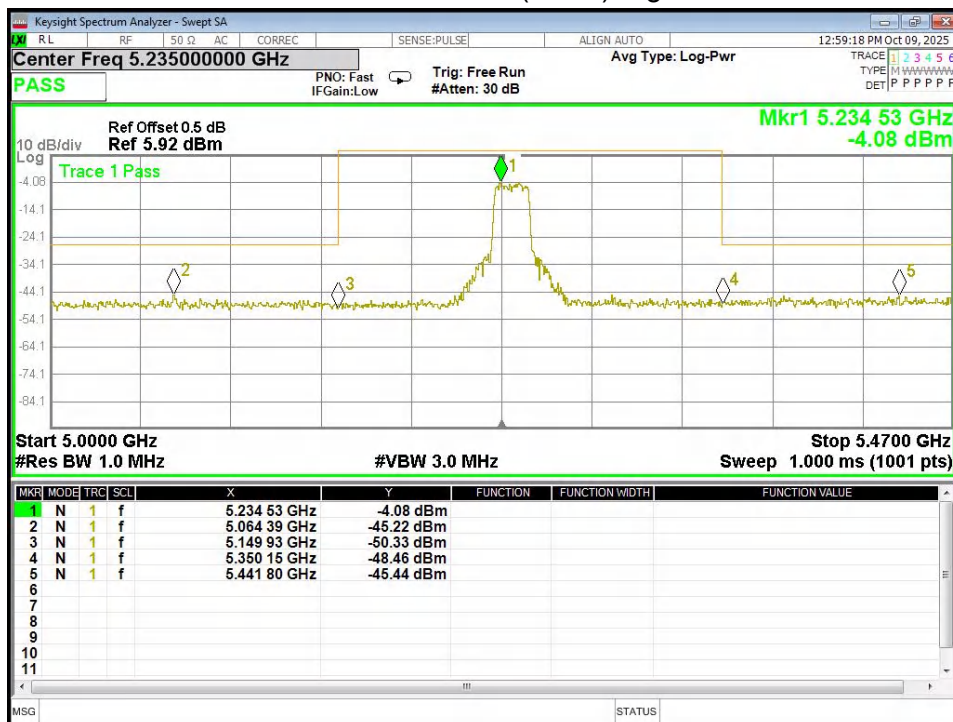

U-NII-1 802.11ac(HT40) Low

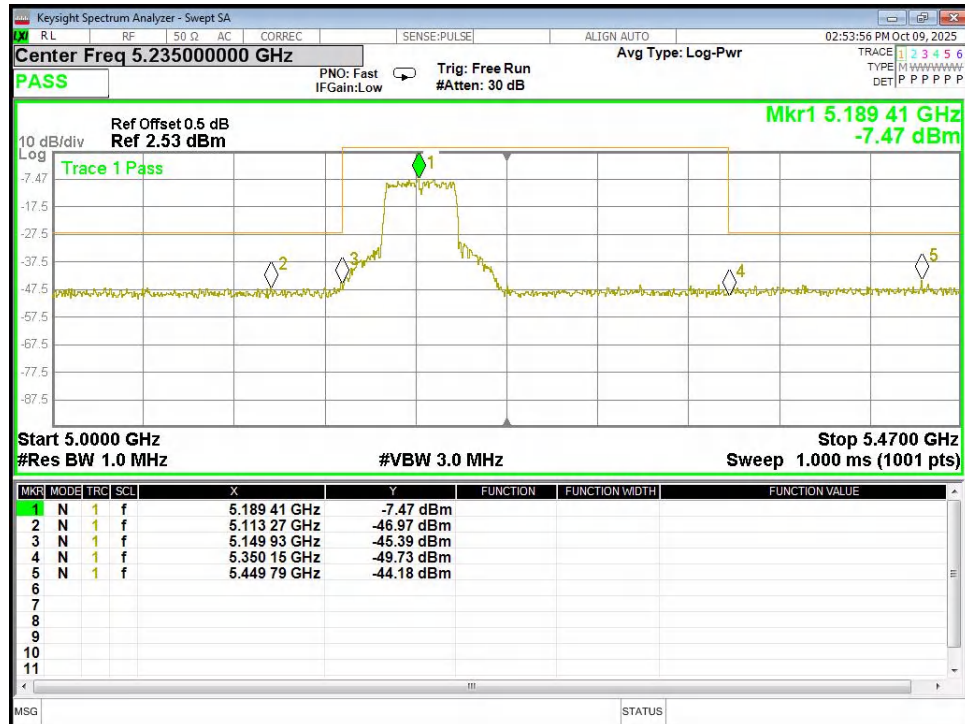

U-NII-1 802.11ac(HT40) High

