



# Appendix B

## Detailed Test Results

|                              |
|------------------------------|
| 1. GSM                       |
| GSM850 for Head& Body        |
| GSM1900 for Head& Body       |
| 2. WCDMA                     |
| WCDMA Band II for Head& Body |
| WCDMA Band V for Head& Body  |
| 3. WIFI                      |
| LTE Band 7 for Head& Body    |
| LTE Band 12 for Head& Body   |
| LTE Band 13 for Head& Body   |
| LTE Band 25 for Head& Body   |
| LTE Band 26 for Head& Body   |
| LTE Band 66 for Head& Body   |
| LTE Band 71 for Head& Body   |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/16.

Test Laboratory: LCS-SAR Lab

## GSM 850 190CH Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 41.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.26 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.276 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

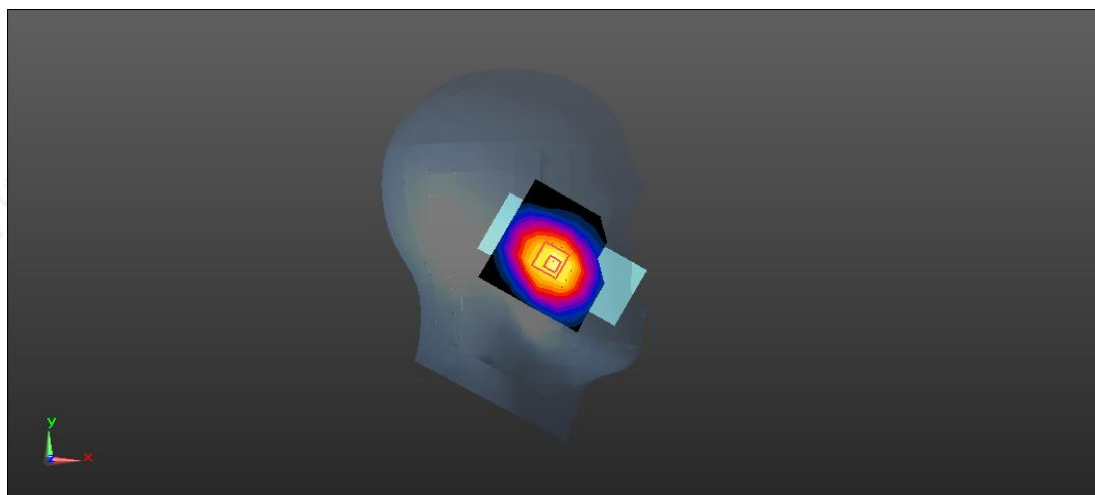

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/16

Test Laboratory: LCS-SAR Lab

## GSM 850 GPRS 3TX 128CH Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 41.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.753 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.56 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.967 W/kg

**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 0.732 W/kg

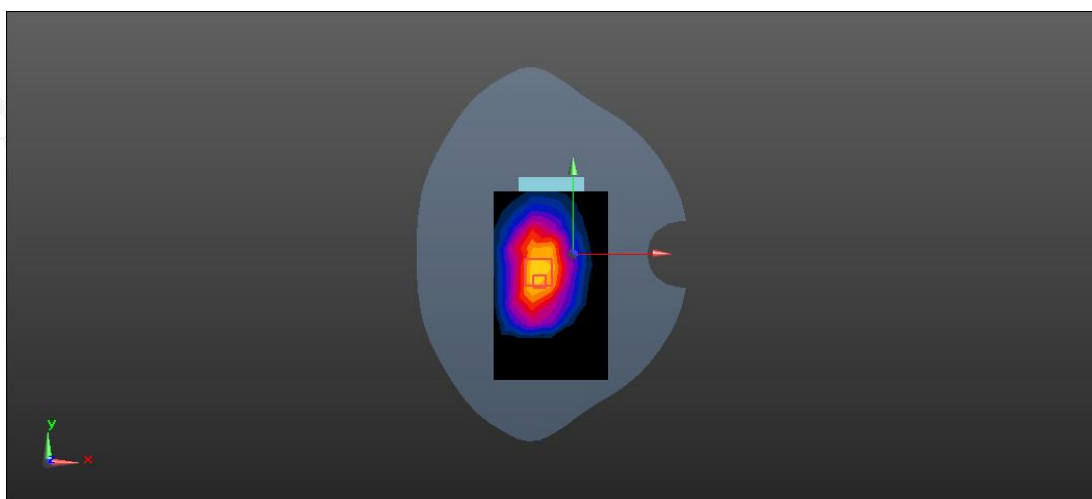

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## GSM 1900 661CH Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.762$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.325 W/kg


**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.24 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.357 W/kg

**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.309 W/kg

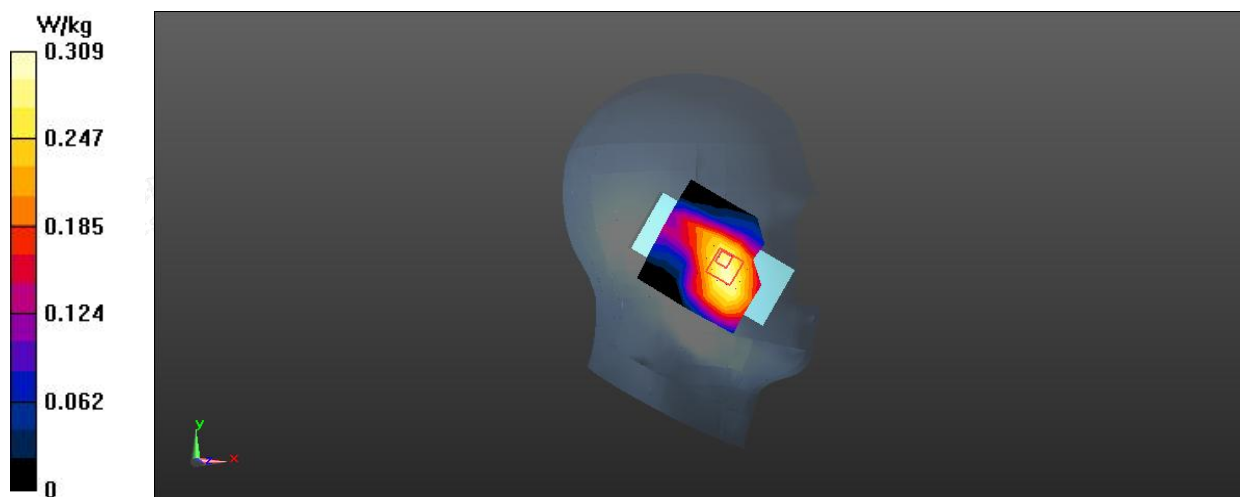

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## GSM 1900 GPRS 3TX 661CH Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 2.77

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.762$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.464 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.624 W/kg

**SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.486 W/kg

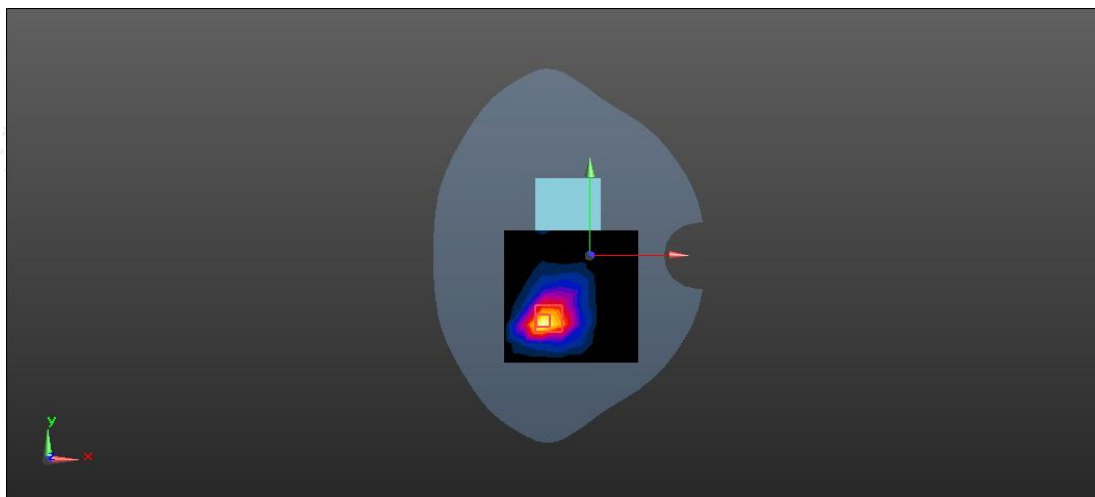

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## WCDMA II RMC 9400CH Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.382$  S/m;  $\epsilon_r = 39.759$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.516 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.426 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.674 W/kg

**SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.545 W/kg

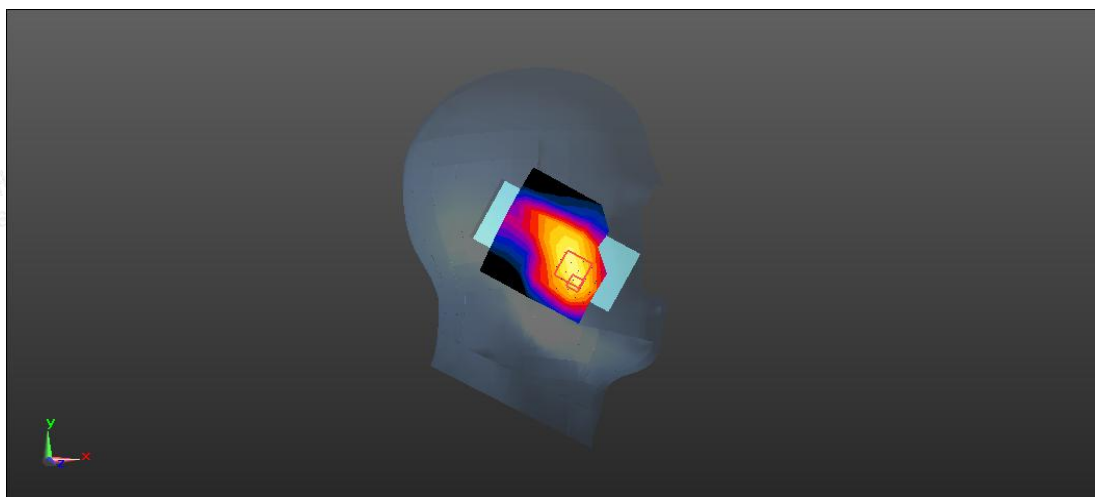

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## WCDMA II RMC 9400CH Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.382$  S/m;  $\epsilon_r = 39.759$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.796 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.68 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.251 W/kg**

Maximum value of SAR (measured) = 0.772 W/kg

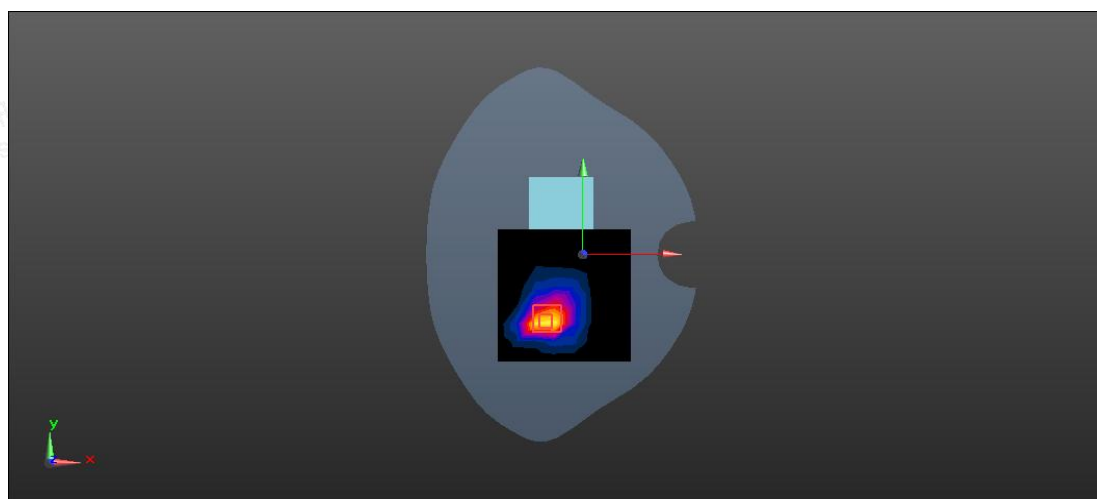

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/16

Test Laboratory: LCS-SAR Lab

## WCDMA V RMC 4233CH Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 41.347$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.558 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.472 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.668 W/kg

**SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.525 W/kg

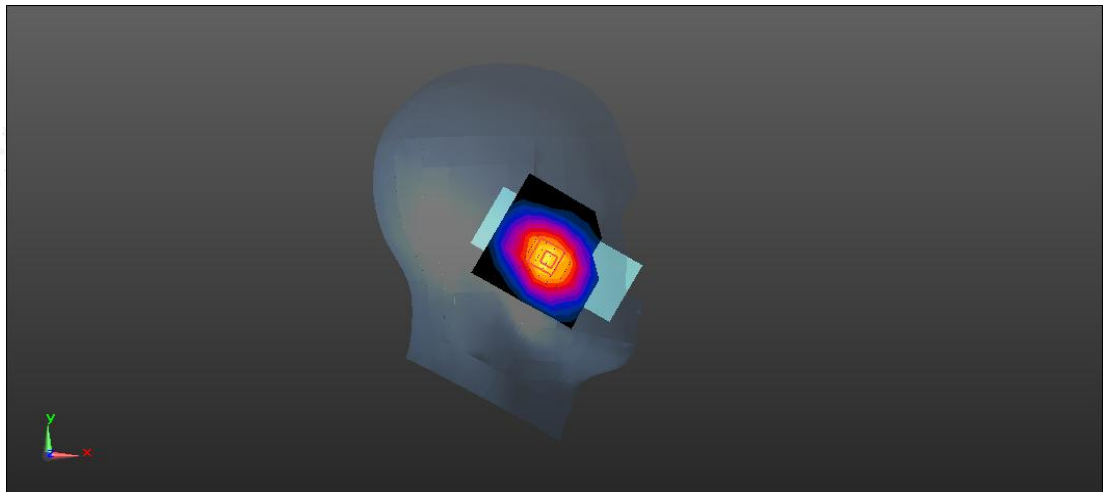

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/16

Test Laboratory: LCS-SAR Lab

## WCDMA V RMC 4233CH Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 41.347$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.862 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 16.43 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 0.844 W/kg

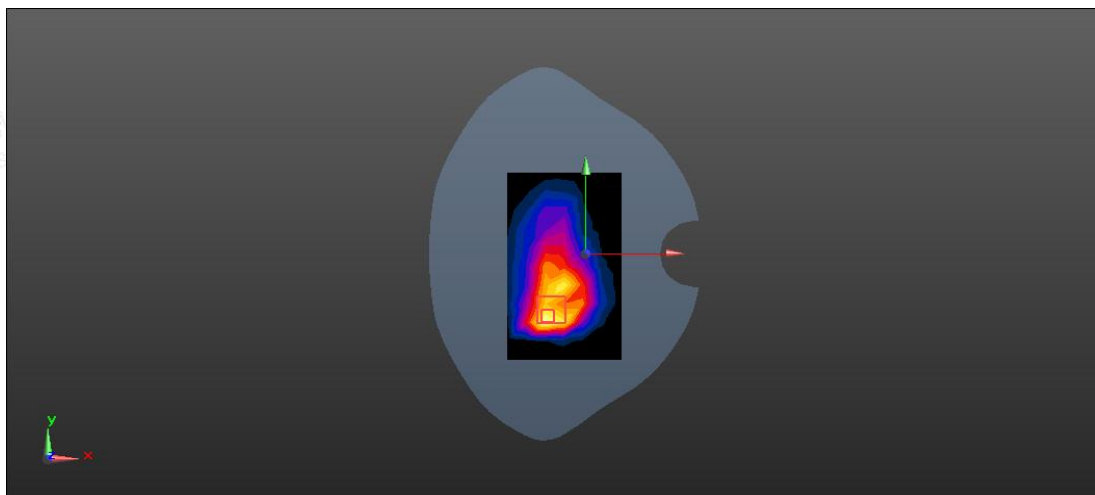

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

## LTE Band 7 20M QPSK 20850CH 1RB99 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 38.558$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.186 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.425 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.197 W/kg

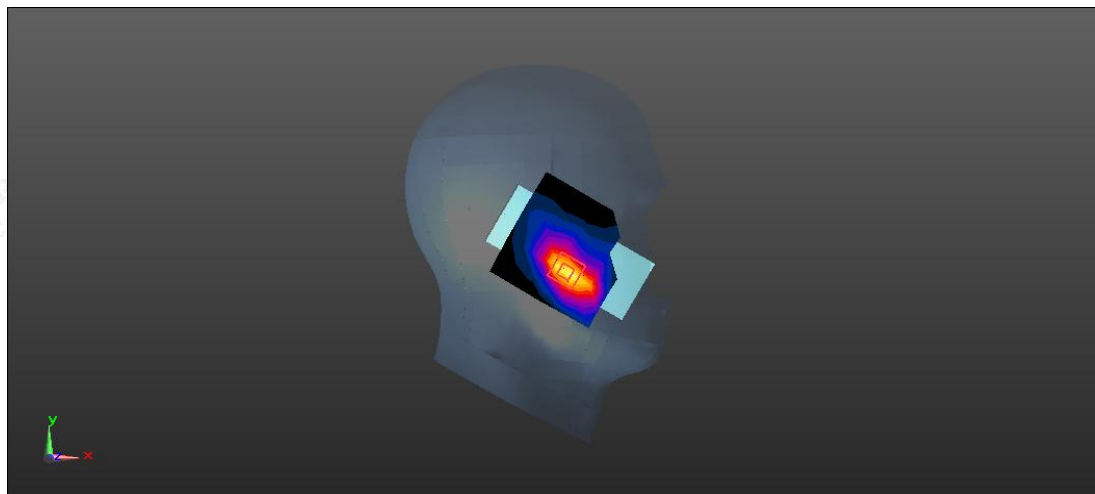

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/21

Test Laboratory: LCS-SAR Lab

**LTE Band 7 20M QPSK 20850CH 1RB99 Rear side 5mm****DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 38.558$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.25, 7.25, 7.25); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (10x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.482 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.283 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.572 W/kg

**SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.451 W/kg

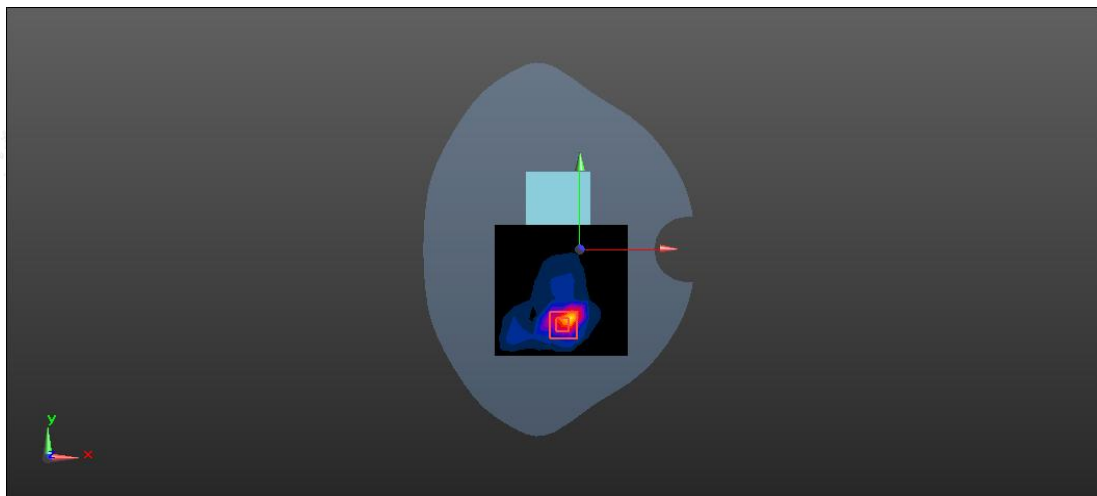

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 12 10M QPSK 23060CH 1RB0 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704 \text{ MHz}$ ;  $\sigma = 0.884 \text{ S/m}$ ;  $\epsilon_r = 41.816$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.176 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.648 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

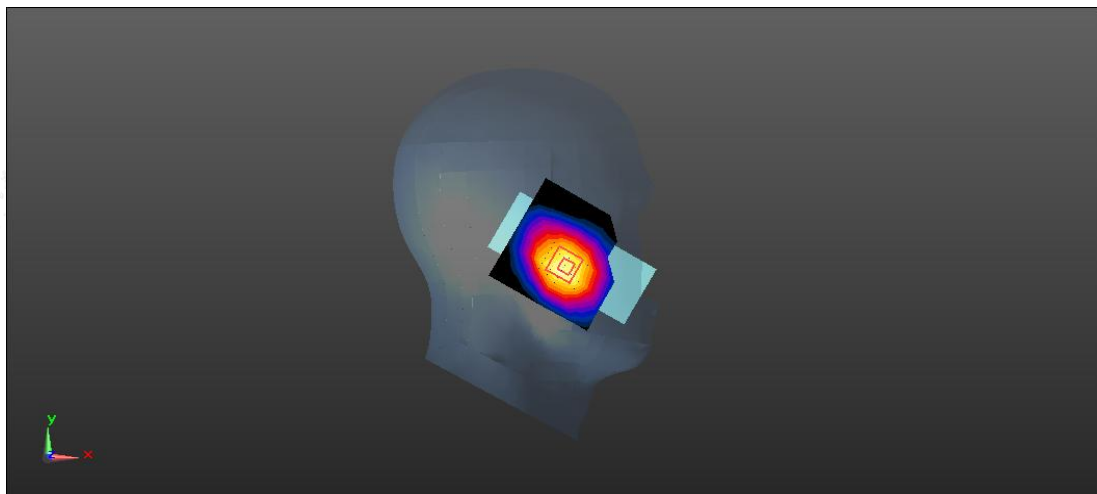

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 12 10M QPSK 23060CH 1RB0 Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.884$  S/m;  $\epsilon_r = 41.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (10x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.572 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.42 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.763 W/kg

**SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.595 W/kg

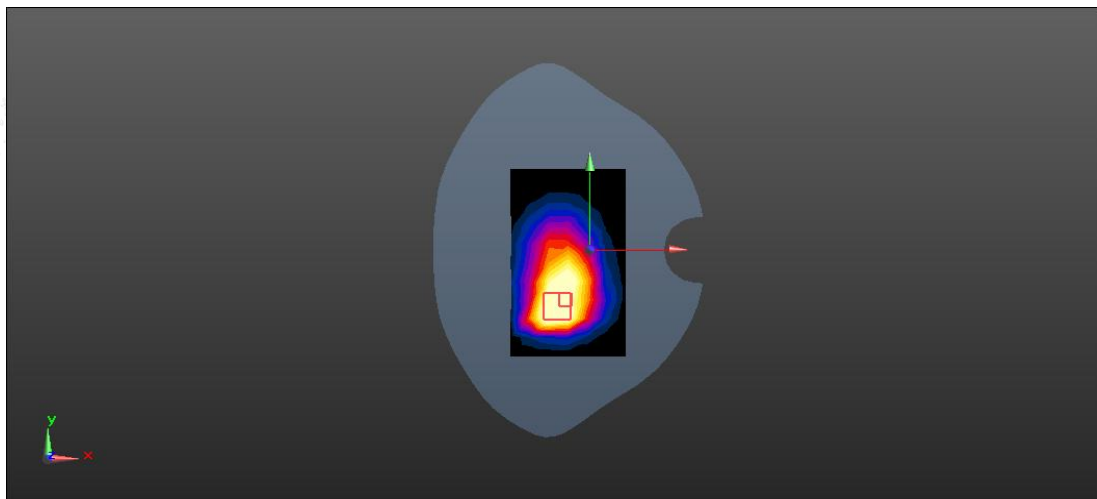

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 13 10M QPSK 23230CH 1RB0 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.883 \text{ S/m}$ ;  $\epsilon_r = 41.829$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.536 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 9.614 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.675 W/kg

**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.514 W/kg

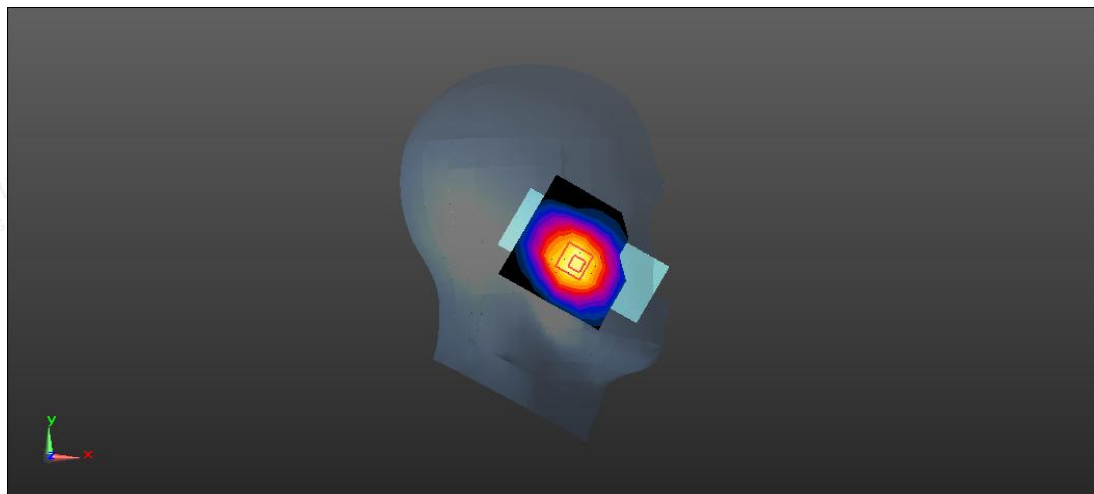

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 13 10M QPSK 23230CH 1RB0 Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 41.829$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (10x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.849 W/kg


**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.303 W/kg**

Maximum value of SAR (measured) = 0.876 W/kg

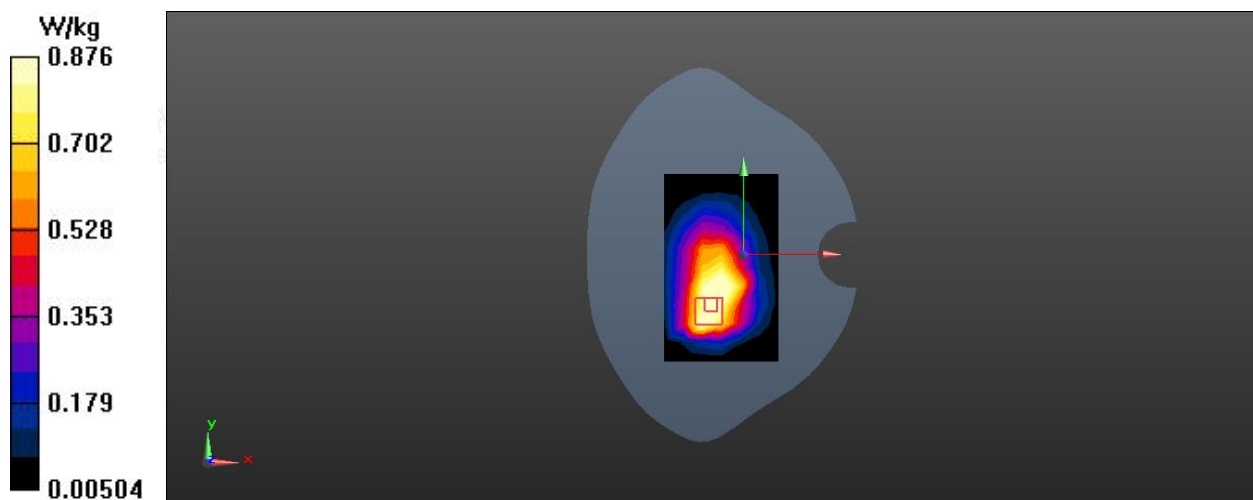

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## LTE Band 25 20M QPSK 26140CH 1RB49 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.388$  S/m;  $\epsilon_r = 39.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.246 W/kg


**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.385 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.095 W/kg**

Maximum value of SAR (measured) = 0.277 W/kg

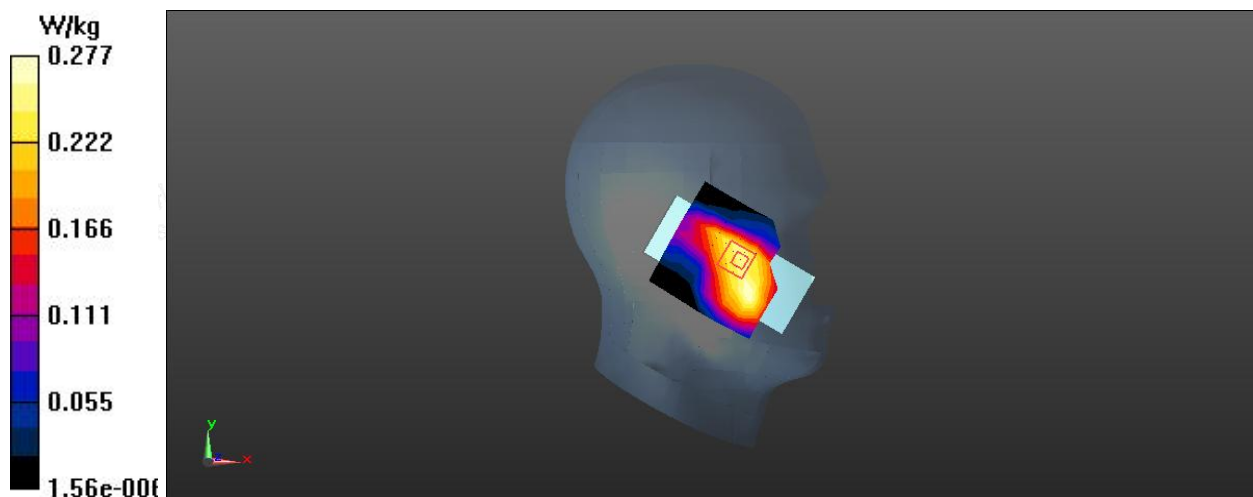

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/7/18

Test Laboratory: LCS-SAR Lab

## LTE Band 25 20M QPSK 26140CH 1RB49 Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.388$  S/m;  $\epsilon_r = 39.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (10x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.738 W/kg



**Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.67 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.827 W/kg

**SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.219 W/kg**

Maximum value of SAR (measured) = 0.711 W/kg

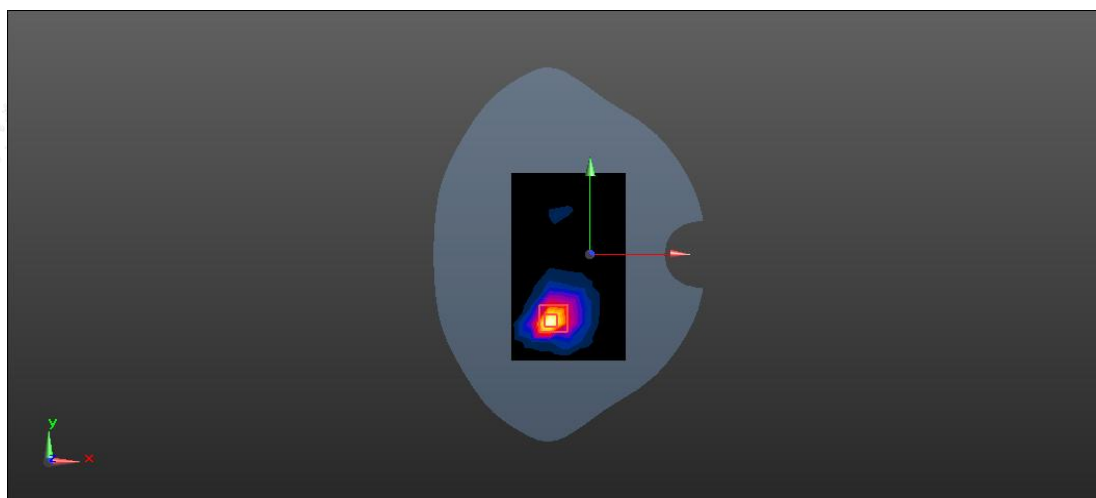

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/16

Test Laboratory: LCS-SAR Lab

## LTE Band 26 15M QPSK 26965CH 1RB0 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 841.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 41.347$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (8x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.574 W/kg



**Configuration/Head /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.72 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.559 W/kg

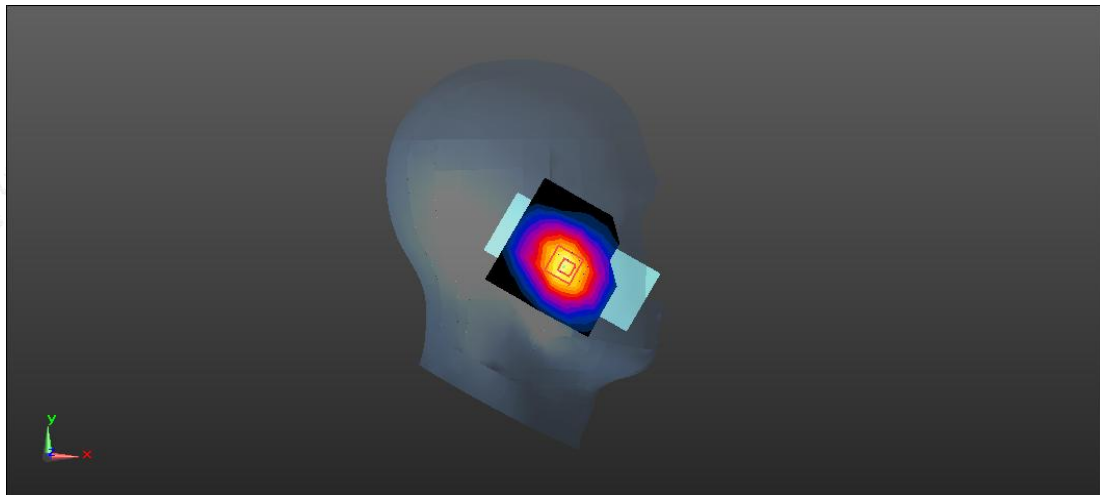

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2025/7/16

Test Laboratory: LCS-SAR Lab

**LTE Band 26 15M QPSK 26965CH 1RB0 Rear side 5mm****DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 841.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 41.347$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/ Body /Area Scan (10x15x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.731 W/kg



**Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.69 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.967 W/kg

**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.246 W/kg**

Maximum value of SAR (measured) = 0.764 W/kg

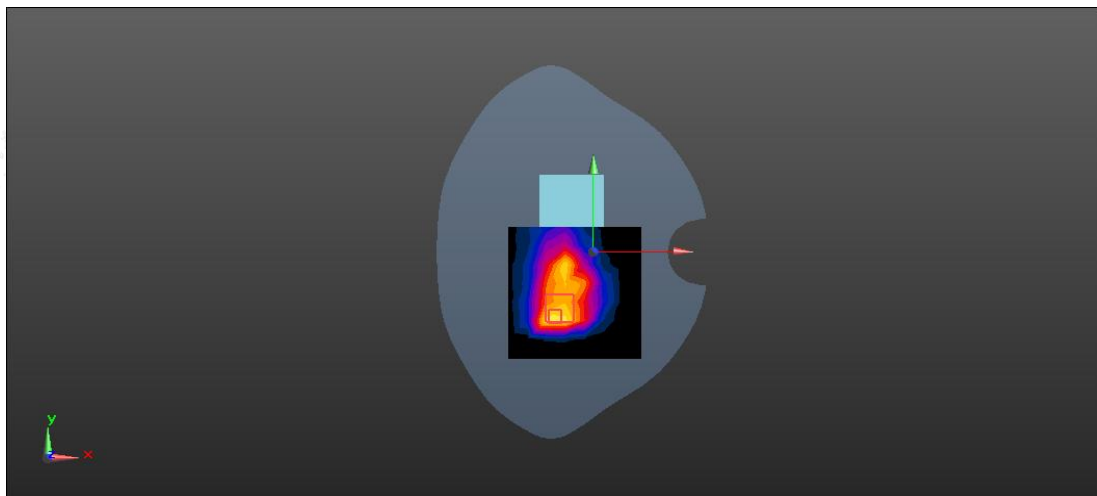

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/17

Test Laboratory: LCS-SAR Lab

## LTE Band 66 20M QPSK 132572CH 1RB0 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1770\text{MHz}$ ;  $\sigma = 1.356\text{ S/m}$ ;  $\epsilon_r = 40.032$ ;  $\rho = 1000\text{ kg/m}^3$   
Phantom section: Left Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.486 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.759 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.537 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.452 W/kg

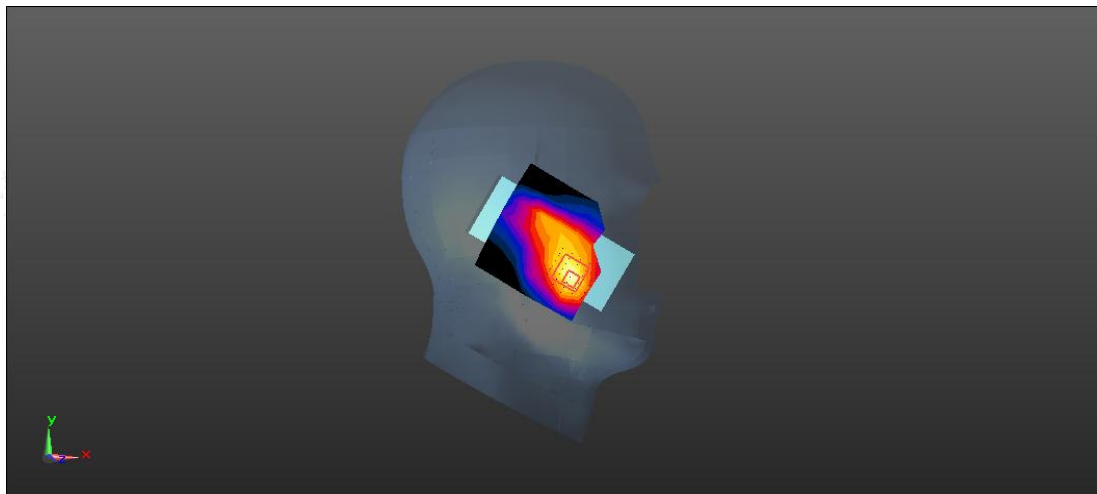

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/17

Test Laboratory: LCS-SAR Lab



## LTE Band 66 20M QPSK 132572CH 1RB0 Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1770\text{MHz}$ ;  $\sigma = 1.356\text{ S/m}$ ;  $\epsilon_r = 40.032$ ;  $\rho = 1000\text{ kg/m}^3$   
Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

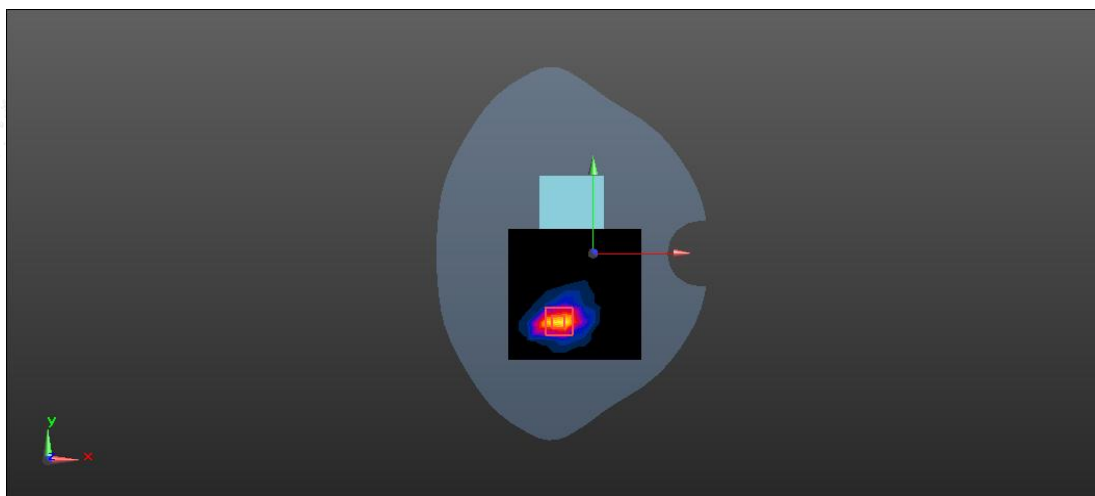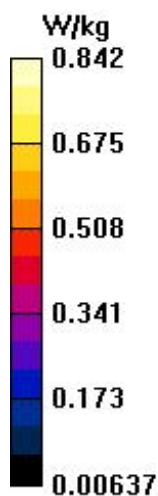**Configuration/ Body /Area Scan (10x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.873\text{ W/kg}$ **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $14.35\text{ V/m}$ ; Power Drift =  $-0.13\text{ dB}$ Peak SAR (extrapolated) =  $1.12\text{ W/kg}$ **SAR(1 g) =  $0.523\text{ W/kg}$ ; SAR(10 g) =  $0.269\text{ W/kg}$** Maximum value of SAR (measured) =  $0.842\text{ W/kg}$ 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 71 20M QPSK 133222CH 1RB99 Left Cheek

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 673 \text{ MHz}$ ;  $\sigma = 0.887 \text{ S/m}$ ;  $\epsilon_r = 41.838$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Head /Area Scan (10x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.296 W/kg



**Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 7.469 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

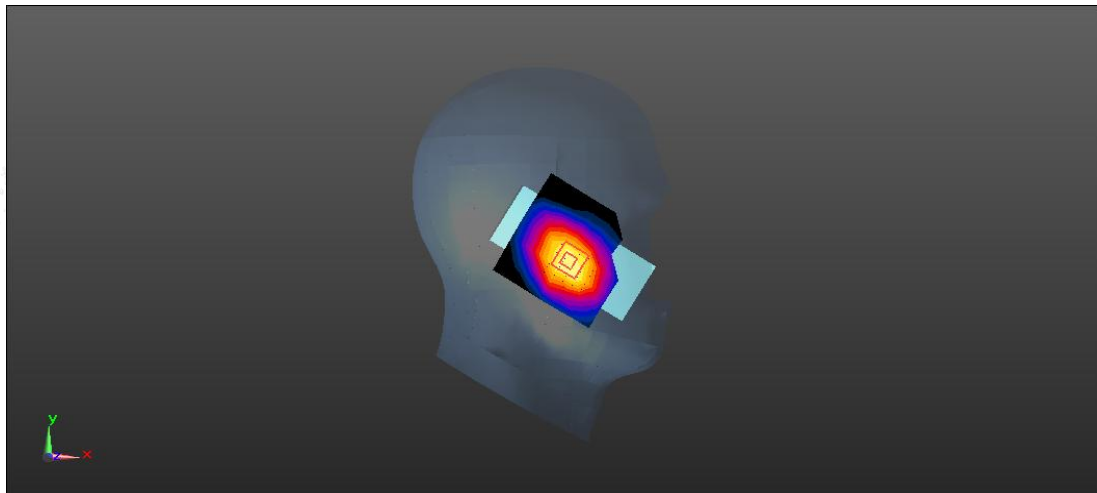

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2025/7/15

Test Laboratory: LCS-SAR Lab

## LTE Band 71 20M QPSK 133222CH 1RB99 Rear side 5mm

**DUT: 4G Feature Phone ; Type: C1 ; Serial: A250609090-1**



Communication System: UID 0, LTE-FDD (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 673 \text{ MHz}$ ;  $\sigma = 0.887 \text{ S/m}$ ;  $\epsilon_r = 41.838$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.48, 9.48, 9.48); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

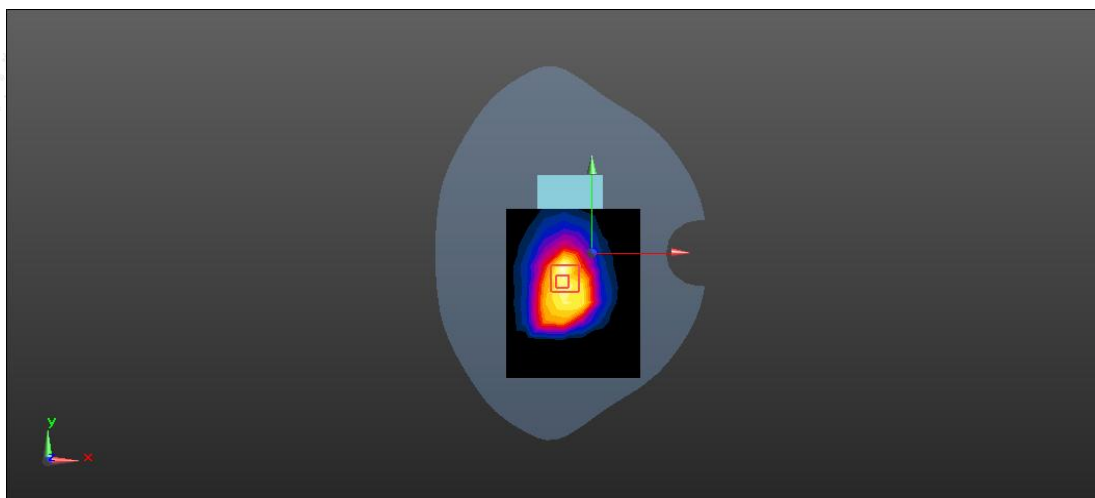**Configuration/ Body /Area Scan (10x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.255 \text{ W/kg}$ **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $13.14 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$ Peak SAR (extrapolated) =  $0.362 \text{ W/kg}$ **SAR(1 g) =  $0.166 \text{ W/kg}$ ; SAR(10 g) =  $0.096 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.274 \text{ W/kg}$ 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity