

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 1 of 23

TEST REPORT

Application No: SUCR2504000309MO
Applicant: METICOMM PTE. LTD.
Address of Applicant: 15 UPPER CIRCULAR ROAD, #06-01, SINGAPORE 058413
Manufacturer: METICOMM PTE. LTD.
Address of Manufacturer: 15 UPPER CIRCULAR ROAD, #06-01, SINGAPORE 058413
EUT Description: IoT Module
Model No.: MQM711-0-50-0B, MQM711-0-50-0U, MQM711-0-50-0P ♣
 ♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: Meticomm
FCC ID: 2BQY7-M7110
Standard(s): FCC 47 CFR Part 15, Subpart B
Date of Receipt: June 7, 2025
Date of Test: June 29, 2025 to July 1, 2025
Date of Issue: July 11, 2025

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903
Rev.: 01
Page: 2 of 23

Version

Revision Record			
Version	Description	Date	Remark
01	Original	July 11, 2025	/

Authorized for issue by:				
Tested By				
		Hayley ZhangProject Manager		
Approved By				
		Cloud Peng/Technical Manager		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 3 of 23

Contents

Version	2
1 Test Summary	4
2 General Information	5
2.1 Description of Support Units	5
2.2 Test Location	5
2.3 Test Facility	6
2.4 Deviation from Standards	6
2.5 Abnormalities from Standard Conditions	6
3 Equipment List	7
4 Measurement Uncertainty	10
5 Emission Test Results	11
5.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)	11
5.2 Radiated Emissions (30MHz-1GHz)	15
5.3 Radiated Emissions (above 1GHz)	19
6 Photographs	23
6.1 Test Setup	23



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903
Rev.: 01
Page: 4 of 23

1 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (30MHz-1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (above 1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 5 of 23

2 General Information

Hardware Version:	N/A		
Software Version:	N/A		
SN:	N/A		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	Bluetooth	2402~2480	2402~2480
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.			

2.1 Description of Support Units

Description	Manufacturer	Model No.	Inventory No.
Router	Smauwave Technology Co.,Ltd	SRT 421	SUWI-04-34-01
Computer	Lenovo	T14	SUWI-03-33-04
Earphones	oppo	oppo Earphones	/
Bluetooth earphone	Lenovo	Thinplus BH3	SUWI-03-48-01
Mouse	Lenovo	3D optical Mouse	SUWI-03-33-05
Adaptor	Huawei	HW-050200C02	SUWI-03-33-06

2.2 Test Location

All tests were performed at:

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	King-p Li



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 6 of 23

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

2.4 Deviation from Standards

None

2.5 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903
Rev.: 01
Page: 7 of 23

3 Equipment List

Conduction Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	9/10/2024	9/9/2025
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/13/2025	2/12/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	5/8/2025	5/7/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	5/8/2025	5/7/2026
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	9/10/2024	9/9/2025
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2024	11/18/2025
DC Power Supply	ROHDE&SCHWARZ	HMC8042	SUWI-01-18-03	1/16/2025	1/15/2026



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 8 of 23

9*6*6 Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/02/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2024	11/20/2025
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	8/22/2024	8/21/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	9/10/2024	9/9/2025
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	9/10/2024	9/9/2025
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR
Measurement Software	Tonscend	JS32-RSE 4.0.0.1	SUWI-02-09-06	NCR	NCR
Router	PLANET	FSD-803	SUWI-03-14-01	NCR	NCR
Open Switch and Control Unit	ROHDE&SCHWARZ	OSP220	SUWI-03-15-01	NCR	NCR



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 9 of 23

Multiplier Unit	ROHDE&SCHWARZ	TC-MX60	SUWI-03-16-01	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE60	SUWI-03-16-02	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE90	SUWI-03-16-03	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX90	SUWI-03-17-01	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TS-RSE140	SUWI-03-19-01	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX140	SUWI-03-19-02	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TS-RSE200	SUWI-03-19-03	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX200	SUWI-03-19-04	NCR	NCR
Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/16/2024	1/15/2026
Measurement Software	ROHDE&SCHWARZ	ELEKTRA V4.10.1	SUWI-02-09-07	NCR	NCR
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2024	11/18/2025
DC Power Supply	ROHDE&SCHWARZ	HMC8042	SUWI-01-18-03	1/16/2025	1/15/2026

Remark: NCR=No Calibration Requirement.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903
Rev.: 01
Page: 10 of 23

4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 2.90dB (150kHz to 30MHz)
2	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.8dB (30M -1GHz)
		± 4.8dB (1GHz to 18GHz)
Remark: The U _{lab} (lab Uncertainty) is less than U _{CISPR/ETSI} (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

5 Emission Test Results

5.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B		
Test Method:	ANSI C63.4:2014		
Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency Range (MHz)	Limit(dBμV)	
		Quasi-peak	average
	0.15M-0.5MHz	66 ~ 56*	56 ~ 46*
	0.5M-5MHz	56	46
	5M-30MHz	60	50
*Decreases with the logarithm of the frequency Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz			

2.1.1 E.U.T. Operation

Operating Environment:

Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
Pretest these modes to find the worst case:	a: Bluetooth Link + EUT + Powered by Test Kit
The worst case for final test:	a: Bluetooth Link + EUT + Powered by Test Kit

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400030903

Rev.: 01

Page: 12 of 23

2.1.2 Test Setup Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

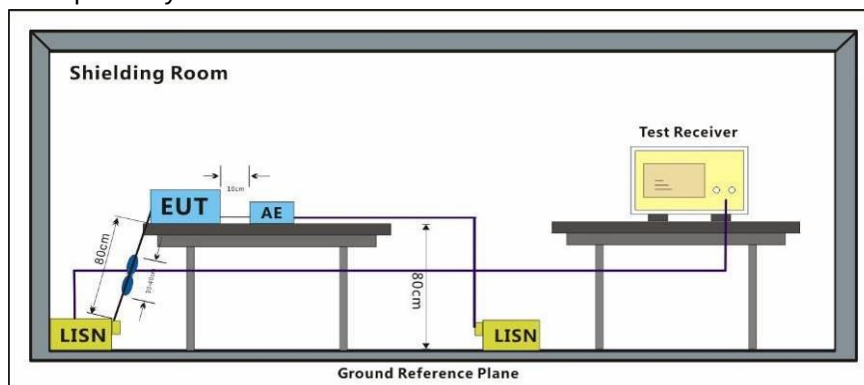

2.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 13 of 23

Final Test Mode:	Mode a	Phase:	Line
------------------	--------	--------	------

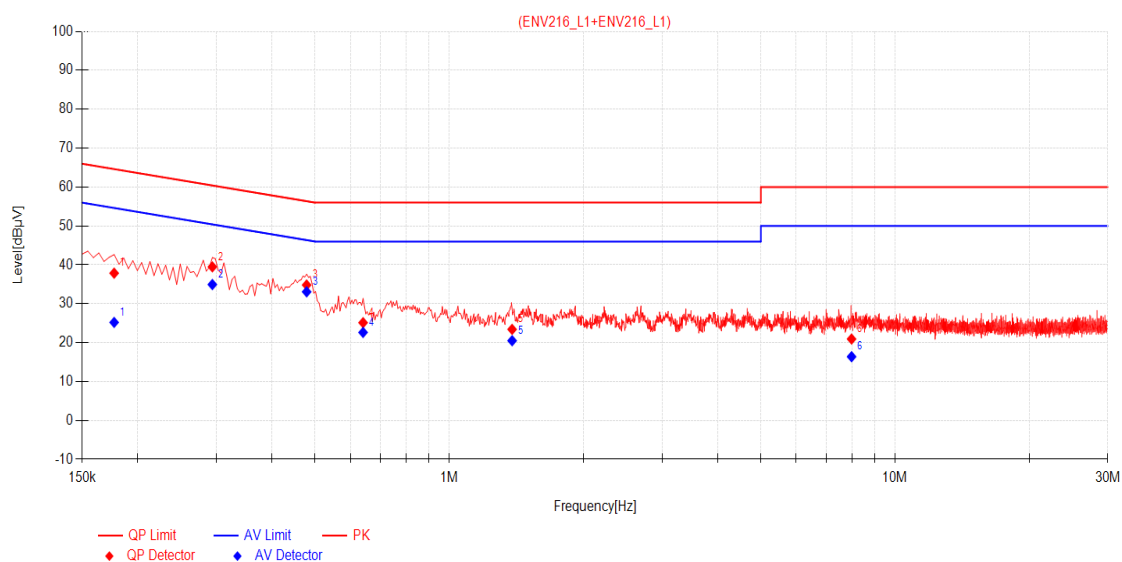

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1770	10.08	27.78	37.86	64.63	26.77	15.12	25.20	54.63	29.43	PASS
2	0.2940	10.06	29.42	39.48	60.41	20.93	24.88	34.94	50.41	15.47	PASS
3	0.4785	10.07	24.75	34.82	56.37	21.55	23.00	33.07	46.37	13.30	PASS
4	0.6405	10.06	15.07	25.13	56.00	30.87	12.57	22.63	46.00	23.37	PASS
5	1.3830	9.91	13.50	23.41	56.00	32.59	10.59	20.50	46.00	25.50	PASS
6	7.9890	9.81	11.12	20.93	60.00	39.07	6.57	16.38	50.00	33.62	PASS

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value = Reading[dBμV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBμV] – Value[dBμV]
4. The high point before 10M-30M is RF signal which comes from NFC, and which can be ignored.


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 14 of 23

Final Test Mode:	Mode a	Phase:	Neutral
------------------	--------	--------	---------

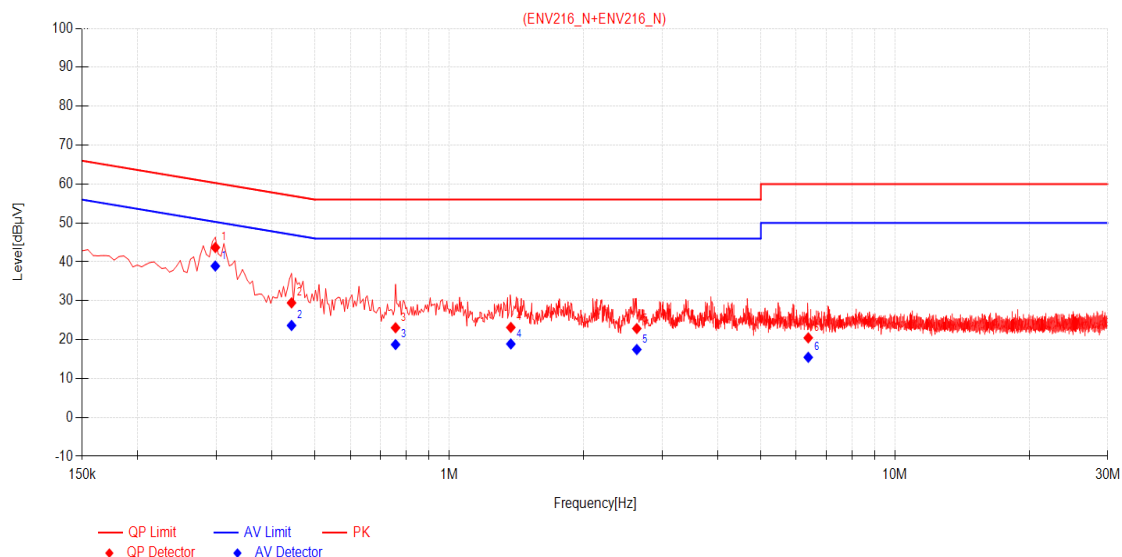

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2985	10.05	33.64	43.69	60.28	16.59	28.87	38.92	50.28	11.36	PASS
2	0.4425	10.06	19.39	29.45	57.01	27.56	13.58	23.64	47.01	23.37	PASS
3	0.7575	10.06	12.99	23.05	56.00	32.95	8.68	18.74	46.00	27.26	PASS
4	1.3740	9.94	13.20	23.14	56.00	32.86	8.95	18.89	46.00	27.11	PASS
5	2.6340	9.89	12.96	22.85	56.00	33.15	7.57	17.46	46.00	28.54	PASS
6	6.3870	9.82	10.64	20.46	60.00	39.54	5.63	15.45	50.00	34.55	PASS

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value = Reading[dBμV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBμV] – Value[dBμV]
4. The high point before 10M-30M is RF signal which comes from NFC, and which can be ignored.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 15 of 23

5.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	47 CFR Part 15, Subpart B		
Test Method:	ANSI C63.4:2014		
Frequency Range:	30MHz to 1GHz		
Measurement Distance:	3m		
Limit:	Frequency Range (MHz)	Limit(dB μ V/m)	Detector
	30MHz -88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1000MHz	54.0	Quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz		

5.2.1 E.U.T. Operation

Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
Pretest these modes to find the worst case:	a: Bluetooth Link + EUT + Powered by Test Kit
The worst case for final test:	a: Bluetooth Link + EUT + Powered by Test Kit

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400030903

Rev.: 01

Page: 16 of 23

5.2.2 Test Setup Procedures

1. The EUT was placed in a semi Anechoic Chamber as show below
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
7. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

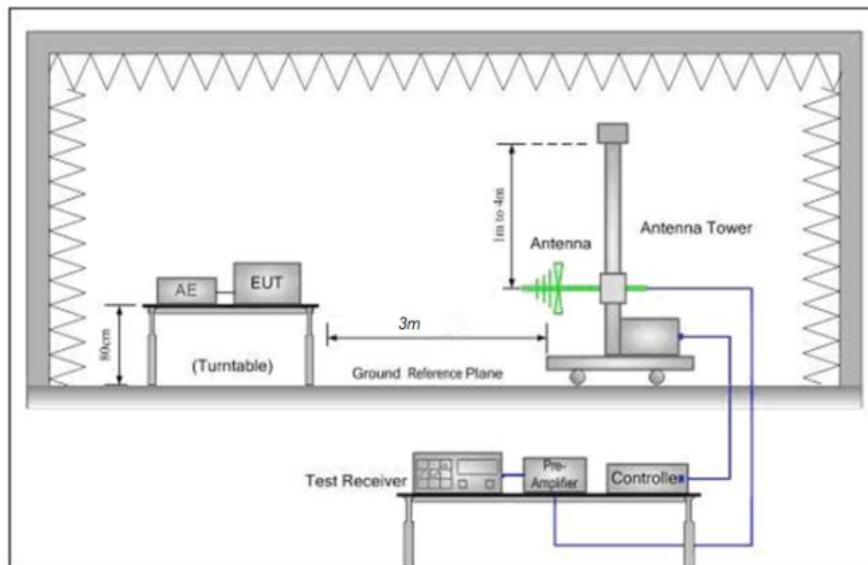

5.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. The three polarities of X,Y,Z were measured by EUT, but only the worst data had been displayed.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01


Page: 17 of 23

Final Test Mode:

Mode a

Polarization:

Horizontal

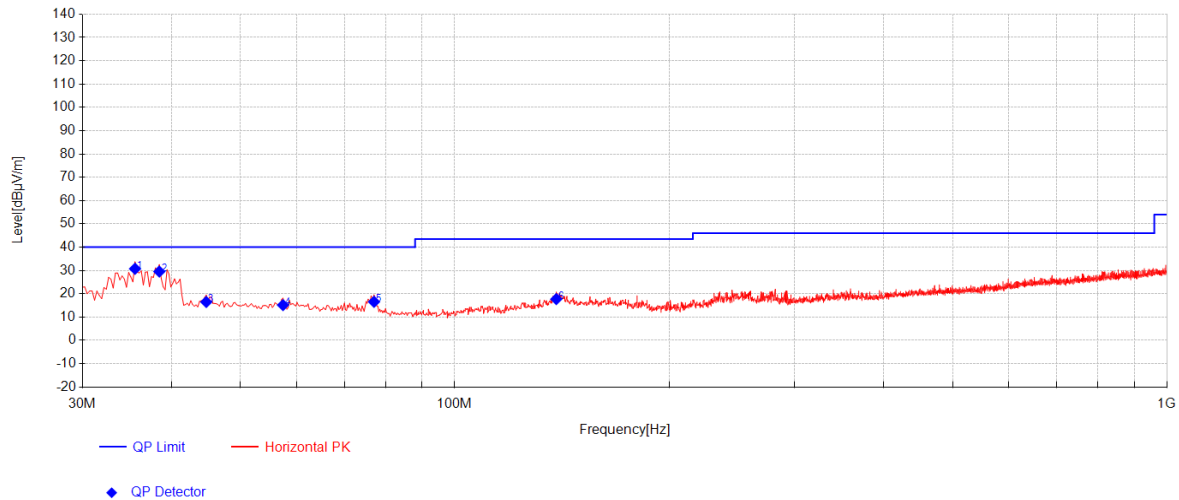

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.5775	46.38	18.26	-33.94	30.70	40.00	9.30	196	339	Horizontal
2	38.4875	44.80	18.60	-33.89	29.51	40.00	10.49	235	339	Horizontal
3	44.7925	31.36	18.88	-33.78	16.46	40.00	23.54	187	339	Horizontal
4	57.4025	30.76	17.94	-33.59	15.11	40.00	24.89	169	166	Horizontal
5	77.045	34.50	15.40	-33.36	16.53	40.00	23.47	255	222	Horizontal
6	138.8825	31.99	18.49	-32.77	17.70	43.50	25.80	182	252	Horizontal

Remark:

1. The Quasi-Peak measurements were performed on the EUT.

2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dBμV/m] - Value[dBμV/m]

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01


Page: 18 of 23

Final Test Mode:

Mode a

Polarization:

Vertical

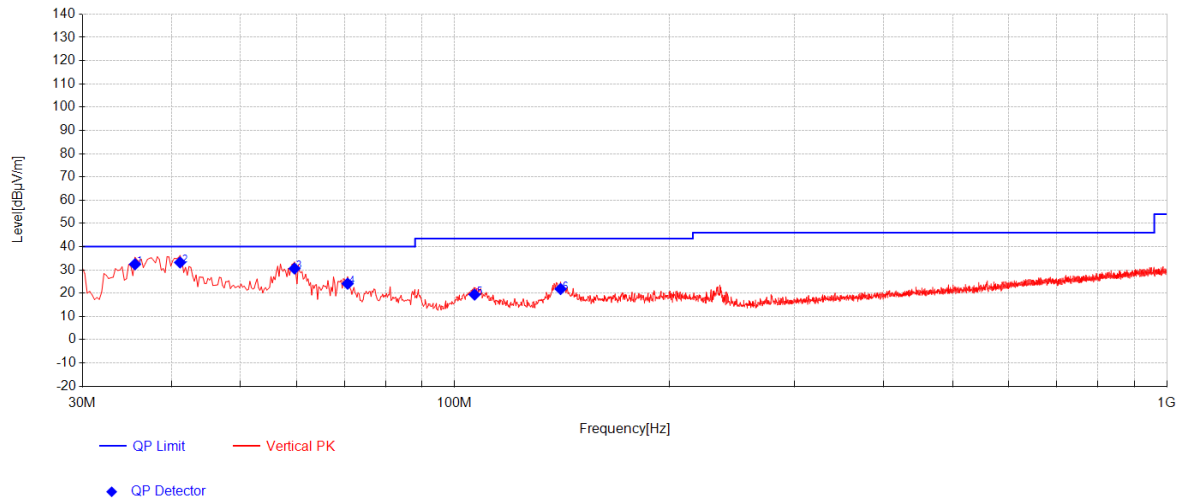

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.5775	48.11	18.26	-33.94	32.43	40.00	7.57	253	0	Vertical
2	41.155	48.26	18.78	-33.84	33.20	40.00	6.80	187	0	Vertical
3	59.585	46.60	17.54	-33.56	30.58	40.00	9.42	169	53	Vertical
4	70.74	41.36	16.13	-33.41	24.07	40.00	15.93	234	233	Vertical
5	106.63	36.89	15.53	-33.04	19.38	43.50	24.12	185	192	Vertical
6	140.8225	36.09	18.44	-32.76	21.77	43.50	21.73	244	233	Vertical

Remark:

1. The Quasi-Peak measurements were performed on the EUT.

2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dBμV/m] - Value[dBμV/m]



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 19 of 23

5.3 Radiated Emissions (above 1GHz)

Test Requirement:	47 CFR Part 15, Subpart B		
Test Method:	ANSI C63.4:2014		
Frequency Range:	Above 1GHz		
Measurement Distance:	3m		
Limit:	Frequency (MHz)	Limit (dB μ V/m)	Detector
	Above 1GHz	74	Peak
		54	Average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 5th harmonic of the highest frequency or 40GHz, whichever is lower.		

5.3.1 E.U.T. Operation

Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
Pretest these modes to find the worst case:	a: Bluetooth Link + EUT + Powered by Test Kit
The worst case for final test:	a: Bluetooth Link + EUT + Powered by Test Kit

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400030903

Rev.: 01

Page: 20 of 23

5.3.2 Test Setup Procedures

1. The EUT was placed in a full Anechoic Chamber as show below
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation
(Distance from antenna to EUT is 1m for measurements >18GHz).
4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak and AV Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
7. At a measurement distance of 1 meter the limit line was increased by $20 \cdot \log(3/1) = 9.54$ dB.

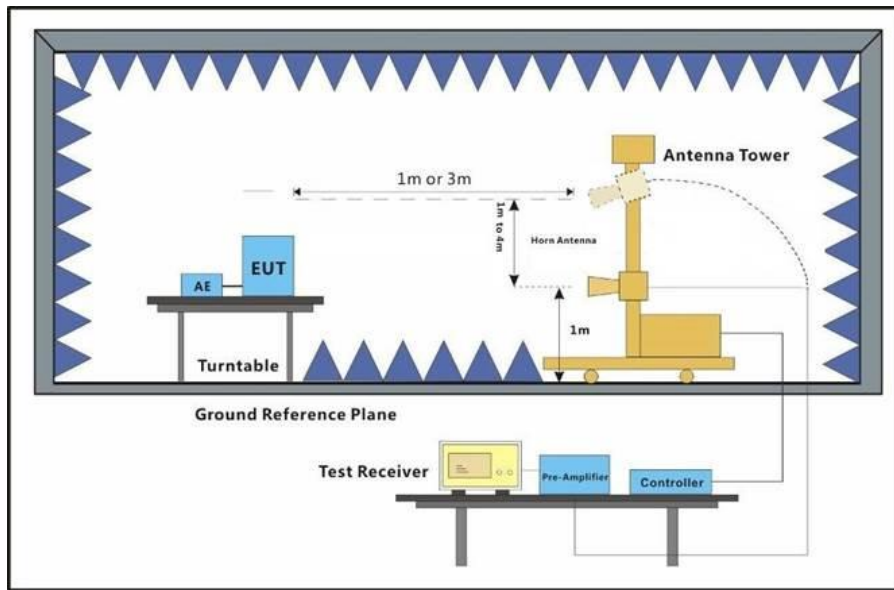

5.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The three polarities of X, Y, Z were measured by EUT, but only the worst data had been displayed.

Scan from 5th harmonic of the highest frequency or 40GHz, whichever is lower, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only below points had been displayed.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01


Page: 21 of 23

Final Test Mode:

Mode a

Polarization:

Horizontal

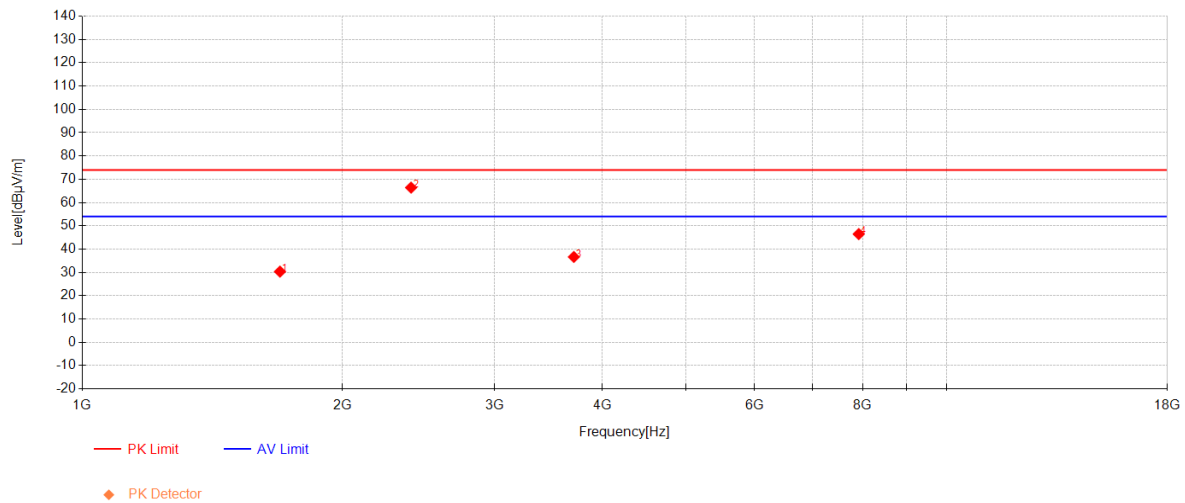

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1693.6	52.30	24.60	-46.55	30.35	74.00	43.65	Horizontal
2	2401.65	84.49	27.18	-45.26	66.41	-	-	Horizontal
3	3705.975	49.50	30.30	-43.16	36.64	74.00	37.36	Horizontal
4	7917.3	46.34	37.02	-36.89	46.47	74.00	27.53	Horizontal

Remark:

1. #2 1G-18G is RF signal which comes from Wi-Fi access point used to connect the EUT, and which can be ignored.

2. The Peak and Average measurements were performed on the EUT.

3. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dBμV/m] – Level[dBμV/m]



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01


Page: 22 of 23

Final Test Mode:

Mode a

Polarization:

Vertical

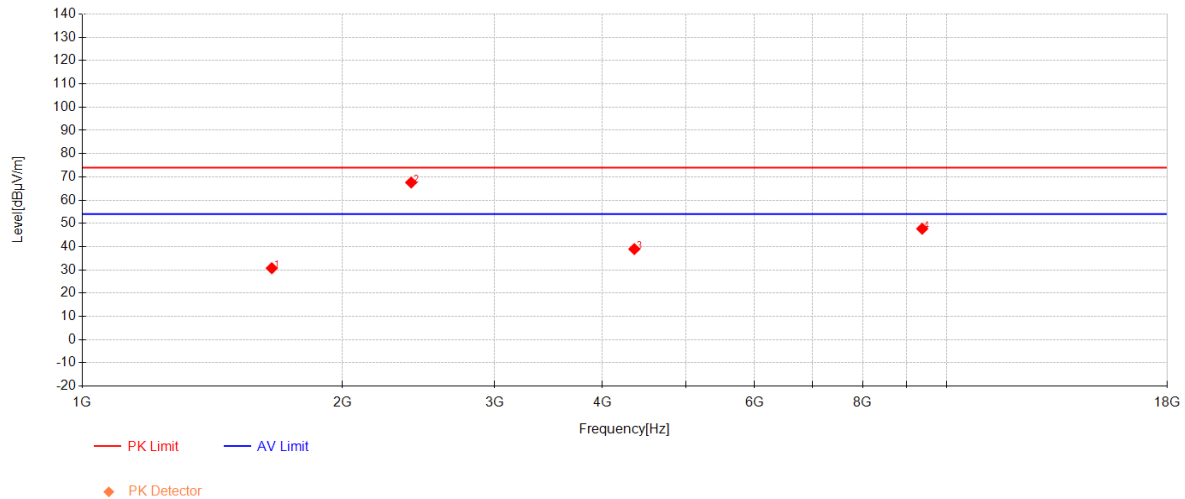

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1657.05	52.76	24.60	-46.64	30.72	74.00	43.28	Vertical
2	2402.5	85.65	27.19	-45.26	67.57	-	-	Vertical
3	4354.1	49.24	31.87	-42.15	38.95	74.00	35.05	Vertical
4	9375.475	43.76	37.71	-33.80	47.68	74.00	26.32	Vertical

Remark:

1. #2 1G-18G is RF signal which comes from Wi-Fi access point used to connect the EUT, and which can be ignored.

2. The Peak and Average measurements were performed on the EUT.

3. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dBμV/m] – Level[dBμV/m]



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400030903

Rev.: 01

Page: 23 of 23

6 Photographs

6.1 Test Setup

Refer to Appendix A.1 15B Setup Photos.

---End of Report---