

1.Explanation of part number :

RF	MTA	1107	00	N	N	L	B	0	04
Type Code	Product Code	Metal Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
Walsin RF Device	Metal Antenna	Per 2 digits of length, width e.g.:1107 Length 11.35 mm, Width 7.85mm	2 digits for cable length e.g.: 00 None Cable	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band N: NFC T: LTE band W: WCDMA band	B: MP T:During Test X: Pile Run	0:None 1:∅ 0.81 2:∅ 1.32 3:∅ 1.13 4:Low Loss ∅ 1.13 5:∅ 0.5 6:RG316 7: ∅ 1.37 8:RG178 9:Low Loss ∅ 1.37	01~99 series number

2.Electrical Specification :

Item	Specification
Working Frequency Range	2.4 ~ 2.5 / 5.15 ~ 5.85 GHz (Note-1)
Return Loss	-10dB(Max)
Peak Gain	ANT1:1.20 dBi(@2.4 ~ 2.5 GHz) ANT1:3.25 dBi(@5.15 ~ 5.85 GHz) ANT2:1.76 dBi(@2.4 ~ 2.5 GHz) ANT2:3.55 dBi(@5.15 ~ 5.85 GHz)
VSWR	< 2.0
Polarization	Linear Vertical
Admitted Power	1W
Operation Temperature	-20℃ ~ +65℃

Manufacturer: INPAQ TECHNOLOGY CO., LTD.

Address: Building 2, Unit 1, Science Park 1, Zone 1, South District, Science and Technology Park, Nanshan District, Shenzhen City, Guangdong Province

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFMTA110700NNLB004

DOCUMENT NO.

SPEC REV.
A0

3. Antenna Drawing : Ant.2 (WIFI)

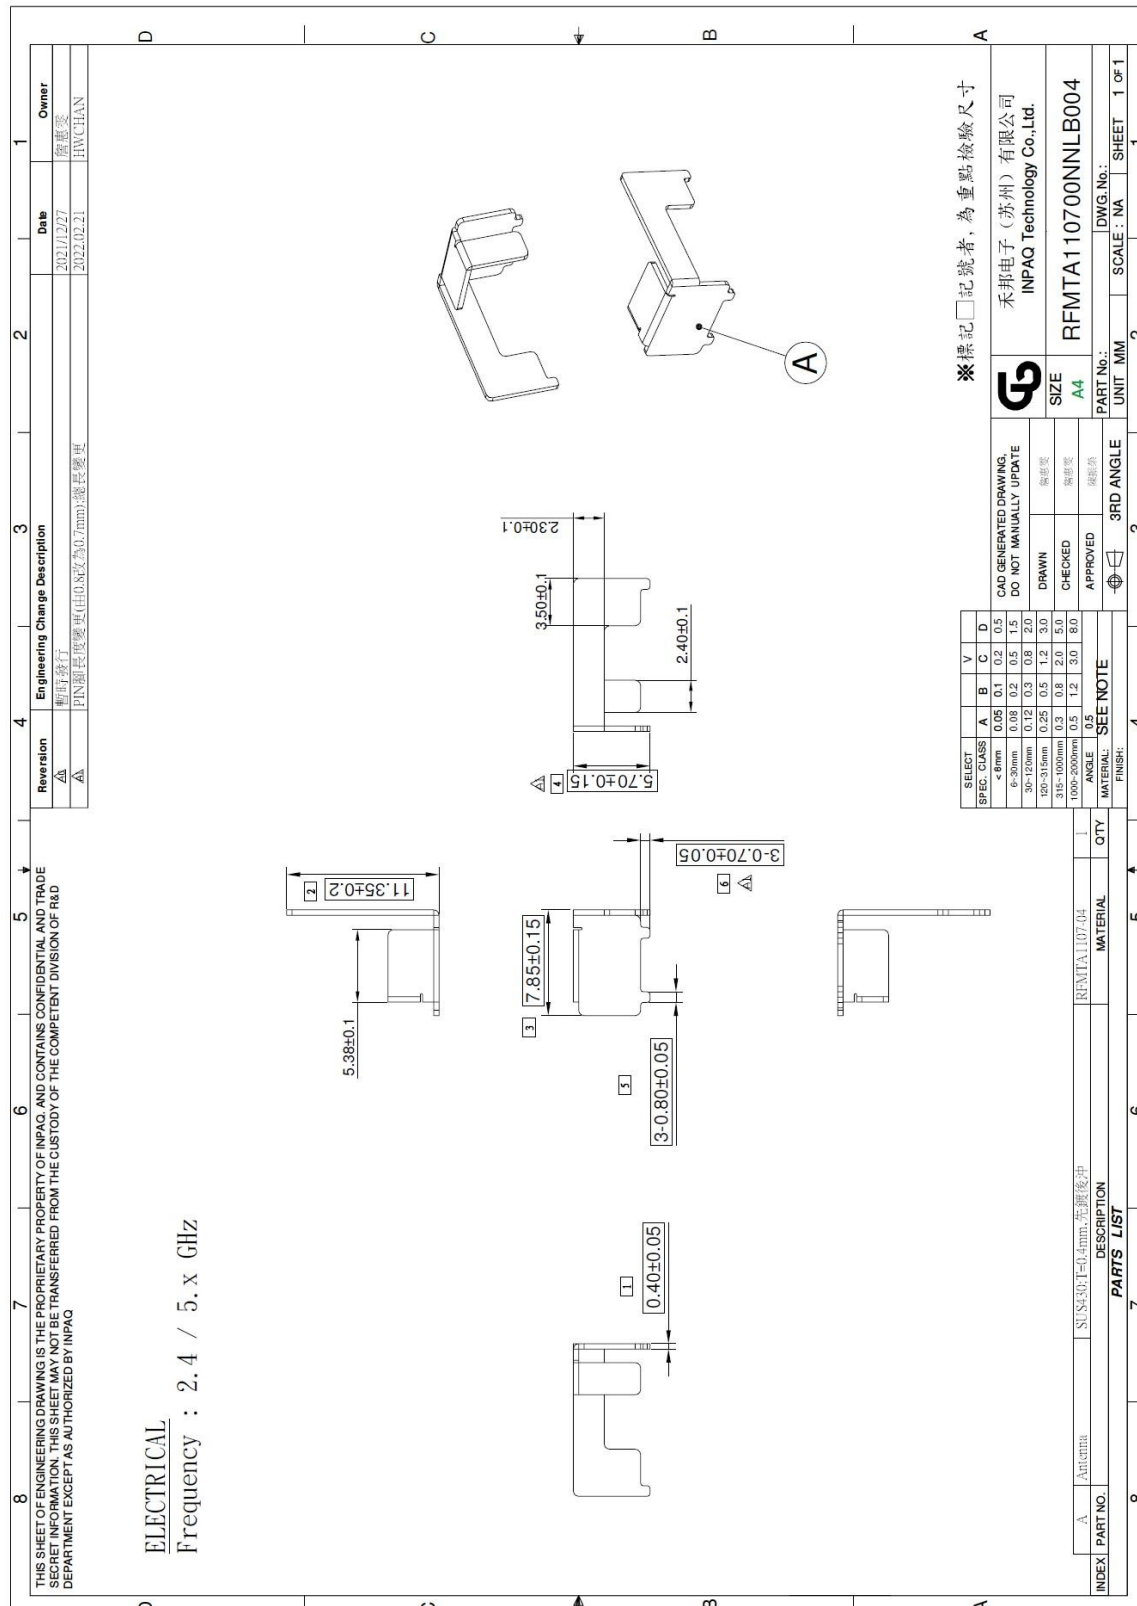

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=N/A X.X=N/A X.XX=N/A
ANGLES=N/A HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY: 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮


TITLE : RFMTA110700NNLB004

DOCUMENT NO.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

SPEC	REV.
A0	

Ant.1 (Bluetooth)

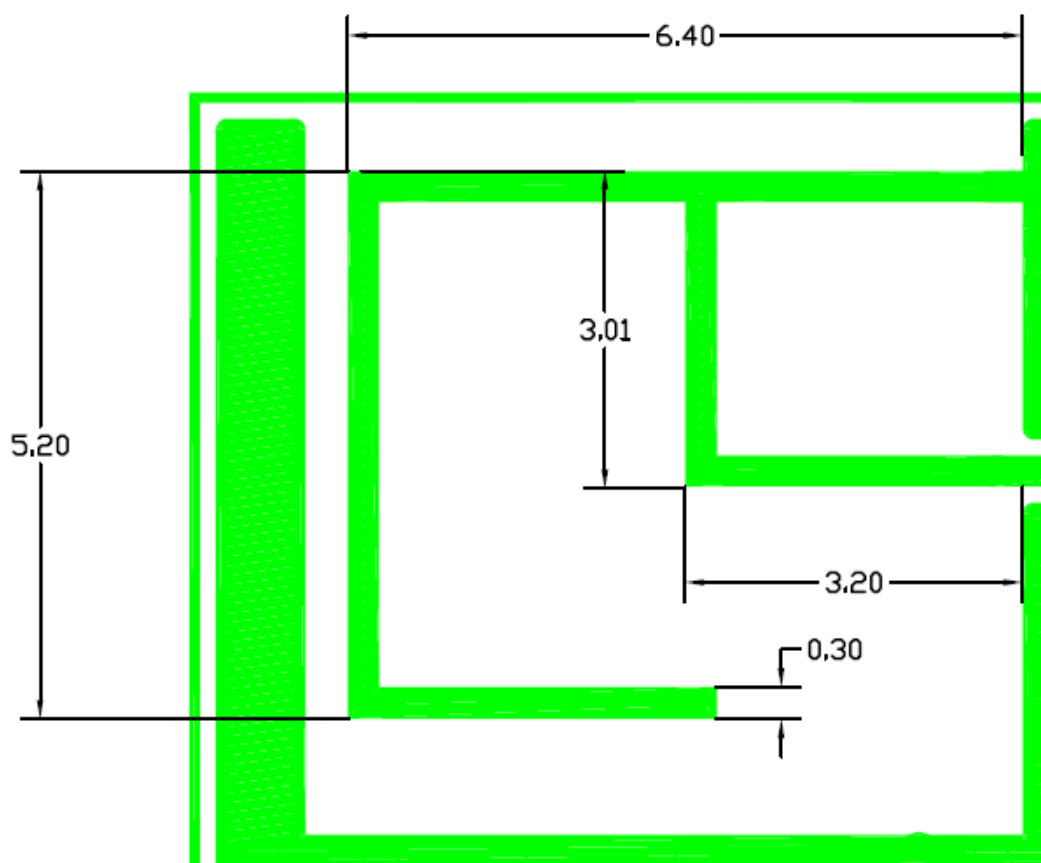



UNLESS OTHER SPECIFIED TOLERANCES ON : X = N/A X.X = N/A X.XX = N/A ANGLES = N/A HOLEDIA = N/A		 INPAQ TECHNOLOGY CO., LTD.	
SCALE : N/A	UNIT : mm		
DRAWN BY : 詹惠雯	CHECKED BY : 詹惠雯	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DESIGNED BY : 黃瑞郎	APPROVED BY : 陳振榮		
TITLE : RFMTA110700NNLB004		DOCUMENT NO.	SPEC REV. A0

4. Performance Report :

Test Report

■ Experimental Setup

Experimental Setup

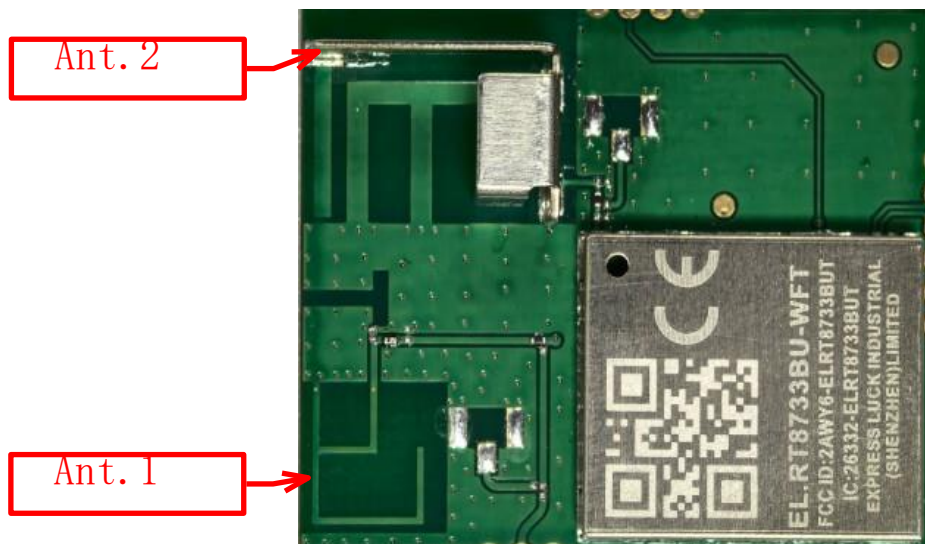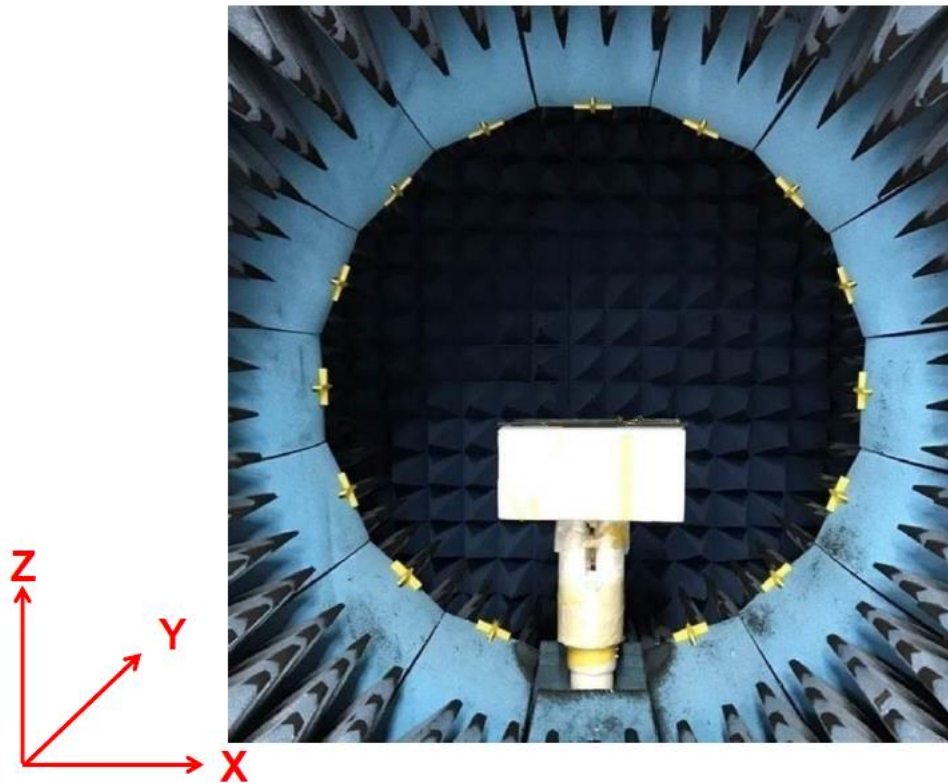

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

E : N/A	UNIT : mm
DRAWN BY : 詹惠雯	CHECKED BY : 詹惠雯
DESIGNED BY : 黃瑞郎	APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : RFMTA110700NNLB004

DOCUMENT
NO.

SPEC REV.
A0

ELECTRICAL CHARACTERISTICS

Return Loss & Isolation

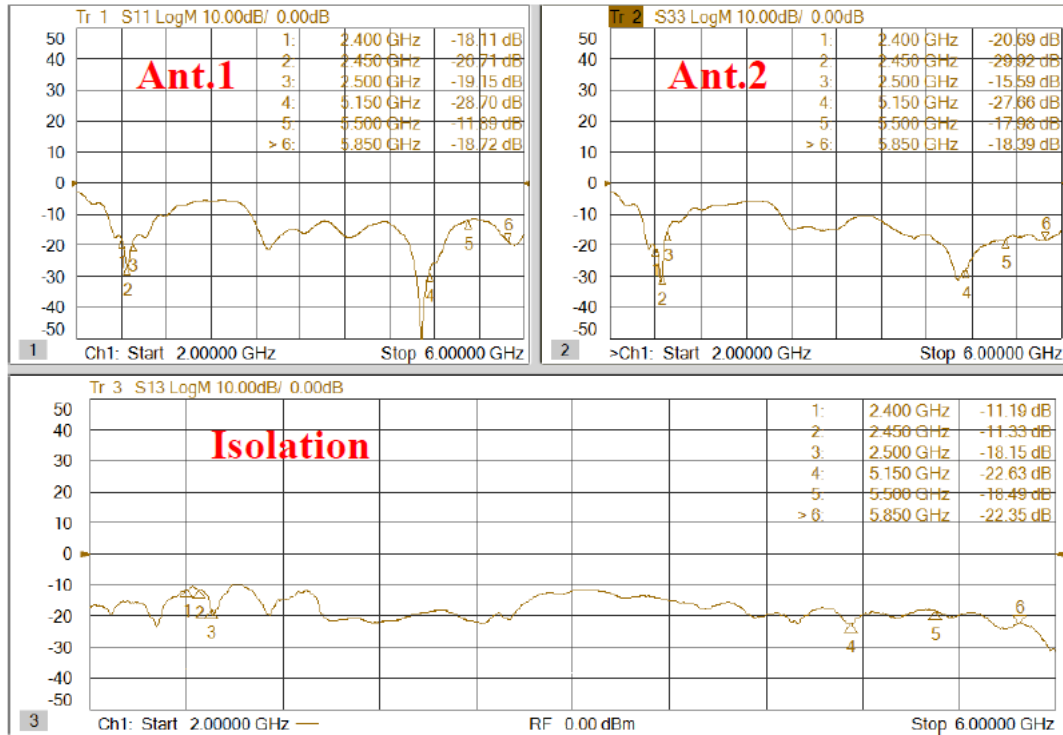

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFMTA110700NNLB004



DOCUMENT
NO.

SPEC REV.
A0


Antenna Efficiency and Peak Gain

Ant.1_2G


2450 MHz

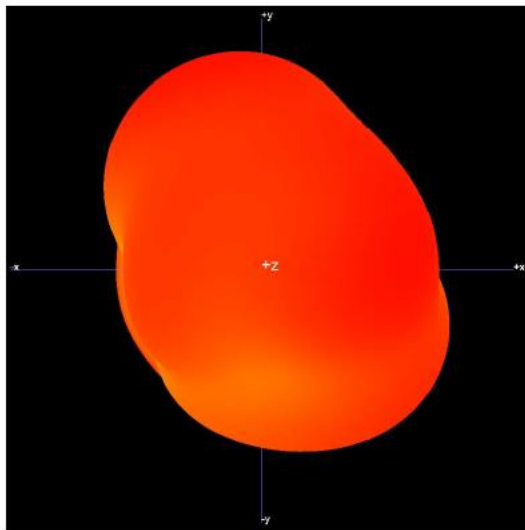

Frequency [MHz]	Gain [dBi]	Efficiency_Pcent
2410	0.42	64.38%
2420	1.20	67.65%
2430	0.38	57.13%
2440	0.42	58.82%
2450	0.39	56.23%
2460	0.35	55.22%
2470	0.49	58.51%
2480	0.42	57.12%
2490	0.21	53.51%
2500	0.11	56.15%

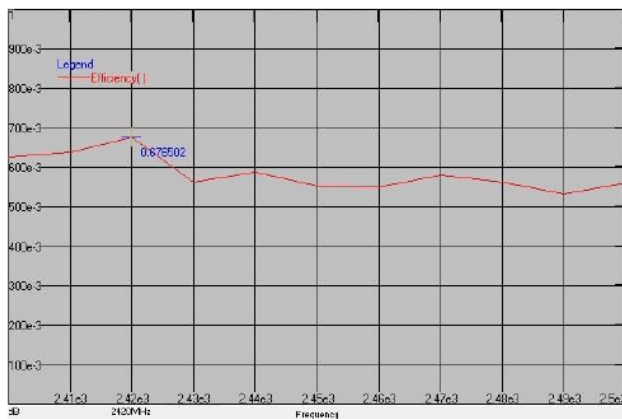

Maximum Efficiency at 2420 MHz : 67.65 %

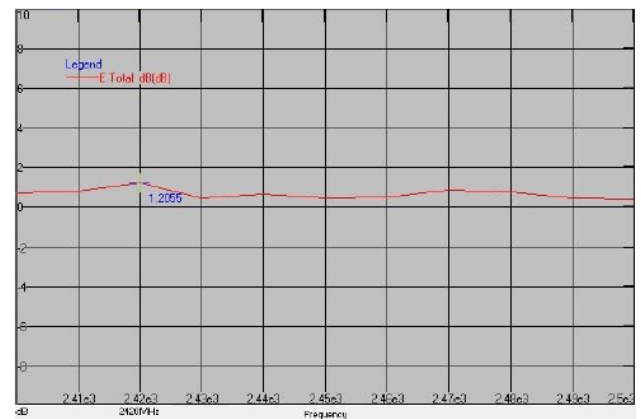

Maximum Peak Gain at 2420 MHz : 1.20 dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎



APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : RFMTA110700NNLB004

DOCUMENT
NO.

SPEC REV.
A0

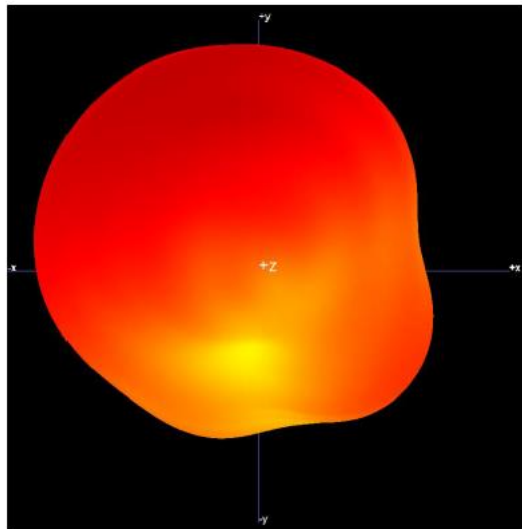Ant.1_5G**5500 MHz**

Frequency [MHz]	Gain [MHz]	Efficiency Pcent
5150	1.76	62.87%
5200	2.93	64.15%
5300	2.90	65.12%
5400	3.13	70.05%
5500	2.40	65.23%
5550	2.65	68.21%
5600	2.51	68.03%
5700	3.01	71.20%
5800	3.25	75.21%
5850	3.13	79.87%

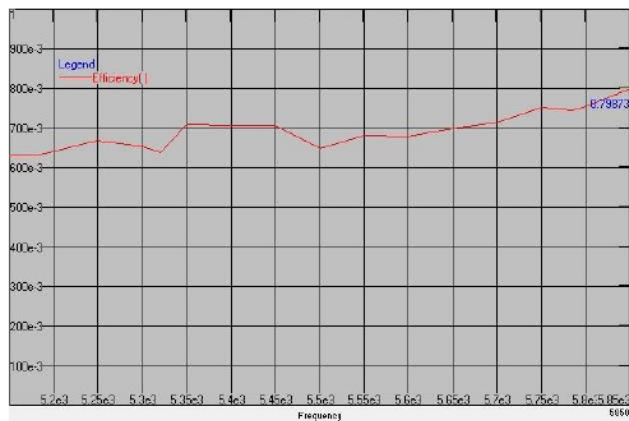

Maximum Efficiency at 5850 MHz : 79.87 %



Maximum Peak Gain at 5800 MHz : 3.25 dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮



TITLE : RFMTA110700NNLB004

**INPAQ TECHNOLOGY CO., LTD.**


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

SPEC REV.
A0

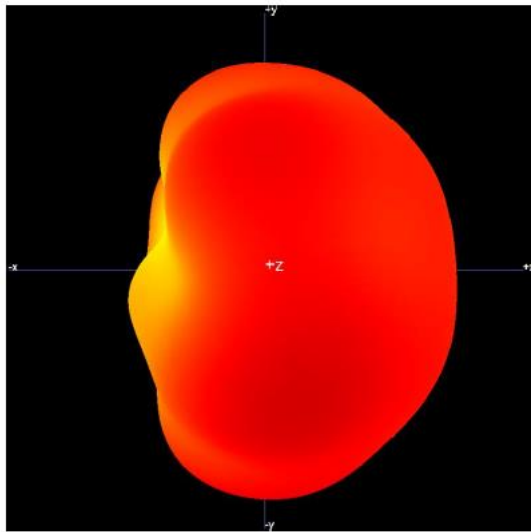Ant.2_2G**2450 MHz**

Frequency [MHz]	Gain [dBi]	Efficiency_Pcent
2410	1.63	62.38%
2420	1.62	62.15%
2430	1.66	62.13%
2440	1.76	62.55%
2450	1.58	61.13%
2460	1.59	63.55%
2470	1.58	62.51%
2480	1.65	61.12%
2490	1.61	61.21%
2500	1.10	60.23%

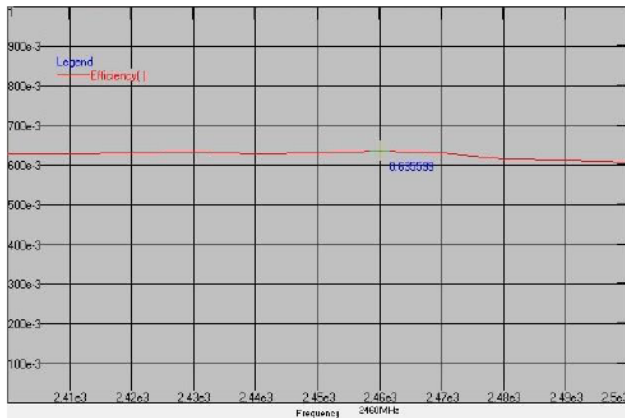

Maximum Efficiency at 2460 MHz : 63.55 %



Maximum Peak Gain at 2440 MHz : 1.76 dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A

**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯



DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFMTA110700NNLB004


DOCUMENT
NO.SPEC REV.
A0

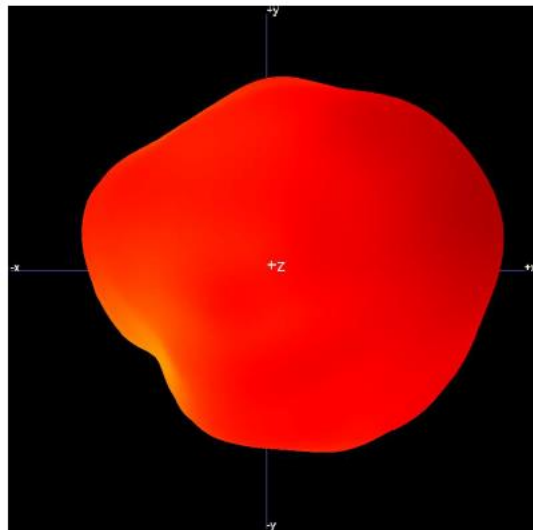Ant.2_5G**5500 MHz**

Frequency [MHz]	Gain [MHz]	Efficiency Pcent
5150	2.54	60.29%
5200	2.98	61.12%
5300	3.01	62.51%
5400	3.12	65.18%
5500	3.23	65.27%
5550	3.55	66.37%
5600	3.51	65.22%
5700	3.15	62.13%
5800	3.21	61.21%
5850	3.12	60.00%

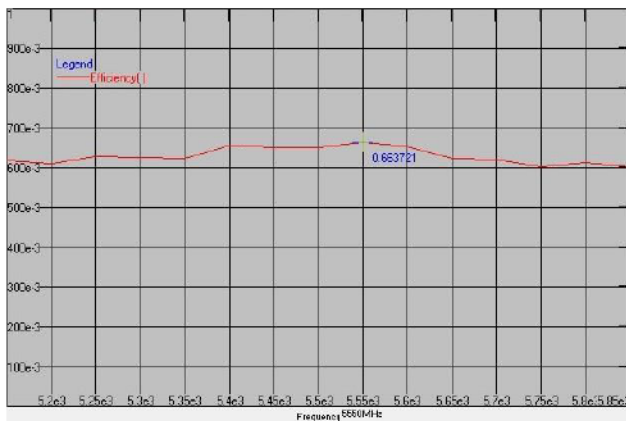

Maximum Efficiency at 5550 MHz : 66.37 %

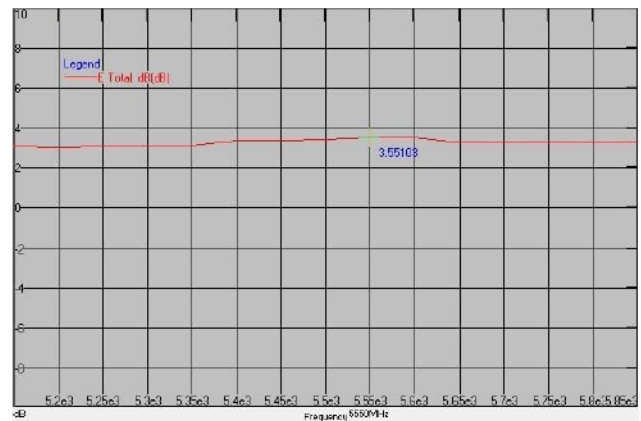

Maximum Peak Gain at 5550 MHz : 3.55 dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A

**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFMTA110700NNLB004

DOCUMENT
NO.SPEC REV.
A0