


Product specification

Quick Reference Date

ITEM	Antenna module on the system board
Frequenc Range	2400 ~ 2500MHz
Efficiency (dB)	70%
Gain (dBi)	1.54
Input Impedence(ohm)	50
Polarization Type	Vertical & Horizontal
VSW	< 2

Rtant Communications Co.,Ltd.
6th Floor, Junye Building (Industrial), No. 676, Houjie Section, Gu
antai Road, Houjie Town, Dongguan City



Antenna Layout & module on the system board

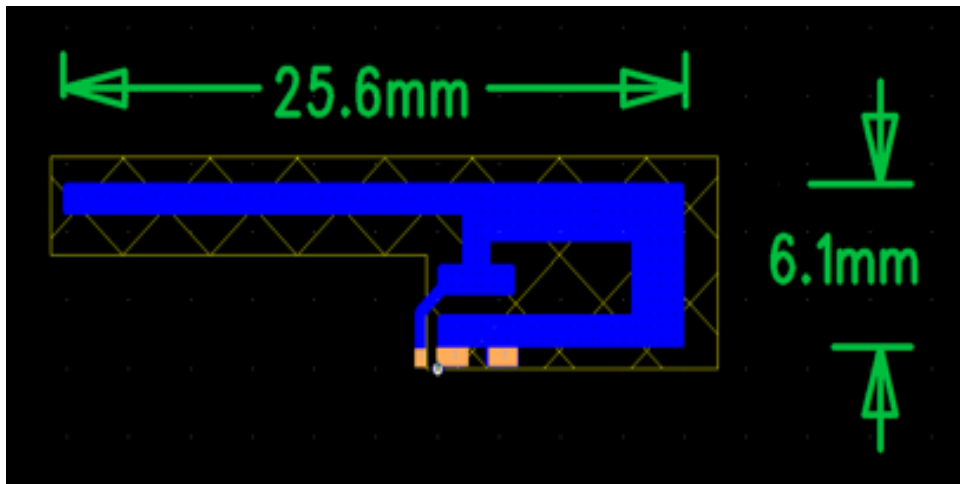


Antenna Gain

Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2402	-1.53	70.34	1.31
2405	-1.52	70.51	1.33
2410	-1.49	71.01	1.33
2415	-1.50	70.82	1.32
2420	-1.46	71.47	1.41
2425	-1.45	71.57	1.37
2430	-1.43	71.89	1.39
2435	-1.44	71.70	1.34
2440	-1.40	72.38	1.47
2441	-1.40	72.44	1.51
2445	-1.40	72.42	1.44
2450	-1.41	72.27	1.50
2455	-1.45	71.60	1.53
2460	-1.44	71.82	1.51
2465	-1.50	70.76	1.54
2470	-1.56	69.76	1.48
2475	-1.59	69.35	1.46
2480	-1.67	68.13	1.47


The Environment of Antenna Radiation Pattern

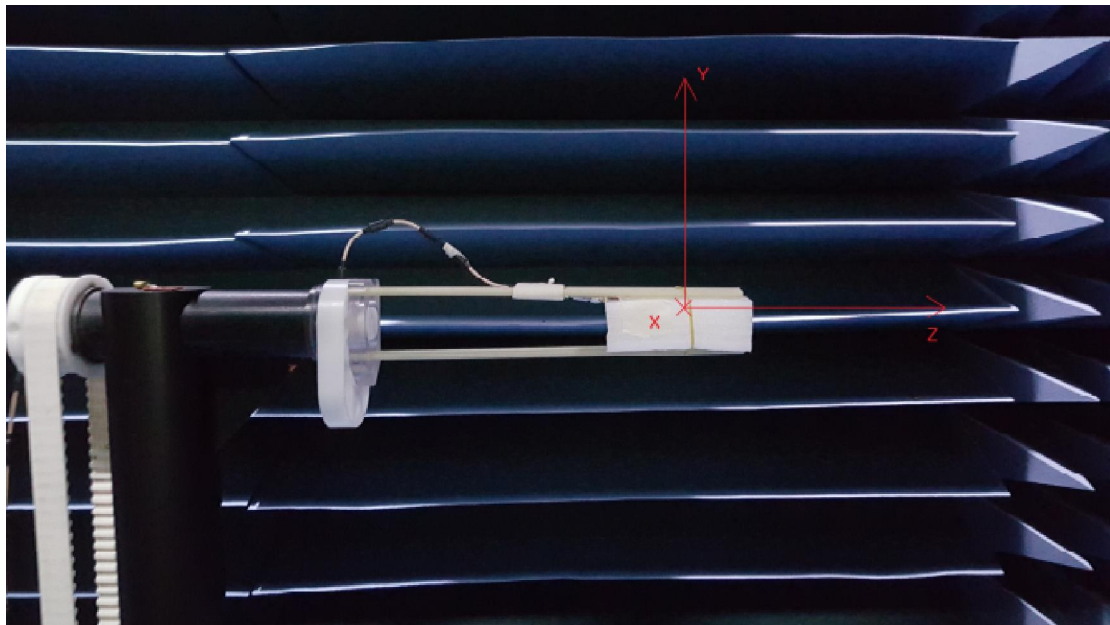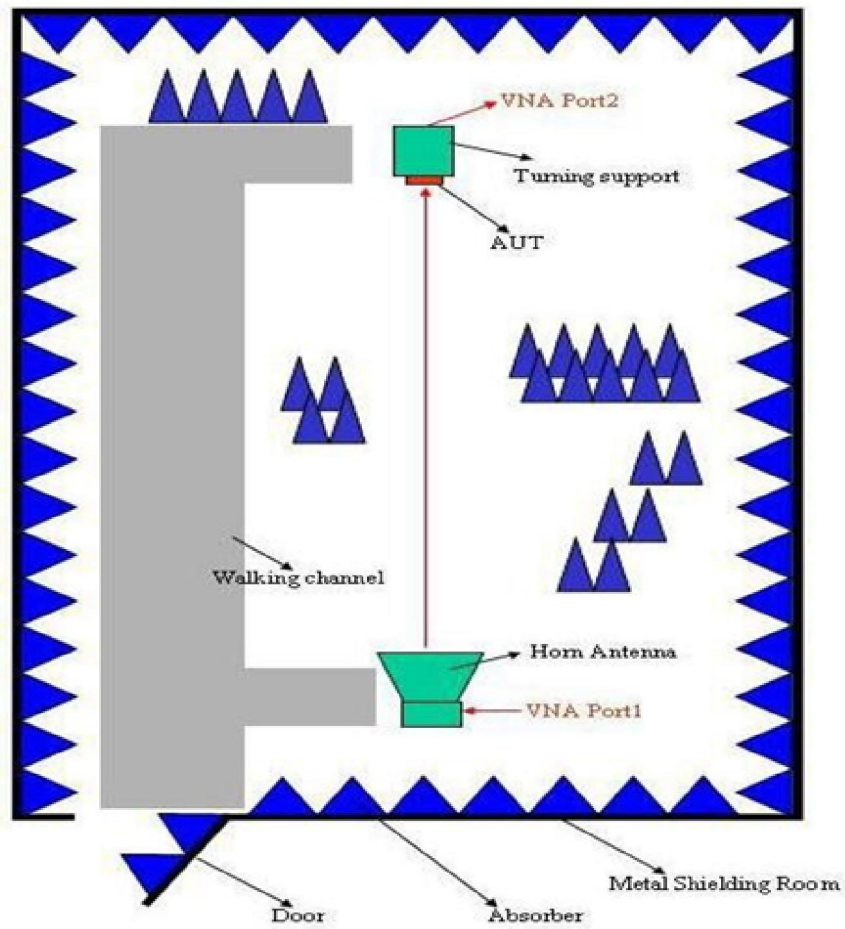

2400MHZ

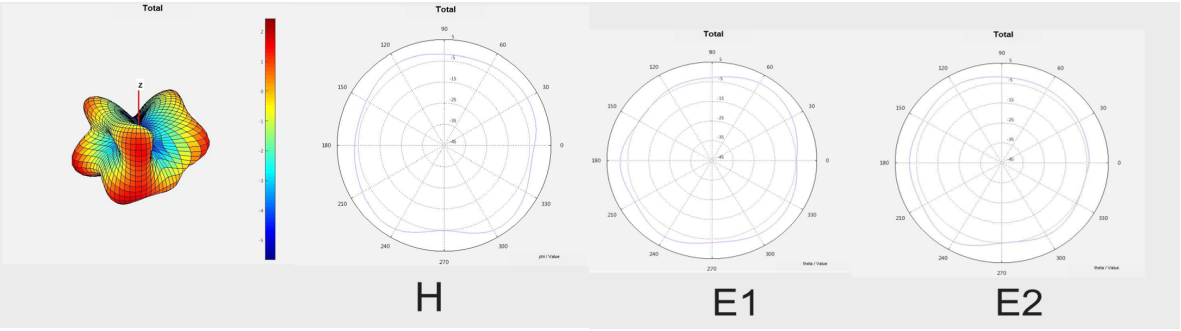

2450MHZ

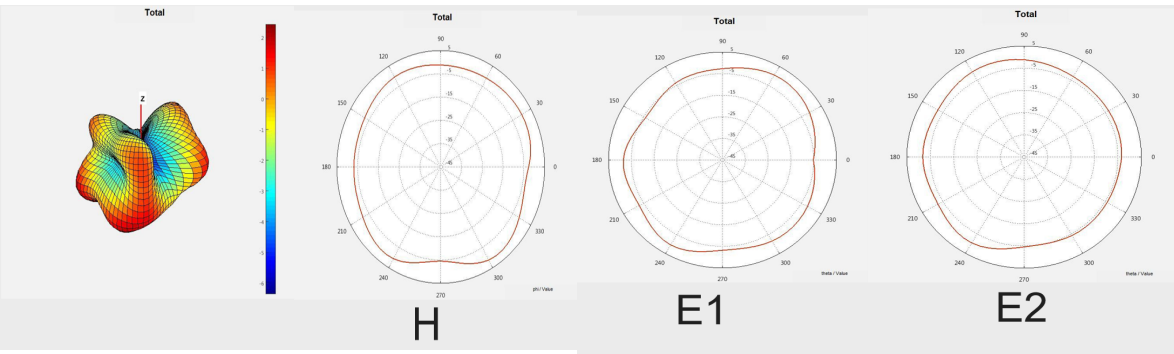

2500MHZ

