



EMC TEST REPORT

Product Name: RADIO

Trade mark: TECSUN

Model No.: H-501

FCC ID No.: 2BR4H-H501

Report No.: CTB24102306901E01V2

Applicant: Kaito Electronics, Inc.

Address: 5185 Cliffwood Drive, Montclair, CA 91763, USA

Manufacturer: TECSUN GENERAL ELECTRIC MANUFACTURER CO., LTD.

Address: NO.58 DONGCHENG SECTION, GUANCHANG ROAD, DONGCHENG STREET, DONGGUAN, GUANGDONG, CHINA.

Prepared by: Shenzhen CTB Testing Technology Co., Ltd.

Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

Sample No.: 24102306901, 25111012401

Date of Receipt: Oct. 24, 2024

Date of Test(s): Oct. 25, 2024 ~ Nov. 12, 2025

Date of Issue: Nov. 13, 2025

Test Standard(s): 47 CFR Part 15 Subchapter B, ANSI C63.4: 2014

Test Result: Pass

In the configuration tested, the EUT complied with the standards specified above.

Compiled by:

Reviewed by:

Approved by:

Blake Cai

Bin Mei

Rita Xiao

Blake Cai

Bin Mei

Rita Xiao

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "★" indicates the testing items were fulfilled by subcontracted lab. "※" indicates the items are not in CNAS accreditation scope.

Table of Contents

1.	Description of version	3
2.	Test summary	4
3.	Measurement uncertainty	5
4.	General information	6
4.1.	Description of EUT	6
4.2.	Description of accessory device	6
4.3.	Test conditions	6
4.4.	Block diagram of EUT configuration	7
4.5.	Operating condition of EUT	7
5.	List of Test and Measurement Instruments	8
6.	Conducted Emission	11
6.1.	Limit	11
6.2.	Test setup	11
6.3.	EMI test receiver setup	11
6.4.	Test procedure	11
6.5.	Test results	12
7.	Radiated emissions	14
7.1.	Limit	14
7.2.	Test setup	14
7.3.	EMI test receiver setup and spectrum analyzer setup	15
7.4.	Test procedure	15
7.5.	Corrected Amplitude & Margin Calculation	15
7.6.	Test results	16
8.	Photographs of test setup	20
9.	Photographs of EUT	22

1. Description of version

Report No.	Issue Date	Description	Approved
CTB24102306901E01	Nov. 22, 2024	Original	Invalid
CTB24102306901E01V1	Sep. 25, 2025	Revision	Invalid
CTB24102306901E01V2	Nov. 13, 2025	Revision	Valid
Note: This report has retested the radiation emissions below 1GHz based on the original report CTB24102306901E01V1.			

2. Test summary

Test procedures according to the technical standards:

Standard	Test Item	Test Result
§15.107	Conducted Emission	PASS
§15.109	Radiated Emission	PASS

3. Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

Test Item	Frequency	Expanded Uncertainty (U_{Lab})
No.1 Conducted Emission	150 kHz to 30 MHz	± 3.1 dB
No.2 Conducted Emission	150 kHz to 30 MHz	± 3.2 dB
Radiated Emission	30 MHz to 1000 MHz	± 4.1 dB
Radiated Emission	1000 MHz to 6000 MHz	± 4.8 dB

4. General information

4.1. Description of EUT

Product name	RADIO
Trade mark	TECSUN
Model No.	H-501
Serial Model No.	/
Model Difference	/
Rated Power	/
Rated Voltage& current	5V $\overline{\sim}$ 1A or DC 3.7V from Li-ion battery
Highest Internal Frequency	>108MHz
Configuration	☒ Table-top ☐ Floor-standing
Classification	☐ Class A ☒ Class B
The highest frequency of the internal sources of the EUT	☐ below 1.705 MHz, the measurement shall only be made up to 30 MHz. ☐ between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. ☐ between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. ☐ between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. ☒ above 1 GHz, the measurement shall be made up to 5th harmonic of the highest frequency or 40 GHz, whichever is lower.
Adapter Information	Model No.: GPE013A-050240-Z Input: AC 100-240V 50/60Hz 0.3A Output: 5V $\overline{\sim}$ 2.4A 12W Max Total output: 2.4A Max

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.2. Description of accessory device

Description	Manufacturer	Model	Specification	Note
/	/	/	/	☐ Applicant ☐ CTB


External I/O Cable

Cable Description	Shielded Type	Ferrite Core	Length(m)	Note
USB Cable	☐ Shielded ☒ Non-shielded	☐ Yes ☒ No	1.0	☒ Applicant ☐ CTB
AUX Cable	☐ Shielded ☒ Non-shielded	☐ Yes ☒ No	0.8	☒ Applicant ☐ CTB

4.3. Test conditions

Temperature: 15-25℃
 Relative Humidity: 30-60 %
 Atmospheric pressure: 800hPa-1060hPa

4.4. Block diagram of EUT configuration



4.5. Operating condition of EUT

The test system was pre-tested based on the consideration of all possible combinations of EUT operation modes according to test plan. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively. All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, (*)the worst data were recorded and reported.

Pretest Test Mode	Description	Test Voltage
Mode 1*	Charging+Working	AC 120V/60Hz

Conducted emission test		
Final Test Mode	Description	Test Voltage
Mode 1*	Charging+Working	AC 120V/60Hz

Radiated emission test		
Final Test Mode	Description	Test Voltage
Mode 1*	Charging+Working	DC 3.7V

5. List of Test and Measurement Instruments

No.1 Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3-Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	R&S	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	Agilent	UCE500-SMNM-1.5M	/	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	ISN	Schwarzbeck	CAT5 8158	00473	/	2025/6/23
8	Voltage Probe	Schwarzbeck	TK 9420	01189	/	2024/11/16
9	EZ-EMC	Frad	Ver/ EMC-con3A1/1	/	/	/
10	Current Probe	FCC	F-52B	199453	/	2025/5/27

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-N MS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-NM S-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-S MS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-N MS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/

Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/6/1
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2026/9/20
4	Preamplifier	Agilent	8449B	3008A01838	/	2026/6/3
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCi7	100861	/	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2026/9/18
10	Coaxial cable	Times	2m	/	/	2026/9/18
11	Coaxial cable	Times	2m	/	/	2026/9/18
12	Coaxial cable	Times	1m	/	/	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/6/1

6. Conducted Emission

6.1. Limit

Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

For Class A devices:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

6.2. Test setup

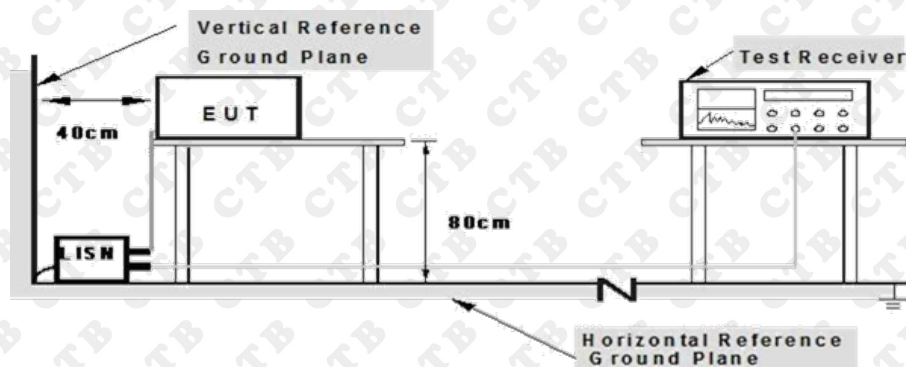

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

6.3. EMI test receiver setup


Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

6.4. Test procedure

1. Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.
2. Detailed test procedure was following clause 7 of ANSI C63.4.
3. Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

6.5. Test results


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

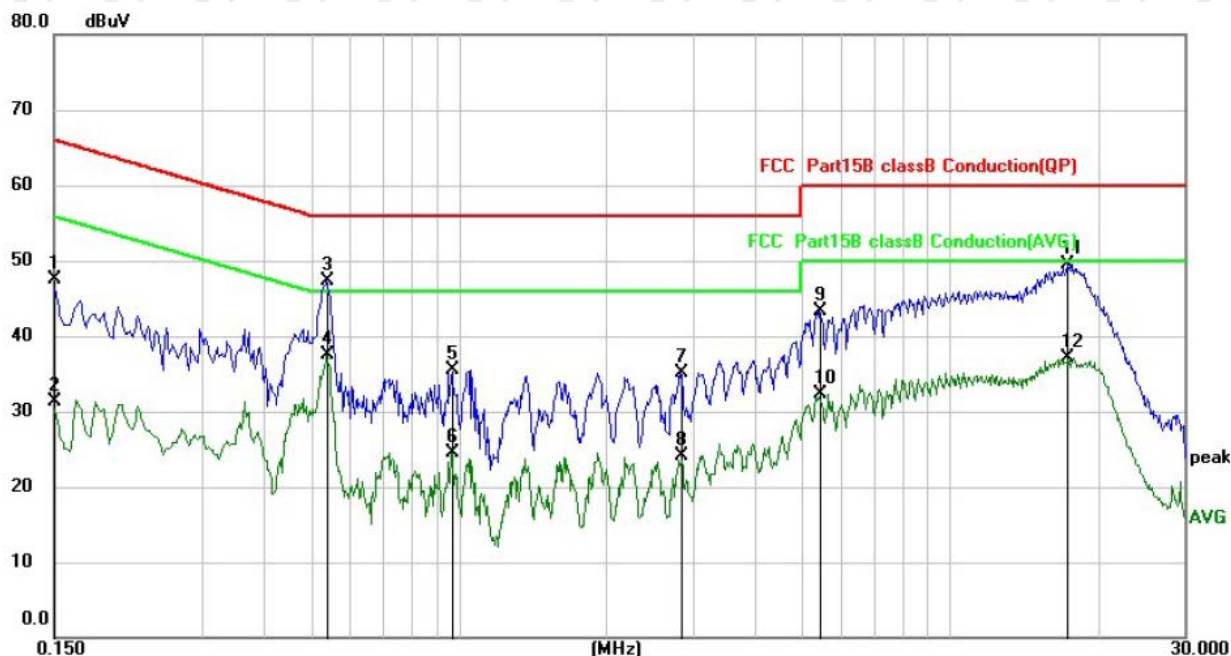

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1500	36.53	10.89	47.42	66.00	-18.58	QP
2		0.1500	20.51	10.89	31.40	56.00	-24.60	AVG
3		0.5380	36.67	10.54	47.21	56.00	-8.79	QP
4	*	0.5380	26.91	10.54	37.45	46.00	-8.55	AVG
5		0.9660	24.65	10.92	35.57	56.00	-20.43	QP
6		0.9660	13.53	10.92	24.45	46.00	-21.55	AVG
7		2.8340	23.38	11.76	35.14	56.00	-20.86	QP
8		2.8340	12.42	11.76	24.18	46.00	-21.82	AVG
9		5.4420	30.82	12.39	43.21	60.00	-16.79	QP
10		5.4420	19.85	12.39	32.24	50.00	-17.76	AVG
11		17.2939	36.00	13.45	49.45	60.00	-10.55	QP
12		17.2939	23.60	13.45	37.05	50.00	-12.95	AVG

Note: Result=Reading + Factor
Over Limit=Result - Limit

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

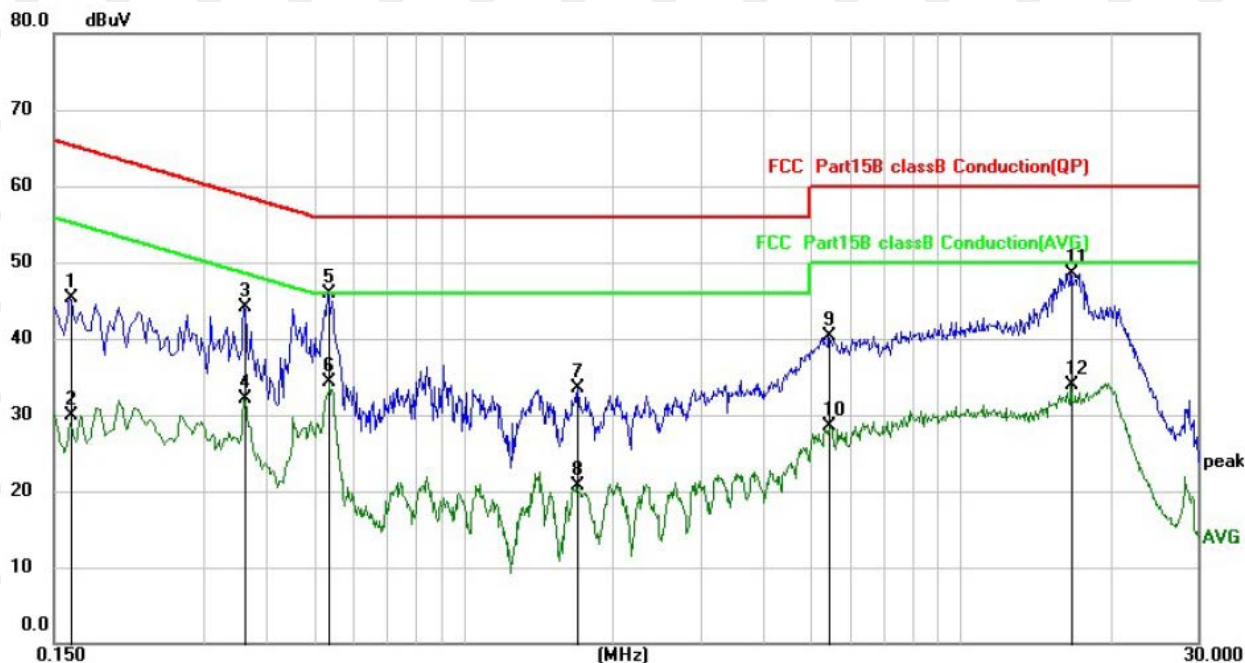

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	34.49	10.85	45.34	65.36	-20.02	QP
2		0.1620	19.11	10.85	29.96	55.36	-25.40	AVG
3		0.3620	33.48	10.60	44.08	58.68	-14.60	QP
4		0.3620	21.51	10.60	32.11	48.68	-16.57	AVG
5	*	0.5340	35.38	10.54	45.92	56.00	-10.08	QP
6		0.5340	23.77	10.54	34.31	46.00	-11.69	AVG
7		1.6900	22.07	11.38	33.45	56.00	-22.55	QP
8		1.6900	9.25	11.38	20.63	46.00	-25.37	AVG
9		5.4260	27.97	12.39	40.36	60.00	-19.64	QP
10		5.4260	16.15	12.39	28.54	50.00	-21.46	AVG
11		16.7099	35.13	13.43	48.56	60.00	-11.44	QP
12		16.7099	20.42	13.43	33.85	50.00	-16.15	AVG

Note: Result=Reading + Factor
Over Limit=Result – Limit

7. Radiated emissions

7.1. Limit

Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

7.2. Test setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

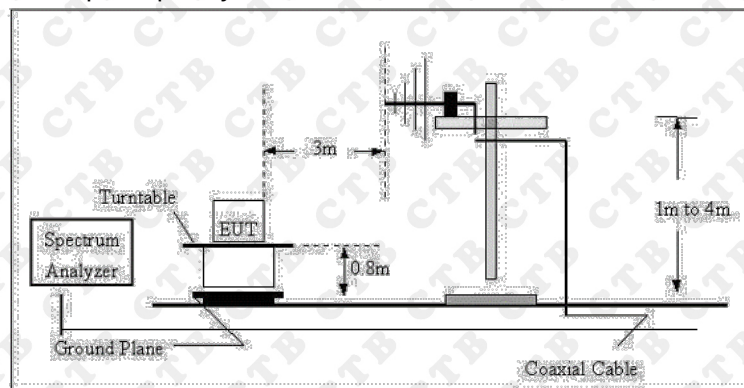

Radiated Emission Test Set-Up Frequency Above 1GHz

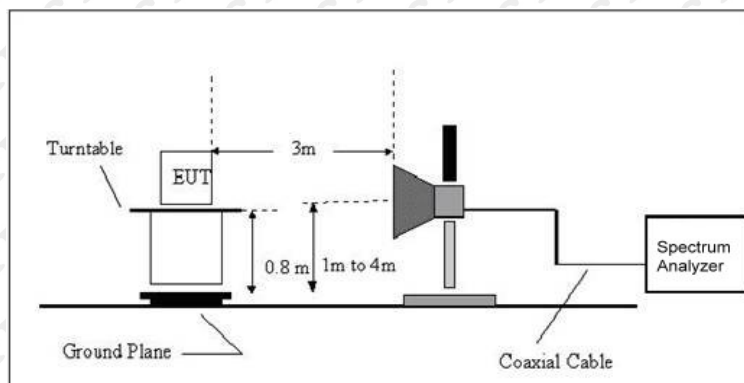

The radiated tests were performed in 3 meter Chamber test site, using the setup accordance with the ANSI C63.4:2014.

7.3. EMI test receiver setup and spectrum analyzer setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

7.4. Test procedure

1. The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4
2. Detailed test procedure was following clause 8 of ANSI C63.4.

7.5. Corrected Amplitude & Margin Calculation

1. The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


2. The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

7.6. Test results

Up to 1GHz


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

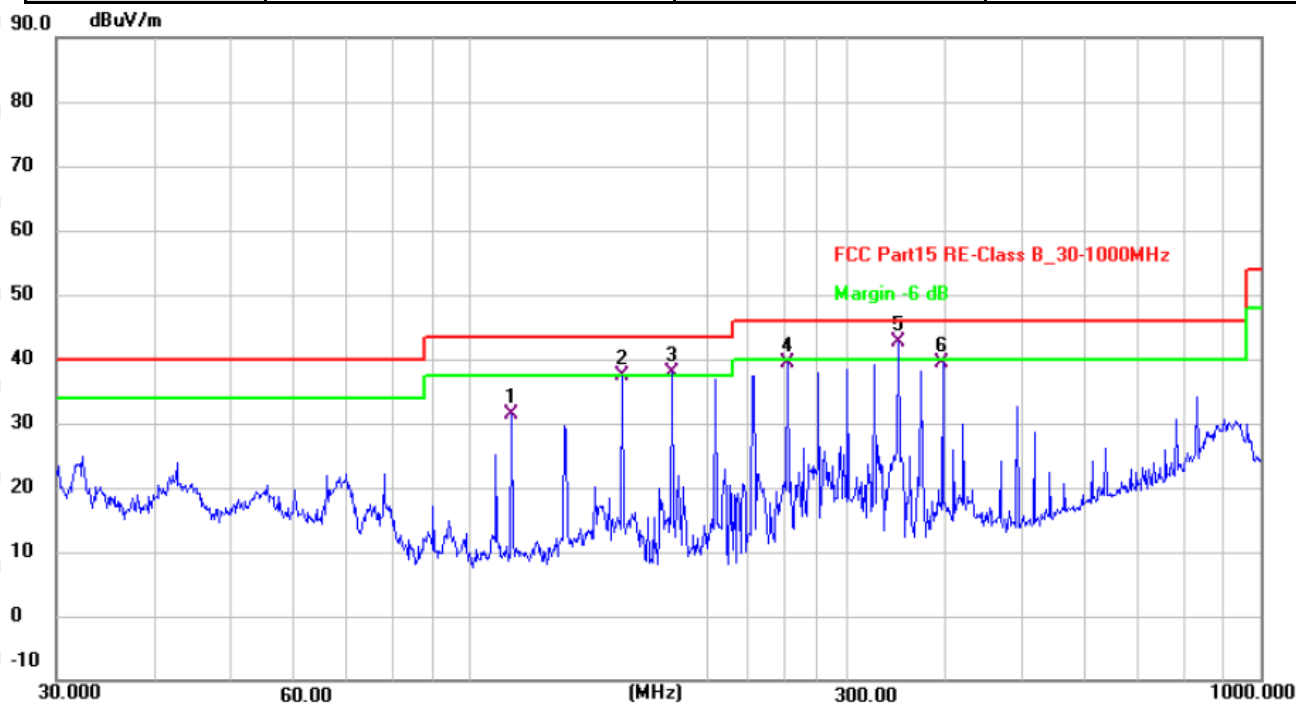

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	112.9196	48.15	-16.74	31.41	43.50	-12.09	QP
2	155.9100	50.60	-13.23	37.37	43.50	-6.13	QP
3 !	180.0164	53.73	-15.90	37.83	43.50	-5.67	QP
4	252.0627	55.59	-16.29	39.30	46.00	-6.70	QP
5 *	348.0274	55.88	-13.13	42.75	46.00	-3.25	QP
6	396.2412	51.81	-12.46	39.35	46.00	-6.65	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Temperature:	23℃	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

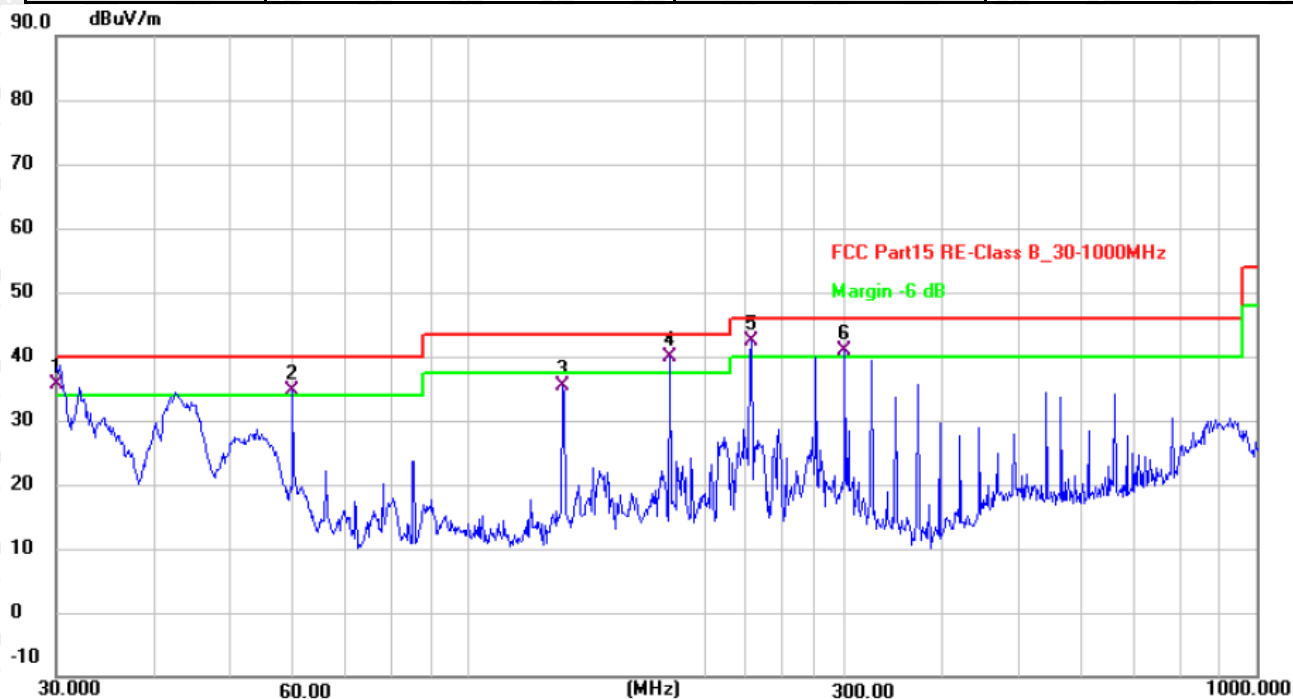


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	30.0000	48.66	-12.93	35.73	40.00	-4.27	QP
2 !	59.8588	49.36	-14.65	34.71	40.00	-5.29	QP
3	131.7572	50.23	-14.97	35.26	43.50	-8.24	QP
4 *	180.0164	55.71	-15.90	39.81	43.50	-3.69	QP
5 !	228.4901	58.95	-16.68	42.27	46.00	-3.73	QP
6 !	300.3672	54.66	-13.78	40.88	46.00	-5.12	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Above 1GHz


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

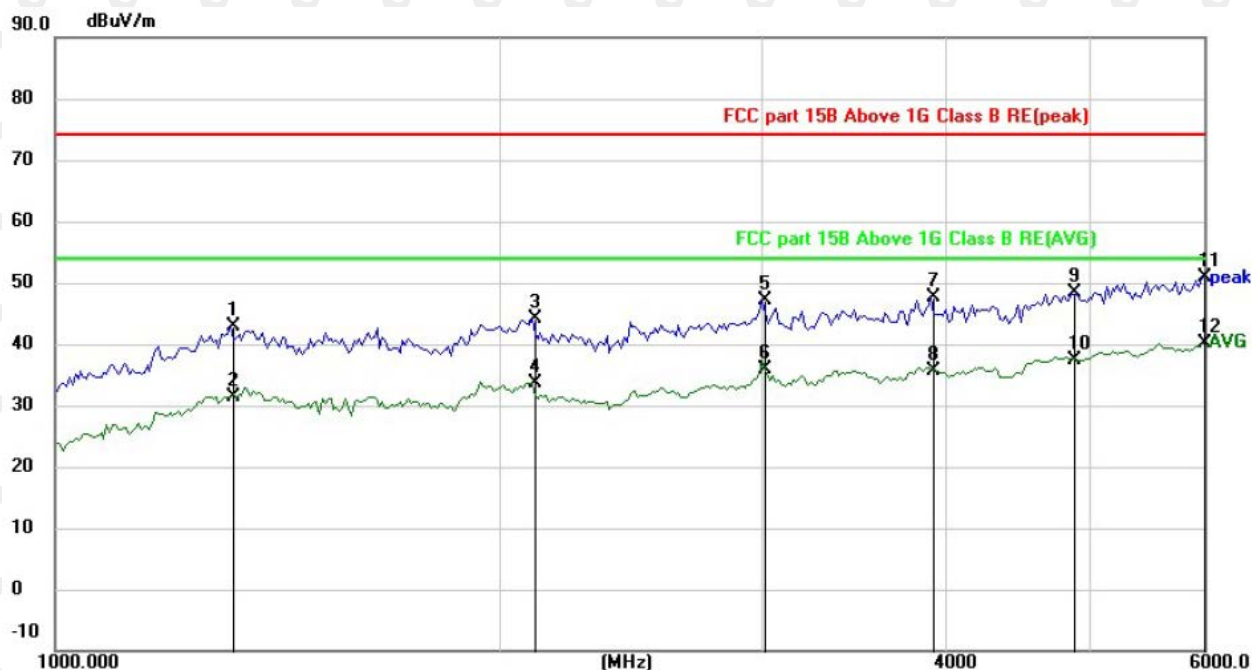

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1314.220	49.36	-6.36	43.00	74.00	-31.00	peak
2		1314.220	37.86	-6.36	31.50	54.00	-22.50	AVG
3		2103.453	44.28	-0.16	44.12	74.00	-29.88	peak
4		2103.453	33.80	-0.16	33.64	54.00	-20.36	AVG
5		3009.976	43.05	4.01	47.06	74.00	-26.94	peak
6		3009.976	31.85	4.01	35.86	54.00	-18.14	AVG
7		3920.490	40.12	7.55	47.67	74.00	-26.33	peak
8		3920.490	28.18	7.55	35.73	54.00	-18.27	AVG
9		4882.743	37.38	11.11	48.49	74.00	-25.51	peak
10		4882.743	26.36	11.11	37.47	54.00	-16.53	AVG
11		5973.184	36.67	14.19	50.86	74.00	-23.14	peak
12	*	5973.184	26.02	14.19	40.21	54.00	-13.79	AVG

Note: Result=Reading+Factor
Over Limit=Result-Limit

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

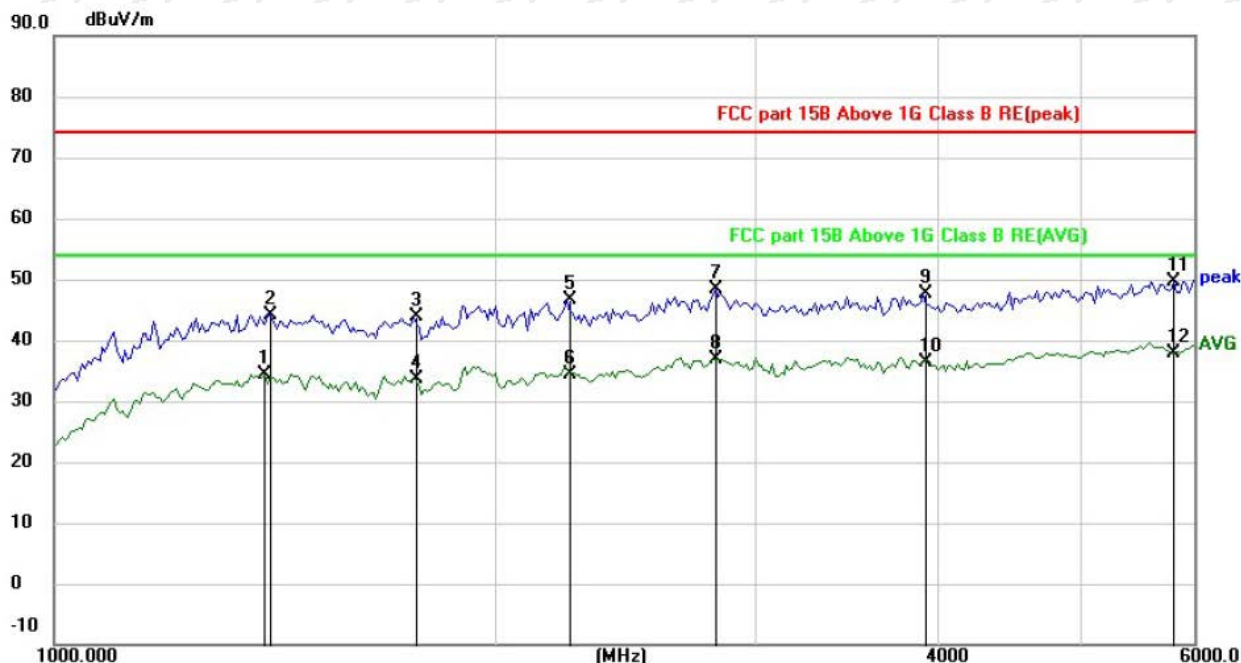


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1393.022	40.69	-6.28	34.41	54.00	-19.59	AVG
2		1399.276	50.47	-6.28	44.19	74.00	-29.81	peak
3		1758.400	47.31	-3.32	43.99	74.00	-30.01	peak
4		1758.400	36.84	-3.32	33.52	54.00	-20.48	AVG
5		2239.588	46.19	0.46	46.65	74.00	-27.35	peak
6		2249.642	33.96	0.51	34.47	54.00	-19.53	AVG
7		2827.012	45.19	3.17	48.36	74.00	-25.64	peak
8		2827.012	33.78	3.17	36.95	54.00	-17.05	AVG
9		3920.490	40.12	7.55	47.67	74.00	-26.33	peak
10		3920.490	28.76	7.55	36.31	54.00	-17.69	AVG
11		5814.784	35.81	13.76	49.57	74.00	-24.43	peak
12	*	5814.784	24.09	13.76	37.85	54.00	-16.15	AVG

Note: Result=Reading+Factor
Over Limit=Result-Limit

8. Photographs of test setup

RE up to 1GHz

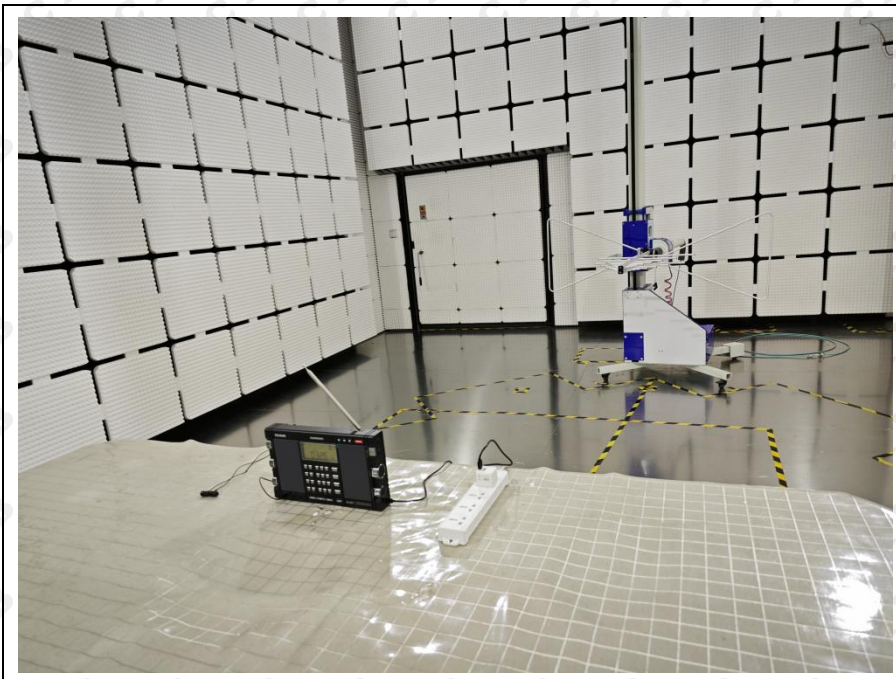

RE above 1GHz



CE



9. Photographs of EUT

EUT photo 1



EUT photo 2



EUT photo 3



EUT photo 4



EUT photo 5



EUT photo 6



EUT photo 7



EUT photo 8



EUT photo 9



End of report