

TEST REPORT

Applicant: SHENZHEN WATER WORLD CO., LTD.
Address: Room 1201, 12F, Block B, Qinghua Information Port
No.1, Songpingshan Xindong Road, Songpingshan
Community, Xili Subdistrict, Nanshan District,
Shenzhen
Equipment Type: Mobile phone
Model Name: BLK-L03
Brand Name: iotapk
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Mar. 02, 2026
Test Date: Mar. 03, 2026 - Mar. 04, 2026
Date of Issue: Apr. 08, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Loring Tan**Checked by:** Xiong Chong**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 08, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	4
2.5	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict.....	6
3.3	Test Uncertainty	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Enclosure List.....	7
4.2	Test Configurations	7
4.3	Test Setups	8
5	TEST ITEMS	10
5.1	Emission Tests	10
ANNEX A	TEST RESULTS	15
A.1	Radiated Emission.....	15
A.2	Conducted Emission, AC Ports.....	21
ANNEX B	TEST SETUP PHOTOS	24
ANNEX C	EUT EXTERNAL PHOTOS.....	24
ANNEX D	EUT INTERNAL PHOTOS.....	24

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN WATER WORLD CO., LTD.
Address	Room 1201,12F, Block B, Qinghua Information Port No.1, Songpingshan Xindong Road, Songpingshan Community, Xili Subdistrict, Nanshan District, Shenzhen

2.2 Manufacturer Information

Manufacturer	N/A
Address	N/A

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile phone
Model Name Under Test	BLK-L03
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	FS310-MB-V0.5
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	456591
	Serial No.	N/A
	Capacity	4900mAh
	Rated Voltage	3.87 V
	Limit Charge Voltage	N/A
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	TPA-203S050200UU01
	Serial No.	N/A
	Rated Input	100-240V~, 50/60Hz, 0.3A
	Rated Output	5.0V= 2.0A
Ancillary Equipment 3	USB Cable	
	Length (Approx.)	1.0 m

2.5 Technical Information

Network and Wireless connectivity	GSM, WCDMA, LTE, Bluetooth, WIFI, GPS
Classification of equipment	Class B
The highest internal frequency of EUT	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

Note 7: Compared with the EUT of test report BL-SZ2570845-401, the changes of the EUT of this report as below:
1.Add secondary battery, adapter, camera, memory;
Other hardware circuit and software are the same as EUT referred in test report BL-SZ2570845-401 published by Shenzhen BALUN Technology Co., Ltd. on Aug. 19, 2025
Therefore, all test items were retested in this report.

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)-AMN	3.2 dB
Radiated emissions (30 MHz-1 GHz)-966#5	4.6 dB
Radiated emissions (1 GHz-18 GHz)-966#5	5.1 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	HONOR	KPRC-W10	N/A	N/A	N/A	☒
Earphone	OPPO	N/A	N/A	1.1m	N/A	☒
TF Card	Kingston	SDCS2/32GB SPCN	N/A	N/A	N/A	☒

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Camera Test Mode</u> EUT + Battery + USB Cable + Adapter + TF Card + Earphone
Mode 2	<u>The Video Playback Test Mode</u> EUT + Battery + USB Cable + Adapter + TF Card + Earphone
Mode 3	<u>The Data Transmission Test Mode</u> EUT + Battery + USB Cable + Laptop + TF Card + Earphone


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 3	1
Conducted Emission, AC Ports	Mode 1~Mode 2	1
Note: All operation modes were tested, but only test data of the worst mode was presented in this report.		

4.3 Test Setups


Test Setup 1

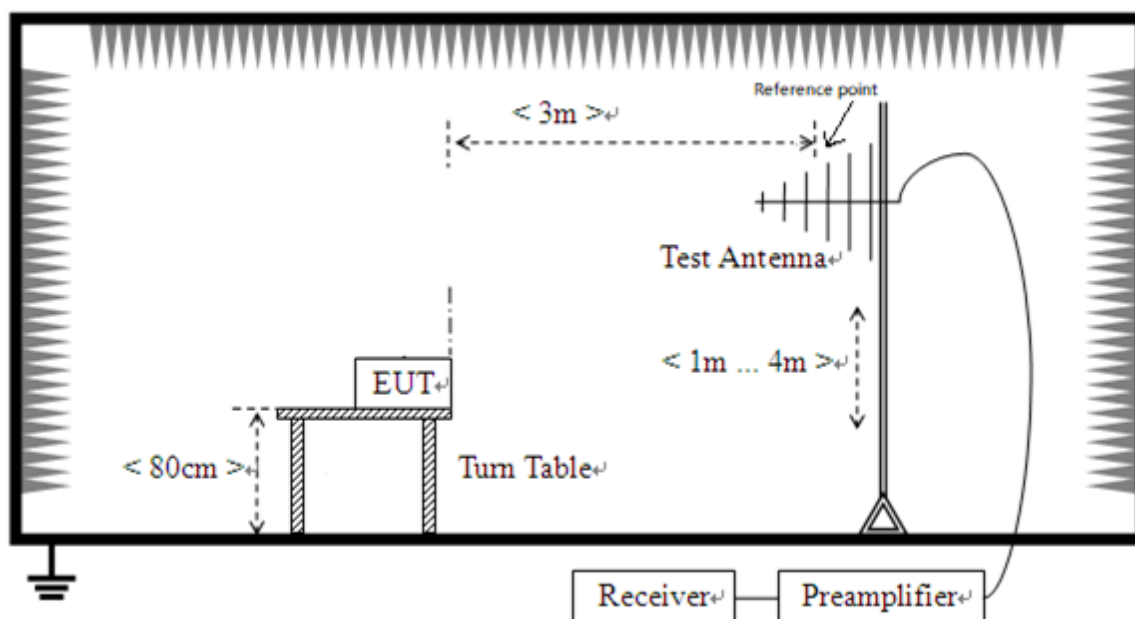

Radiated Emission (30 MHz-1 GHz)

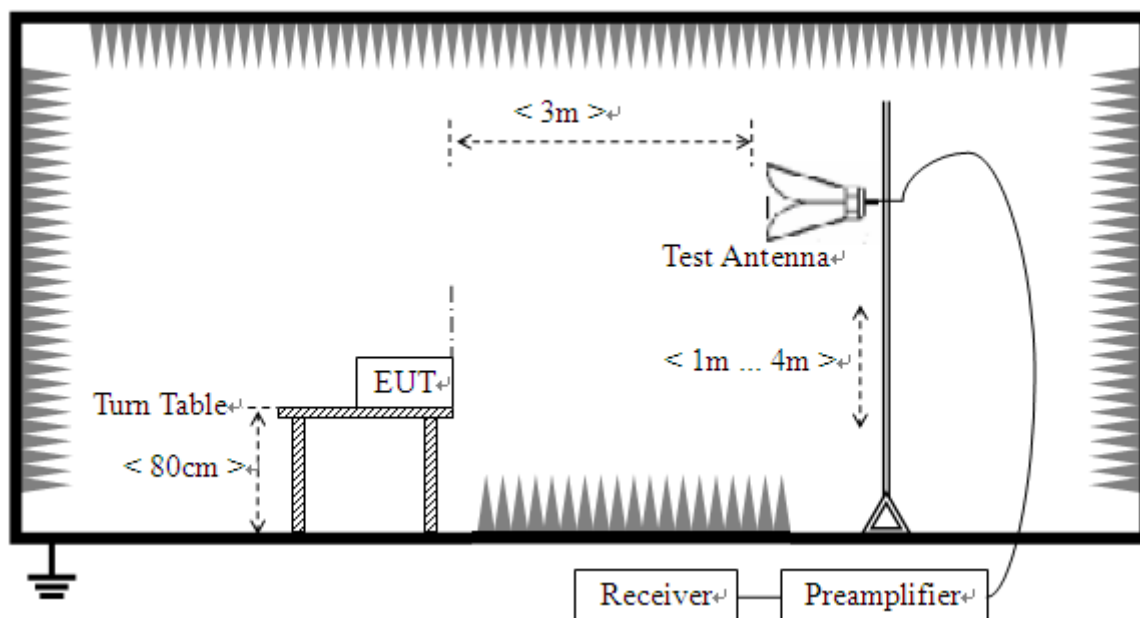

Radiated Emission (above 1 GHz)

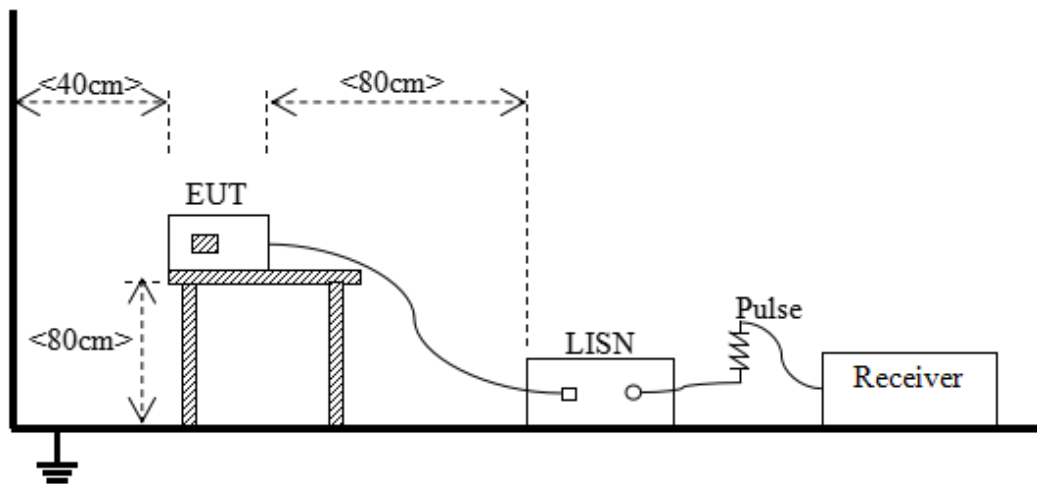Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$
Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS


A.1 Radiated Emission

Note: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S01	Temperature	23.6℃
Humidity	50%RH	Pressure	101.2kPa
Test Engineer	Yang Yang	Test Date	2026.03.04


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz

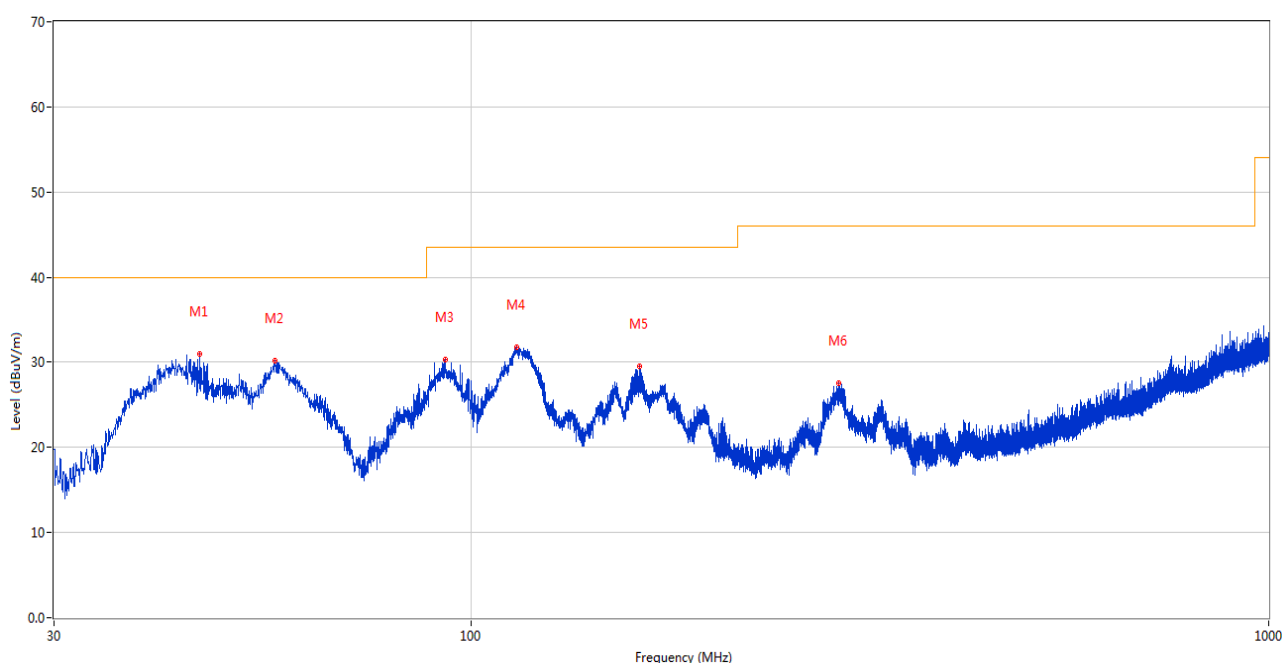

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	45.714	30.98	-24.37	40.0	9.02	Peak	80.40	100	Vertical	Pass
2	56.821	30.17	-24.83	40.0	9.83	Peak	204.00	100	Vertical	Pass
3	92.759	30.30	-26.76	43.5	13.20	Peak	296.00	100	Vertical	Pass
4	113.953	31.71	-26.08	43.5	11.79	Peak	255.50	100	Vertical	Pass
5	162.454	29.55	-27.60	43.5	13.95	Peak	0.00	100	Vertical	Pass
6	289.378	27.61	-21.68	46.0	18.39	Peak	281.80	100	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

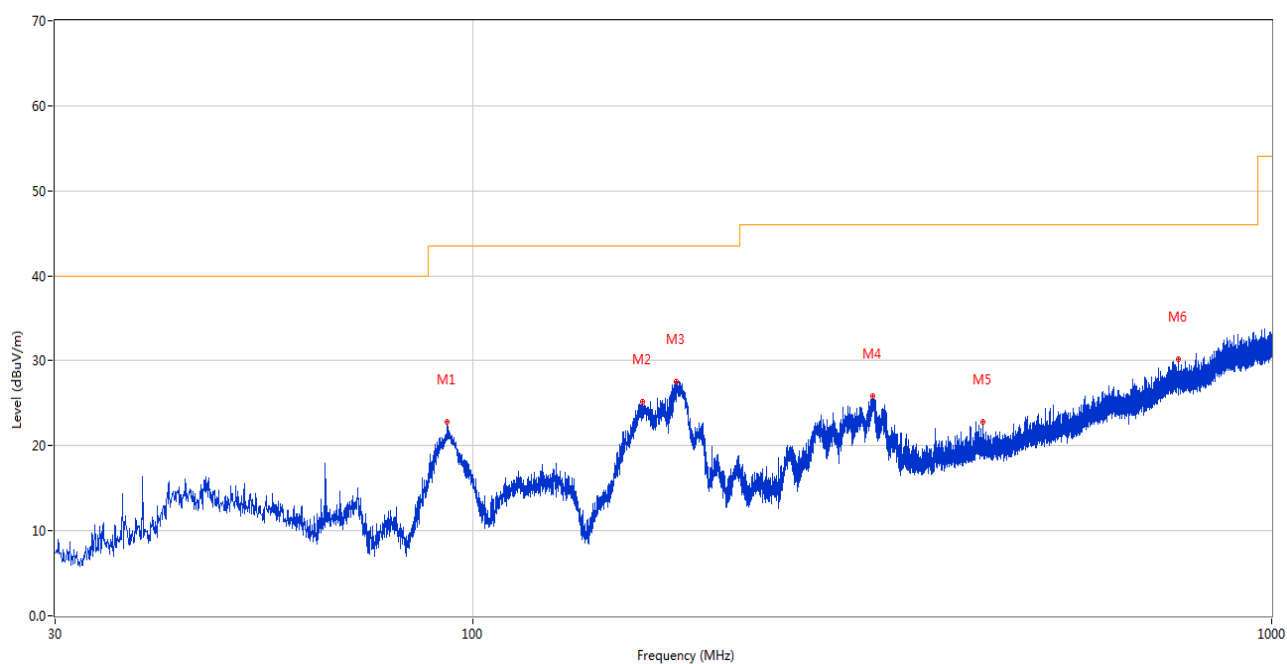

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	92.808	22.76	-26.74	43.5	20.74	Peak	119.00	100	Horizontal	Pass
2	163.278	25.22	-27.56	43.5	18.28	Peak	322.40	100	Horizontal	Pass
3	179.526	27.61	-26.48	43.5	15.89	Peak	296.00	100	Horizontal	Pass
4	316.441	25.88	-21.07	46.0	20.12	Peak	35.30	100	Horizontal	Pass
5	434.587	22.85	-17.49	46.0	23.15	Peak	263.80	100	Horizontal	Pass
6	763.999	30.23	-8.88	46.0	15.77	Peak	119.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY53220118	2025.06.16	2026.06.15	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119082	2025.11.25	2026.11.24	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9163	9163-624	2024.07.06	2027.07.05	☒
Anechoic Chamber (#5)	ChangNing	9m*6m*6m	104-1	2025.10.13	2028.10.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

3) Test Antenna Vertical, 1 GHz – 18 GHz

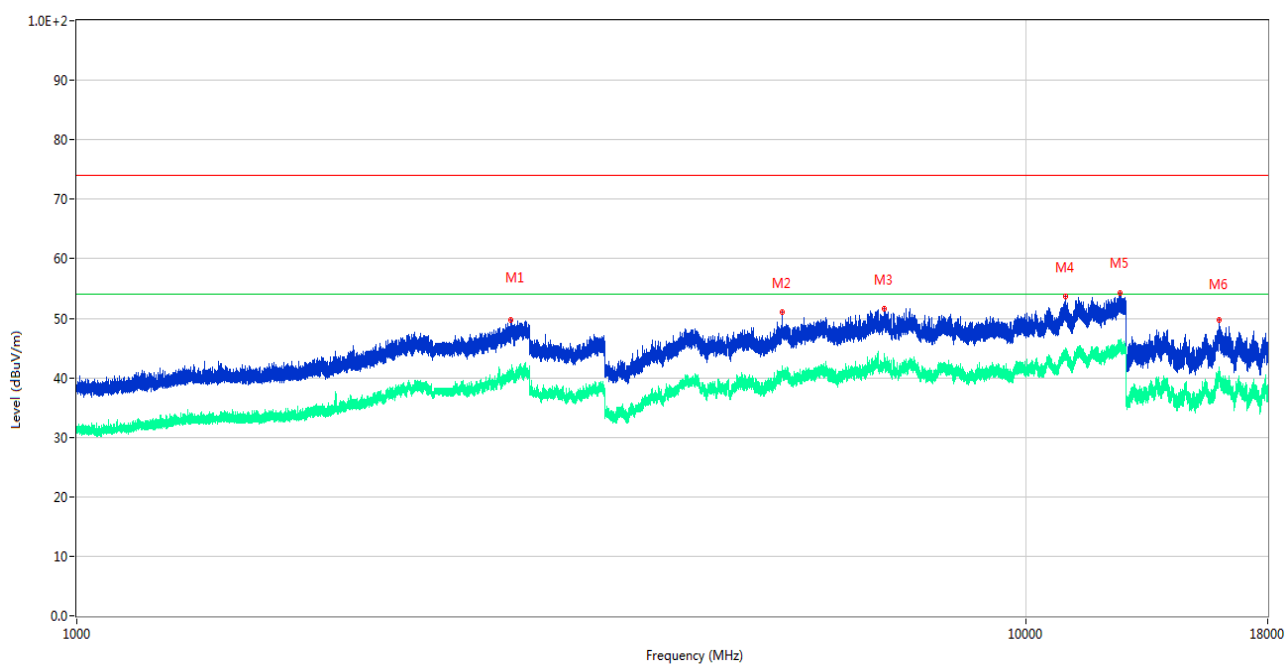

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2865.700	49.70	-4.81	74.0	24.30	Peak	7.80	100	Vertical	Pass
1**	2865.700	41.08	-4.81	54.0	12.92	AV	7.80	100	Vertical	Pass
2	5538.000	51.01	-0.13	74.0	22.99	Peak	187.90	100	Vertical	Pass
2**	5538.000	41.05	-0.13	54.0	12.95	AV	187.90	100	Vertical	Pass
3	7102.350	51.56	20.57	74.0	22.44	Peak	24.50	100	Vertical	Pass
3**	7102.350	44.06	20.57	54.0	9.94	AV	24.50	100	Vertical	Pass
4	11022.412	53.65	21.99	74.0	20.35	Peak	325.90	100	Vertical	Pass
4**	11022.412	43.20	21.99	54.0	10.80	AV	325.90	100	Vertical	Pass
5	12570.888	54.30	22.66	74.0	19.70	Peak	278.90	100	Vertical	Pass
5**	12570.888	45.50	22.66	54.0	8.50	AV	278.90	100	Vertical	Pass
6	15999.225	49.73	26.00	74.0	24.27	Peak	46.20	100	Vertical	Pass
6**	15999.225	40.78	26.00	54.0	13.22	AV	46.20	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 18 GHz

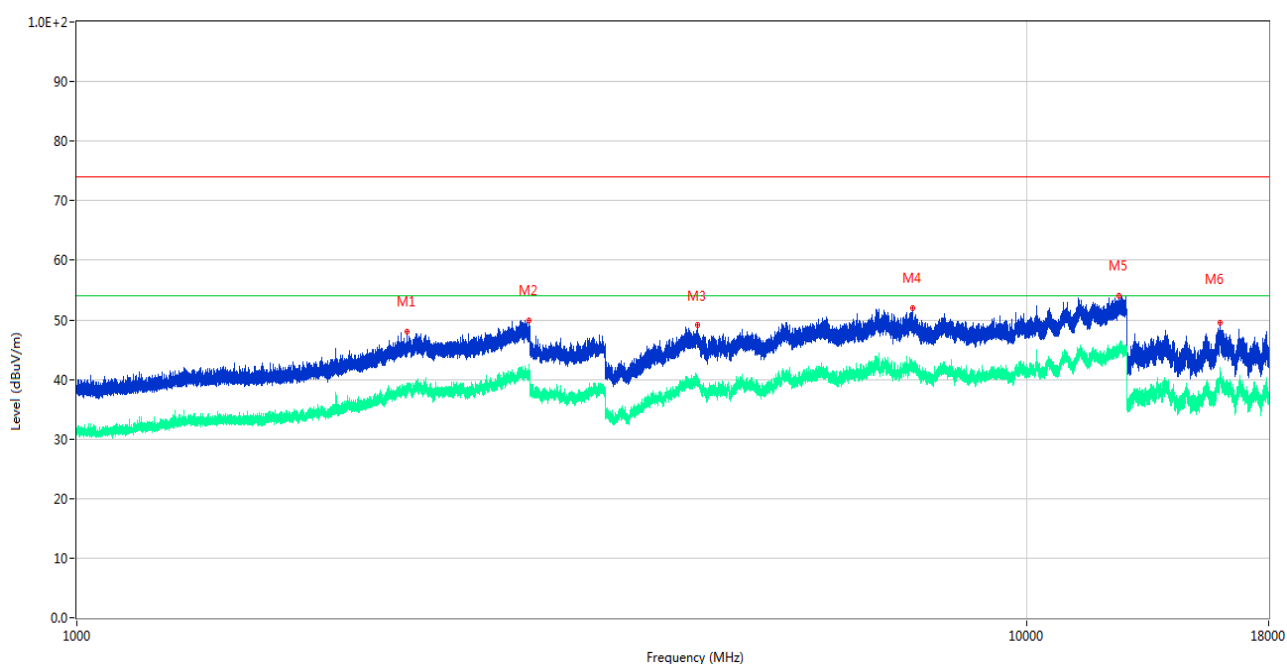

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2224.600	48.03	-8.23	74.0	25.97	Peak	216.40	100	Horizontal	Pass
1**	2224.600	37.40	-8.23	54.0	16.60	AV	216.40	100	Horizontal	Pass
2	2995.700	49.94	-3.56	74.0	24.06	Peak	90.20	100	Horizontal	Pass
2**	2995.700	40.96	-3.56	54.0	13.04	AV	90.20	100	Horizontal	Pass
3	4508.200	49.10	-1.17	74.0	24.90	Peak	317.30	100	Horizontal	Pass
3**	4508.200	39.40	-1.17	54.0	14.60	AV	317.30	100	Horizontal	Pass
4	7589.087	52.05	19.67	74.0	21.95	Peak	126.30	100	Horizontal	Pass
4**	7589.087	41.97	19.67	54.0	12.03	AV	126.30	100	Horizontal	Pass
5	12518.850	54.08	22.15	74.0	19.92	Peak	327.10	100	Horizontal	Pass
5**	12518.850	45.42	22.15	54.0	8.58	AV	327.10	100	Horizontal	Pass
6	15994.237	49.46	25.78	74.0	24.54	Peak	0.00	100	Horizontal	Pass
6**	15994.237	40.93	25.78	54.0	13.07	AV	0.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY53220118	2025.06.16	2026.06.15	☒
Amplifier (1-12GHz)	COM-MV	DLNAB-1000- 12000-002	18080279	2025.11.25	2026.11.24	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	619201336	2025.11.25	2026.11.24	☒
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	1148	2025.05.28	2028.05.27	☒
Anechoic Chamber (#5)	ChangNing	9m*6m*6m	104-1	2025.10.13	2028.10.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission, AC Ports

Sample No.	S01	Temperature	26.6℃
Humidity	55%RH	Pressure	101.1kPa
Test Engineer	Huang Penghui	Test Date	2026.03.04


Test Mode 1

1) AC Ports - L Phase

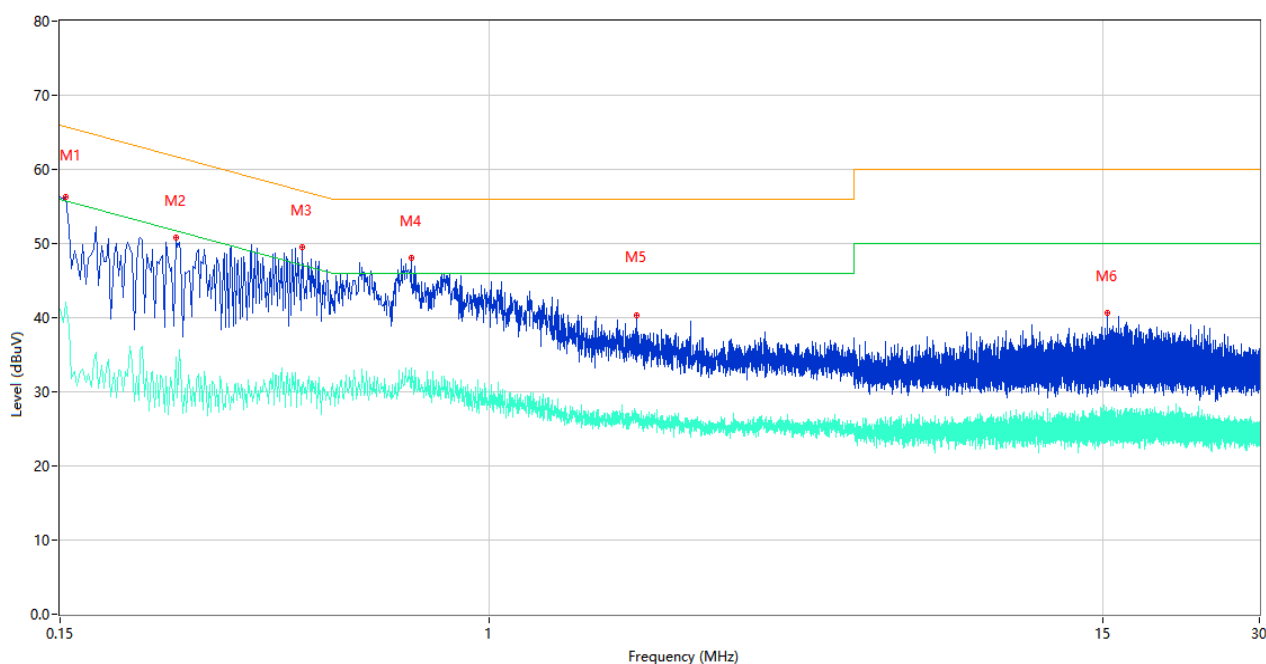

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	56.23	9.86	65.78	9.55	Peak	L	Pass
1**	0.154	42.16	9.86	55.78	13.62	AV	L	Pass
2	0.250	50.73	9.82	61.76	11.03	Peak	L	Pass
2**	0.250	34.74	9.82	51.76	17.02	AV	L	Pass
3	0.438	49.45	10.21	57.10	7.65	Peak	L	Pass
3**	0.438	30.88	10.21	47.10	16.22	AV	L	Pass
4	0.708	48.08	10.62	56.00	7.92	Peak	L	Pass
4**	0.708	30.45	10.62	46.00	15.55	AV	L	Pass
5	1.920	40.32	10.55	56.00	15.68	Peak	L	Pass
5**	1.920	27.04	10.55	46.00	18.96	AV	L	Pass
6	15.344	40.61	10.80	60.00	19.39	Peak	L	Pass
6**	15.344	27.03	10.80	50.00	22.97	AV	L	Pass

2) AC Ports - N Phase

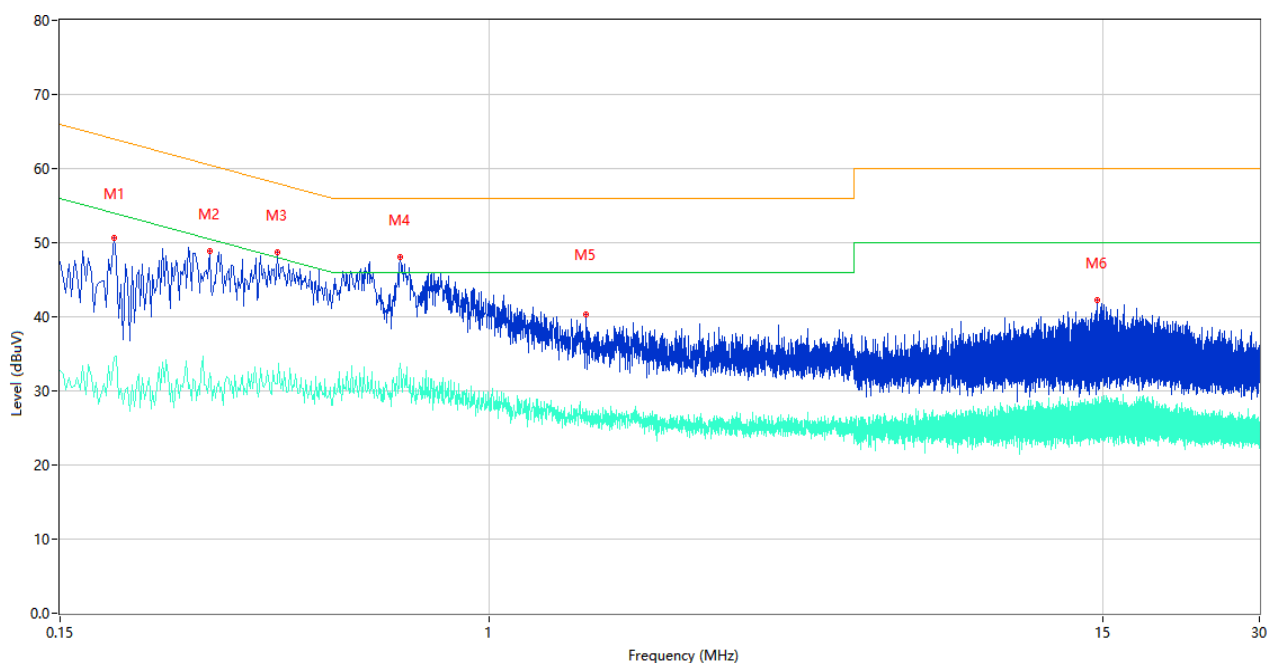

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.190	50.57	9.84	64.04	13.47	Peak	N	Pass
1**	0.190	34.54	9.84	54.04	19.50	AV	N	Pass
2	0.290	48.94	9.82	60.52	11.58	Peak	N	Pass
2**	0.290	32.46	9.82	50.52	18.06	AV	N	Pass
3	0.392	48.67	10.64	58.02	9.35	Peak	N	Pass
3**	0.392	31.00	10.64	48.02	17.02	AV	N	Pass
4	0.674	48.13	10.49	56.00	7.87	Peak	N	Pass
4**	0.674	33.63	10.49	46.00	12.37	AV	N	Pass
5	1.528	40.38	10.26	56.00	15.62	Peak	N	Pass
5**	1.528	26.87	10.26	46.00	19.13	AV	N	Pass
6	14.652	42.32	10.60	60.00	17.68	Peak	N	Pass
6**	14.652	26.38	10.60	50.00	23.62	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.06.16	2026.06.15	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28	☒
Shielded Room	Chang Chuang	4*4*3m	662	2025.10.12	2028.10.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26020341-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-EE26020341-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-EE26020341-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--