

Appendix B:SAR Measurement results Plots

Table of contents
WIFI 2.4G Head&Body
WIFI 5.2G Head&Body
WIFI 5.3G Head&Body
WIFI 5.6G Head&Body
WIFI 5.8G Head&Body
Bluetooth Head&Body

Test Laboratory: CTI SAR Lab

WIFI 2.4G 802.11b 6CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.782$ S/m; $\epsilon_r = 39.741$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2437 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.263 W/kg

Configuration/Head/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.188 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.276 W/kg

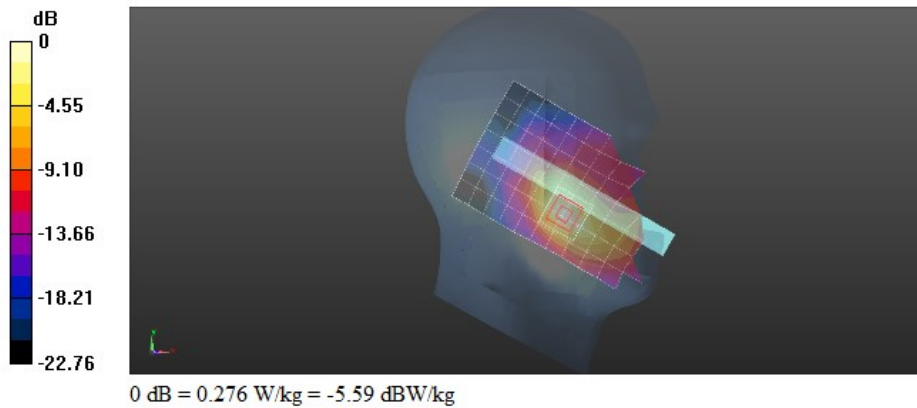

Test Laboratory: CTI SAR Lab

WIFI 2.4G 802.11b 6CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.782$ S/m; $\epsilon_r = 39.741$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2437 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.283 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.52 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 33.6%

Maximum value of SAR (measured) = 0.409 W/kg

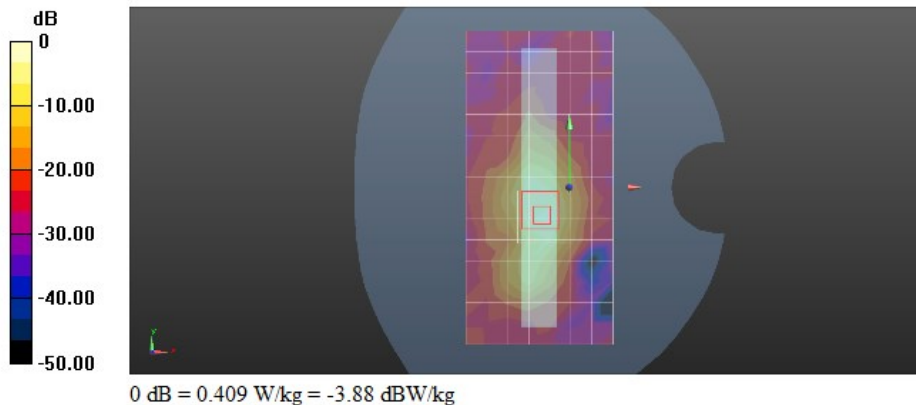

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 36CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5180 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.507$ S/m; $\epsilon_r = 35.916$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.37, 5.37, 5.37) @ 5180 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.12 W/kg

Configuration/Head/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.497 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.08 W/kg

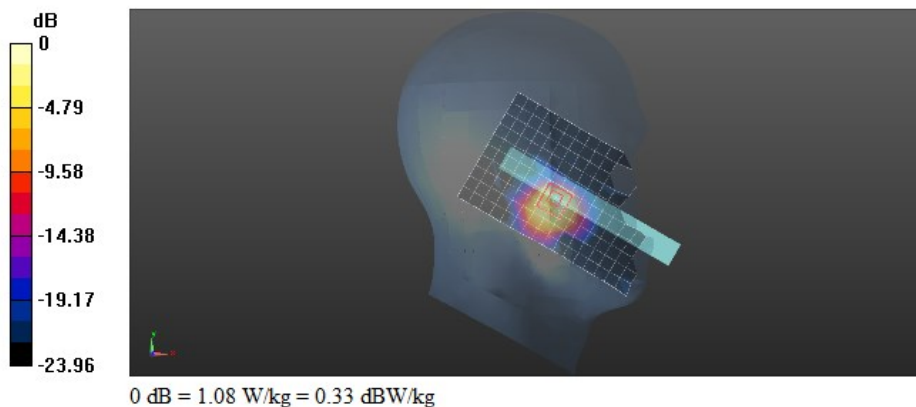

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 36CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5180 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.507$ S/m; $\epsilon_r = 35.916$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.37, 5.37, 5.37) @ 5180 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.430 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 1.08 W/kg

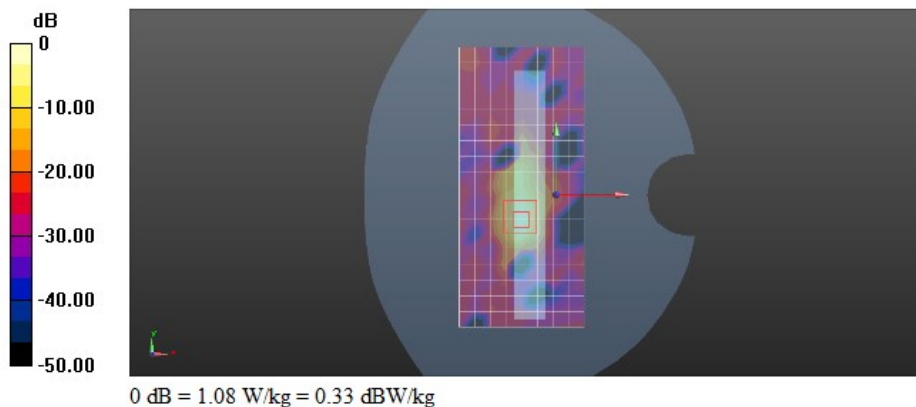

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 64CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.3G; Frequency: 5320 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.675$ S/m; $\epsilon_r = 35.665$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.37, 5.37, 5.37) @ 5320 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.05 W/kg

Configuration/Head/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.778 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 1.03 W/kg

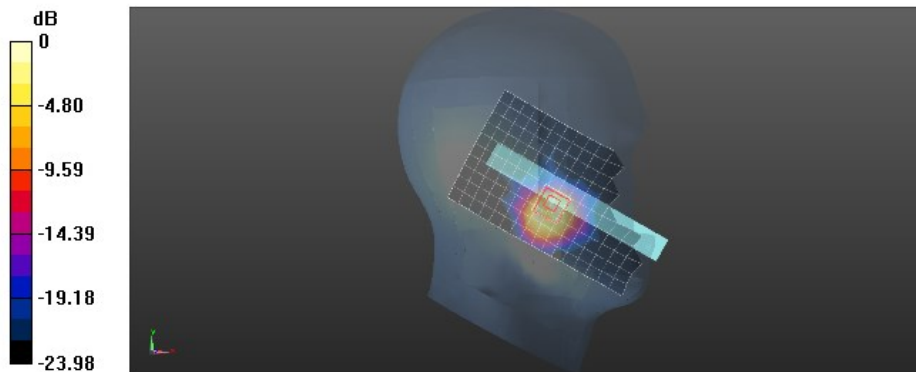

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 64CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.3G; Frequency: 5320 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.675$ S/m; $\epsilon_r = 35.665$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.37, 5.37, 5.37) @ 5320 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.11 W/kg

Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.471 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 1.18 W/kg

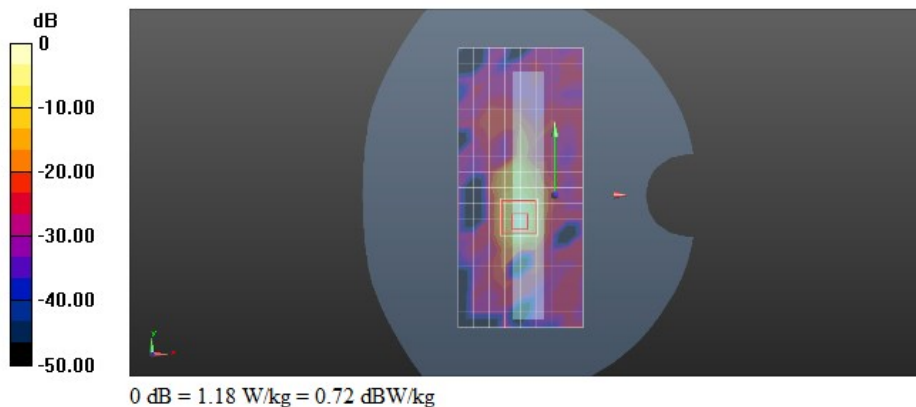

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 140CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.5G; Frequency: 5700 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.474$ S/m; $\epsilon_r = 35.647$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.85, 4.85, 4.85) @ 5700 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.28 W/kg

Configuration/Head/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.668 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.26 W/kg

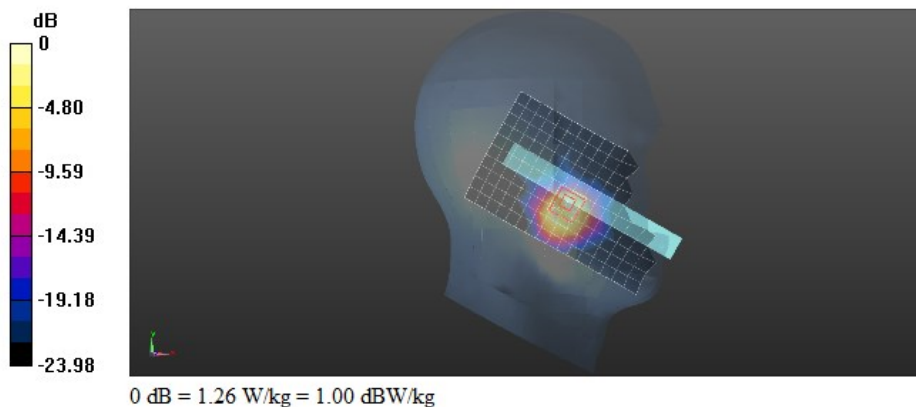

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 140CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.5G; Frequency: 5700 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.474$ S/m; $\epsilon_r = 35.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.85, 4.85, 4.85) @ 5700 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.885 W/kg

Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.660 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.06 W/kg

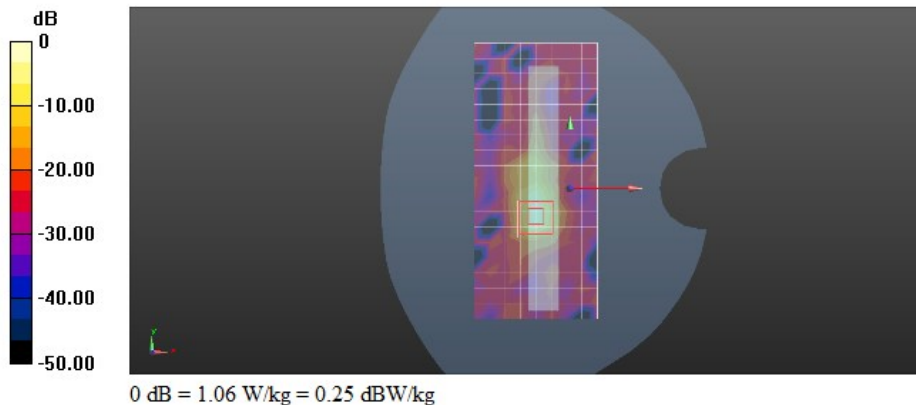

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 165CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.097$ S/m; $\epsilon_r = 34.789$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.96, 4.96, 4.96) @ 5825 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.03 W/kg

Configuration/Head/Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.826 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 1.22 W/kg

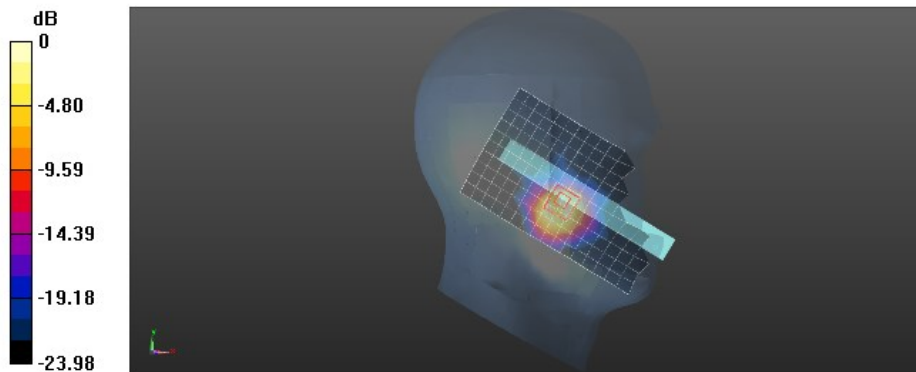

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: CTI SAR Lab

WIFI 5G 802.11a 165CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.097$ S/m; $\epsilon_r = 34.789$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.96, 4.96, 4.96) @ 5825 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.994 W/kg

Configuration/Body/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.264 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 1.23 W/kg

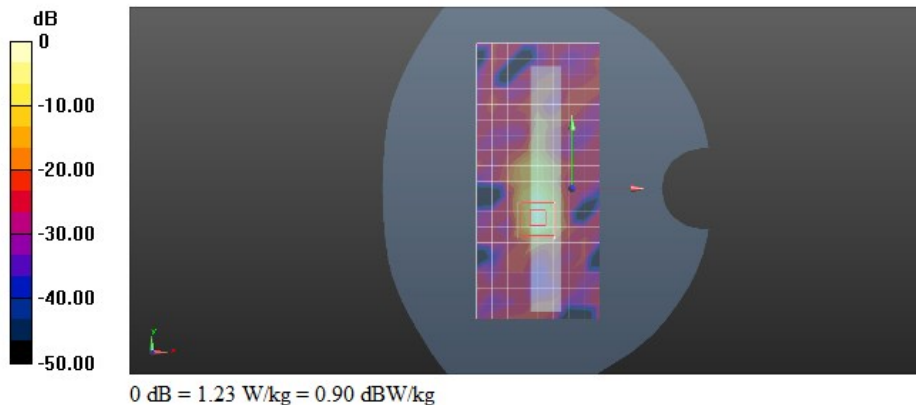

Test Laboratory: CTI SAR Lab

Bluetooth GFSK 2441CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 3.0; Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.797$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2441 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.459 W/kg

Configuration/Head/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.661 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.444 W/kg

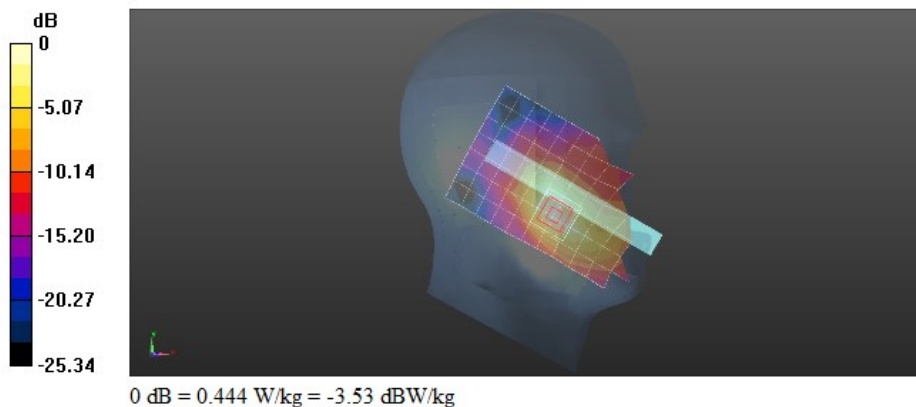

Test Laboratory: CTI SAR Lab

Bluetooth GFSK 2441CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 3.0; Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.79 \text{ S/m}$; $\epsilon_r = 39.797$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2441 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.885 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.65 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.3%

Maximum value of SAR (measured) = 1.25 W/kg

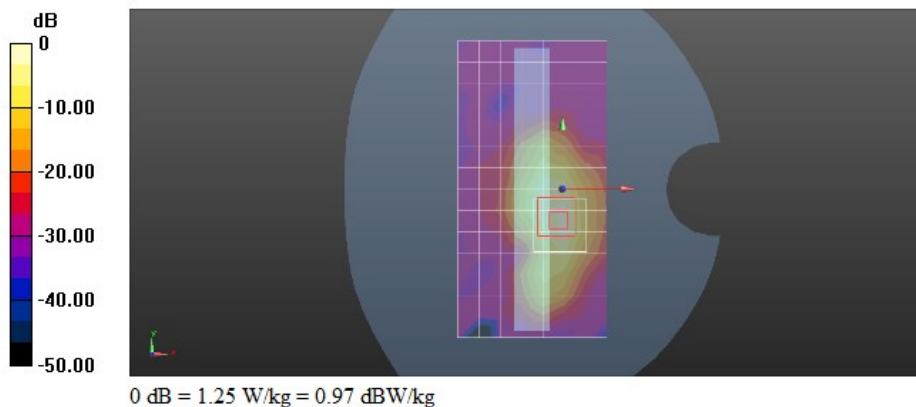

Test Laboratory: CTI SAR Lab

BLE GFSK 2440CH Left Hand Touched**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 4.0; Frequency: 2440 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.777 \text{ S/m}$; $\epsilon_r = 39.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2440 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.421 W/kg

Configuration/Head/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.779 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.426 W/kg

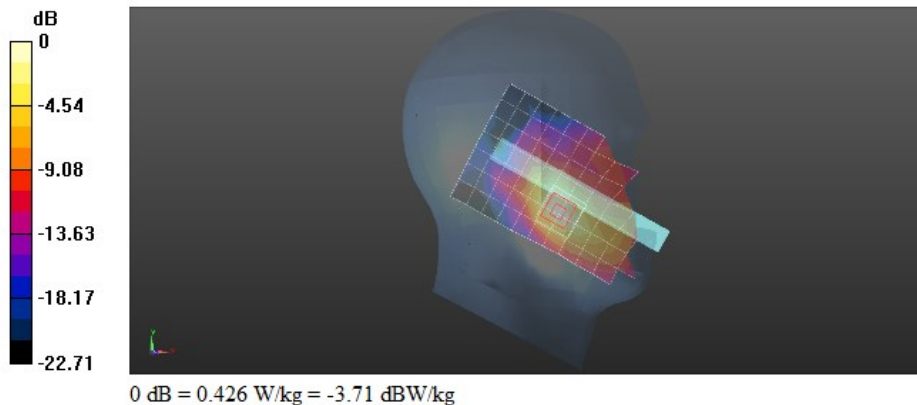

Test Laboratory: CTI SAR Lab

BLE GFSK 2440CH Front Side 0mm**DUT: L'Atitude 528N Smart Glasses; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 4.0; Frequency: 2440 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.777 \text{ S/m}$; $\epsilon_r = 39.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2440 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.430 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 33.6%

Maximum value of SAR (measured) = 0.839 W/kg

