FCC TEST REPORT

FCC ID: 2BR7U-SEAN

Report No.	:	SSP25080095-2E
Applicant	:	Shanghai Shilai Technology Co.,Ltd
Product Name	:	Spatial camera
Model Name	:	SEAN
Test Standard	:	FCC Part 15.247
Date of Issue	:	2025-08-30

Shenzhen CCUT Quality Technology Co., Ltd.
1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant.....:	Shanghai Shilai Technology Co.,Ltd
Address of Applicant.....:	Room 889, 8th Floor, Building 6, No. 1528 Gumei Road, Xuhui District, Shanghai, China
Manufacturer.....:	Shanghai Shilai Technology Co.,Ltd
Address of Manufacturer.....:	Room 889, 8th Floor, Building 6, No. 1528 Gumei Road, Xuhui District, Shanghai, China
Product Name.....:	Spatial camera
Brand Name.....:	SLAM XCAM
Main Model.....:	SEAN
Series Models.....:	-
Test Standard.....:	FCC Part 15 Subpart C KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.4-2014 ANSI C63.10-2013
Date of Test .....:	2025-08-06 to 2025-08-25
Test Result.....:	PASS
Tested By .....:	Coke Huang (Coke Huang)
Reviewed By.....:	Lorzix Luo (Lorzix Luo)
Authorized Signatory.....:	Lahm Peng (Lahm Peng)

Shenzhen CCUT Quality Technology Co., Ltd. APPROVED

Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.

CONTENTS

1. General Information **5**
1.1 Product Information 5
1.2 Test Setup Information 6
1.3 Compliance Standards 7
1.4 Test Facilities 7
1.5 List of Measurement Instruments 8
1.6 Measurement Uncertainty 9
2. Summary of Test Results **10**
3. Antenna Requirement **11**
3.1 Standard and Limit 11
3.2 Test Result 11
4. Conducted Emissions **12**
4.1 Standard and Limit 12
4.2 Test Procedure 12
4.3 Test Data and Results 13
5. Radiated Emissions **16**
5.1 Standard and Limit 16
5.2 Test Procedure 16
5.3 Test Data and Results 18
6. Band-edge Emissions(Radiated) **24**
6.1 Standard and Limit 24
6.2 Test Procedure 24
6.3 Test Data and Results 24
7. Maximum Conducted Output Power **26**
7.1 Standard and Limit 26
7.2 Test Procedure 26
7.3 Test Data and Results 26
8. Occupied Bandwidth **35**
8.1 Standard and Limit 35
8.2 Test Procedure 35
8.3 Test Data and Results 35
9. Maximum Power Spectral Density **43**
9.1 Standard and Limit 43
9.2 Test Procedure 43
9.3 Test Data and Results 43
10. Band-edge Emission(Conducted) **48**
10.1 Standard and Limit 48
10.2 Test Procedure 48
10.3 Test Data and Results 48
11. Conducted RF Spurious Emissions **54**
11.1 Standard and Limit 54
11.2 Test Procedure 54
11.3 Test Data and Results 54

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-08-30	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Spatial camera
Trade Name:	SLAM XCAM
Test Model:	SEAN
Series Models:	-
Rated Voltage:	DC 3.91V by battery, USB 5V Charging
Power Adapter:	-
Battery:	DC 3.91V, 4850mAh
Test Sample No:	SSP25080095-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	802.11b/g/n/ax
Operating Frequency:	2412MHz ~ 2462MHz for 802.11b/g/n/ax (HT/HE20) 2422MHz ~ 2452MHz for 802.11n/ax (HT/HE40)
RF Output Power:	6.65dBm
Number of Channel:	11/7
Channel Separation:	5MHz
Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Antenna Gain:	2.3dBi
Type of Antenna:	PCB Antenna
Type of Device:	☒ Portable Device ☐ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes		
Test Mode	Description	Remark
TM1	802.11b	2412MHz/2437MHz/2462MHz
TM2	802.11g	2412MHz/2437MHz/2462MHz
TM3	802.11n(H20)	2412MHz/2437MHz/2462MHz
TM4	802.11n(H40)	2422MHz/2437MHz/2452MHz
TM5	Charging + 802.11b	2412MHz/2437MHz/2462MHz
TM6	Charging + 802.11g	2412MHz/2437MHz/2462MHz
TM7	Charging + 802.11n(H20)	2412MHz/2437MHz/2462MHz
TM8	Charging + 802.11n(H40)	2422MHz/2437MHz/2452MHz

List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB cable	120	Unshielded	Without Ferrite
-	-	-	-

List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	Shilai	B30W	-
-	-	-	-

List of Channels							
No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	--
02	2417	06	2437	10	2457	14	--
03	2422	07	2442	11	2462	15	--
04	2427	08	2447	12	--	16	--

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	**Shenzhen CCUT Quality Technology Co., Ltd.** 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2025-07-15	2026-07-14
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2025-07-15	2026-07-14
Test Cable	N/A	Cable 5	N/A	2025-07-15	2026-07-14
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2025-07-15	2026-07-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2025-07-15	2026-07-14
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2025-07-15	2026-07-14
Amplifier	SCHWARZBECK	BBV 9743B	00251	2025-07-15	2026-07-14
Amplifier	HUABO	YXL0518-2.5-45	--	2025-07-15	2026-07-14
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2025-07-15	2026-07-14
Loop Antenna	DAZE	ZN30900C	21104	2025-07-12	2026-07-11
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2025-07-12	2026-07-11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2025-07-12	2026-07-11
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2025-07-12	2026-07-11
Attenuator	QUANJUDA	6dB	220731	2025-07-15	2026-07-14
Test Cable	N/A	Cable 1	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 2	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 3	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 4	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 8	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 9	N/A	2025-07-15	2026-07-14
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTest	MW100-RFCB	220418SQS-37	2025-07-16	2026-07-15
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2025-07-16	2026-07-15
RF Test Software	MWRFTest	MTS 8310	N/A	N/A	N/A
Laptop	Lenovo	ThlnkPad E15 Gen 3	SPPOZ22485	N/A	N/A

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Conducted Output Power	9kHz ~ 26GHz	±0.50 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %
Conducted Spurious Emission	9kHz ~ 26GHz	±1.32 dB
Power Spectrum Density	9kHz ~ 26GHz	±0.62 dB

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.247(i)	RF Exposure(see the RF exposure report)	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.247(d)	Radiated Emissions	Passed
FCC Part 15.247(d)	Band-edge Emissions(Radiated)	Passed
FCC Part 15.247(b)(3)	Maximum Conducted Output Power	Passed
FCC Part 15.247(a)(2)	Occupied Bandwidth	Passed
FCC Part 15.247(e)	Maximum Power Spectral Density	Passed
FCC Part 15.247(d)	Band-edge Emissions(Conducted)	Passed
FCC Part 15.247(d)	Conducted RF Spurious Emissions	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an PCB antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit

According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz Note 2: The lower limit applies at the band edges		

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

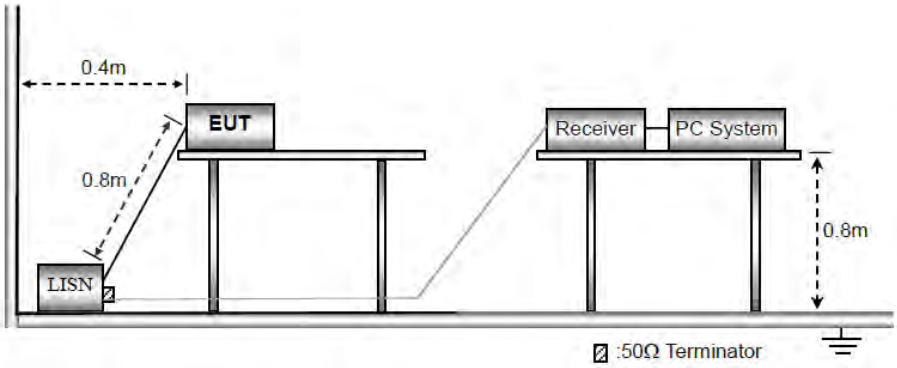

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver
Attenuation: 10dB
Start Frequency: 0.15MHz
Stop Frequency: 30MHz
IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.

4.3 Test Data and Results

All of the 802.11b, 802.11g and 802.11n, 802.11ax modes have been tested, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case TM5_2412MHz as below:
Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions	
Tested Mode:	TM5
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

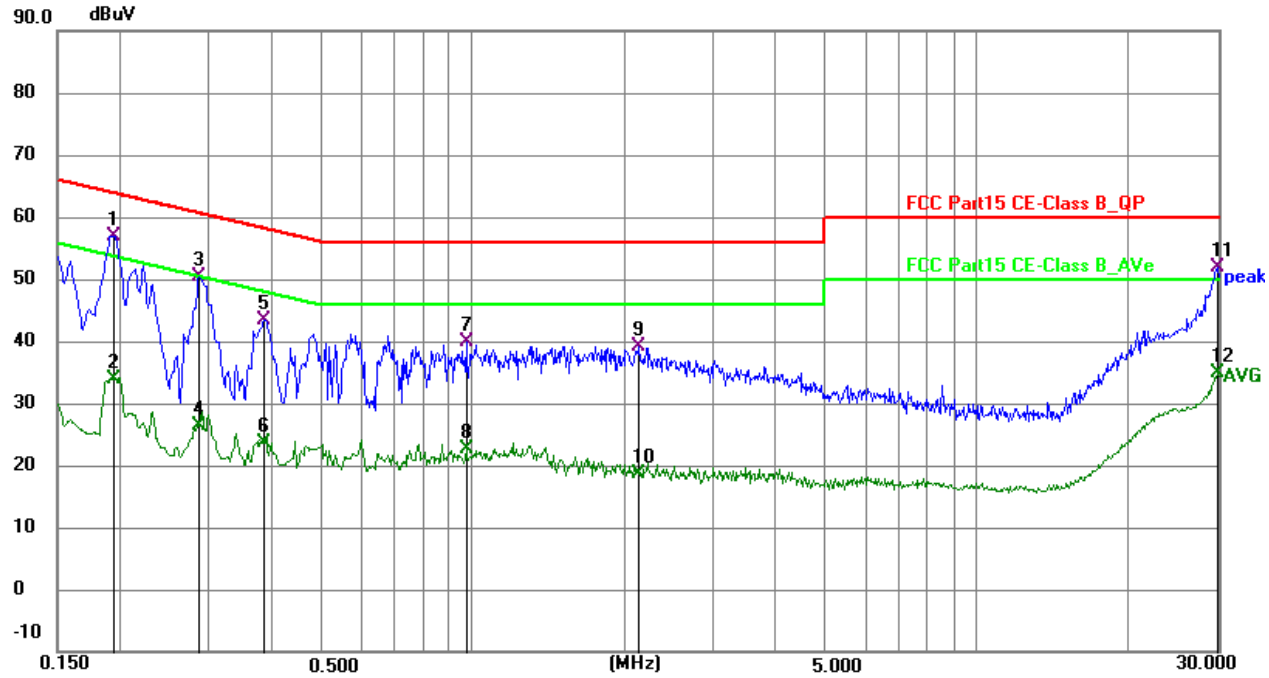

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1949	47.72	9.21	56.93	63.83	-6.90	QP	P	
2	0.1949	24.60	9.21	33.81	53.83	-20.02	AVG	P	
3	0.2850	41.06	9.37	50.43	60.67	-10.24	QP	P	
4	0.2850	17.05	9.37	26.42	50.67	-24.25	AVG	P	
5	0.3840	34.03	9.38	43.41	58.19	-14.78	QP	P	
6	0.3840	14.16	9.38	23.54	48.19	-24.65	AVG	P	
7	0.9690	30.36	9.41	39.77	56.00	-16.23	QP	P	
8	0.9690	13.23	9.41	22.64	46.00	-23.36	AVG	P	
9	2.1390	29.55	9.47	39.02	56.00	-16.98	QP	P	
10	2.1390	9.08	9.47	18.55	46.00	-27.45	AVG	P	
11	29.8680	41.66	10.11	51.77	60.00	-8.23	QP	P	
12	29.8680	24.77	10.11	34.88	50.00	-15.12	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Mode:	TM5
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

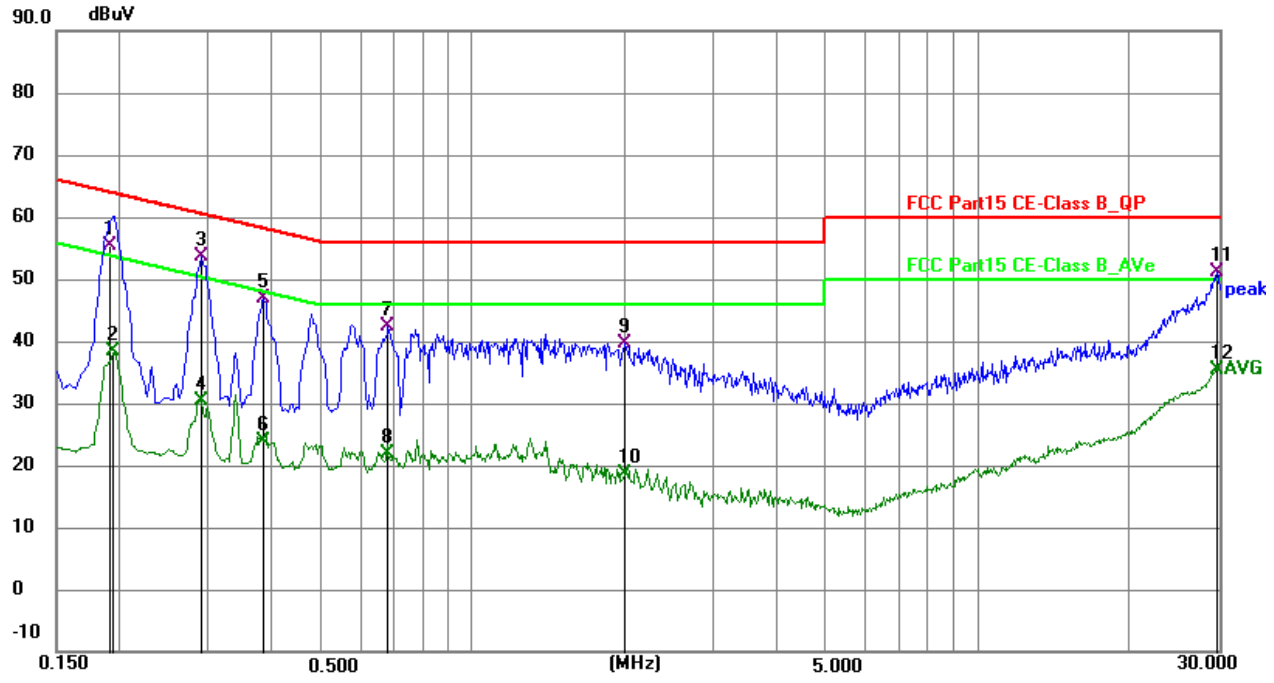

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1914	45.91	9.39	55.30	63.98	-8.68	QP	P	
2	0.1949	28.96	9.39	38.35	53.83	-15.48	AVG	P	
3 *	0.2895	43.95	9.57	53.52	60.54	-7.02	QP	P	
4	0.2895	20.84	9.57	30.41	50.54	-20.13	AVG	P	
5	0.3840	37.30	9.57	46.87	58.19	-11.32	QP	P	
6	0.3840	14.43	9.57	24.00	48.19	-24.19	AVG	P	
7	0.6809	32.81	9.56	42.37	56.00	-13.63	QP	P	
8	0.6809	12.22	9.56	21.78	46.00	-24.22	AVG	P	
9	2.0040	30.01	9.66	39.67	56.00	-16.33	QP	P	
10	2.0040	8.95	9.66	18.61	46.00	-27.39	AVG	P	
11	29.7375	40.76	10.34	51.10	60.00	-8.90	QP	P	
12	29.7375	24.92	10.34	35.26	50.00	-14.74	AVG	P	

5. Radiated Emissions

5.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:

Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

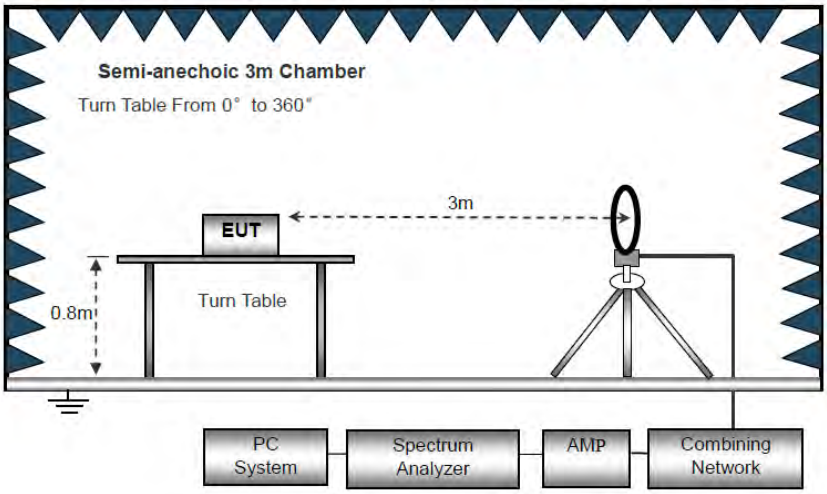

Block Diagram of Radiated Emission Below 30MHz

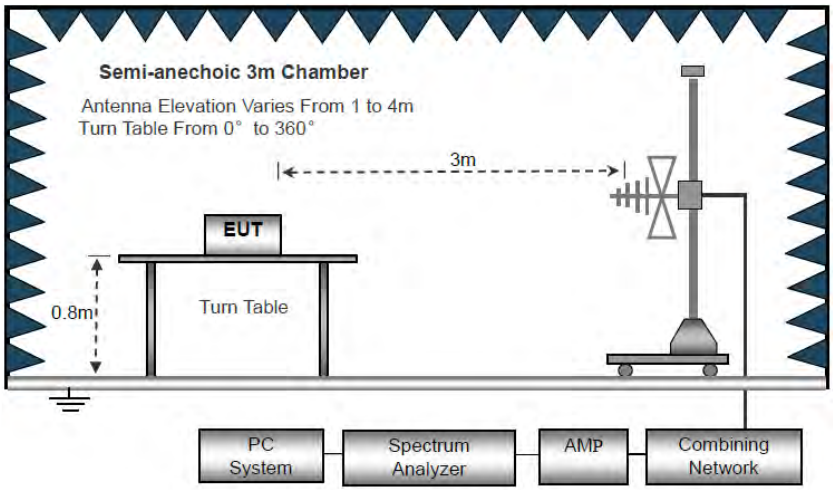

Block Diagram of Radiated Emission From 30MHz to 1GHz

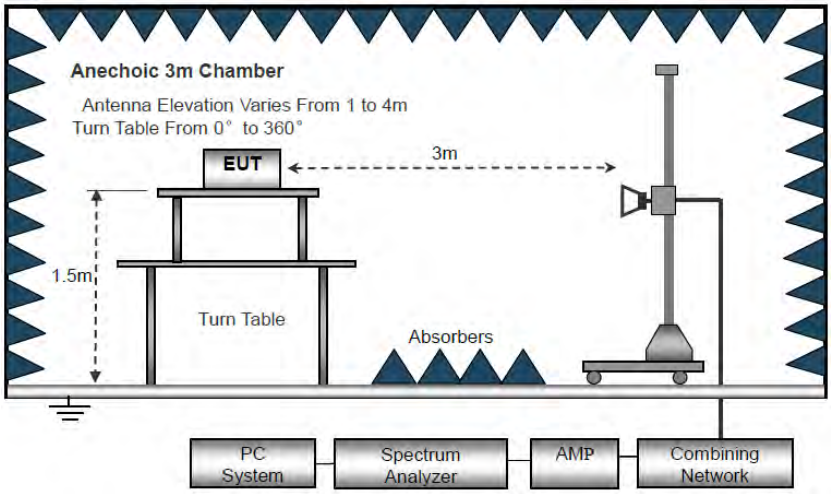

Block Diagram of Radiated Emission Above 1GHz

a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range blew 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.

b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for f ≥ 1GHz, 100 kHz for f < 1 GHz, 10kHz for f < 30MHz
VBW ≥ RBW, Sweep = auto
Detector function = peak
Trace = max hold

d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.

f) For the actual test configuration, please refer to the related item - EUT test photos.

5.3 Test Data and Results

All of the 802.11b, 802.11g and 802.11n modes have been tested, the EUT complied with the FCC Part 15.247 standard limit for a wireless device, and with the worst case TM1_2412MHz and TM5_2412MHz as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Radiated Emission Test Data (30MHz to 1GHz)	
Tested Mode:	TM1
Test Voltage:	DC 3.91V from battery
Test Antenna Polarization:	Horizontal
Remark:	

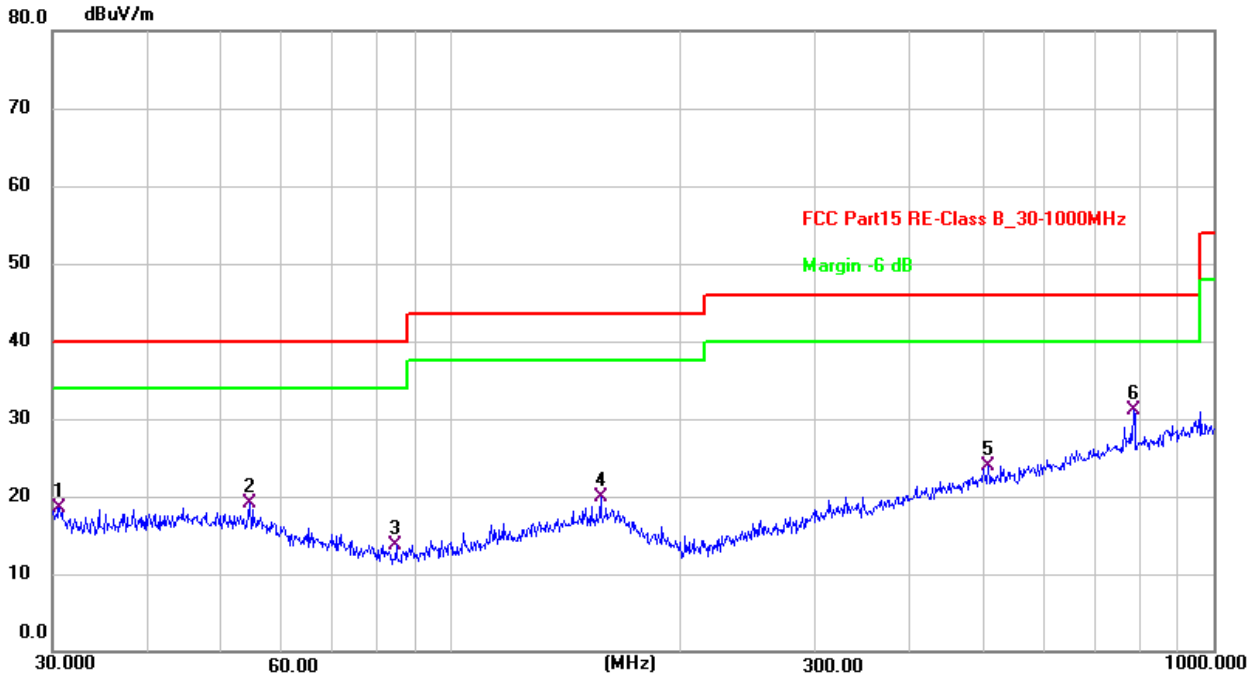

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.6379	27.51	-8.92	18.59	40.00	-21.41	QP	100	307	P	
2	54.4516	28.26	-9.10	19.16	40.00	-20.84	QP	100	59	P	
3	84.7019	26.59	-12.96	13.63	40.00	-26.37	QP	100	205	P	
4	157.0074	27.82	-7.82	20.00	43.50	-23.50	QP	100	287	P	
5	506.4791	27.15	-3.18	23.97	46.00	-22.03	QP	100	10	P	
6 *	785.0935	29.86	1.33	31.19	46.00	-14.81	QP	100	329	P	

Radiated Emission Test Data (30MHz to 1GHz)	
Tested Mode:	TM1
Test Voltage:	DC 3.91V from battery
Test Antenna Polarization:	Vertical
Remark:	

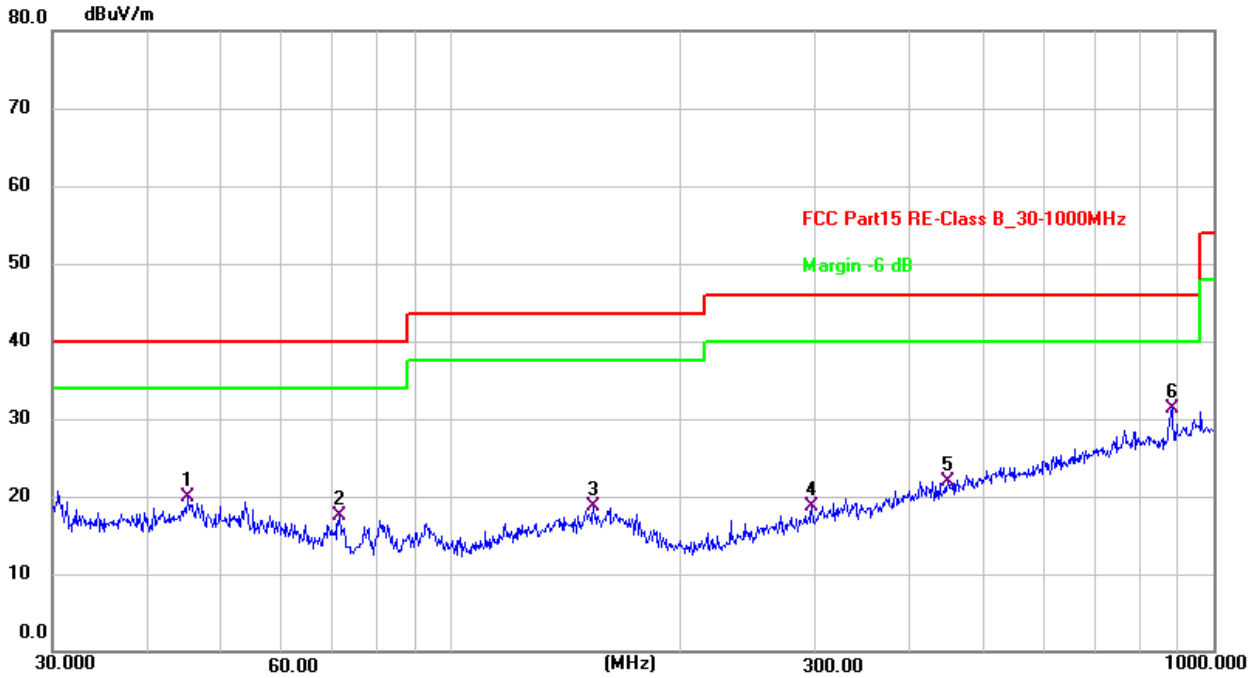

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.2166	28.22	-8.27	19.95	40.00	-20.05	QP	100	71	P	
2	71.3300	29.43	-11.86	17.57	40.00	-22.43	QP	100	31	P	
3	153.7385	26.57	-7.79	18.78	43.50	-24.72	QP	100	41	P	
4	297.2241	26.80	-8.19	18.61	46.00	-27.39	QP	100	21	P	
5	447.9822	26.56	-4.57	21.99	46.00	-24.01	QP	100	21	P	
6 *	881.4067	29.13	2.23	31.36	46.00	-14.64	QP	100	114	P	

Radiated Emission Test Data (30MHz to 1GHz)	
Tested Mode:	TM5
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

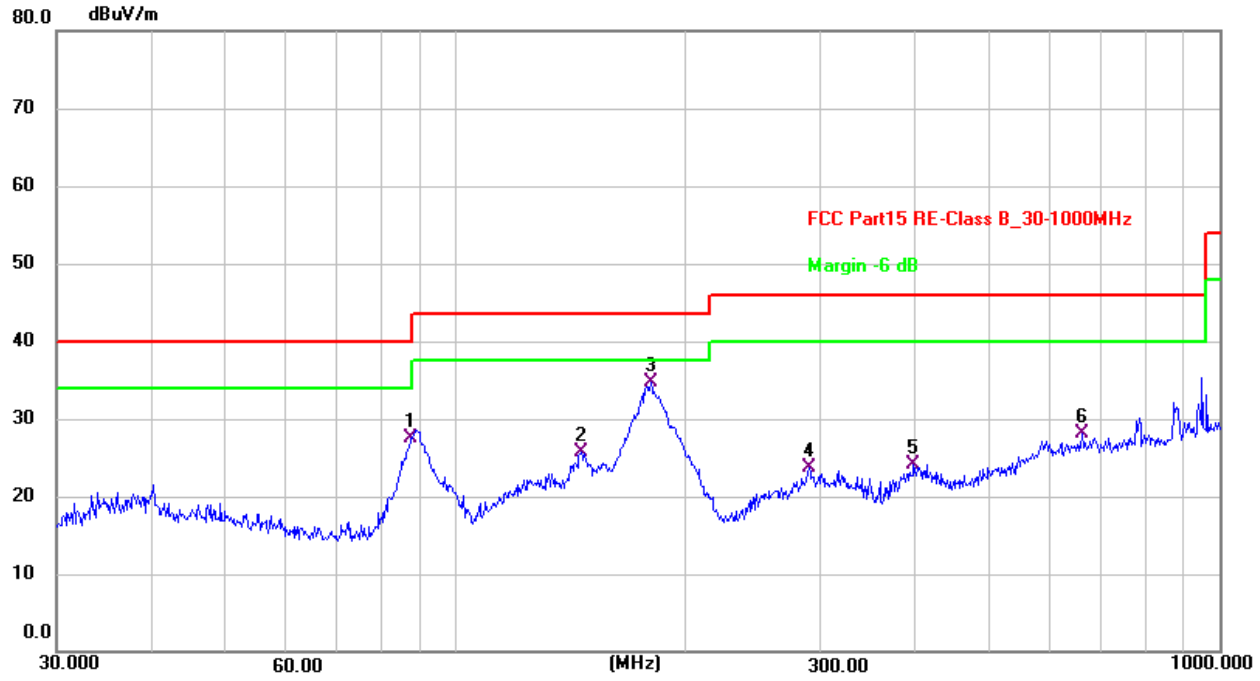

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	87.4177	40.48	-13.00	27.48	40.00	-12.52	QP	200	349	P	
2	145.8611	33.58	-7.94	25.64	43.50	-17.86	QP	200	236	P	
3 *	180.0165	45.25	-10.55	34.70	43.50	-8.80	QP	100	309	P	
4	290.0172	32.27	-8.56	23.71	46.00	-22.29	QP	100	258	P	
5	397.6334	29.72	-5.66	24.06	46.00	-21.94	QP	100	196	P	
6	661.1505	28.72	-0.60	28.12	46.00	-17.88	QP	200	81	P	

Radiated Emission Test Data (30MHz to 1GHz)	
Tested Mode:	TM5
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

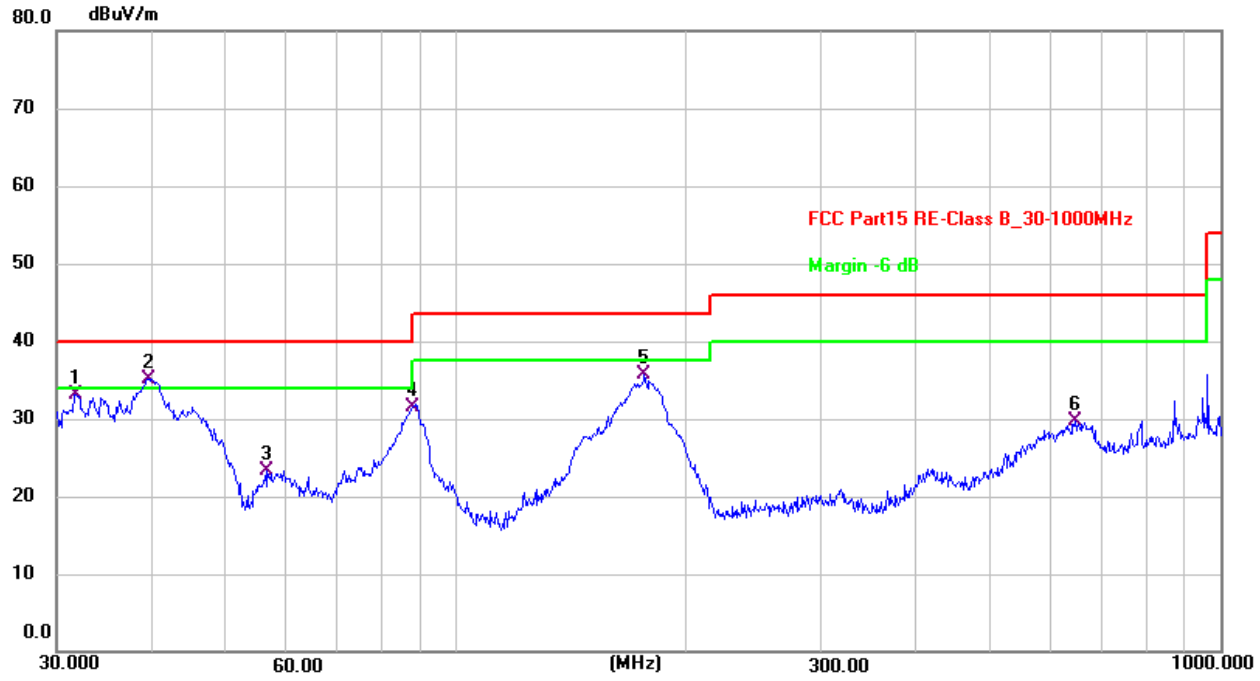

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	31.8427	42.07	-8.97	33.10	40.00	-6.90	QP	100	348	P	
2 *	39.7146	43.53	-8.35	35.18	40.00	-4.82	QP	100	254	P	
3	56.5929	32.78	-9.41	23.37	40.00	-16.63	QP	100	213	P	
4	87.7248	44.59	-13.03	31.56	40.00	-8.44	QP	100	234	P	
5	176.2686	45.61	-9.88	35.73	43.50	-7.77	QP	100	128	P	
6	645.1195	30.65	-0.93	29.72	46.00	-16.28	QP	100	46	P	

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (802.11b_2412MHz)							
4824	76.34	-14.72	61.62	74	-12.38	H	PK
4824	60.69	-14.72	45.97	54	-8.03	H	AV
7236	62.85	-8.41	54.44	74	-19.56	H	PK
7236	47.6	-8.41	39.19	54	-14.81	H	AV
4824	74.16	-14.72	59.44	74	-14.56	V	PK
4824	59.23	-14.72	44.51	54	-9.49	V	AV
7236	63.3	-8.41	54.89	74	-19.11	V	PK
7236	48.78	-8.41	40.37	54	-13.63	V	AV
Middle Channel (802.11b_2437MHz)							
4874	75.74	-14.64	61.1	74	-12.9	H	PK
4874	60.73	-14.64	46.09	54	-7.91	H	AV
7311	62.1	-8.28	53.82	74	-20.18	H	PK
7311	45.4	-8.28	37.12	54	-16.88	H	AV
4874	73.87	-14.64	59.23	74	-14.77	V	PK
4874	57.53	-14.64	42.89	54	-11.11	V	AV
7311	64.79	-8.28	56.51	74	-17.49	V	PK
7311	49.53	-8.28	41.25	54	-12.75	V	AV
Highest Channel (802.11b_2462MHz)							
4924	77.57	-14.53	63.04	74	-10.96	H	PK
4924	62.02	-14.53	47.49	54	-6.51	H	AV
7386	62.66	-8.13	54.53	74	-19.47	H	PK
7386	46.77	-8.13	38.64	54	-15.36	H	AV
4924	73.85	-14.53	59.32	74	-14.68	V	PK
4924	60.06	-14.53	45.53	54	-8.47	V	AV
7386	63.1	-8.13	54.97	74	-19.03	V	PK
7386	48.47	-8.13	40.34	54	-13.66	V	AV

Note 1: This EUT was tested in 3 orthogonal positions with the X-axis being the worst and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded report, 18GHz-26GHz not recorded for no spurious point have a margin of less than 20 dB with respect to the limits.

6. Band-edge Emissions(Radiated)

6.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6 and section 6.10.

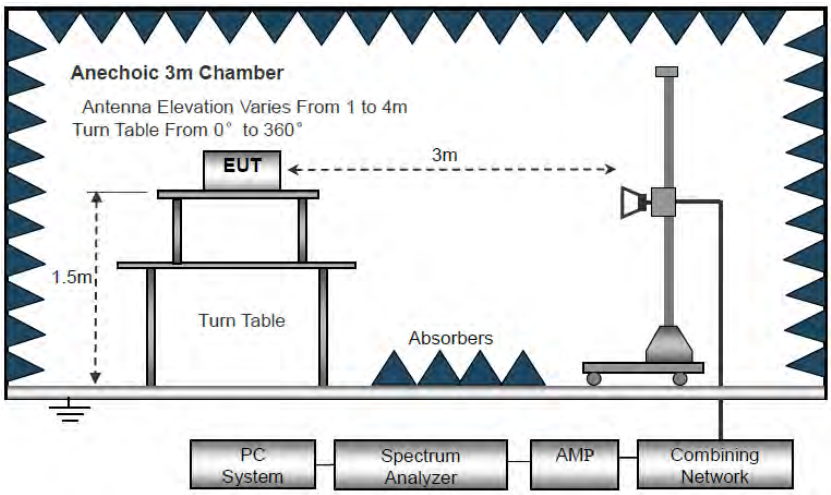

Test Setup Block Diagram

As the radiated emissions testing, set the Lowest and Highest Transmitting Channel, observed the outside band of 2310MHz to 2400MHz and 2483.5MHz to 2500MHz, than mark the higher-level emission for comparing with the FCC rules.

6.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.247 standard limit, and with the worst case as below:

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

Radiated Emission Test Data (Band edge emissions)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (802.11n_2412MHz)							
2310	66.67	-21.34	45.33	74	-28.67	H	PK
2310	49.8	-21.34	28.46	54	-25.54	H	AV
2390	66.69	-20.96	45.73	74	-28.27	H	PK
2390	49.23	-20.96	28.27	54	-25.73	H	AV
2400	67.88	-20.91	46.97	74	-27.03	H	PK
2400	52.61	-20.91	31.7	54	-22.3	H	AV
2310	67.82	-21.34	46.48	74	-27.52	V	PK
2310	51.64	-21.34	30.3	54	-23.7	V	AV
2390	65.55	-20.96	44.59	74	-29.41	V	PK
2390	51.85	-20.96	30.89	54	-23.11	V	AV
2400	72	-20.91	51.09	74	-22.91	V	PK
2400	52.08	-20.91	31.17	54	-22.83	V	AV
Highest Channel (802.11n_2462MHz)							
2483.50	71.64	-20.51	51.13	74	-22.87	H	PK
2483.50	54.45	-20.51	33.94	54	-20.06	H	AV
2500	65.43	-20.43	45	74	-29	H	PK
2500	52.12	-20.43	31.69	54	-22.31	H	AV
2483.50	68.86	-20.51	48.35	74	-25.65	V	PK
2483.50	53.58	-20.51	33.07	54	-20.93	V	AV
2500	65.65	-20.43	45.22	74	-28.78	V	PK
2500	50.84	-20.43	30.41	54	-23.59	V	AV

Remark: Level = Reading + Factor, Margin = Level - Limit

7. Maximum Conducted Output Power

7.1 Standard and Limit

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

7.2 Test Procedure

A spectrum analyzer or similar device shall be used to observe a sample of the modulated transmitter's radio frequency power output.

1) A measurement instrument with an integrated channel bandwidth function may be used to automate the test process.
2) Set center of frequency = operating frequency.
3) Connect the EUT to the RF input of the spectrum analyzer via a low loss RF cable
4) Set the RBW = 1MHz, VBW = 3MHz, Detector = RMS, Sweep = Auto.
5) Set the SPAN to 40MHz/80MHz for 20MHz/40MHz emission bandwidth mode.
6) Measure the highest amplitude appearing on spectral display and mark the value.
7) Repeat the above procedures until all frequency measured was complete.

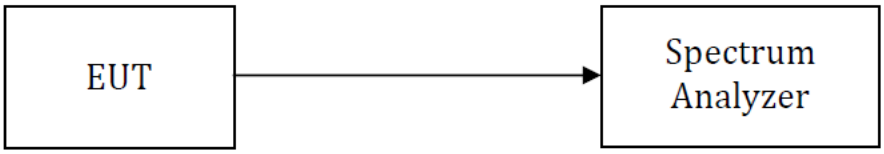

Test Setup Block Diagram

7.3 Test Data and Results

Duty Cycle

Test Mode	Test Channel MHz	Ton (ms)	Ttotal (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
802.11b	2412	0.666	0.678	98.23	0	1.5
	2437	0.666	0.676	98.52	0	1.5
	2462	0.664	0.676	98.22	0	1.51
802.11g	2412	0.63	0.648	97.22	0.12	1.59
	2437	0.63	0.648	97.22	0.12	1.59
	2462	0.628	0.646	97.21	0.12	1.59
802.11n(HT20)	2412	1.484	1.502	98.8	0	0.67
	2437	1.486	1.502	98.93	0	0.67
	2462	1.486	1.502	98.93	0	0.67
802.11n(HT40)	2422	0.976	0.994	98.19	0	1.02
	2437	0.976	0.994	98.19	0	1.02
	2452	0.978	0.994	98.39	0	1.02
802.11ax(HE20)	2412	0.714	0.732	97.54	0.11	1.4
	2437	0.716	0.732	97.81	0.1	1.4
	2462	0.714	0.732	97.54	0.11	1.4
802.11ax(HE40)	2422	0.586	0.602	97.34	0.12	1.71
	2437	0.586	0.602	97.34	0.12	1.71
	2452	0.586	0.604	97.02	0.13	1.71

802.11b	802.11g
2412MHz	2412MHz
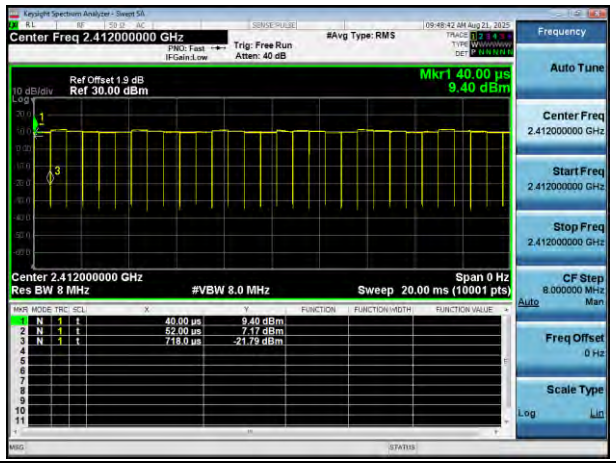	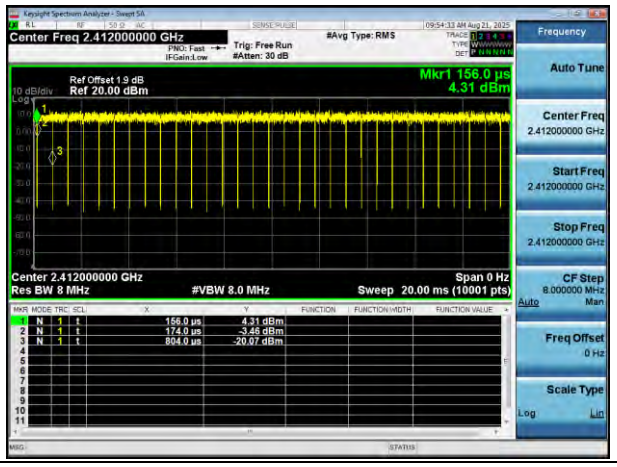
2437MHz	2437MHz
	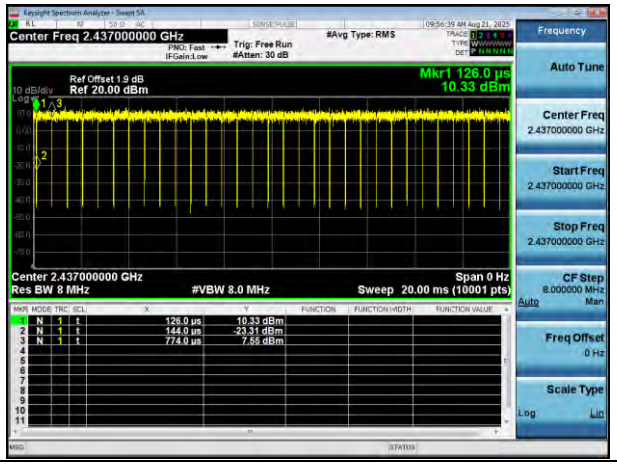
2462MHz	2462MHz
	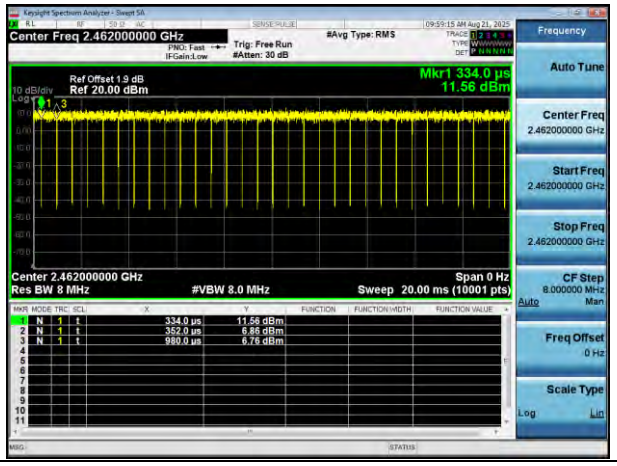

802.11n(HT20)	802.11n(HT40)
2412MHz	2422MHz
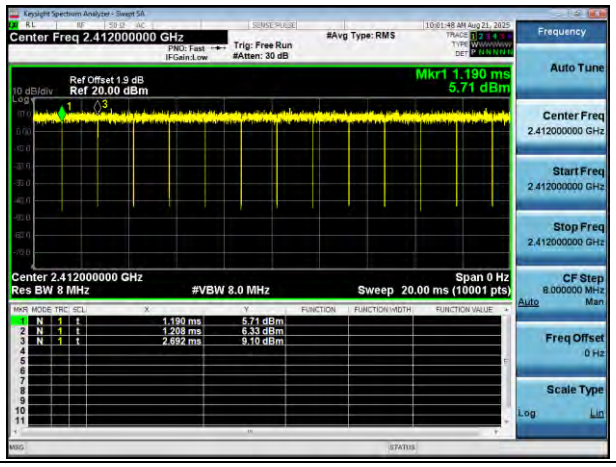	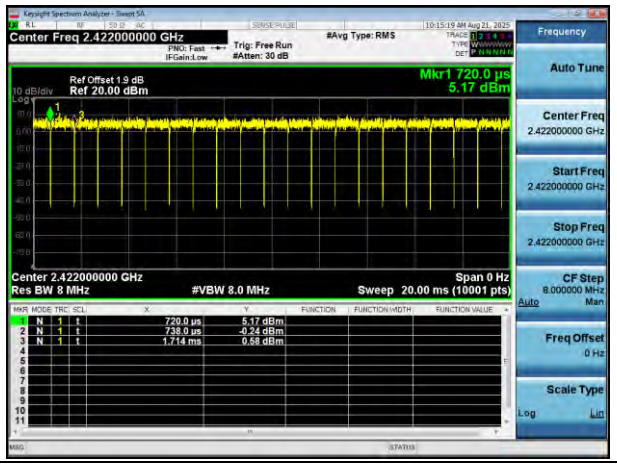
2437MHz	2437MHz
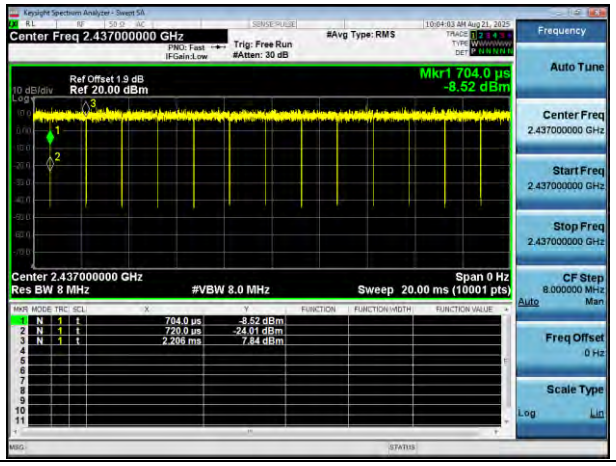	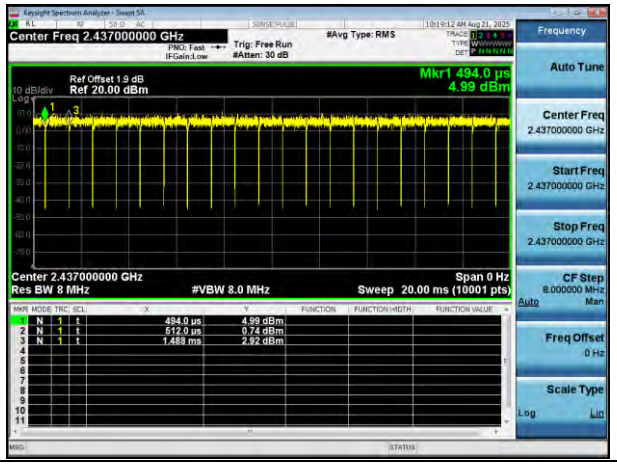
2462MHz	2452MHz
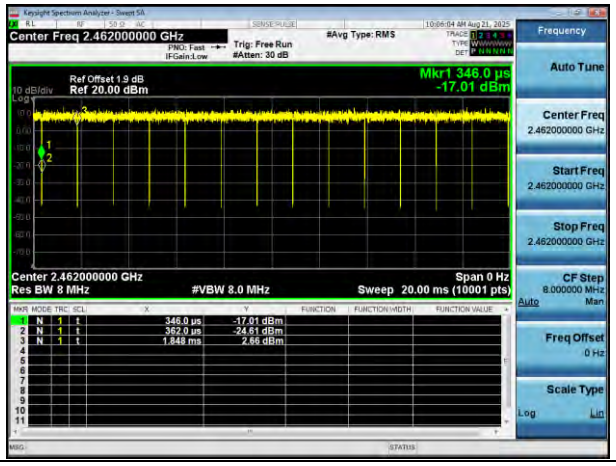	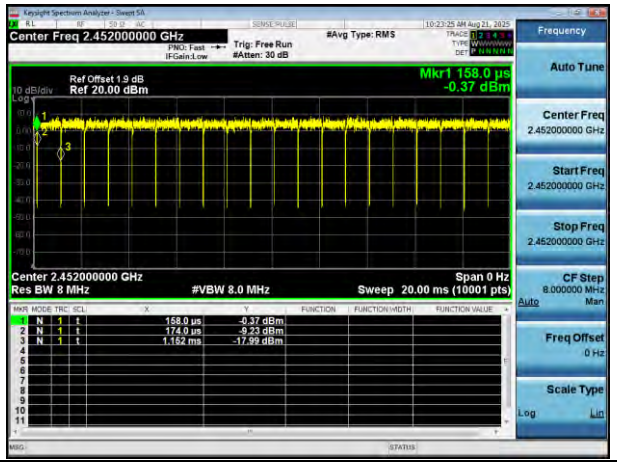

802.11ax(HE20)	802.11ax(HE40)
2412MHz 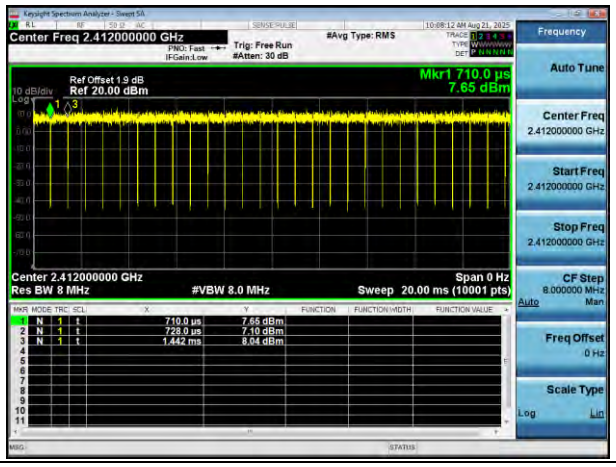 	2422MHz 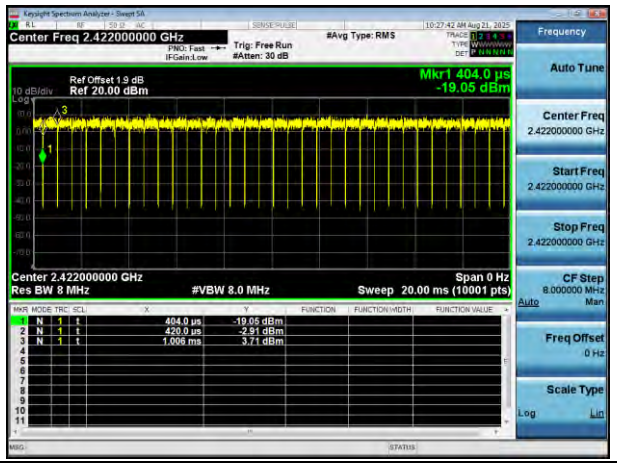
2437MHz 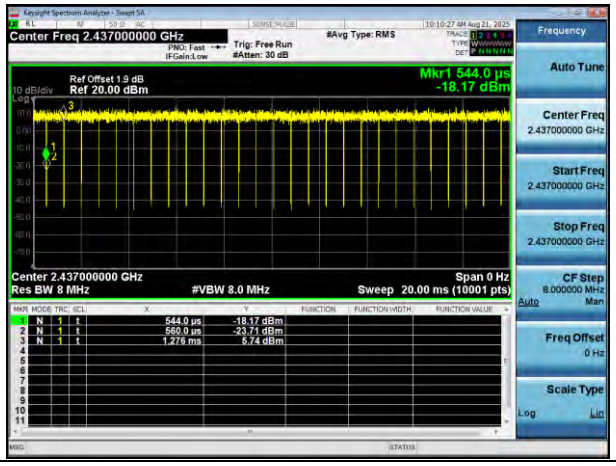 	2437MHz 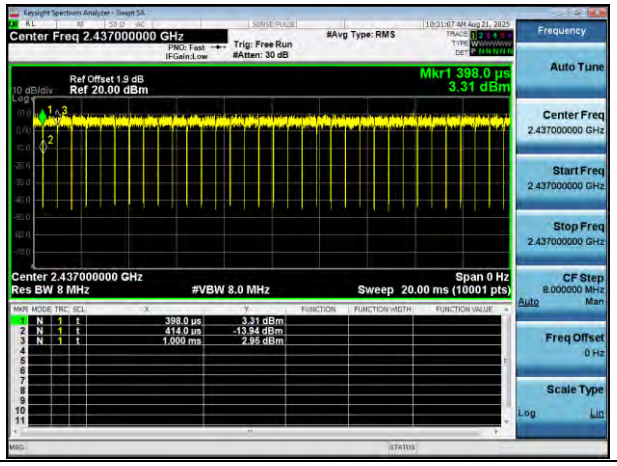
2462MHz 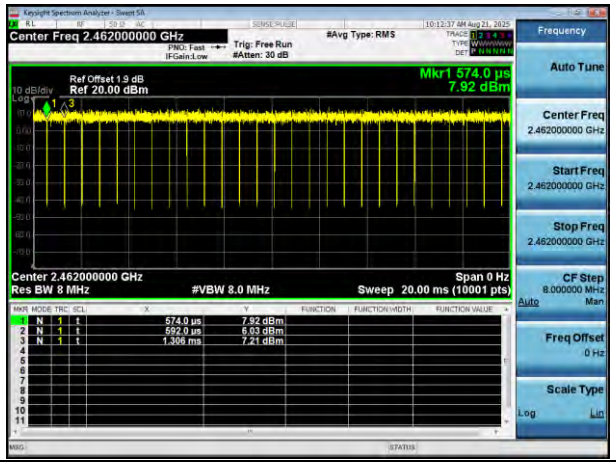 	2452MHz 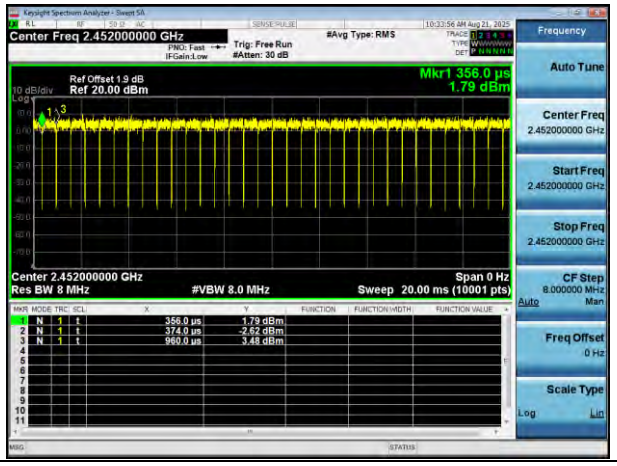

Test Mode	Test Channel (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Test Result
802.11b	2412	6.05	0	6.05	30	Pass
	2437	6.34	0	6.34	30	Pass
	2462	6.19	0	6.19	30	Pass
802.11g	2412	5.87	0.12	5.99	30	Pass
	2437	6.15	0.12	6.27	30	Pass
	2462	6.31	0.12	6.43	30	Pass
802.11n(HT20)	2412	6.33	0	6.33	30	Pass
	2437	6.6	0	6.6	30	Pass
	2462	6.42	0	6.42	30	Pass
802.11n(HT40)	2422	6.2	0	6.2	30	Pass
	2437	6.45	0	6.45	30	Pass
	2452	5.7	0	5.7	30	Pass
802.11ax(HE20)	2412	6.3	0.11	6.41	30	Pass
	2437	6.55	0.1	6.65	30	Pass
	2462	6.39	0.11	6.5	30	Pass
802.11ax(HE40)	2422	6.18	0.12	6.3	30	Pass
	2437	6.4	0.12	6.52	30	Pass
	2452	5.62	0.13	5.75	30	Pass

Note: Total Power = Conducted Power + Duty Factor

802.11b	802.11g
2412MHz	2412MHz
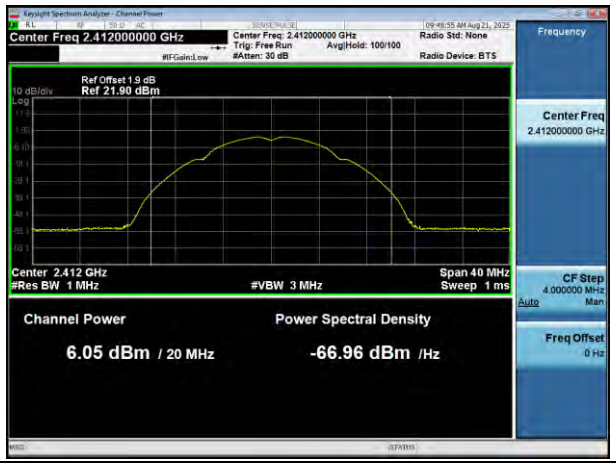	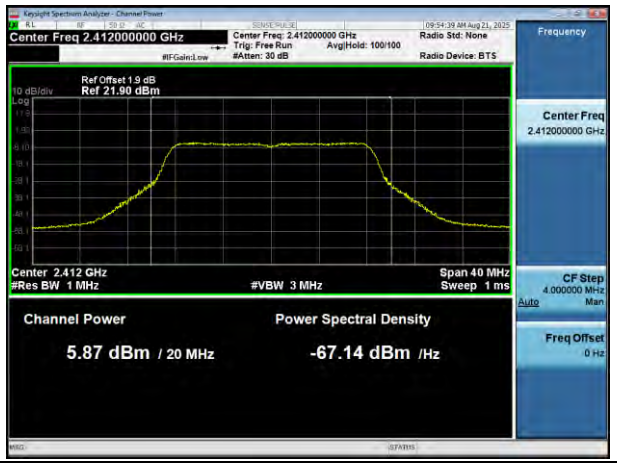
2437MHz	2437MHz
2462MHz	2462MHz

802.11n(HT20)	802.11n(HT40)
2412MHz	2422MHz
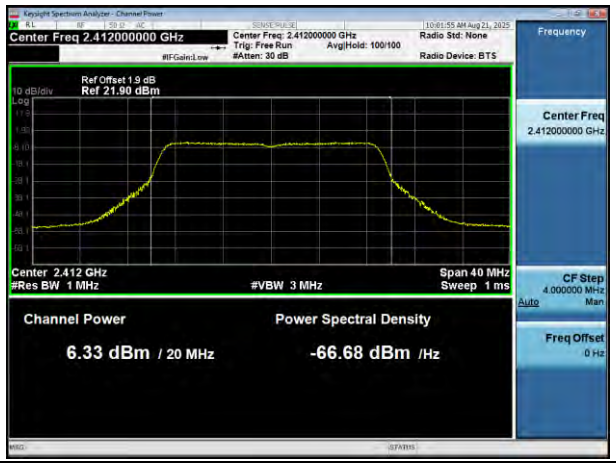	
2437MHz	2437MHz
2462MHz	2452MHz

802.11ax(HE20)	802.11ax(HE40)
2412MHz	2422MHz
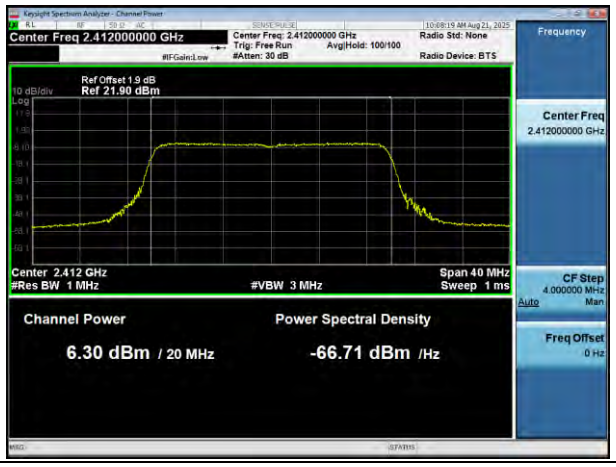	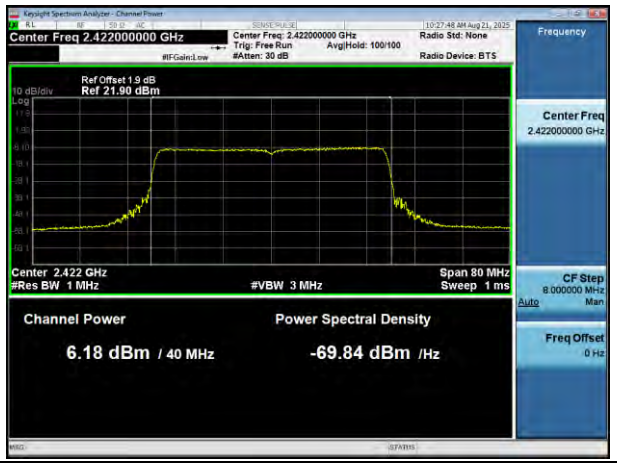
2437MHz	2437MHz
2462MHz	2452MHz
	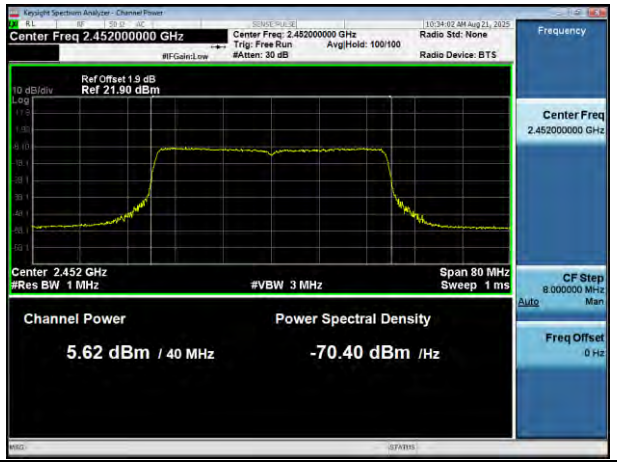

8. Occupied Bandwidth

8.1 Standard and Limit

According to 15.247(a)(2), Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
2) Set the spectrum analyzer to any one measured frequency within its operating range.
3) 6dB: Set RBW = 100kHz, VBW ≥ [3 × RBW], Sweep = Auto.
   99%: Set RBW = 1%~5% of 99% bandwidth, VBW ≥ [3 × RBW], Sweep = Auto.
4) Set a reference level on the measuring instrument equal to the highest peak value.
5) Measure the frequency difference of two frequencies that were attenuated 6dB from the reference level. Record the frequency difference as the emission bandwidth.
6) Repeat the above procedures until all frequencies measured were complete.

Test Setup Block Diagram

8.3 Test Data and Results

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB BW Limit (MHz)	Test Result
802.11b	2412	7.563	13.175	0.5	Pass
	2437	8.059	13.023	0.5	Pass
	2462	8.054	13.109	0.5	Pass
802.11g	2412	16.48	16.555	0.5	Pass
	2437	16.48	16.478	0.5	Pass
	2462	16.45	16.554	0.5	Pass
802.11n(HT20)	2412	17.74	17.762	0.5	Pass
	2437	17.72	17.726	0.5	Pass
	2462	17.73	17.739	0.5	Pass
802.11n(HT40)	2422	36.46	36.422	0.5	Pass
	2437	36.43	36.403	0.5	Pass
	2452	36.46	36.449	0.5	Pass
802.11ax(HE20)	2412	19.10	19.037	0.5	Pass
	2437	19.05	18.999	0.5	Pass
	2462	19.08	19.014	0.5	Pass
802.11ax(HE40)	2422	38.27	37.973	0.5	Pass
	2437	38.18	37.872	0.5	Pass
	2452	38.21	37.966	0.5	Pass

6dB Bandwidth:

802.11b	802.11g
2412MHz	2412MHz
	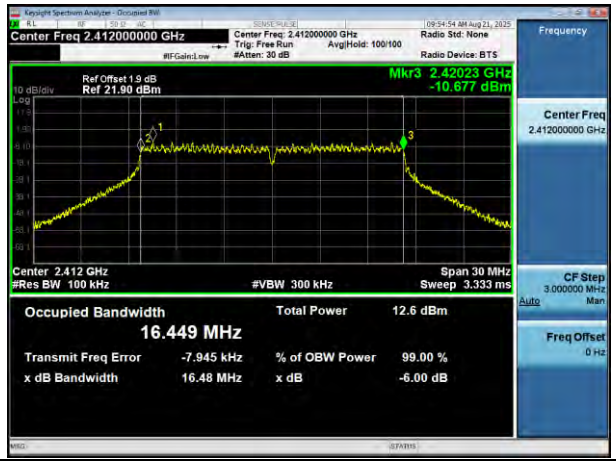
2437MHz	2437MHz
	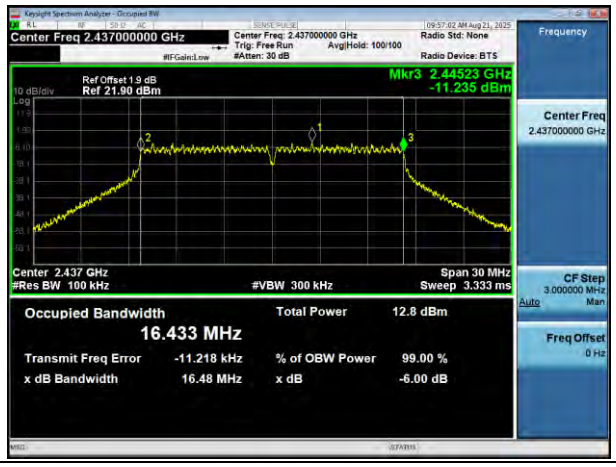
2462MHz	2462MHz
	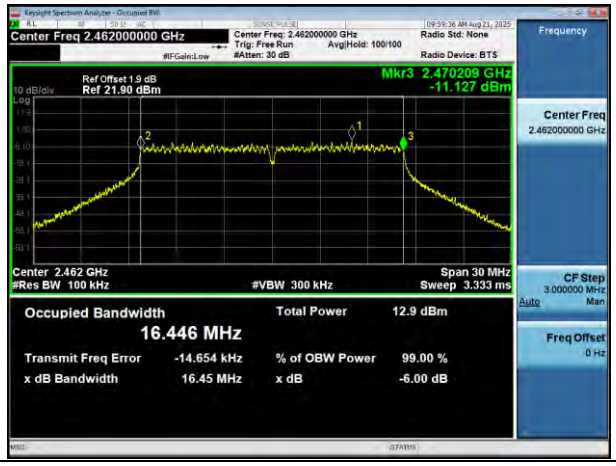

802.11n(HT20)	802.11n(HT40)
2412MHz	2422MHz
	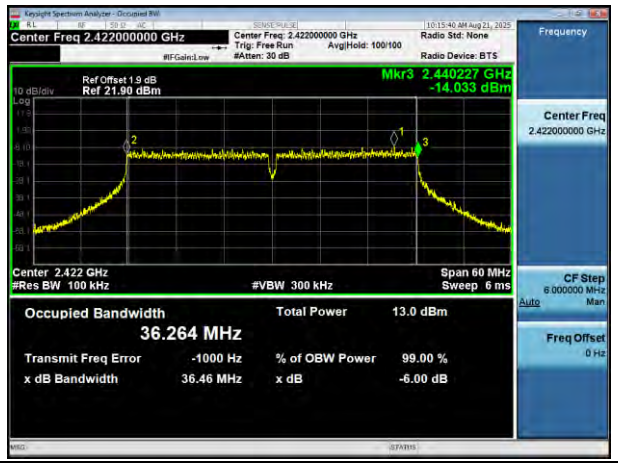
2437MHz	2437MHz
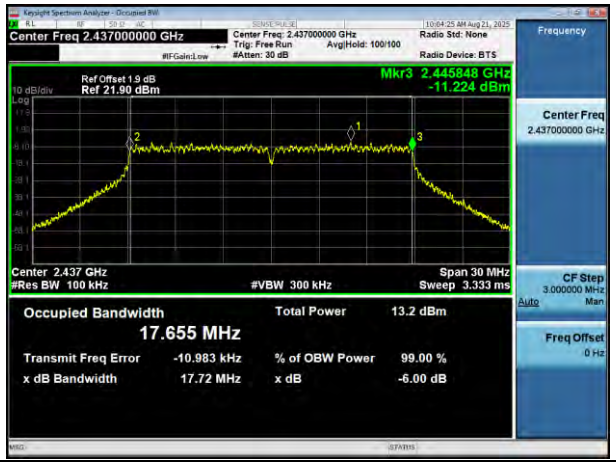	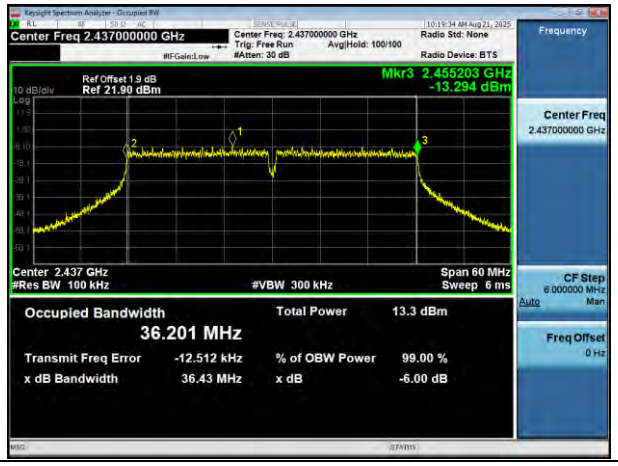
2462MHz	2452MHz
	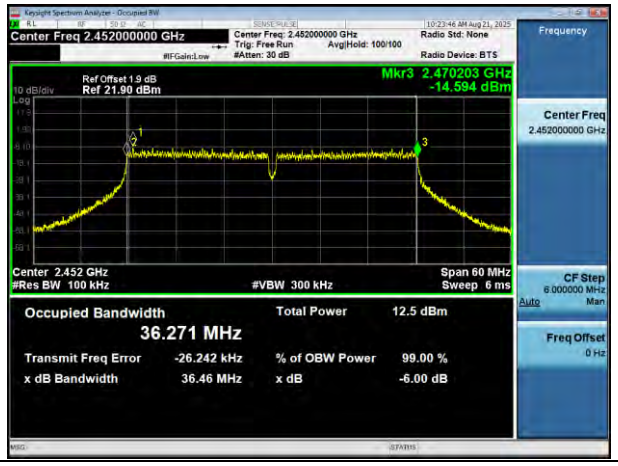

802.11ax(HE20)	802.11ax(HE40)
2412MHz	2422MHz
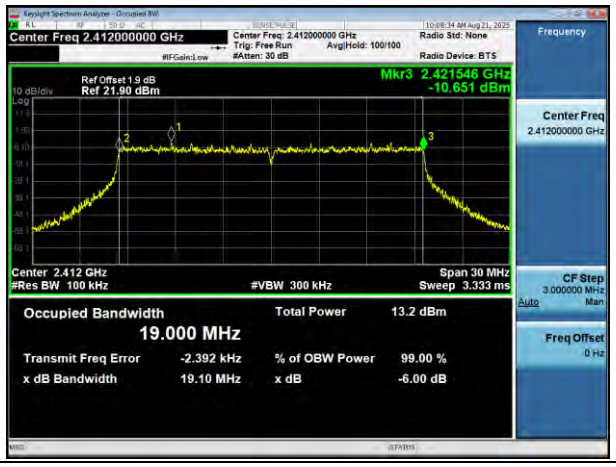	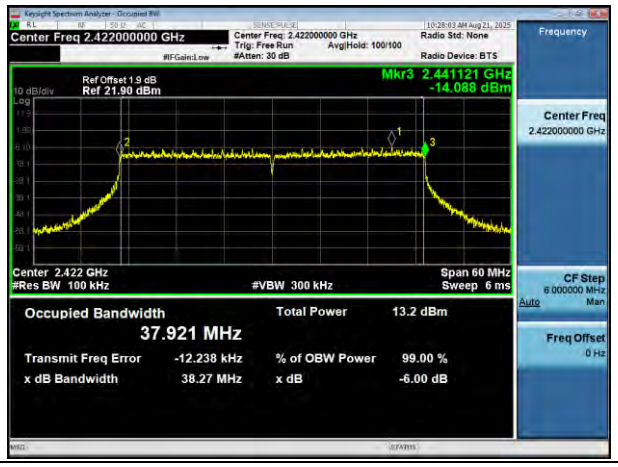
2437MHz	2437MHz
	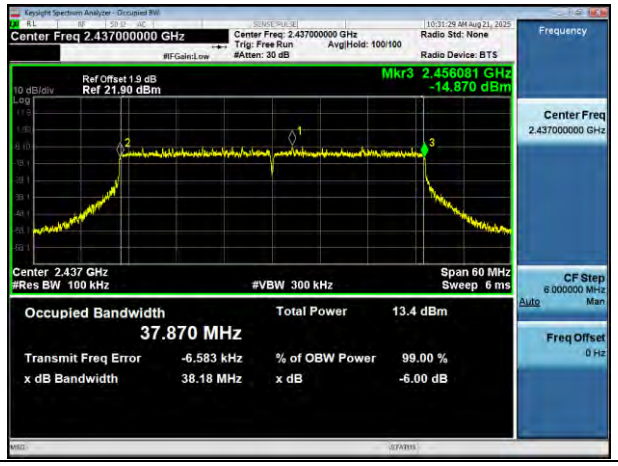
2462MHz	2452MHz
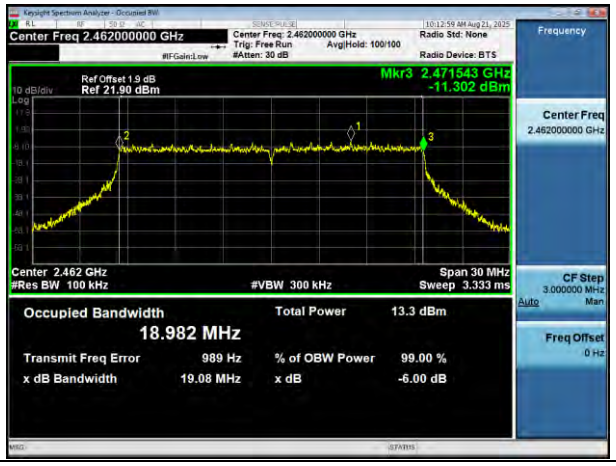	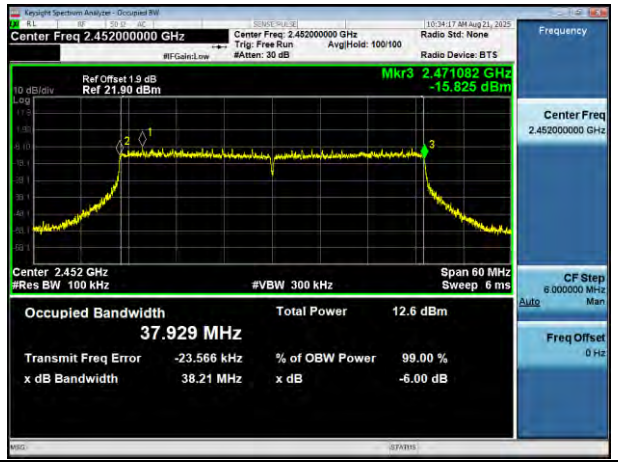

99% Bandwidth:

802.11b	802.11g
2412MHz	2412MHz
2437MHz	2437MHz
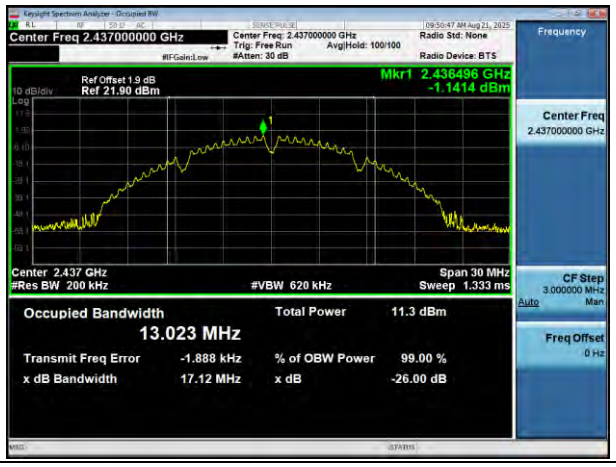	
2462MHz	2462MHz

802.11n(HT20)	802.11n(HT40)
2412MHz	2422MHz
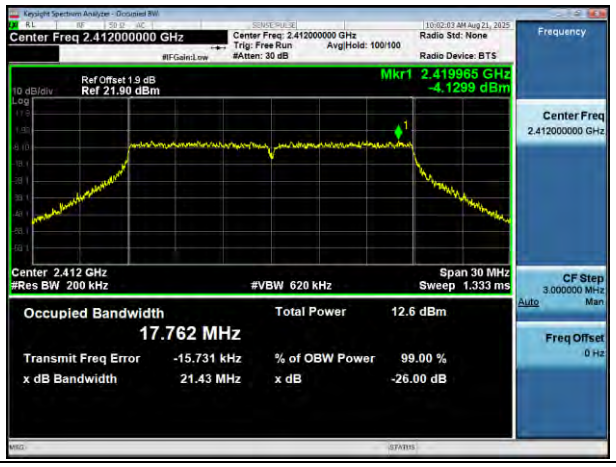	
2437MHz	2437MHz
2462MHz	2452MHz
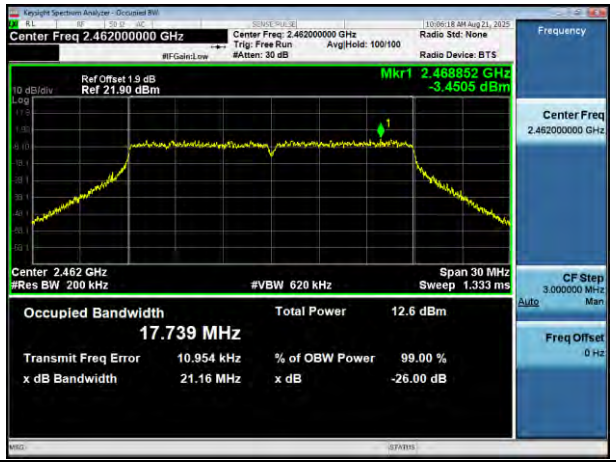	

802.11ax(HE20)	802.11ax(HE40)
2412MHz	2422MHz
	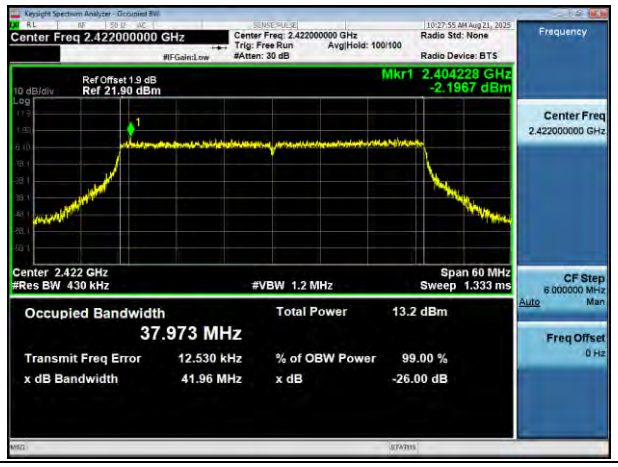
2437MHz	2437MHz
	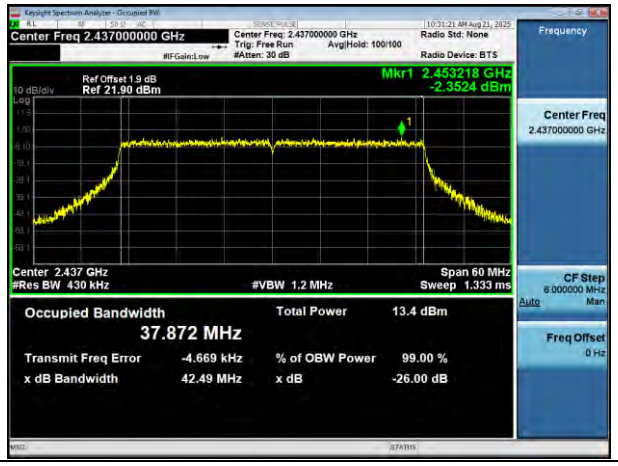
2462MHz	2452MHz

9. Maximum Power Spectral Density

9.1 Standard and Limit

According to FCC 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 Test Procedure

1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
2) Set the spectrum analyzer to any one measured frequency within its operating range.
3) Set RBW = 3kHz, VBW = 10kHz, Sweep = Auto, Detector = RMS.
4) Measure the highest amplitude appearing on spectral display and mark the value.
5) Repeat above procedures until all frequencies measured were complete.

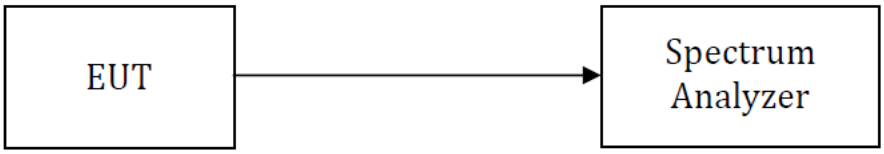

Test Setup Block Diagram

9.3 Test Data and Results

Test Mode	Test Channel (MHz)	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
802.11b	2412	-23.83	0	-23.83	8	Pass
	2437	-22.87	0	-22.87	8	Pass
	2462	-23.75	0	-23.75	8	Pass
802.11g	2412	-28.19	0.12	-28.07	8	Pass
	2437	-27.67	0.12	-27.55	8	Pass
	2462	-27.26	0.12	-27.14	8	Pass
802.11n(HT20)	2412	-28.54	0	-28.54	8	Pass
	2437	-28.43	0	-28.43	8	Pass
	2462	-28.62	0	-28.62	8	Pass
802.11n(HT40)	2422	-31.74	0	-31.74	8	Pass
	2437	-31.77	0	-31.77	8	Pass
	2452	-32.21	0	-32.21	8	Pass
802.11ax(HE20)	2412	-29.14	0.11	-29.03	8	Pass
	2437	-29.53	0.1	-29.43	8	Pass
	2462	-28.69	0.11	-28.58	8	Pass
802.11ax(HE40)	2422	-31.65	0.12	-31.53	8	Pass
	2437	-32.65	0.12	-32.53	8	Pass
	2452	-33.17	0.13	-33.04	8	Pass

Note: Total PSD = Conducted PSD + Duty Factor

802.11b	802.11g
2412MHz	2412MHz
	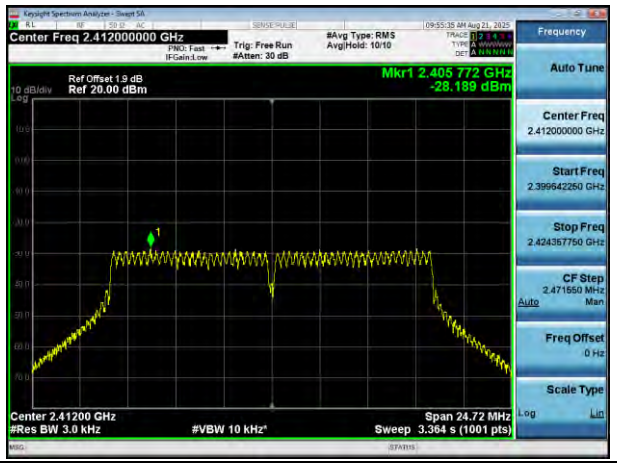
2437MHz	2437MHz
	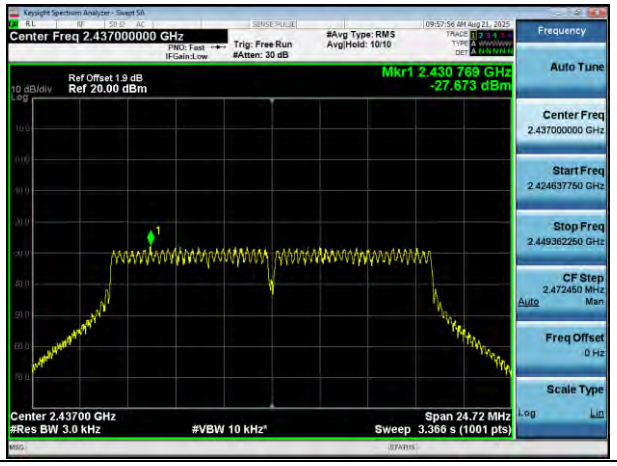
2462MHz	2462MHz
	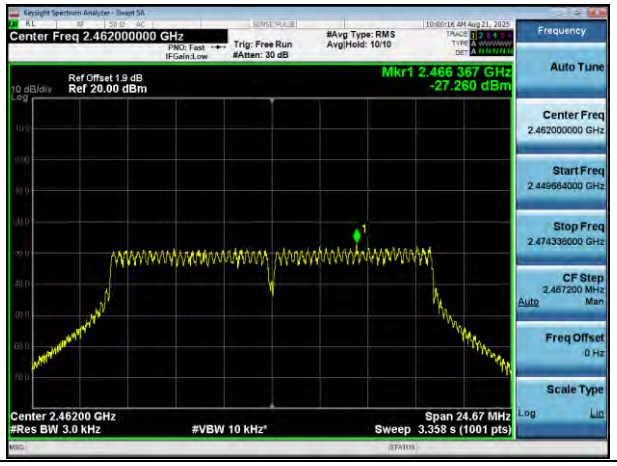

802.11n(HT20)	802.11n(HT40)
2412MHz	2422MHz
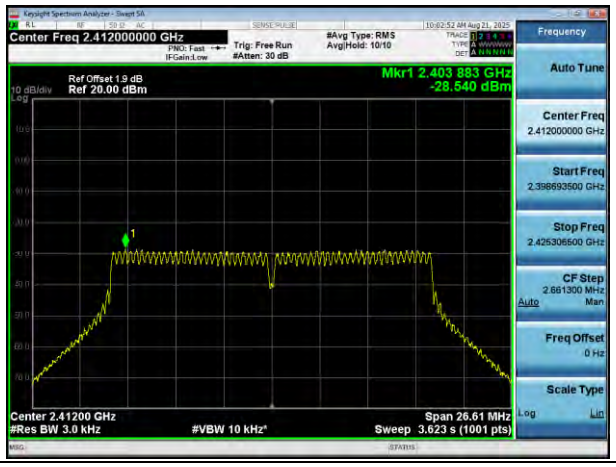	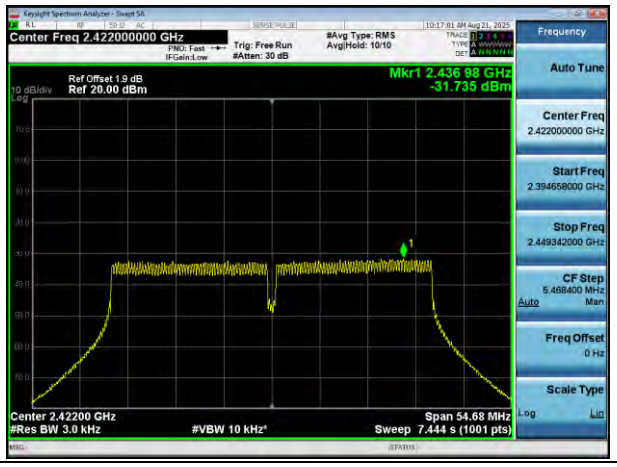
2437MHz	2437MHz
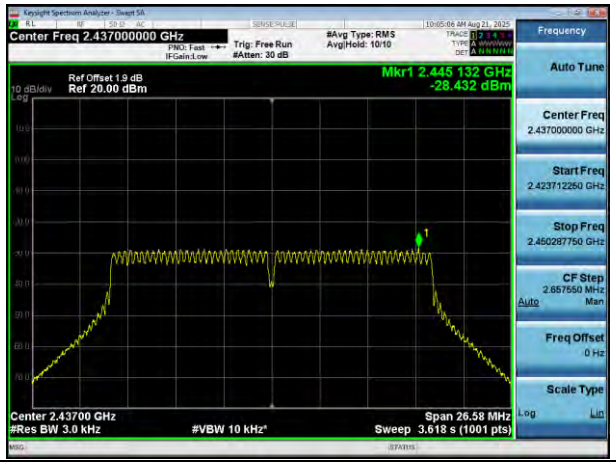	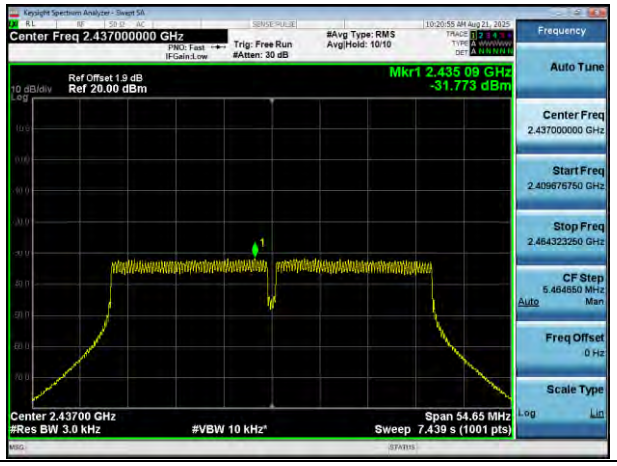
2462MHz	2452MHz
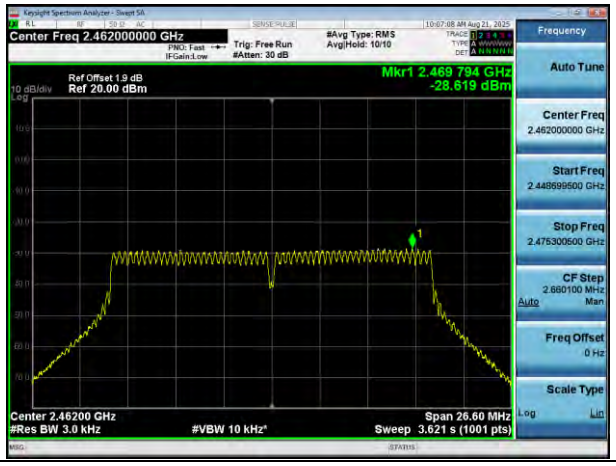	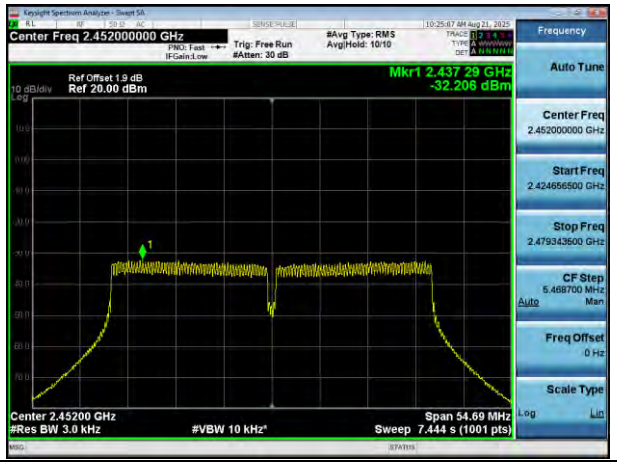

802.11ax(HE20)	802.11ax(HE40)
2412MHz	2422MHz
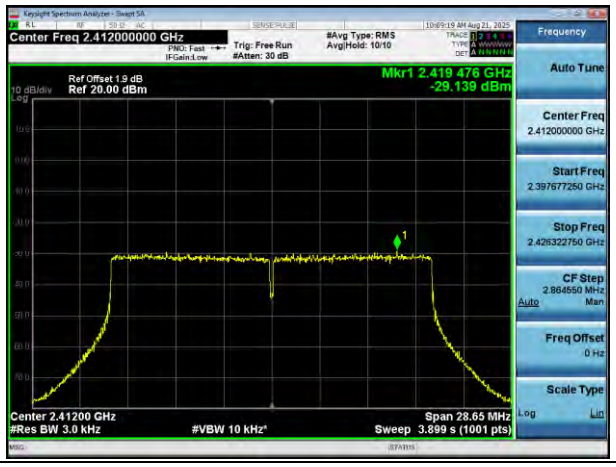	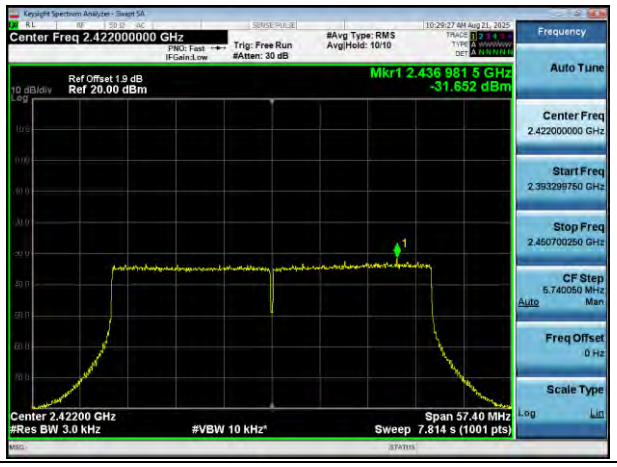
2437MHz	2437MHz
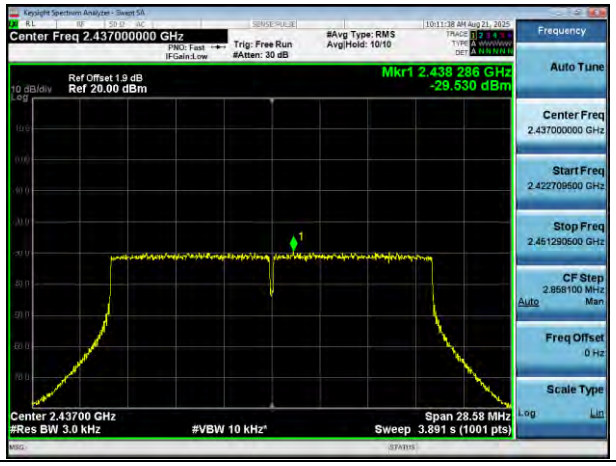	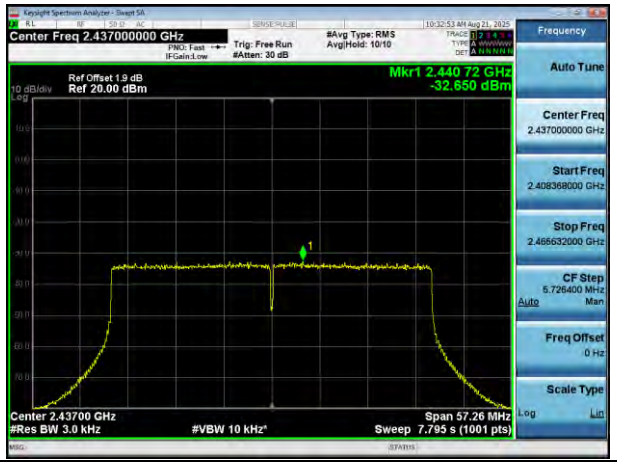
2462MHz	2452MHz
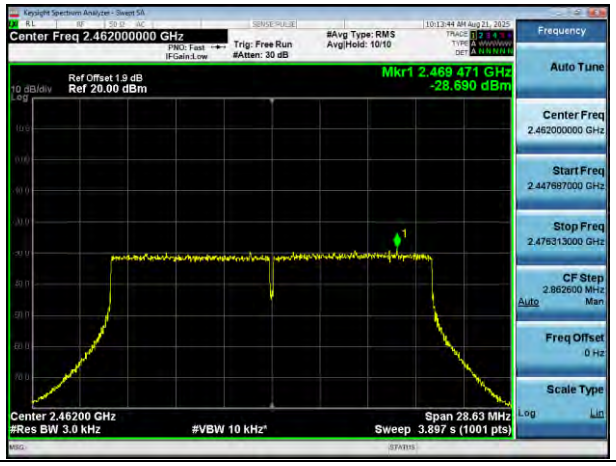	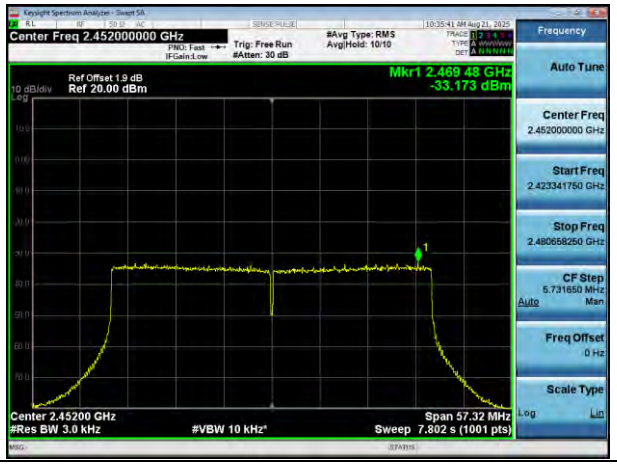

10. Band-edge Emission(Conducted)

10.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

10.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.10.

1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
2) Set the spectrum analyzer to any one measured frequency within its operating range.
3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
5) Set a convenient frequency span including 100 kHz bandwidth from band edge.
6) Measure the emission and marking the edge frequency.
7) Repeat above procedures until all frequencies measured were complete.

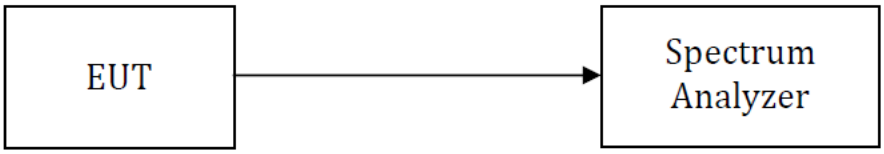

Test Setup Block Diagram

10.3 Test Data and Results

Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
802.11b	Lowest	2412	-50.48	-30	Pass
	Highest	2462	-53.49	-30	Pass
802.11g	Lowest	2412	-36.79	-30	Pass
	Highest	2462	-49.97	-30	Pass
802.11n(HT20)	Lowest	2412	-35.17	-30	Pass
	Highest	2462	-49.86	-30	Pass
802.11n(HT40)	Lowest	2422	-32.15	-30	Pass
	Highest	2452	-45.36	-30	Pass
802.11ax(HE20)	Lowest	2412	-36.18	-30	Pass
	Highest	2462	-50.39	-30	Pass
802.11ax(HE40)	Lowest	2422	-32.25	-30	Pass
	Highest	2452	-45.88	-30	Pass

802.11b Lowest

Reference Power

Band-edge Emission

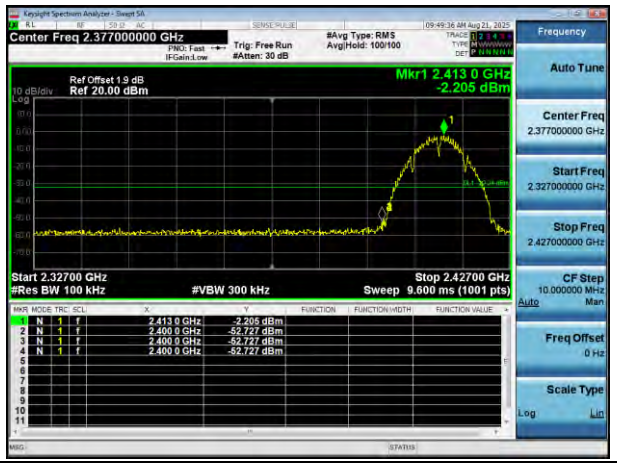

802.11b Highest

Reference Power

Band-edge Emission

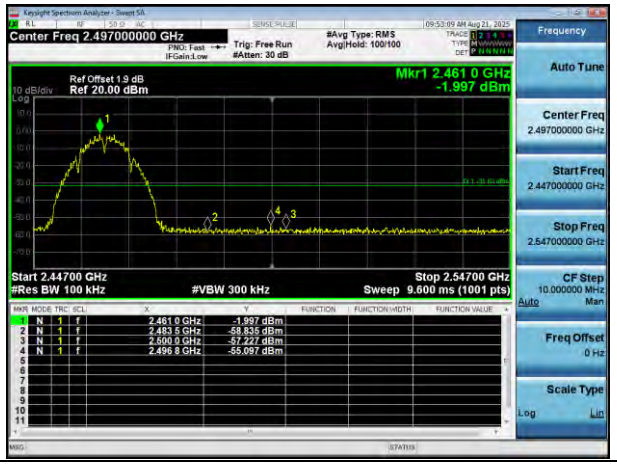

802.11g Lowest

Reference Power

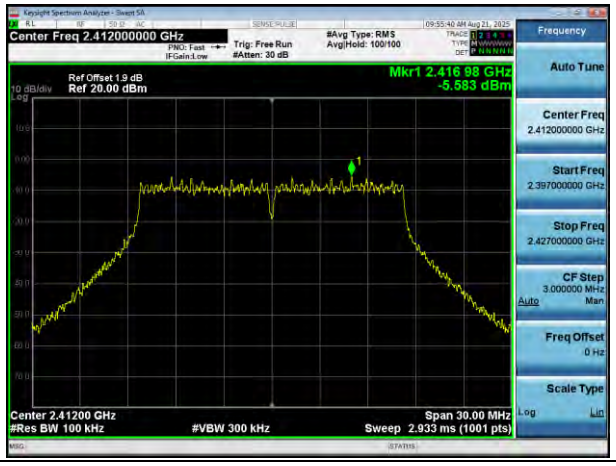

Band-edge Emission

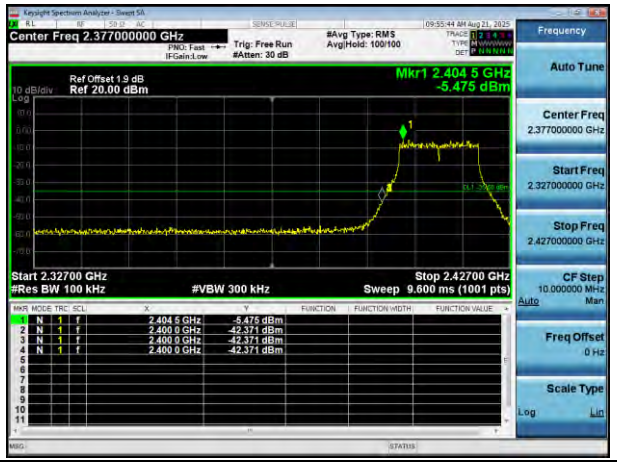

802.11g Highest

Reference Power

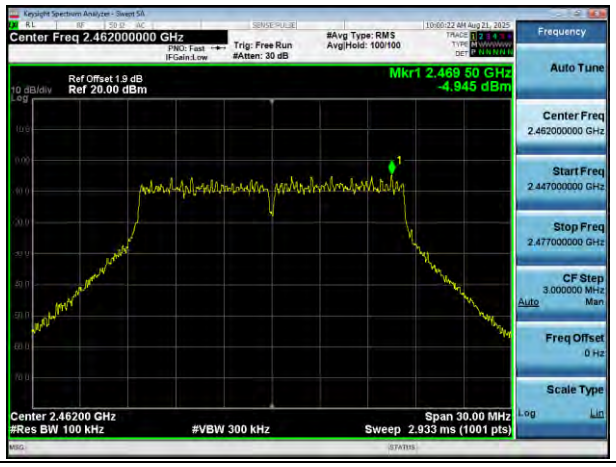

Band-edge Emission

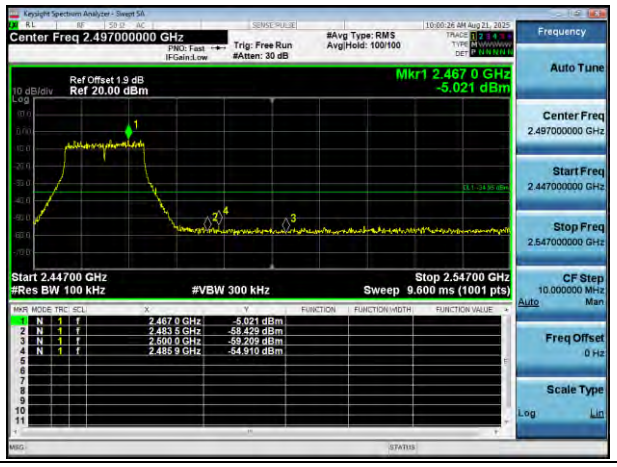

802.11n(HT20) Lowest

Reference Power

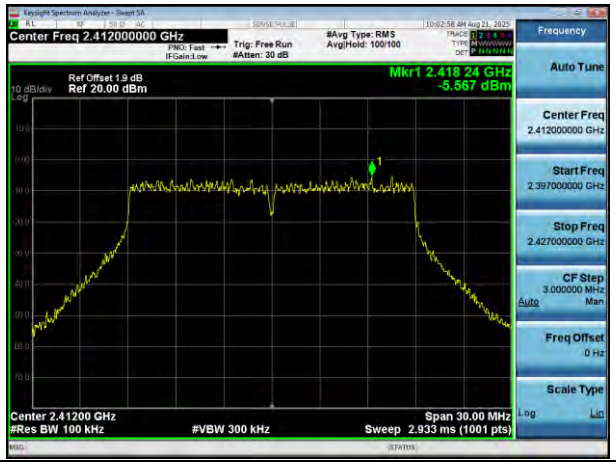

Band-edge Emission

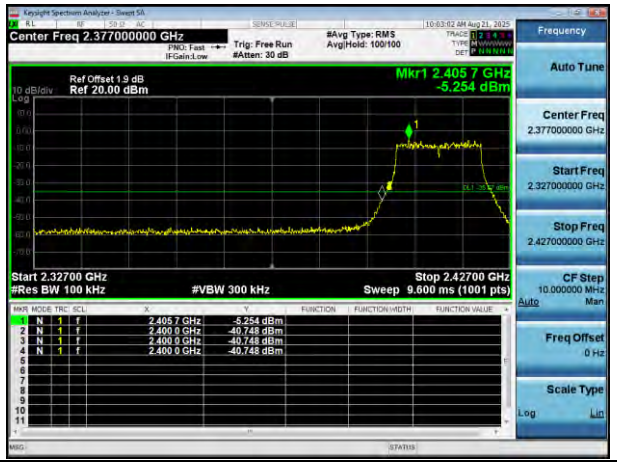

802.11n(HT20) Highest

Reference Power

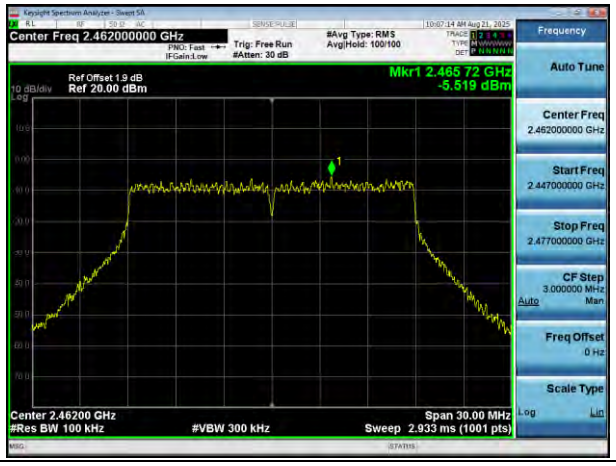

Band-edge Emission

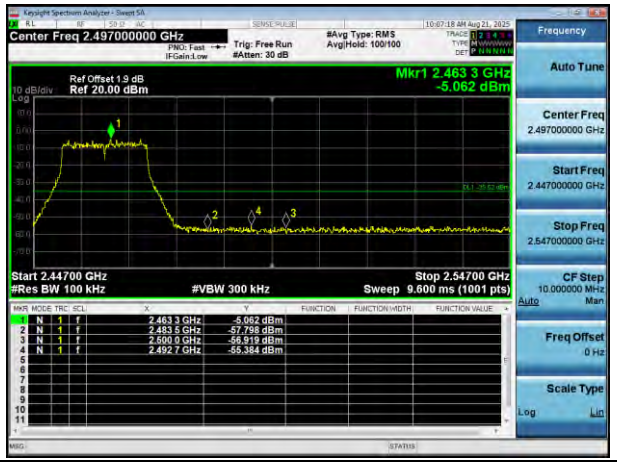

802.11n(HT40) Lowest	
Reference Power	Band-edge Emission
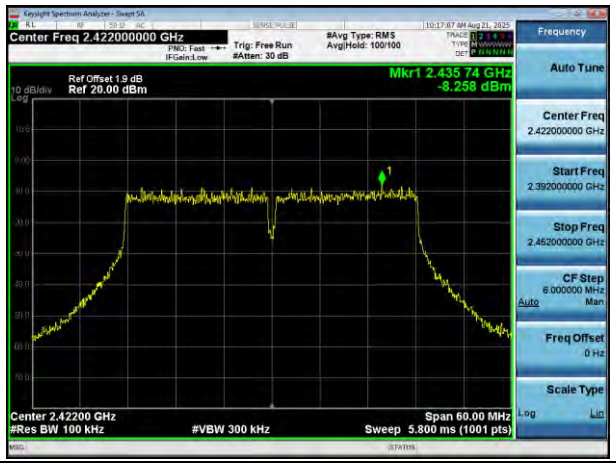	

802.11n(HT40) Highest	
Reference Power	Band-edge Emission
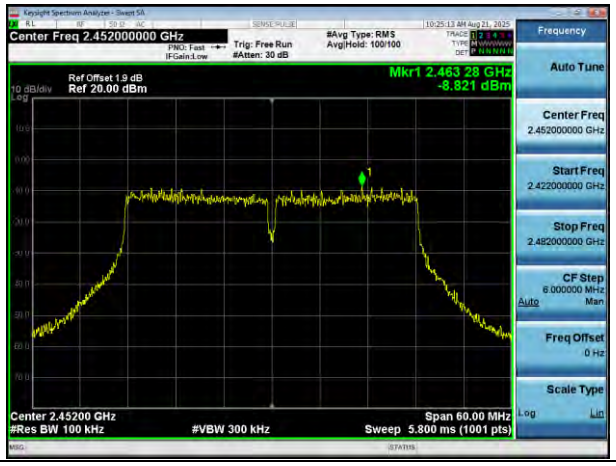	

802.11ax(HE20) Lowest	
Reference Power	Band-edge Emission
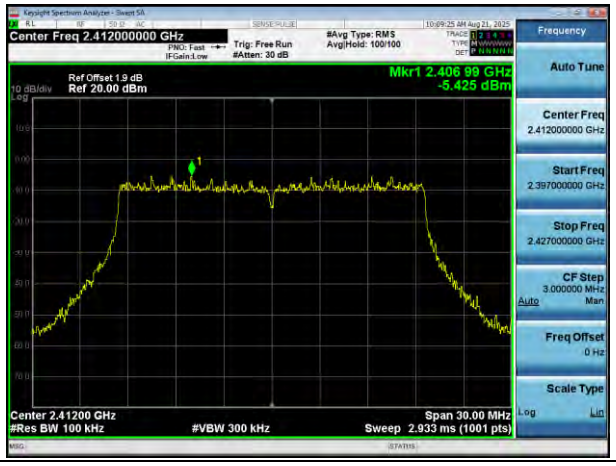	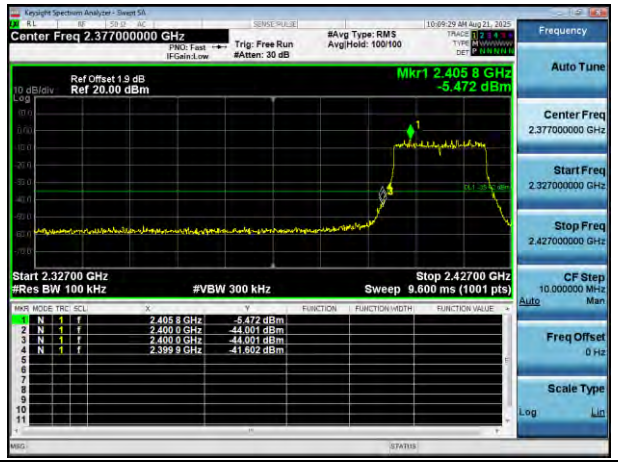

802.11ax(HE20) Highest

Reference Power

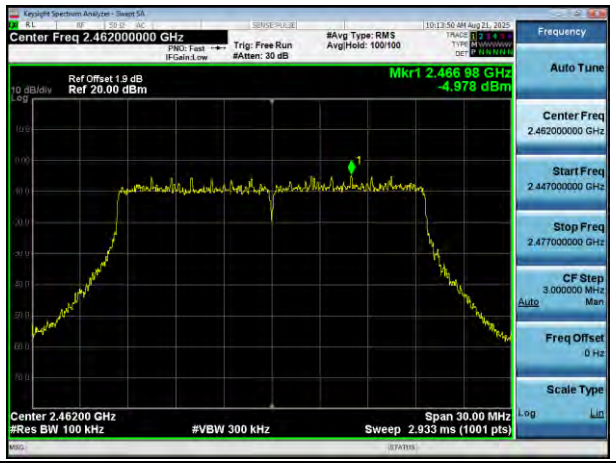

Band-edge Emission

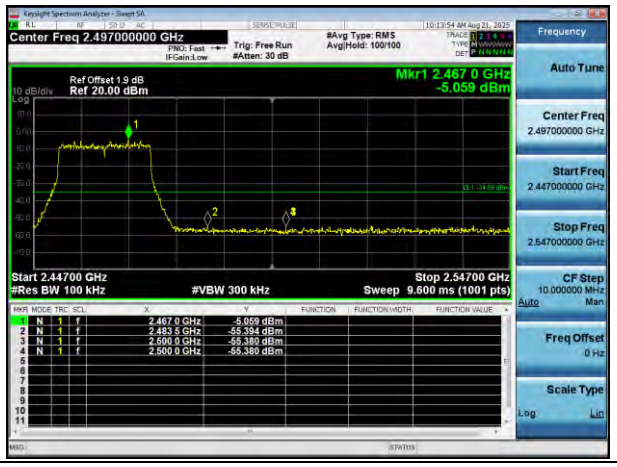

802.11ax(HE40) Lowest

Reference Power

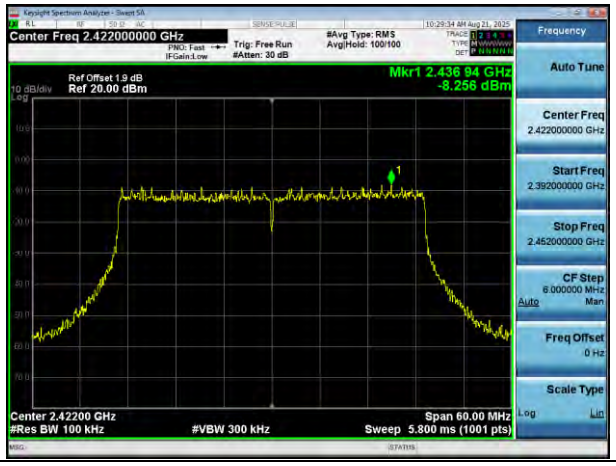

Band-edge Emission

802.11ax(HE40) Highest

Reference Power

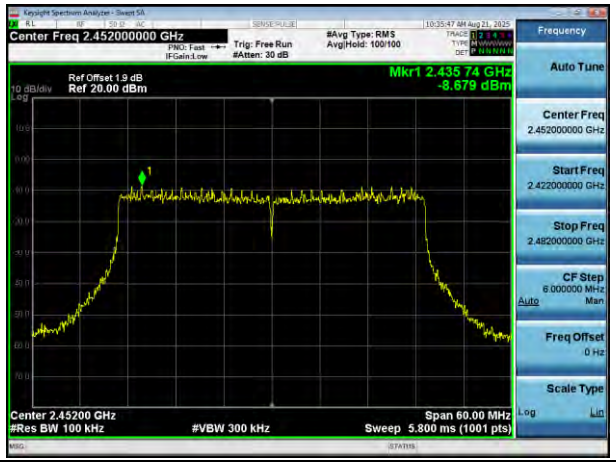

Band-edge Emission

11. Conducted RF Spurious Emissions

11.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

11.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.7.

1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
2) Set the spectrum analyzer to any one measured frequency within its operating range.
3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
5) Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.
6) Repeat above procedures until all measured frequencies were complete.

Test Setup Block Diagram

11.3 Test Data and Results

Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions measurement data.

802.11b Lowest

Reference Power

Spurious Emissions

802.11b Middle

Reference Power

Spurious Emissions

802.11b Highest

Reference Power

Spurious Emissions

802.11g Lowest

Reference Power

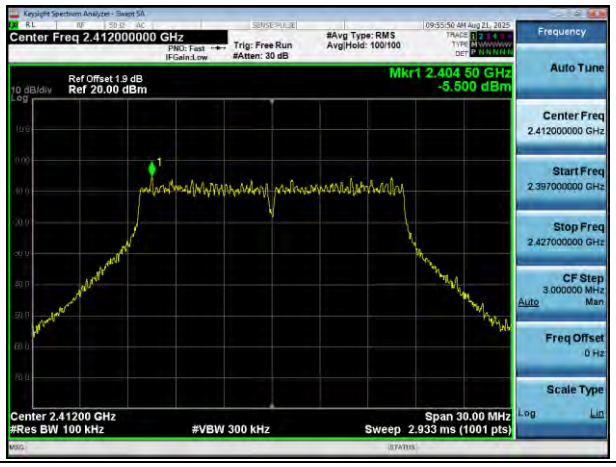

Spurious Emissions

802.11g Middle

Reference Power

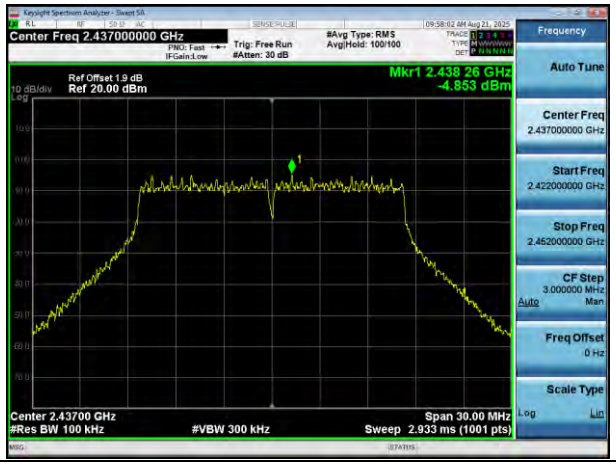

Spurious Emissions

802.11g Highest

Reference Power

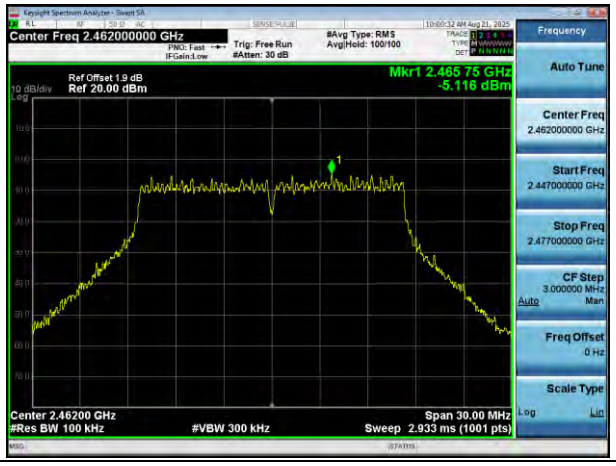

Spurious Emissions

802.11n(HT20) Lowest

Reference Power

Spurious Emissions

802.11n(HT20) Middle

Reference Power

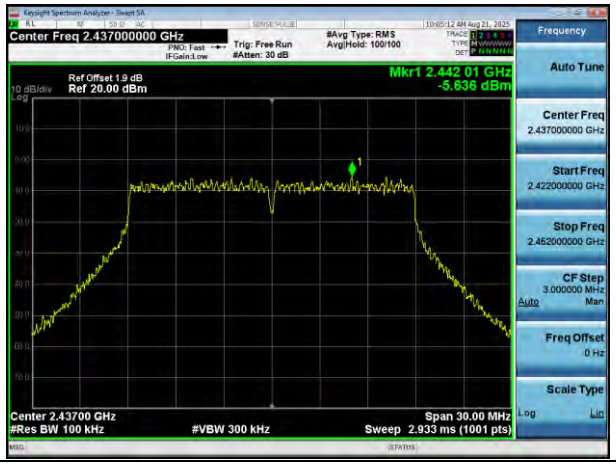

Spurious Emissions

802.11n(HT20) Highest

Reference Power

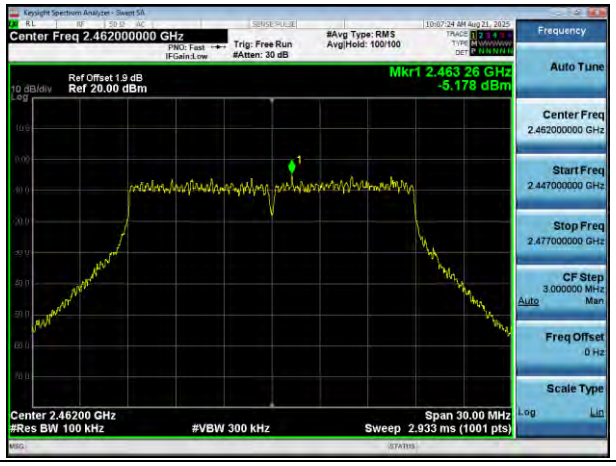

Spurious Emissions

802.11n(HT40) Lowest

Reference Power

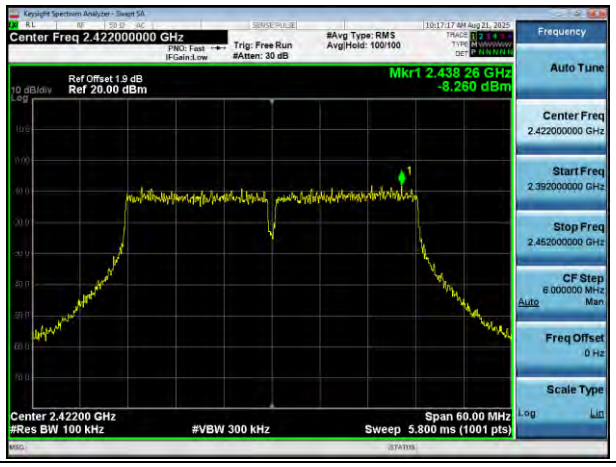

Spurious Emissions

802.11n(HT40) Middle

Reference Power

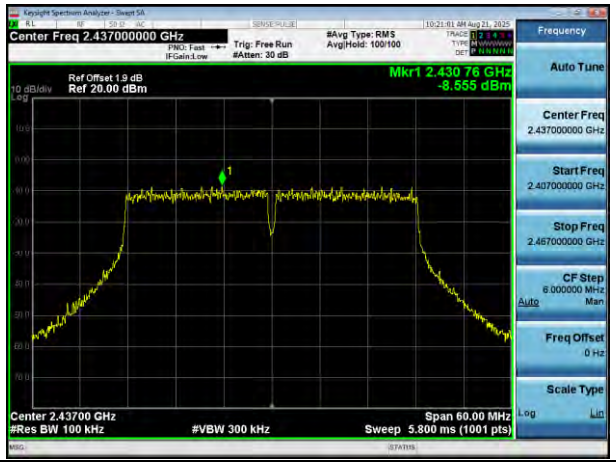

Spurious Emissions

802.11n(HT40) Highest

Reference Power

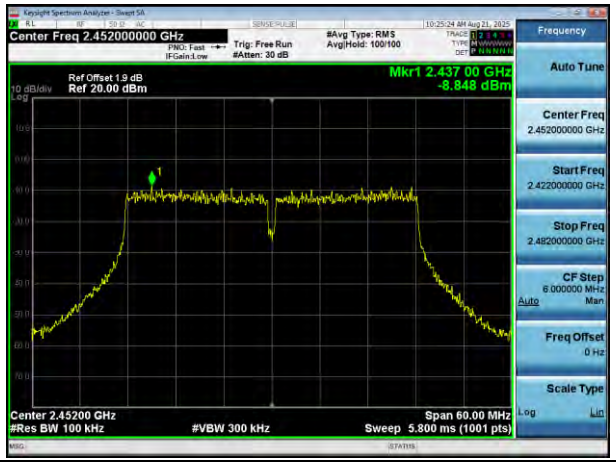

Spurious Emissions

802.11ax(HE20) Lowest

Reference Power

Spurious Emissions

802.11ax(HE20) Middle

Reference Power

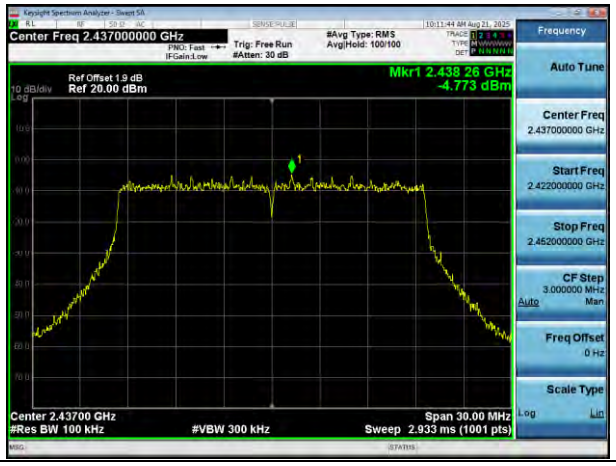

Spurious Emissions

802.11ax(HE20) Highest

Reference Power

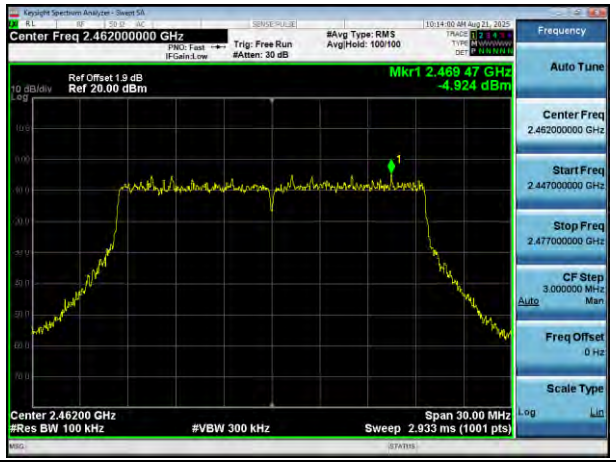

Spurious Emissions

802.11ax(HE40) Lowest

Reference Power

Spurious Emissions

802.11ax(HE40) Middle

Reference Power

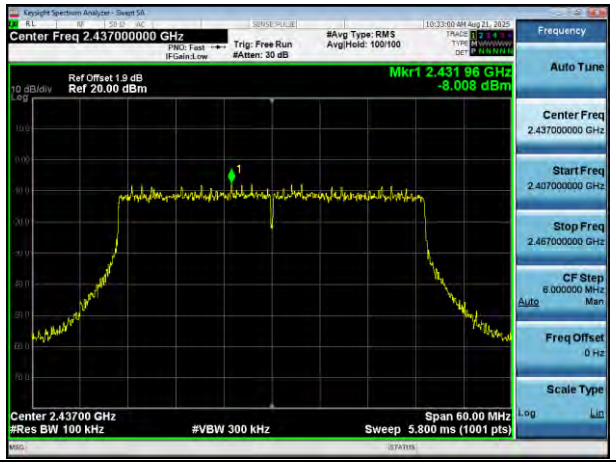

Spurious Emissions

802.11ax(HE40) Highest

Reference Power

Spurious Emissions

******* END OF REPORT *******