



ESWL67-WISUN-HL-2SYB-917M

User Manual

DATE: 2024/09/10

Qingdao Eastsoft Communication Technology Co.Ltd

目 录

1. Introduction	3
1.1. Purpose	3
2. Overview	3
3. Specifications	3
4. Interface Pinout	3
5. Pin Header Specifications	5

1. Introduction

1.1. Purpose

This document is intended to assist meter developers in familiarizing themselves with and correctly using the ESWL67-WISUN-HL-2SYB-917M wireless module provided by Qingdao Eastsoft.

2. Overview

The ESWL67-WISUN-HL-2SYB-917M is a Wi-SUN module, in which the Wi-SUN functional circuit is separately mounted onto the main module in a modular form.

3. Specifications


- Power Supply: DC 12V $\pm$ 1V;
- Complies with the EMC test requirements specified in the State Grid standards.

RF Performance

- Frequency Band: 915.2-925 MHz;
- Communication Protocol: Supports IEEE 802.15.4g / Wi-SUN;
- TX Power: Supports up to 27 dBm, configurable.


4. Interface Pinout

The low-voltage interface of the module uses a 2×6 -pin dual-row right-angle pin header as the connector. A schematic diagram of the interface pin definitions is shown below:

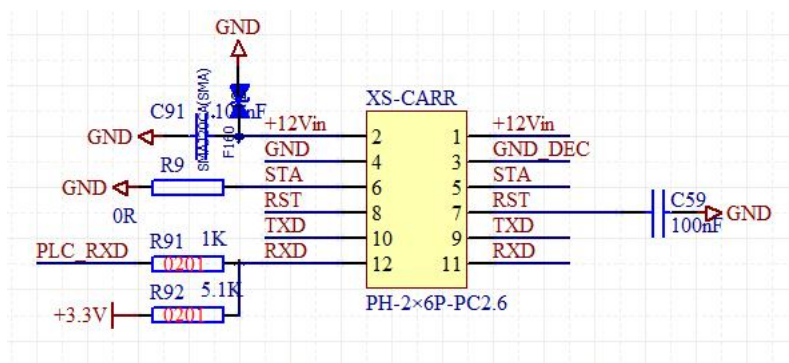

No.	Signal Type	Signal Name	Description
1、 2	Power	+12Vin	The communication module's analog power supply is provided by the electricity meter, with a voltage range of +12V $\pm$ 1V (maximum load current: 700mA). A power fault or short circuit in the communication module must not affect the basic functions of the electricity meter (protective measures shall be implemented by the meter).
3、 4	Power	GND	GND
5、 6	Signal	STA	Reserved
7、 8	Signal	RST	Reset pin, active low.
9、 10	Signal	TXD	The module's serial port output signal is an open-drain output.
11、 12	Signal	RXD	The module's serial port input signal is open-drain and is in a high-impedance state by default.

5. Pin Header Specifications

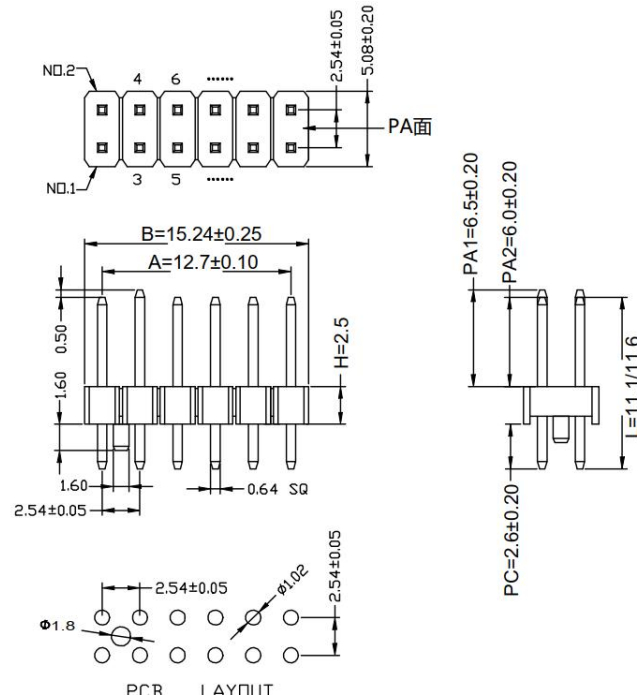

Federal Communication Commission Statement (FCC, U.S.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled

environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IMPORTANT NOTES

Co-location warning:

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

OEM integration instructions:

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the external antenna(s) that has been originally tested and certified with this module.

As long as the conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

Validity of using the module certification:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End product labeling:

The final end product must be labeled in a visible area with the following: “Contains Transmitter Module FCC ID: 2BRB5-HL-2SYB” .

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Integration instructions for host product manufactures according to KDB 996369 D03 OEM Manual v01

2.2 List of applicable FCC rules

FCC Part 15 Subpart C 15.247 & 15.207 & 15.209

2.3 Specific operational use conditions

The host manufacturer installing this module into their product must ensure that the final composite product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

2.4 Limited module procedures

Not applicable.

2.5 Trace antenna designs

Not applicable. The module has its own antenna, and doesn't need a host's printed board microstrip trace antenna etc.

2.6 RF exposure considerations

The module must be installed in the host equipment such that at least 20cm is maintained between the antenna and users' body; and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization

2.7 Antennas

Antenna Specification are as follows:

Type: Spring Antenna

Gain: 0dBi

This device is intended only for host manufacturers under the following conditions: The transmitter module may not be co-located with any other transmitter or antenna; The module shall be only used with the internal antenna(s) that has been originally tested and certified with this module. The antenna must be either permanently attached or employ a 'unique' antenna coupler.

As long as the conditions above are met, further transmitter test will not be required. However, the host manufacturer is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.)

2.8 Label and compliance information

Host product manufacturers need to provide a physical or e-label stating "Contains Transmitter Module FCC ID: 2BRB5-HL-2SYB" with their finished product.

2.9 Information on test modes and additional testing requirements

Operation Frequency: 915.2-925MHz

Number of Channel: 5 0

Modulation: GFSK.

Host manufacturer must perform test of radiated & conducted emission and spurious emission, etc according to the actual test modes for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product. Only when all the test results of test modes comply with FCC requirements, then the end product can be sold legally.

2.10 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 & 15.207 & 15.209 and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.