

# HG229USER MANUAL 说明书折页

材质：128g双筒纸 双面印刷

工艺：风琴折 成品规格：100x140mm

\*印刷前去掉所有黑色外框，按文件颜色印刷。

封底

封面

正面

反面

### 8. HYGGER LIMITED MANUFACTURER'S WARRANTY

We offer the end user of this product a manufacturer warranty of 3 (2) years from the date of sale if this product was purchased from a hygger®-authorised specialist dealer.

Retain receipt for any future warranty claim. Conditions apply. Products are guaranteed by hygger®Aquatic Supplies to the original purchaser against defective material and workmanship under normal use for a period up to 3 (2) years from the date of the original purchase through an Authorized Dealer. Refer to the User Manual included with your product for specific warranty details.

**Products have no warranty if**

- 1.) The product has been serviced, modified or tampered with by anyone other than hygger®Aquatic Supplies.
- 2.) The product has been abused or damaged (including broken or cracked bulbs), and/ or.
- 3.) The product has been transported without proper packaging.
- 4.) The product was purchased from an Unauthorized Reseller.

**WARRANTY LIABILITY DISCLAIMER**

In no event will hygger® be liable for any consequential or incidental damages, including but not limited to, lost aquatic life, personal injury, property damage, equipment damage, lost profits, lost wages, lost savings, lost income, etc., arising out of the use of any hygger®products.

1.0. Terms and Conditions of Warranty.

1.1. hygger® warrants to the purchaser, for 3 (2) years from date of original purchase through an Authorized hygger® Reseller, free to repair or replace parts where fault is found due to defective materials or faulty workmanship and where goods do not operate in accordance with the instructions.

1.2. All claims for repair or replacement must be made at place of purchase.

1.3. Only the direct purchaser is entitled to warranty claims against us and these are not transferable without our consent.

1.4. The original and dated Proof of Purchase (receipt) must be supplied with all goods claims. Please also provide this Guarantee where possible.

1.5. Wear parts (e.g.: seals, suction devices, axes, pump wheels, light sources, pH electrodes, filter media, such as filter cartridges, as well as UVC burners), glass damage and the opening of the product, as well as structural changes or the use of non-hygger® original parts are excluded from the guarantee.

1.6. All goods subject to claim under Guarantee should be prepared for transportation in the original packaging or other comparable packaging which offers the same degree of protection and hygger® must incur no costs from the shipment.

1.7. Where claims on inspection reveal goods are in normal working order, hygger® will request reimbursement of all reasonable costs incurred.

1.8. Warranty claims do not exist in the case of only insignificant deviations from the agreed or customary condition or usability, e.g. insignificant deviations in colour, dimensions and/or quality or performance characteristics of the products.

1.9. Our warranty obligation extends only to the delivery of newly manufactured products. Unless otherwise agreed, used products are sold as seen, excluding any warranty. For more warranty information, please see the hygger website.

- 5 -

### 9. DISPOSAL

Do not dispose of this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary. This product has to be disposed of at an authorized place for the recycling of electrical and electronic appliances rather than being disposed of together with the domestic waste. Collecting and recycling waste is a way of saving natural resources. So, please consult with your local seller to make sure the product is disposed of in an environmentally friendly way.



### 10. PACKING LIST

1x ATO Monitor  
1x 2m soft hose with check valve  
1x Hose clamp  
1x Adapter  
1x Water pump  
1x User manual

### 11. CONTACT INFORMATION

Distributed by: Hygger Aquarium, Inc.  
13941 Magnolia Ave, Chino, CA 91710

Contact us at [www.hygger-online.com](http://www.hygger-online.com)  
Email: [mago@hygger-online.com](mailto:mago@hygger-online.com)

Trademarks of Shenzhen Mago Trading Co., Ltd  
Bantian Group Business Center, Longgang,  
Shenzhen City, China  
All Rights Reserved  
Made in China



Have a question?  
We're here to help:  
USA Call: +1 (909) 590-2880  
Mon-Fri: 9:00 am - 5:30 pm PST Sat-Sun: Closed

EC

REP

E-CrossStu GmbH  
Mainzer Landstr. 69,80329 Frankfurt  
am Main  
E-CrossStu@web.de  
+49 69332967674

UK

REP

YH Consulting Limited  
C/O YH Consulting Limited Office  
147,Centurion House,London Road,  
Staines-upon-Thames,Surrey,  
TW18 4AX,London  
HZYHUK@gmail.com  
+44 07514-577668

CE

UK

CA

Recycling symbol


WEEE symbol

MADE IN CHINA



## HG229 USER MANUAL

### hygger MagSense Aquarium ATO Refill System

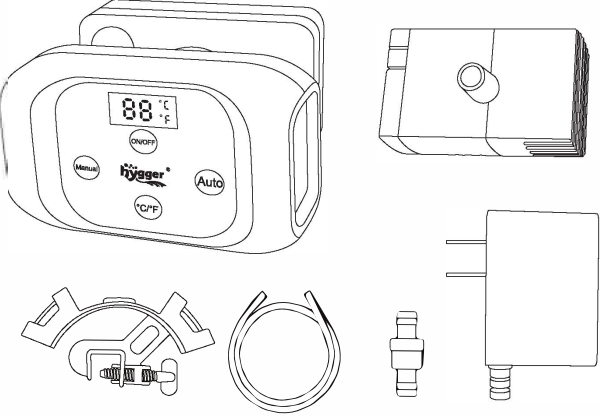

**Attention: To prevent siphoning, the soft outlet hose should be above the water surface.**

hygger MagSense Aquarium ATO Refill System is designed for automatic water filling and manual drainage. It can be installed in a cabinet-type filter or directly on the edge of an aquarium. Connect the water pump, external sensors, and power supply to the monitor, which is ready to work. The two built-in sensors provide overflow protection. When the water level drops below the minimum, the power will be activated, the pump will work automatically, and it will shut down once the level reaches the maximum.


### 1. PRODUCT FEATURES

- **Easy-to-use Interface with Magnetic Holders:** 4 Functions are displayed on the interface: Manual refill, Auto refill, °C/°F switch, Power ON/OFF and current water temperature display.
- **Safe Low-power Input and Magnetic Induction Charging:** It features innovative magnetic induction charging technology, which is more scientific and technological.
- It is equipped with built-in dual probe sensors to monitor the water level, ensuring the ideal level and providing dual protection to prevent it from being too high. When the water level is too low, the external sensor will be activated, and an alarm will be triggered.
- **Dual Functions:** Automatic water filling and one-click drainage.
- **Suitable for Saltwater and Freshwater:** Designed for different sizes of tanks. Fits for fish tanks with a thickness of less than 10 mm.


### 2. PRODUCT PARAMETERS

|               |                                          |
|---------------|------------------------------------------|
| Model         | HG229                                    |
| Product Size  | Length:3.15Inch(8CM);Width:1.96Inch(5CM) |
| Water Pump    |                                          |
| Volt/Freq     | Input:100-240V 50/60Hz Output:12V 1A     |
| Water Flow    | 53GPH(200L/H)                            |
| Pump Head     | 4.9FT/1.5M                               |
| Hose Diameter | Inner: 6mm Outer: 9mm                    |
| Hose Length   | 6.5FT/2M                                 |

### 3. INSTALLATION INSTRUCTIONS

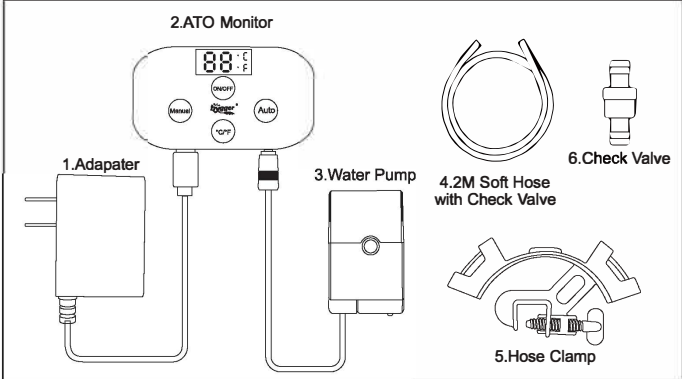

### Controller Display Instruction

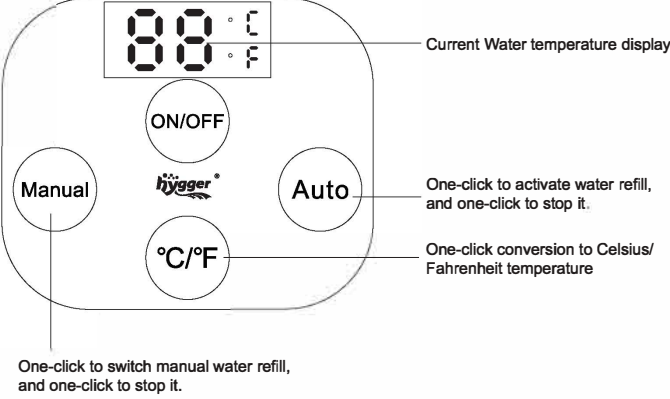


### 4. TROUBLESHOOTING

| Trouble Shooting                                                                                                                                   |                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Issue                                                                                                                                              | Solution                                                                                                                                                                                                                                                                                              |
| E1 alarm program communication is not connected (the wireless circle is not powered on).                                                           | After the water refiller is attached to the base, the temperature display on the screen is normal, it indicates that the water refiller is working properly.                                                                                                                                          |
| E2 alarm or the display screen does not show the temperature. The reason is that the internal temperature probe on the base has malfunctioned.     | Contact the seller for after-sales service.                                                                                                                                                                                                                                                           |
| E5 Alarm: 1) Water pump shortage alarm<br>2) The water pump is not connected.                                                                      | 1) Fully submerge the pump in the water. If the temperature display on the screen is normal, it indicates that the water refiller is working properly.<br>2) After connecting the pump, if the temperature display on the screen is normal, it indicates that the water refiller is working properly. |
| Red indicator lights up on the water pump: water shortage protection.<br>Blue indicator lights up on the water pump: the pump is working normally. | Fully submerged the pump in water when red indicator lights up.                                                                                                                                                                                                                                       |

### 5. APPLICATION INSTALLATION

- 1) Connect the soft hose to the water pump, insert the hose into the hose clamp, and then connect the check valve to the end of the hose.
- 2) Insert Type-C port and water pump jack into water refiller.
- 3) Clean the position where you want to place the monitor and its part inside. Place the monitor away from air bubbles.
- 4) Mount the ATO on the tank and make sure it's in line with the water level.
- 5) Place the monitor horizontally.

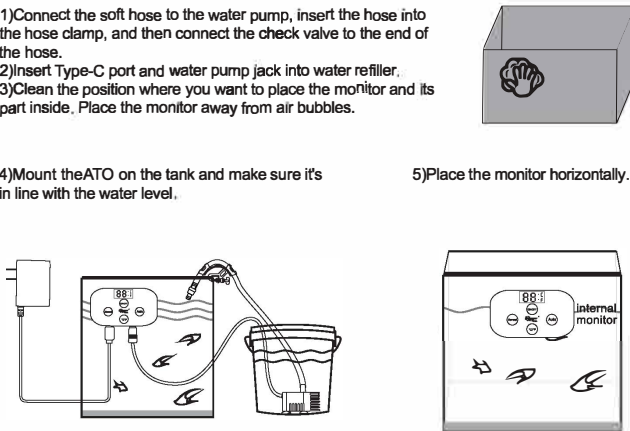

### 7. WARNING

To avoid possible electrical shock, do not immerse the switch in water. If the switch falls into the water, or otherwise becomes wet, do not touch it until you have unplugged it. Basic safety precautions should be observed including the following:

1. Read and follow this user manual strictly.
2. DANGER-To avoid possible electric shock, special care should be taken. For each of the following situations, do not attempt to repair yourself; return the appliance to an authorized service facility for service or discard it.  
A. Carefully examine the ATO after installation. It should not be plugged in if there is water on parts not intended to be wet.  
B. Do not operate the ATO if it has a damaged cord or plug, if it is malfunctioning or if it is dropped or damaged in any manner. The power cord of the appliance cannot be replaced, if the cord is damaged, the ATO should be discarded.  
C. To avoid the possibility of the ATO plug getting wet, position the aquarium stand and tank to one side of a wall-mounted receptacle to prevent water from dripping onto the receptacle or plug. A "drip loop", shown in the figure below, should be arranged by the user for each cord connecting the ATO to the receptacle. The "drip loop" is the part of the cord below the level of the receptacle or the connector. If an extension cord is used, prevent water from traveling along the cord and coming in contact with the receptacle. If the plug or receptacle does get wet, DO NOT unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the ATO. Then unplug and examine for the presence of water in the receptacle.
3. Close supervision is necessary when the appliance is used near children.
4. Make sure the appliance is securely installed before operating it.
5. Read and observe all the important notices on the appliance.
6. The appliance is intended FOR HOUSEHOLD USE ONLY.
7. SAVE THIS USER MANUAL.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

