

SAR TEST REPORT

Application No.: SZCR2507002850AT
Applicant: Ember LifeSciences, Inc.
Address of Applicant: 4607 Lakeview Canyon Rd., #426 Westlake Village California 91361 United States
Manufacturer: Ember LifeSciences, Inc.
Address of Manufacturer: 4607 Lakeview Cyn Rd., #426 Westlake Village, CA 91361
EUT Description: Cold Cube Tablet
Model No.: CBT2
Trade Mark: Ember
FCC ID: Host FCC ID: 2BRET-CBT2
 Contains Module FCC ID: 2BRET-9151
Standards: FCC 47CFR §2.1093
Date of Receipt: 2025-08-17 (for original report SZCR250700285004)
Date of Test: 2025-08-18 to 2025-08-22 (for original report SZCR250700285004)
Date of Issue: 2025-08-28 (for original report SZCR250700285004)
 2025-08-29 (for original report SZCR250700285005)

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 2 of 60

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-08-29		Original

Authorized for issue by:				
		Gebin Sun		
		Gebin Sun/Project Engineer		
		Roman Pan		
		Roman Pan / Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)
	Body
Cat-M1 Band 2	0.23
Cat-M1 Band 4	0.12
Cat-M1 Band 5	0.10
Cat-M1 Band 8	0.11
Cat-M1 Band 12	<0.10
Cat-M1 Band 13	0.10
Cat-M1 Band 25	0.21
Cat-M1 Band 26	0.10
Cat-M1 Band 66	0.17
Cat-M1 Band 85	0.10
NB-IoT Band 4	1.17
NB-IoT Band 5	0.78
NB-IoT Band 8	0.31
NB-IoT Band 12	0.30
NB-IoT Band 13	0.43
NB-IoT Band 17	0.31
NB-IoT Band 25	1.35
NB-IoT Band 26	0.72
NB-IoT Band 65	1.16
NB-IoT Band 66	0.78
NB-IoT Band 85	0.63
SAR Limited(W/kg)	1.6
Maximum Simultaneous Transmission SAR (W/kg)	
Scenario	Body
Sum SAR	1.36



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Contents

1	General Information	6
1.1	General Description of EUT	6
1.2	Test Specification	8
1.3	RF exposure limits	9
1.4	Test Location	10
1.5	Test Facility	10
2	Laboratory Environment	11
3	SAR Measurements System Configuraion	12
3.1	The SAR Measurement System	12
3.2	Isotropic E-field Probe EX3DV4	14
3.3	Data Acquisition Electronics (DAE)	15
3.4	SAM Twin Phantom	15
3.5	ELI Phantom	16
3.6	Device Holder for Transmitters	17
3.7	Measurement Procedure	18
3.7.1	Scanning procedure	18
3.7.2	Data storage	20
3.7.3	Data Evaluation by SEMCAD	20
4	SAR measurement variability and uncertainty	22
4.1	SAR measurement variability	22
4.2	SAR measurement uncertainty	22
5	Description of Test Position	23
5.1	Tablet Computers used next to or against the body	23
6	SAR System Verificaion Procedure	24
6.1	Tissue Simulate Liquid	24
6.1.1	Recipes for Tissue Simulate Liquid	24
6.1.2	Measurement for Tissue Simulate Liquid	25
6.2	SAR System Check	26
6.2.1	Justification for Extended SAR Dipole Calibrations	27
6.2.2	Summary System Check Result(s)	28
6.2.3	Detailed System Check Results	28
7	Test Configuration	29
7.1	Operation Configurations	29
7.1.1	LTE Cat-M1 Test Configuration	29
7.1.2	NR IOT Band Test Configuration	33



8	Test Result	34
8.1	DUT Antenna Locations (Back View)	34
8.2	Measurement of RF Conducted Power	34
8.3	SAR-based Exemption	35
8.4	Measurement of SAR Data	36
8.4.1	SAR Result of Cat-M1 Band 2	37
8.4.2	SAR Result of Cat-M1 Band 4	38
8.4.3	SAR Result of Cat-M1 Band 5	39
8.4.4	SAR Result of Cat-M1 Band 8	40
8.4.5	SAR Result of Cat-M1 Band 12	41
8.4.6	SAR Result of Cat-M1 Band 13	42
8.4.7	SAR Result of Cat-M1 Band 25	43
8.4.8	SAR Result of Cat-M1 Band 26	44
8.4.9	SAR Result of Cat-M1 Band 66	45
8.4.10	SAR Result of Cat-M1 Band 85	46
8.4.11	SAR Result of NB-IoT Band 4	47
8.4.12	SAR Result of NB-IoT Band 5	48
8.4.13	SAR Result of NB-IoT Band 8	49
8.4.14	SAR Result of NB-IoT Band 12	50
8.4.15	SAR Result of NB-IoT Band 13	51
8.4.16	SAR Result of NB-IoT Band 17	52
8.4.17	SAR Result of NB-IoT Band 25	53
8.4.18	SAR Result of NB-IoT Band 26	54
8.4.19	SAR Result of NB-IoT Band 65	55
8.4.20	SAR Result of NB-IoT Band 66	56
8.4.21	SAR Result of NB-IoT Band 85	57
8.5	Multiple Transmitter Evaluation	58
8.5.1	Simultaneous SAR test evaluation	58
8.5.2	Simultaneous Transmission SAR Summation Scenario	58
9	Equipment list	59
10	Calibration certificate	60
11	Photographs	60
Appendix A: Detailed System Check Results		60
Appendix B: Detailed Test Results		60
Appendix C: Calibration certificate		60
Appendix D: Photographs		60
Appendix E: Conducted RF Output Power		60



1 General Information

1.1 General Description of EUT

Product Name:	Cold Cube Tablet	
Model No.:	CBT2	
Trade Mark:	Ember	
Product Phase:	production unit	
Device Type:	portable device	
Exposure Category:	uncontrolled environment / general population	
IMEI/SN:	CBT2ABBAV25280047	
Hardware Version:	Rev:01	
Software Version:	FW Package v1.0	
Antenna Type:	PIFA	
Device Operating Configurations:		
Modulation Mode:	LTE Cat-M1: QPSK, 16QAM NB-IoT: BPSK, QPSK	
Frequency Bands:	Band	Tx(MHz)
	Cat-M1 Band 2	1850 ~1910
	Cat-M1 Band 4	1710~1755
	Cat-M1 Band 5	824~849
	Cat-M1 Band 8	897.5~900.5
	Cat-M1 Band 12	699~716
	Cat-M1 Band 13	777~787
	Cat-M1 Band 25	1850~1915
	Cat-M1 Band 26	814~849
	Cat-M1 Band 66	1710~1780
	Cat-M1 Band 85	698~716
	NB-IoT Band n4	1710~1755
	NB-IoT Band n5	824~849
	NB-IoT Band n8	880~915
	NB-IoT Band n12	699~716
	NB-IoT Band n13	777~787
	NB-IoT Band n17	704~716

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 7 of 60

	NB-IoT Band n25	1850~1915
	NB-IoT Band n26	814~849
	NB-IoT Band n65	1920~2010
	NB-IoT Band n66	1710~1780
	NB-IoT Band n85	698~716
	BT	2402~2480
	NFC	13.56
RF Cable:	☒ Provided by applicant ☐ Provided by the laboratory	
Battery Information:	Model:	L1377
	Normal Voltage:	3.7V
	Rated capacity:	5000mAh
	Manufacturer:	EVE Energy Co., Ltd
Note: Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.		

Remark:

This report was an additional report copied from the report SZCR250700285004, just changed the report number and updated the Bluetooth SAR-based Exemption. Other original data were kept in this report SZCR250700285005.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 8 of 60

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



1.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI (Member No. 1937)**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1336**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Inspection & Testing Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 SAR Measurements System Configuraion

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

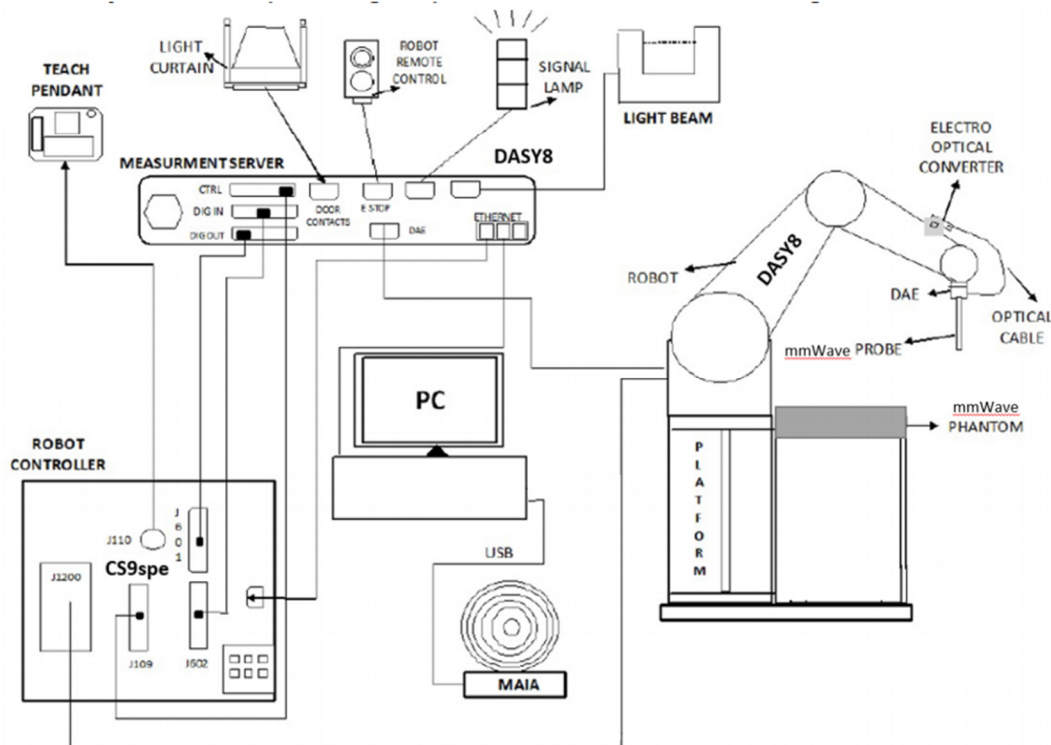

F-1. SAR Measurement System Configuration

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 13 of 60

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows system.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

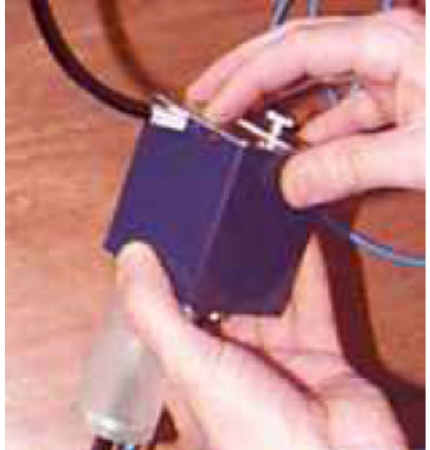Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	


3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	pprox.. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

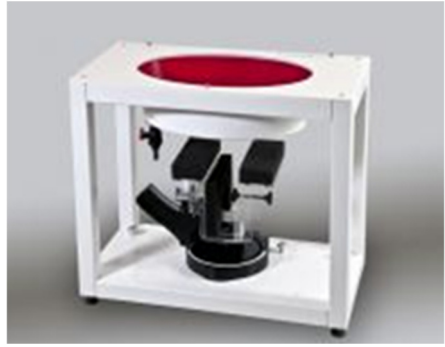Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm(bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	pprox.. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEEE 1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4 but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement Procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid $\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max $\pm 5 \%$.

3.7.2 Data storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents, or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel I (I = x, y, z)

U_i = input signal of channel I (I = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp I = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:
E-field probes:



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 21 of 60

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



5 Description of Test Position

5.1 Tablet Computers used next to or against the body

The overall diagonal dimension of the display section of a tablet is > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary. The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

6 SAR System Verificaion Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-1000	1700-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MQ+ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
Head Tissue Simulate Liquid (HBBL600-10000V6) is composed of the following ingredients: (Manufactured by SPEAG) Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 1: Recipe of Tissue Simulate Liquid

6.1.2 Measurement for Tissue Simulate Liquid

The Conductivity (σ) and Permittivity (ϵ_r) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22 \pm 2^\circ\text{C}$.


Tissue Type	Measured Frequency (MHz)	Measured Tissue		Target Tissue ($\pm 5\%$)		Deviation (Within $\pm 5\%$)		Liquid Temp. ($^\circ\text{C}$)	Test Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	43.000	0.867	41.90	0.89	2.63%	-2.58%	21.5	2025/8/20
835 Head	835	43.000	0.928	41.50	0.90	3.61%	3.11%	21.7	2025/8/19
1750 Head	1750	40.700	1.390	40.10	1.37	1.50%	1.46%	21.6	2025/8/18
1950 Head	1950	40.600	1.430	40.00	1.40	1.50%	2.14%	21.5	2025/8/21

Table 2: Measurement result of Tissue electric parameters



6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^\circ\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above $15\pm 0.5\text{ cm}$ in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

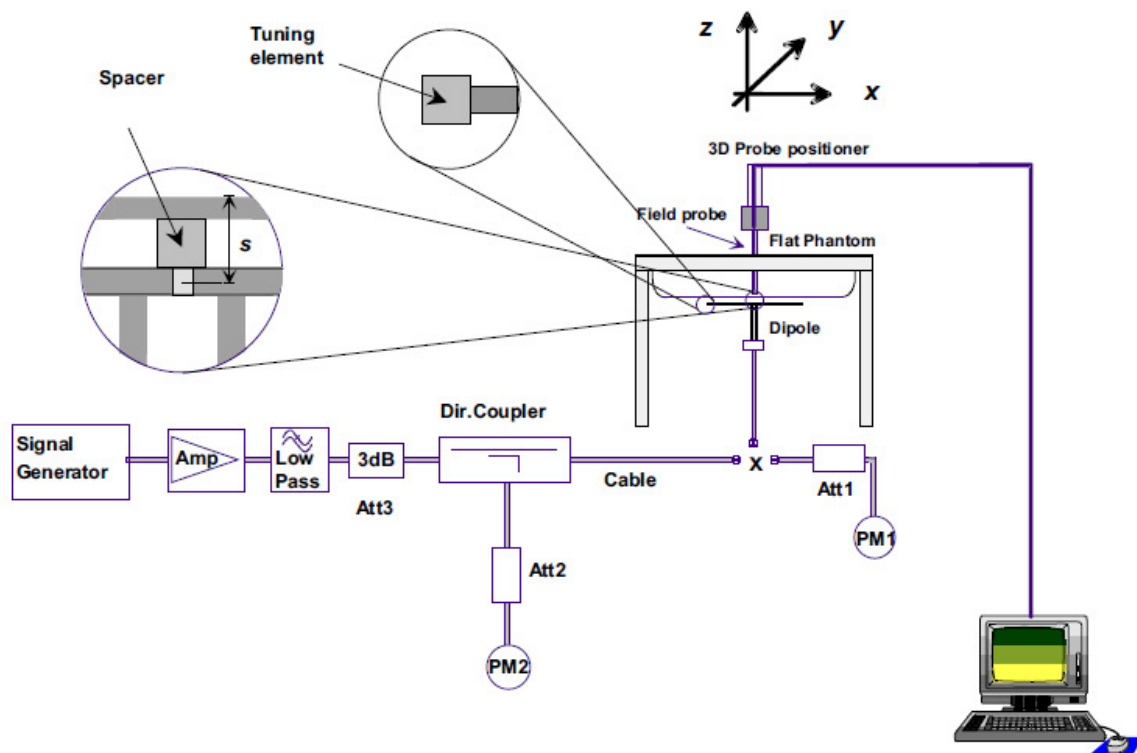

F-12. The microwave circuit arrangement used for SAR system Check

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 20% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.2.2 Summary System Check Result(s)

Validation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V3_Head	1.98	1.29	7.92	5.16	8.42	5.49	-5.94%	-6.01%	21.5	2025/8/20
D835V2_Head	2.55	1.65	10.20	6.60	9.53	6.29	7.03%	4.93%	21.7	2025/8/19
D1750V2_Head	9.34	4.97	37.36	19.88	36.20	19.10	3.20%	4.08%	21.6	2025/8/18
D1950V3_Head	10.70	5.47	42.80	21.88	40.50	20.80	5.68%	5.19%	21.5	2025/8/21

Table 3: SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A



7 Test Configuration

7.1 Operation Configurations

7.1.1 LTE Cat-M1 Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Radio Communication Analyzer was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

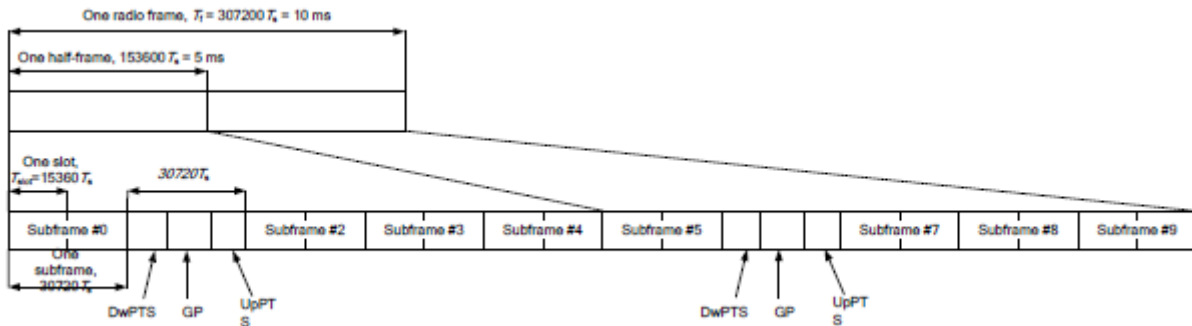


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts	4384.Ts	5120.Ts
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts		

6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	-
9	13168.Ts			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth/Transmission bandwidth						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 31 of 60

16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2
64QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	2
64QAM	> 5	> 4	> 8	> 12	> 16	> 18	3
256QAM	≥1						5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Inspection & Testing Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 32 of 60

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.1.2 NR IOT Band Test Configuration

Select the maximum power tones for SAR testing, when the reported SAR is ≤ 0.8 W/kg, testing of the remaining tones configurations and required test channels is not required.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8 Test Result

8.1 DUT Antenna Locations (Back View)

The DUT Antenna Locations can be referred to Appendix D

8.2 Measurement of RF Conducted Power

The detailed power data can be referred to Appendix E Conducted RF Output Power.

8.3 SAR-based Exemption

The NFC SAR test exclusion thresholds based on KDB 447498 D04 Interim General RF Exposure Guidance v01 Appendix B B.2, the 1 mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation.

Bnad	Pmax (dBm)	Exposure Condition	separation distance(cm)	f (MHz)	Pmax	Pth	SAR Test (Yes or No)	Estimated SAR(W/kg) Limit 1g 1.6
					(mw)	(mw)		
NFC	-38.66	Body	0	13.56	0.0002	1	No	0.001

The Bluetooth SAR test exclusion thresholds based on KDB 447498 D04 Interim General RF Exposure Guidance v01 Appendix B B.4 SAR-based Exemption as below, the exclusion thresholds of 0.5 cm also applies at separation distances less than 0.5 cm, including where there is no separation.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).
The example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

Bnad	Pmax (dBm)	Exposure Condition	separation distance(cm)	f (MHz)	Pmax	Pth	SAR Test (Yes or No)	Estimated SAR(W/kg) Limit 1g 1.6
					(mw)	(mw)		
Bluetooth	-15.5	Body	0	2480	0.03	2.72	No	0.017



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.1 SAR Result of Cat-M1 Band 2

Cat-M1 Band 2 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Body Test data (Separate 0mm 1RB)												
Back side	20	QPSK 1_0	18700/1860	1:1	0.172	0.086	0.10	22.79	24.00	1.321	0.227	22.1
Left side	20	QPSK 1_0	18700/1860	1:1	0.019	0.007	-0.01	22.79	24.00	1.321	0.025	22.1
Right side	20	QPSK 1_0	18700/1860	1:1	0.009	0.004	-0.11	22.79	24.00	1.321	0.012	22.1
Top side	20	QPSK 1_0	18700/1860	1:1	0.016	0.007	0.08	22.79	24.00	1.321	0.021	22.1
Bottom side	20	QPSK 1_0	18700/1860	1:1	0.002	0.001	0.05	22.79	24.00	1.321	0.003	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	20	QPSK 3_1	18900/1880	1:1	0.168	0.080	0.12	22.79	24.00	1.321	0.222	22.1
Left side	20	QPSK 3_1	18900/1880	1:1	0.013	0.007	-0.17	22.79	24.00	1.321	0.017	22.1
Right side	20	QPSK 3_1	18900/1880	1:1	0.007	0.003	0.17	22.79	24.00	1.321	0.009	22.1
Top side	20	QPSK 3_1	18900/1880	1:1	0.022	0.009	0.00	22.79	24.00	1.321	0.029	22.1
Bottom side	20	QPSK 3_1	18900/1880	1:1	0.007	0.002	0.06	22.79	24.00	1.321	0.009	22.1

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 38 of 60

8.4.2 SAR Result of Cat-M1 Band 4

Cat-M1 Band 4 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	20	QPSK 1_2	20175/1732.5	1:1	0.093	0.047	-0.05	22.75	24.00	1.334	0.124	22.1
Left side	20	QPSK 1_2	20175/1732.5	1:1	0.006	0.003	0.09	22.75	24.00	1.334	0.008	22.1
Right side	20	QPSK 1_2	20175/1732.5	1:1	0.009	0.004	-0.07	22.75	24.00	1.334	0.012	22.1
Top side	20	QPSK 1_2	20175/1732.5	1:1	0.017	0.007	-0.16	22.75	24.00	1.334	0.023	22.1
Bottom side	20	QPSK 1_2	20175/1732.5	1:1	0.006	0.001	-0.03	22.75	24.00	1.334	0.008	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	20	QPSK 3_0	20175/1732.5	1:1	0.089	0.043	0.02	22.73	24.00	1.340	0.119	22.1
Left side	20	QPSK 3_0	20175/1732.5	1:1	0.005	0.001	-0.06	22.73	24.00	1.340	0.007	22.1
Right side	20	QPSK 3_0	20175/1732.5	1:1	0.008	0.003	0.13	22.73	24.00	1.340	0.011	22.1
Top side	20	QPSK 3_0	20175/1732.5	1:1	0.012	0.006	0.16	22.73	24.00	1.340	0.016	22.1
Bottom side	20	QPSK 3_0	20175/1732.5	1:1	0.004	0.001	-0.05	22.73	24.00	1.340	0.005	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 39 of 60

8.4.3 SAR Result of Cat-M1 Band 5

Cat-M1 Band 5 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Bodyt Test data (Separate 0mm 1RB)												
Back side	10	QPSK 1_2	20525/836.5	1:1	0.077	0.040	-0.01	23.05	24.00	1.245	0.096	22.1
Left side	10	QPSK 1_2	20525/836.5	1:1	0.006	0.002	0.14	23.05	24.00	1.245	0.007	22.1
Right side	10	QPSK 1_2	20525/836.5	1:1	0.008	0.005	0.00	23.05	24.00	1.245	0.010	22.1
Top side	10	QPSK 1_2	20525/836.5	1:1	0.012	0.006	-0.08	23.05	24.00	1.245	0.015	22.1
Bottom side	10	QPSK 1_2	20525/836.5	1:1	0.005	0.001	-0.07	23.05	24.00	1.245	0.006	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	10	QPSK 3_1	20525/836.5	1:1	0.062	0.032	-0.07	21.91	23.00	1.285	0.080	22.1
Left side	10	QPSK 3_1	20525/836.5	1:1	0.005	0.002	0.11	21.91	23.00	1.285	0.006	22.1
Right side	10	QPSK 3_1	20525/836.5	1:1	0.008	0.004	-0.16	21.91	23.00	1.285	0.010	22.1
Top side	10	QPSK 3_1	20525/836.5	1:1	0.010	0.005	0.08	21.91	23.00	1.285	0.013	22.1
Bottom side	10	QPSK 3_1	20525/836.5	1:1	0.003	0.001	0.06	21.91	23.00	1.285	0.004	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.4 SAR Result of Cat-M1 Band 8

Cat-M1 Band 8 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	3	QPSK 1_2	21640/899	1:1	0.083	0.042	-0.09	22.89	24.00	1.291	0.107	22.1
Left side	3	QPSK 1_2	21640/899	1:1	0.008	0.002	-0.10	22.89	24.00	1.291	0.010	22.1
Right side	3	QPSK 1_2	21640/899	1:1	0.016	0.010	-0.11	22.89	24.00	1.291	0.021	22.1
Top side	3	QPSK 1_2	21640/899	1:1	0.019	0.011	-0.01	22.89	24.00	1.291	0.025	22.1
Bottom side	3	QPSK 1_2	21640/899	1:1	0.007	0.002	0.09	22.89	24.00	1.291	0.009	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	3	QPSK 3_3	21640/899	1:1	0.081	0.039	-0.07	21.83	23.00	1.309	0.106	22.1
Left side	3	QPSK 3_3	21640/899	1:1	0.007	0.001	-0.01	21.83	23.00	1.309	0.009	22.1
Right side	3	QPSK 3_3	21640/899	1:1	0.012	0.006	-0.05	21.83	23.00	1.309	0.016	22.1
Top side	3	QPSK 3_3	21640/899	1:1	0.014	0.008	-0.11	21.83	23.00	1.309	0.018	22.1
Bottom side	3	QPSK 3_3	21640/899	1:1	0.004	0.001	0.15	21.83	23.00	1.309	0.005	22.1

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 41 of 60

8.4.5 SAR Result of Cat-M1 Band 12

Cat-M1 Band 12 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	10	QPSK 1_2	23095/707.5	1:1	0.062	0.031	-0.16	22.88	24.00	1.294	0.080	22.1
Left side	10	QPSK 1_2	23095/707.5	1:1	0.003	0.001	-0.03	22.88	24.00	1.294	0.004	22.1
Right side	10	QPSK 1_2	23095/707.5	1:1	0.009	0.004	-0.10	22.88	24.00	1.294	0.012	22.1
Top side	10	QPSK 1_2	23095/707.5	1:1	0.011	0.005	0.08	22.88	24.00	1.294	0.014	22.1
Bottom side	10	QPSK 1_2	23095/707.5	1:1	0.003	0.001	-0.09	22.88	24.00	1.294	0.004	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	10	QPSK 3_1	23095/707.5	1:1	0.068	0.036	-0.06	21.80	23.00	1.318	0.090	22.1
Left side	10	QPSK 3_1	23095/707.5	1:1	0.005	0.002	-0.08	21.80	23.00	1.318	0.007	22.1
Right side	10	QPSK 3_1	23095/707.5	1:1	0.008	0.003	0.04	21.80	23.00	1.318	0.011	22.1
Top side	10	QPSK 3_1	23095/707.5	1:1	0.009	0.005	-0.19	21.80	23.00	1.318	0.012	22.1
Bottom side	10	QPSK 3_1	23095/707.5	1:1	0.003	0.001	0.02	21.80	23.00	1.318	0.004	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 42 of 60

8.4.6 SAR Result of Cat-M1 Band 13

Cat-M1 Band 13 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	10	QPSK 1_0	23230/782	1:1	0.082	0.044	-0.14	22.22	23.00	1.197	0.098	22.1
Left side	10	QPSK 1_0	23230/782	1:1	0.008	0.003	0.06	22.22	23.00	1.197	0.010	22.1
Right side	10	QPSK 1_0	23230/782	1:1	0.012	0.006	0.10	22.22	23.00	1.197	0.014	22.1
Top side	10	QPSK 1_0	23230/782	1:1	0.009	0.005	0.11	22.22	23.00	1.197	0.011	22.1
Bottom side	10	QPSK 1_0	23230/782	1:1	0.005	0.002	0.11	22.22	23.00	1.197	0.006	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	10	QPSK 3_0	23230/782	1:1	0.069	0.033	0.16	21.06	22.00	1.242	0.086	22.1
Left side	10	QPSK 3_0	23230/782	1:1	0.007	0.002	-0.07	21.06	22.00	1.242	0.009	22.1
Right side	10	QPSK 3_0	23230/782	1:1	0.011	0.004	0.07	21.06	22.00	1.242	0.014	22.1
Top side	10	QPSK 3_0	23230/782	1:1	0.015	0.008	-0.06	21.06	22.00	1.242	0.019	22.1
Bottom side	10	QPSK 3_0	23230/782	1:1	0.006	0.002	0.12	21.06	22.00	1.242	0.007	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.7 SAR Result of Cat-M1 Band 25

Cat-M1 Band 25 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	20	QPSK 1_2	26140/1860	1:1	0.158	0.082	-0.02	22.85	24.00	1.303	0.206	22.1
Left side	20	QPSK 1_2	26140/1860	1:1	0.016	0.006	-0.13	22.85	24.00	1.303	0.021	22.1
Right side	20	QPSK 1_2	26140/1860	1:1	0.037	0.015	0.13	22.85	24.00	1.303	0.048	22.1
Top side	20	QPSK 1_2	26140/1860	1:1	0.038	0.016	-0.08	22.85	24.00	1.303	0.050	22.1
Bottom side	20	QPSK 1_2	26140/1860	1:1	0.011	0.004	-0.16	22.85	24.00	1.303	0.014	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	20	QPSK 3_0	26590/1905	1:1	0.150	0.069	0.12	22.79	24.00	1.321	0.198	22.1
Left side	20	QPSK 3_0	26590/1905	1:1	0.012	0.006	-0.04	22.79	24.00	1.321	0.016	22.1
Right side	20	QPSK 3_0	26590/1905	1:1	0.027	0.010	-0.03	22.79	24.00	1.321	0.036	22.1
Top side	20	QPSK 3_0	26590/1905	1:1	0.023	0.009	0.12	22.79	24.00	1.321	0.030	22.1
Bottom side	20	QPSK 3_0	26590/1905	1:1	0.009	0.004	0.07	22.79	24.00	1.321	0.012	22.1



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 44 of 60

8.4.8 SAR Result of Cat-M1 Band 26

Cat-M1 Band 26 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	15	QPSK 1_2	26865/831.5	1:1	0.067	0.033	-0.19	23.06	24.00	1.242	0.083	22.1
Left side	15	QPSK 1_2	26865/831.5	1:1	0.011	0.005	0.06	23.06	24.00	1.242	0.014	22.1
Right side	15	QPSK 1_2	26865/831.5	1:1	0.016	0.006	-0.19	23.06	24.00	1.242	0.020	22.1
Top side	15	QPSK 1_2	26865/831.5	1:1	0.020	0.011	-0.06	23.06	24.00	1.242	0.025	22.1
Bottom side	15	QPSK 1_2	26865/831.5	1:1	0.008	0.003	0.05	23.06	24.00	1.242	0.010	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	15	QPSK 3_3	26865/831.5	1:1	0.078	0.038	-0.16	21.97	23.00	1.268	0.099	22.1
Left side	15	QPSK 3_3	26865/831.5	1:1	0.013	0.004	-0.08	21.97	23.00	1.268	0.016	22.1
Right side	15	QPSK 3_3	26865/831.5	1:1	0.015	0.005	-0.07	21.97	23.00	1.268	0.019	22.1
Top side	15	QPSK 3_3	26865/831.5	1:1	0.018	0.008	-0.12	21.97	23.00	1.268	0.023	22.1
Bottom side	15	QPSK 3_3	26865/831.5	1:1	0.005	0.002	-0.08	21.97	23.00	1.268	0.006	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 45 of 60

8.4.9 SAR Result of Cat-M1 Band 66

Cat-M1 Band 66 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	20	QPSK 1_0	132072/1720	1:1	0.119	0.058	-0.19	22.83	24.00	1.309	0.156	22.1
Left side	20	QPSK 1_0	132072/1720	1:1	0.010	0.004	-0.10	22.83	24.00	1.309	0.013	22.1
Right side	20	QPSK 1_0	132072/1720	1:1	0.027	0.012	0.17	22.83	24.00	1.309	0.035	22.1
Top side	20	QPSK 1_0	132072/1720	1:1	0.023	0.011	-0.10	22.83	24.00	1.309	0.030	22.1
Bottom side	20	QPSK 1_0	132072/1720	1:1	0.007	0.003	0.11	22.83	24.00	1.309	0.009	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	20	QPSK 3_1	132572/1770	1:1	0.131	0.066	0.03	22.82	24.00	1.312	0.172	22.1
Left side	20	QPSK 3_1	132572/1770	1:1	0.013	0.006	-0.15	22.82	24.00	1.312	0.017	22.1
Right side	20	QPSK 3_1	132572/1770	1:1	0.029	0.013	0.00	22.82	24.00	1.312	0.038	22.1
Top side	20	QPSK 3_1	132572/1770	1:1	0.025	0.011	0.11	22.82	24.00	1.312	0.033	22.1
Bottom side	20	QPSK 3_1	132572/1770	1:1	0.013	0.006	0.12	22.82	24.00	1.312	0.017	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 46 of 60

8.4.10 SAR Result of Cat-M1 Band 85

Cat-M1 Band 85 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	10	QPSK 1_2	134092/707	1:1	0.067	0.032	0.01	22.87	24.00	1.297	0.087	22.1
Left side	10	QPSK 1_2	134092/707	1:1	0.007	0.004	0.19	22.87	24.00	1.297	0.009	22.1
Right side	10	QPSK 1_2	134092/707	1:1	0.009	0.005	-0.08	22.87	24.00	1.297	0.012	22.1
Top side	10	QPSK 1_2	134092/707	1:1	0.017	0.008	0.11	22.87	24.00	1.297	0.022	22.1
Bottom side	10	QPSK 1_2	134092/707	1:1	0.006	0.003	0.05	22.87	24.00	1.297	0.008	22.1
Body Test data (Separate 0mm 50%RB)												
Back side	10	QPSK 3_0	134092/707	1:1	0.077	0.042	-0.01	21.76	23.00	1.330	0.102	22.1
Left side	10	QPSK 3_0	134092/707	1:1	0.008	0.003	0.09	21.76	23.00	1.330	0.011	22.1
Right side	10	QPSK 3_0	134092/707	1:1	0.012	0.006	0.19	21.76	23.00	1.330	0.016	22.1
Top side	10	QPSK 3_0	134092/707	1:1	0.019	0.010	-0.04	21.76	23.00	1.330	0.025	22.1
Bottom side	10	QPSK 3_0	134092/707	1:1	0.007	0.003	-0.01	21.76	23.00	1.330	0.009	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.11 SAR Result of NB-IoT Band 4

NB-IoT Band 4 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_11	20175/1732.5	1:1	0.916	0.478	-0.03	22.45	23.50	1.274	1.167	22.6
Back side Repeated	0.18	QPSK 1_11	20175/1732.5	1:1	0.906	0.461	0.06	22.45	23.50	1.274	1.154	22.6
Left side	0.18	QPSK 1_11	20175/1732.5	1:1	0.008	0.003	0.17	22.45	23.50	1.274	0.010	22.6
Right side	0.18	QPSK 1_11	20175/1732.5	1:1	0.012	0.005	0.15	22.45	23.50	1.274	0.015	22.6
Top side	0.18	QPSK 1_11	20175/1732.5	1:1	0.009	0.004	0.11	22.45	23.50	1.274	0.011	22.6
Bottom side	0.18	QPSK 1_11	20175/1732.5	1:1	0.004	0.001	0.15	22.45	23.50	1.274	0.005	22.6
Back side	0.18	QPSK 3_3	20399/1754.9	1:1	0.885	0.452	0.01	22.35	23.50	1.303	1.153	22.6
Back side	0.18	QPSK 1_11	19951/1710.1	1:1	0.878	0.449	0.06	22.43	23.50	1.279	1.123	22.6

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2nd Repeated	3 rd Repeated
Back side 0mm	20175/1732.5	0.916	0.906	1.011	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 48 of 60

8.4.12 SAR Result of NB-IoT Band 5

NB-IoT Band 5 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_0	20649/848.9	1:1	0.616	0.325	0.03	22.50	23.50	1.259	0.775	21.5
Left side	0.18	QPSK 1_0	20649/848.9	1:1	0.034	0.015	0.12	22.50	23.50	1.259	0.043	21.5
Right side	0.18	QPSK 1_0	20649/848.9	1:1	0.052	0.029	-0.06	22.50	23.50	1.259	0.065	21.5
Top side	0.18	QPSK 1_0	20649/848.9	1:1	0.030	0.011	0.11	22.50	23.50	1.259	0.038	21.5
Bottom side	0.18	QPSK 1_0	20649/848.9	1:1	0.013	0.005	0.04	22.50	23.50	1.259	0.016	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 49 of 60

8.4.13 SAR Result of NB-IoT Band 8

NB-IoT Band 8 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 3_3	21627/897.7	1:1	0.244	0.129	-0.04	22.43	23.50	1.279	0.312	21.5
Left side	0.18	QPSK 3_3	21627/897.7	1:1	0.032	0.015	0.11	22.43	23.50	1.279	0.041	21.5
Right side	0.18	QPSK 3_3	21627/897.7	1:1	0.107	0.048	-0.06	22.43	23.50	1.279	0.137	21.5
Top side	0.18	QPSK 3_3	21627/897.7	1:1	0.050	0.027	-0.19	22.43	23.50	1.279	0.064	21.5
Bottom side	0.18	QPSK 3_3	21627/897.7	1:1	0.021	0.011	-0.16	22.43	23.50	1.279	0.027	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 50 of 60

8.4.14 SAR Result of NB-IoT Band 12

NB-IoT Band 12 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_0	23095/707.5	1:1	0.234	0.131	0.01	22.44	23.50	1.276	0.299	21.5
Left side	0.18	QPSK 1_0	23095/707.5	1:1	0.039	0.021	0.13	22.44	23.50	1.276	0.050	21.5
Right side	0.18	QPSK 1_0	23095/707.5	1:1	0.062	0.030	0.01	22.44	23.50	1.276	0.079	21.5
Top side	0.18	QPSK 1_0	23095/707.5	1:1	0.032	0.015	-0.19	22.44	23.50	1.276	0.041	21.5
Bottle side	0.18	QPSK 1_0	23095/707.5	1:1	0.010	0.004	-0.15	22.44	23.50	1.276	0.013	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 51 of 60

8.4.15 SAR Result of NB-IoT Band 13

NB-IoT Band 13 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_11	23181/777.1	1:1	0.342	0.186	0.05	22.49	23.50	1.262	0.432	21.5
Left side	0.18	QPSK 1_11	23181/777.1	1:1	0.025	0.013	-0.04	22.49	23.50	1.262	0.032	21.5
Right side	0.18	QPSK 1_11	23181/777.1	1:1	0.035	0.010	0.14	22.49	23.50	1.262	0.044	21.5
Top side	0.18	QPSK 1_11	23181/777.1	1:1	0.012	0.005	-0.02	22.49	23.50	1.262	0.015	21.5
Bottom side	0.18	QPSK 1_11	23181/777.1	1:1	0.003	0.001	0.14	22.49	23.50	1.262	0.004	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 52 of 60

8.4.16 SAR Result of NB-IoT Band 17

NB-IoT Band 17 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_0	23731/704.1	1:1	0.248	0.139	0.06	22.49	23.50	1.262	0.313	21.5
Left side	0.18	QPSK 1_0	23731/704.1	1:1	0.041	0.022	0.13	22.49	23.50	1.262	0.052	21.5
Right side	0.18	QPSK 1_0	23731/704.1	1:1	0.066	0.032	0.01	22.49	23.50	1.262	0.083	21.5
Top side	0.18	QPSK 1_0	23731/704.1	1:1	0.034	0.016	-0.19	22.49	23.50	1.262	0.043	21.5
Bottle side	0.18	QPSK 1_0	23731/704.1	1:1	0.011	0.004	-0.15	22.49	23.50	1.262	0.014	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.17 SAR Result of NB-IoT Band 25

NB-IoT Band 25 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_11	26689/1914.9	1:1	1.120	0.560	-0.04	22.70	23.50	1.202	1.347	21.5
Back side Repeated	0.18	QPSK 1_11	26689/1914.9	1:1	1.028	0.550	0.06	22.70	23.50	1.202	1.236	21.5
Left side	0.18	QPSK 1_11	26689/1914.9	1:1	0.051	0.021	-0.02	22.70	23.50	1.202	0.061	21.5
Right side	0.18	QPSK 1_11	26689/1914.9	1:1	0.072	0.040	-0.09	22.70	23.50	1.202	0.087	21.5
Top side	0.18	QPSK 1_11	26689/1914.9	1:1	0.259	0.149	-0.08	22.70	23.50	1.202	0.311	21.5
Bottom side	0.18	QPSK 1_11	26689/1914.9	1:1	0.023	0.012	0.04	22.70	23.50	1.202	0.028	21.5
Back side	0.18	QPSK 1_0	26365/1882.5	1:1	1.020	0.551	0.02	22.56	23.50	1.242	1.266	21.5
Back side	0.18	QPSK 1_11	26041/1850.1	1:1	1.010	0.543	0.07	22.40	23.50	1.288	1.301	21.5

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2nd Repeated	3 rd Repeated
Back side 0mm	26689/1914.9	1.120	1.028	1.089	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 54 of 60

8.4.18 SAR Result of NB-IoT Band 26

LTE Band 26 SAR Test Record												
NB-IoT Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_0	27039/848.9	1:1	0.564	0.310	0.03	22.44	23.50	1.276	0.720	21.5
Left side	0.18	QPSK 1_0	27039/848.9	1:1	0.007	0.003	-0.06	22.44	23.50	1.276	0.009	21.5
Right side	0.18	QPSK 1_0	27039/848.9	1:1	0.011	0.004	-0.01	22.44	23.50	1.276	0.014	21.5
Top side	0.18	QPSK 1_0	27039/848.9	1:1	0.005	0.002	-0.15	22.44	23.50	1.276	0.006	21.5
Bottom side	0.18	QPSK 1_0	27039/848.9	1:1	0.002	0.001	0.00	22.44	23.50	1.276	0.003	21.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.19 SAR Result of NB-IoT Band 65

NB-IoT Band 65 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 1_0	131072/1920	1:1	0.997	0.498	0.06	22.86	23.50	1.159	1.155	22.5
Back side Repeated	0.18	QPSK 1_0	131072/1920	1:1	0.915	0.490	0.06	22.86	23.50	1.159	1.060	22.5
Left side	0.18	QPSK 1_0	131072/1920	1:1	0.045	0.019	-0.02	22.86	23.50	1.159	0.052	22.5
Right side	0.18	QPSK 1_0	131072/1920	1:1	0.064	0.036	-0.09	22.86	23.50	1.159	0.074	22.5
Top side	0.18	QPSK 1_0	131072/1920	1:1	0.231	0.133	-0.08	22.86	23.50	1.159	0.268	22.5
Bottom side	0.18	QPSK 1_0	131072/1920	1:1	0.020	0.011	0.04	22.86	23.50	1.159	0.023	22.5
Back side	0.18	QPSK 1_0	131522/1965	1:1	0.901	0.432	0.05	22.47	23.50	1.268	1.142	22.5
Back side	0.18	QPSK 3_3	131971/2009.9	1:1	0.898	0.425	0.06	22.42	23.50	1.282	1.152	22.5

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2nd Repeated	3 rd Repeated
Back side 0mm	131072/1920	0.997	0.915	1.090	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01 Rev. A/1

Report No.: SZCR250700285005

Page: 56 of 60

8.4.20 SAR Result of NB-IoT Band 66

NB-IoT Band 66 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)												
Back side	0.18	QPSK 3_3	132671/1779.9	1:1	0.612	0.318	-0.01	22.46	23.50	1.271	0.778	22.5
Left side	0.18	QPSK 3_3	132671/1779.9	1:1	0.046	0.022	0.18	22.46	23.50	1.271	0.058	22.5
Right side	0.18	QPSK 3_3	132671/1779.9	1:1	0.080	0.036	0.06	22.46	23.50	1.271	0.102	22.5
Top side	0.18	QPSK 3_3	132671/1779.9	1:1	0.095	0.056	0.02	22.46	23.50	1.271	0.121	22.5
Bottom side	0.18	QPSK 3_3	132671/1779.9	1:1	0.012	0.005	-0.05	22.46	23.50	1.271	0.015	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4.21 SAR Result of NB-IoT Band 85

NB-IoT Band 85 SAR Test Record												
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Body Test data (Separate 0mm 1RB) DSI												
Back side	0.18	QPSK 1_0	134003/698.1	1:1	0.495	0.260	0.06	22.49	23.50	1.262	0.625	22.5
Left side	0.18	QPSK 1_0	134003/698.1	1:1	0.010	0.004	0.16	22.49	23.50	1.262	0.013	22.5
Right side	0.18	QPSK 1_0	134003/698.1	1:1	0.011	0.005	0.17	22.49	23.50	1.262	0.014	22.5
Top side	0.18	QPSK 1_0	134003/698.1	1:1	0.009	0.003	-0.15	22.49	23.50	1.262	0.011	22.5
Bottom side	0.18	QPSK 1_0	134003/698.1	1:1	0.004	0.002	-0.09	22.49	23.50	1.262	0.005	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.5 Multiple Transmitter Evaluation

8.5.1 Simultaneous SAR test evaluation

No.	Simultaneous Tx Combination	Body
1	WWAN + BT	Yes

8.5.2 Simultaneous Transmission SAR Summation Scenario

Test position	SAR _{max} (W/kg)		Summed SAR
	WWAN	BT	
	1	2	1+2
Front side	0.486	0.017	0.503
Back side	1.347	0.017	1.364
Left side	0.061	0.017	0.078
Right side	0.137	0.017	0.154
Top side	0.311	0.017	0.328
Bottom side	0.028	0.017	0.045

9 Equipment list

Test Platform		SPEAG DASY Professional				
Description		SAR Test System				
Software Reference		cDASY8 V16.4.0.5005				
Hardware Reference						
Equipment		Manufacturer	Model	Inventory No.	Calibration Date	Due date of calibration
☒	Test Phantom	SPEAG	SAM Twin	SZ-WSR-A-026	NCR	NCR
☒	DAE	SPEAG	DAE4ip	SZ-WSR-M-078	2024/10/18	2025/10/17
☒	E-Field Probe	SPEAG	EX3DV4	SZ-WSR-M-075	2024/08/29	2025/08/28
☒	Validation Kits	SPEAG	D750V3	SZ-WSR-M-032	2025/06/18	2028/06/17
☒	Validation Kits	SPEAG	D835V2	SZ-WSR-M-033	2022/11/02	2025/11/01
☒	Validation Kits	SPEAG	D1750V2	SZ-WSR-M-035	2025/06/18	2028/06/17
☒	Validation Kits	SPEAG	D1950V3	SZ-WSR-M-037	2022/10/31	2025/10/30
☒	Dielectric parameter probes	SPEAG	DAK-3.5	SZ-WSR-M-093	2024/11/18	2025/11/17
☒	Agilent Network Analyzer	Agilent	E5071C	SZ-WSR-M-067	2024/12/19	2025/12/18
☒	Radio Communication Analyzer	Anritsu	MT8820C	SZ-WSR-M-005	2025/01/08	2026/01/07
☒	Radio Communication Analyzer	Anritsu	MT8820C	SZ-WSR-M-018	2025/05/22	2026/05/21
☒	Radio Communication Analyzer	Anritsu	MT8820C	SZ-WSR-M-020	2024/08/19	2025/08/18
☒	RF Bi-Directional Coupler	Agilent	86205-60001	SZ-WSR-A-004	NCR	NCR
☒	Signal Generator	Agilent	N5171B	SZ-WSR-M-006	2025/01/07	2026/01/06
☒	Preamplifier	Mini-Circuits	ZHL-42W	SZ-WSR-A-001	NCR	NCR
☒	Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	SZ-WSR-A-002	NCR	NCR
☒	Power Meter	Agilent	E4416A	SZ-WSR-M-007	2025/01/07	2026/01/06
☒	Power Sensor	Agilent	8481H	SZ-WSR-M-008	2025/01/07	2026/01/06
☒	Power Sensor	R&S	NRP-Z92	SZ-WSR-M-009	2025/01/08	2026/01/07
☒	Attenuator	SHX	TS2-3dB	SZ-WSR-A-012	NCR	NCR
☒	Speed reading thermometer	Zhengzhou Boyang Instrument	TP3001	SZ-WSR-M-014	2025/05/19	2026/05/18
☒	Temperature	MingGao	T809	SZ-WSR-M-015	2025/05/19	2026/05/18
☒	Temperature	MingGao	T809	SZ-WSR-M-016	2025/05/19	2026/05/18
☒	Humidity and Temperature Indicator	CHIGAO	HTC-1	SZ-WSR-M-013	2025/05/16	2026/05/15

Note: All the equipment are within the valid period when the tests are performed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

Appendix E: Conducted RF Output Power

--- End of report ---

