

Appendix B

Detailed Test Results

1. LTE Cat M
LTE Cat M Band 2
LTE Cat M Band 4
LTE Cat M Band 5
LTE Cat M Band 8
LTE Cat M Band 12
LTE Cat M Band 13
LTE Cat M Band 25
LTE Cat M Band 26
LTE Cat M Band 66
LTE Cat M Band 85
2. NB-IoT
NB-IoT Band 4
NB-IoT Band 5
NB-IoT Band 8
NB-IoT Band 12
NB-IoT Band 13
NB-IoT Band 17
NB-IoT Band 25
NB-IoT Band 26
NB-IoT Band 65
NB-IoT Band 66
NB-IoT Band 85



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

HonorTone Cat-M1 Band 2 20M QPSK 1RB0 18700CH Back side 0mm


HonorTone

Communication System: Band 2; Frequency: 1860.000
Medium: Head Simulating Liquid. Medium parameters used: f= 1860.000 MHz; σ = 1.37 S/m; ϵ_r = 40.8

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.86, 7.86, 7.86); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.208 W/kg; SAR (10g) = 0.108 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.10 dB
SAR (1g) = 0.172 W/kg; SAR (10g) = 0.086 W/kg;
M2/M1 [%]=52.1
Dist 3dB Peak [mm]=9.1

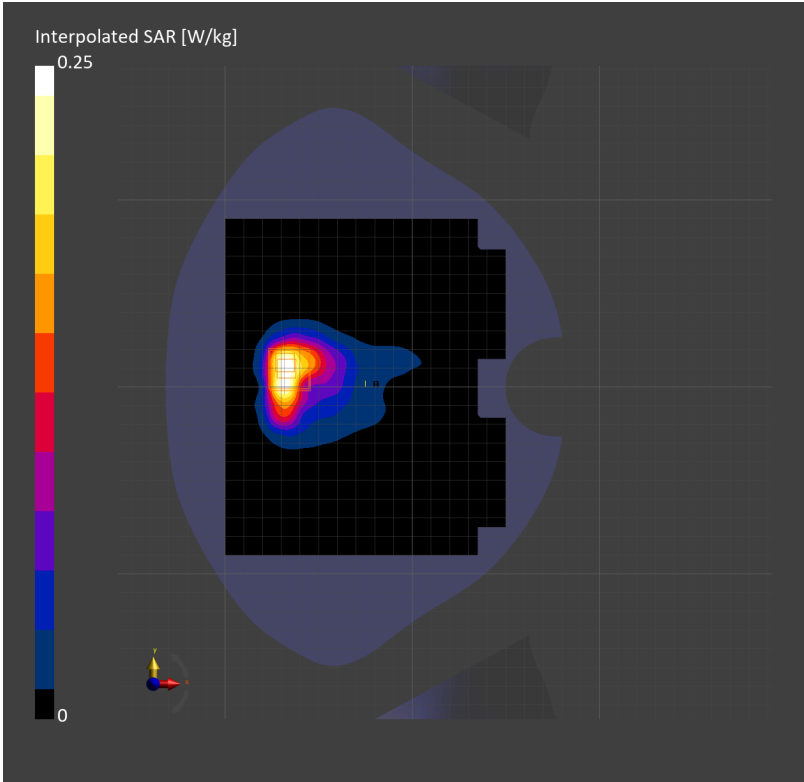

HonorTone Cat-M1 Band 4 20M QPSK 1RB2 20175CH Back side 0mm


HonorTone

Communication System: Band 4; Frequency: 1732.500
Medium: Head Simulating Liquid. Medium parameters used: $f=1732.500$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(8.19, 8.19, 8.19); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.107 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.05dB
SAR (1g) = 0.093 W/kg; SAR (10g) = 0.047 W/kg;
M2/M1 [%]=51.2
Dist 3dB Peak [mm]=9.1

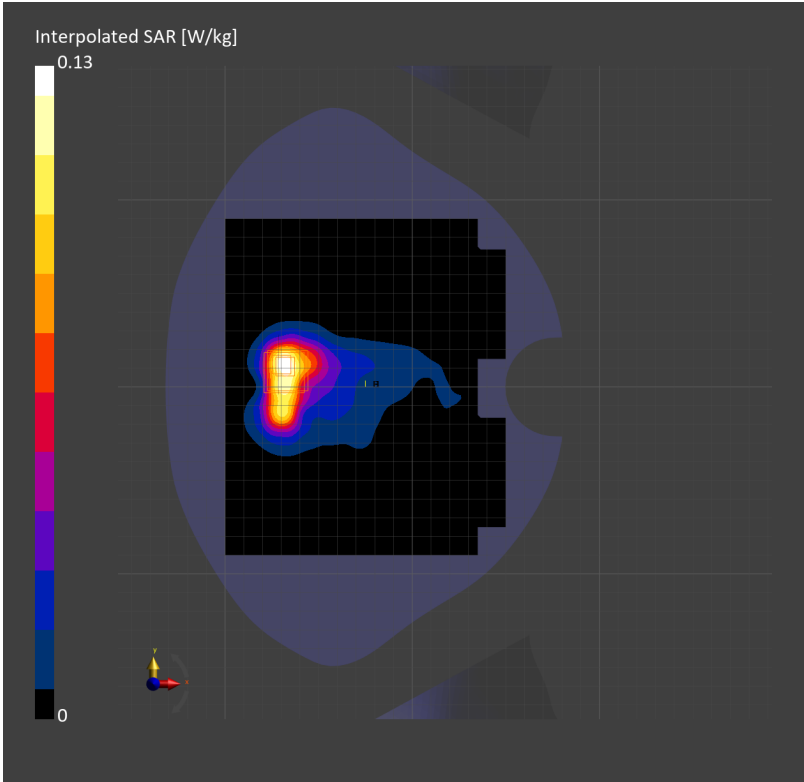

HonorTone Cat-M1 Band 5 10M QPSK 1RB2 20525CH Back side 0mm


HonorTone

Communication System: Band 5; Frequency: 836.500
Medium: Head Simulating Liquid. Medium parameters used: f= 836.500 MHz; σ = 0.893 S/m; ϵ_r = 42.5

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.078 W/kg; SAR (10g) = 0.047 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.077 W/kg; SAR (10g) = 0.040 W/kg;
M2/M1 [%]=51.4
Dist 3dB Peak [mm]=9.0

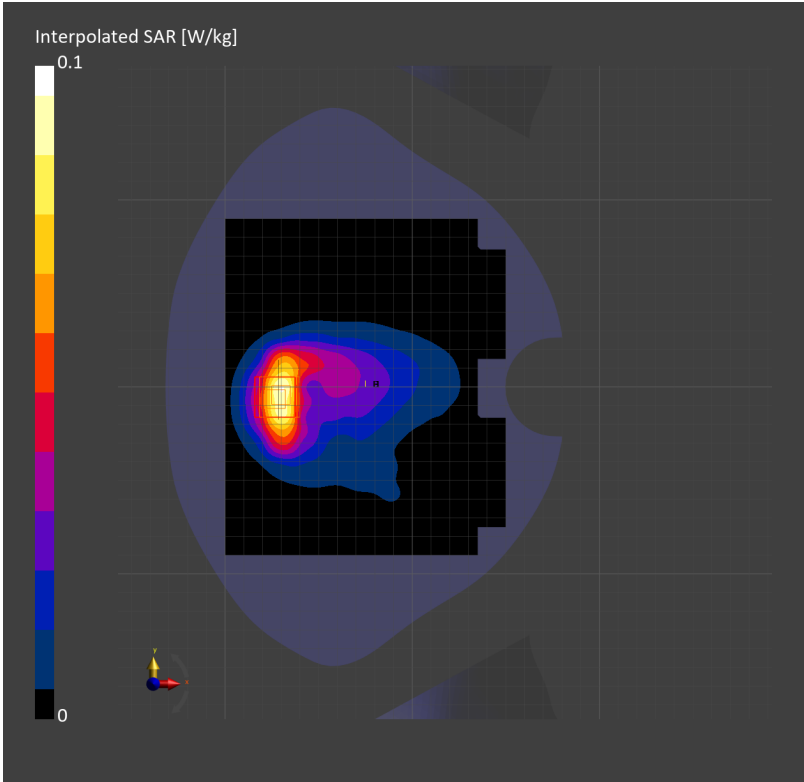

HonorTone Cat-M1 Band 8 10M QPSK 1RB2 21640CH Back side 0mm


HonorTone

Communication System: Band 8; Frequency: 899.000
Medium: Head Simulating Liquid. Medium parameters used: f= 899.000 MHz; σ = 0.954 S/m; ϵ_r = 42.0

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.062 W/kg; SAR (10g) = 0.040 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.09 dB
SAR (1g) = 0.083 W/kg; SAR (10g) = 0.042 W/kg;
M2/M1 [%]=54.1
Dist 3dB Peak [mm]=9.2

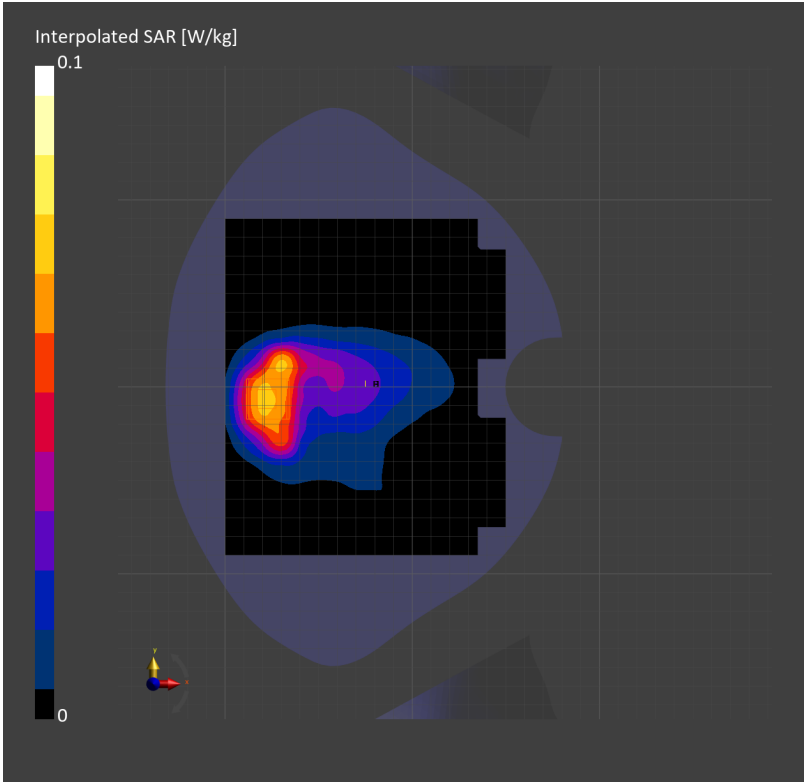

HonorTone Cat-M1 Band 12 10M QPSK 3RB1 23095CH Back side 0mm


HonorTone

Communication System: Band 12; Frequency: 707.500
Medium: Head Simulating Liquid. Medium parameters used: $f=707.500\text{ MHz}$; $\sigma=0.861\text{ S/m}$; $\epsilon_r=43.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.060 W/kg; SAR (10g) = 0.042 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.06 dB
SAR (1g) = 0.068 W/kg; SAR (10g) = 0.036 W/kg;
M2/M1 [%]=51.4
Dist 3dB Peak [mm]=10.3

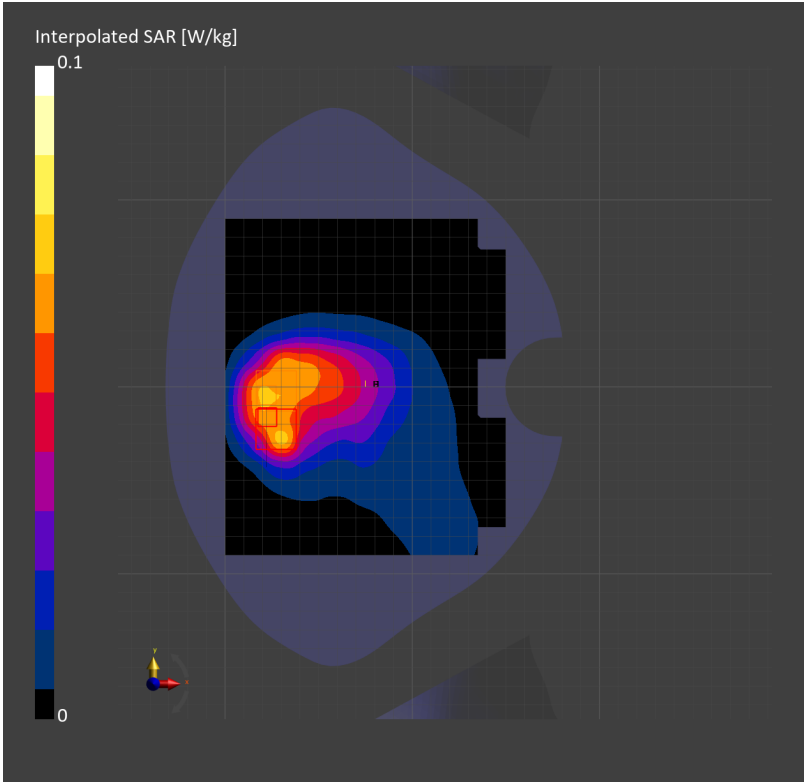

HonorTone Cat-M1 Band 13 10M QPSK 1RB0 23230CH Back side 0mm


HonorTone

Communication System: Band 13; Frequency: 782.000
Medium: Head Simulating Liquid. Medium parameters used: $f=782.000$ MHz; $\sigma=0.911$ S/m; $\epsilon_r=42.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.071 W/kg; SAR (10g) = 0.046 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.14 dB
SAR (1g) = 0.082 W/kg; SAR (10g) = 0.044 W/kg;
M2/M1 [%]=54.7
Dist 3dB Peak [mm]=10.3

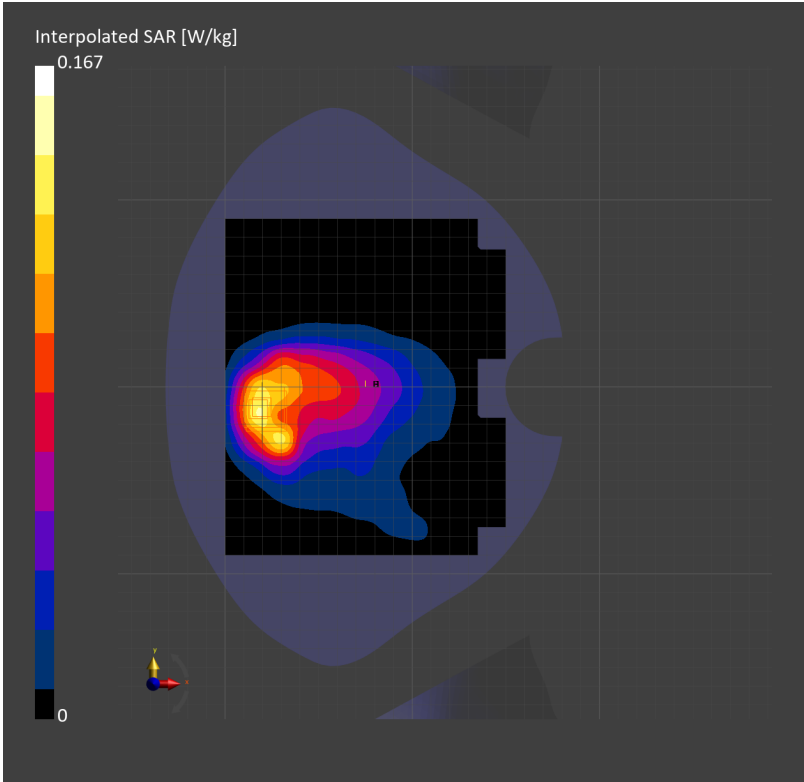

HonorTone Cat-M1 Band 25 20M QPSK 1RB2 26140CH Back side 0mm


HonorTone

Communication System: Band 25; Frequency: 1860.000
Medium: Head Simulating Liquid. Medium parameters used: f= 1860.000 MHz; σ = 1.37 S/m; ϵ_r = 40.8

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.86, 7.86, 7.86); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.191 W/kg; SAR (10g) = 0.100 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.158 W/kg; SAR (10g) = 0.082 W/kg;
M2/M1 [%]=49.7
Dist 3dB Peak [mm]=12.6

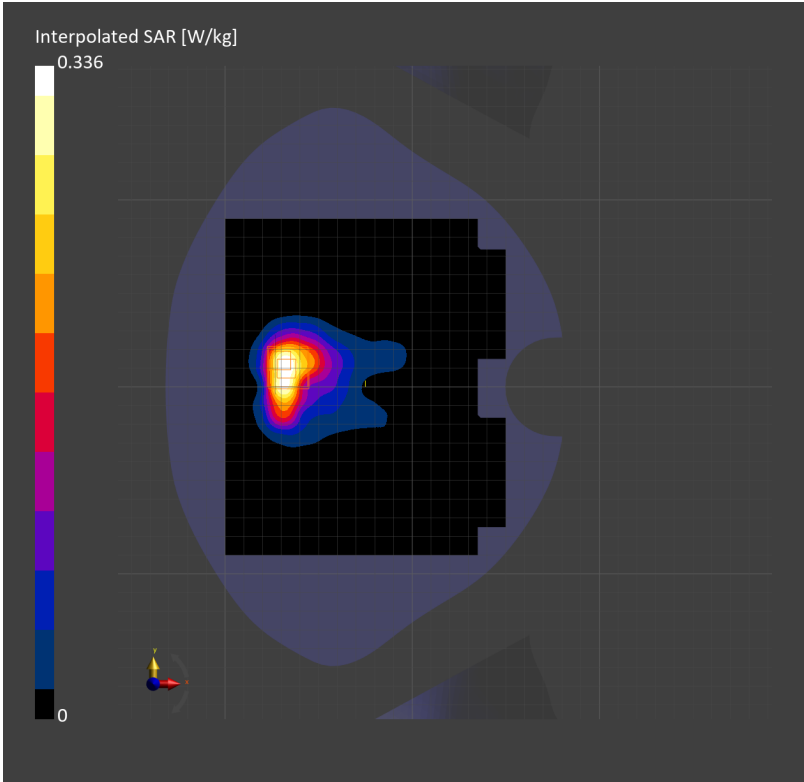

HonorTone Cat-M1 Band 26 15M QPSK 3RB3 26865CH Back side 0mm


HonorTone

Communication System: Band 26; Frequency: 831.500
Medium: Head Simulating Liquid. Medium parameters used: f= 831.500 MHz; σ = 0.903 S/m; ϵ_r = 42.6

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.066 W/kg; SAR (10g) = 0.040 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.078 W/kg; SAR (10g) = 0.038 W/kg;
M2/M1 [%]=72.8
Dist 3dB Peak [mm]=7.2

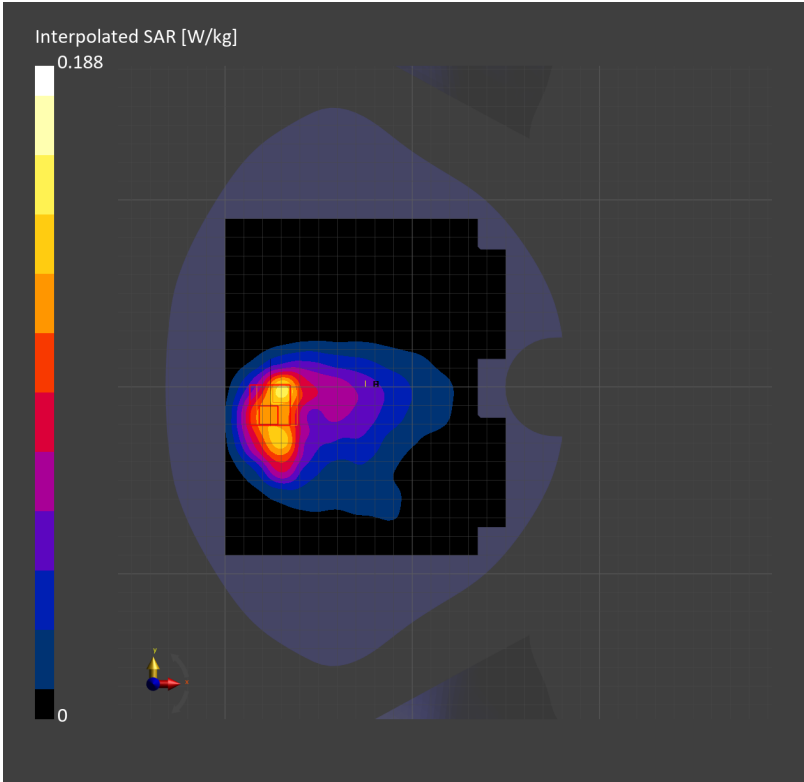

HonorTone Cat-M1 Band 66 20M QPSK 3RB1 132572CH Back side 0mm


HonorTone

Communication System: Band 66; Frequency: 1770.000
Medium: Head Simulating Liquid. Medium parameters used: f= 1770.000 MHz; σ = 1.36 S/m; ϵ_r = 40.6

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(8.19, 8.19, 8.19); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.128 W/kg; SAR (10g) = 0.070 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.131 W/kg; SAR (10g) = 0.066 W/kg;
M2/M1 [%]=48.4
Dist 3dB Peak [mm]=10.6

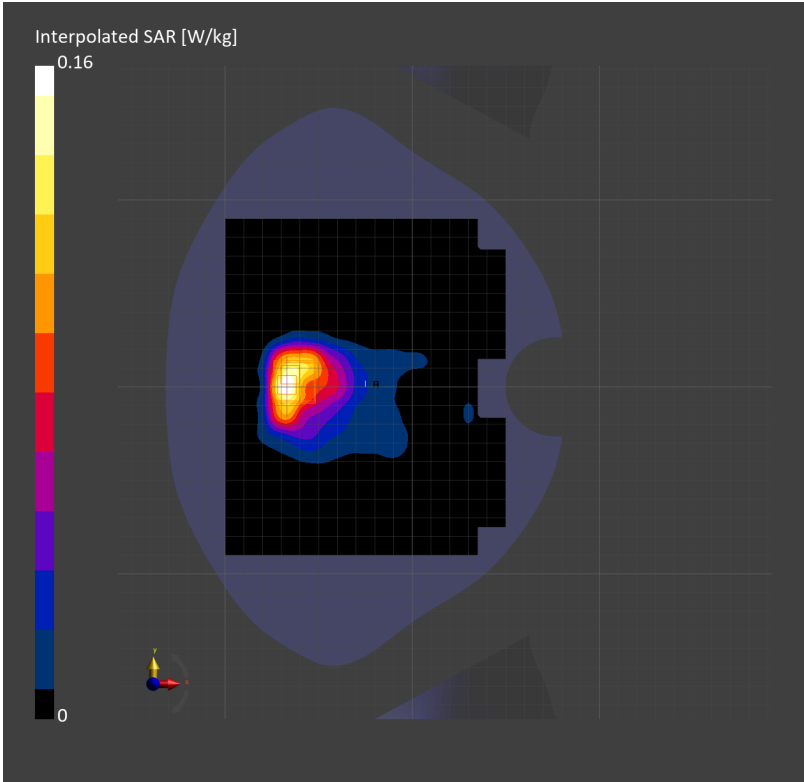

HonorTone Cat-M1 Band 85 10M QPSK 3RB0 134092CH Back side 0mm


HonorTone

Communication System: Band 85; Frequency: 707.000
Medium: Head Simulating Liquid. Medium parameters used: f= 707.000 MHz; σ = 0.852 S/m; ϵ_r = 43.4

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.081 W/kg; SAR (10g) = 0.051 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.077 W/kg; SAR (10g) = 0.042 W/kg;
M2/M1 [%]=44.0
Dist 3dB Peak [mm]=9.5

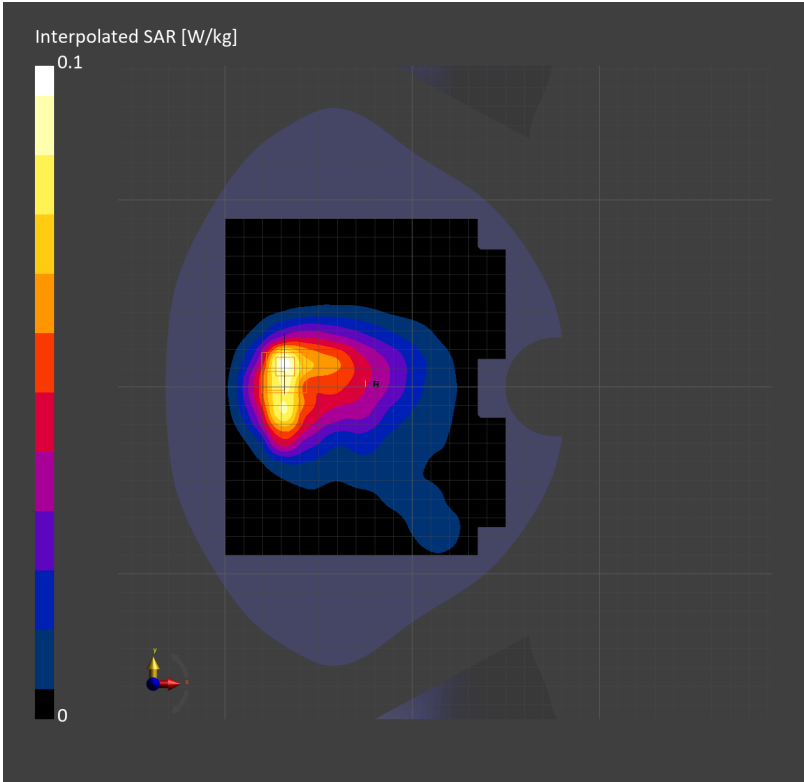

HonorTone NB-IoT Band 4 0.18M QPSK 1RB11 20175CH Back side 0mm


HonorTone

Communication System: Band 4; Frequency: 1732.500
Medium: Head Simulating Liquid. Medium parameters used: $f=1732.500$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(8.19, 8.19, 8.19); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.01 W/kg; SAR (10g) = 0.539 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.03 dB
SAR (1g) = 0.916 W/kg; SAR (10g) = 0.478 W/kg;
M2/M1 [%]=62.4
Dist 3dB Peak [mm]=9.6

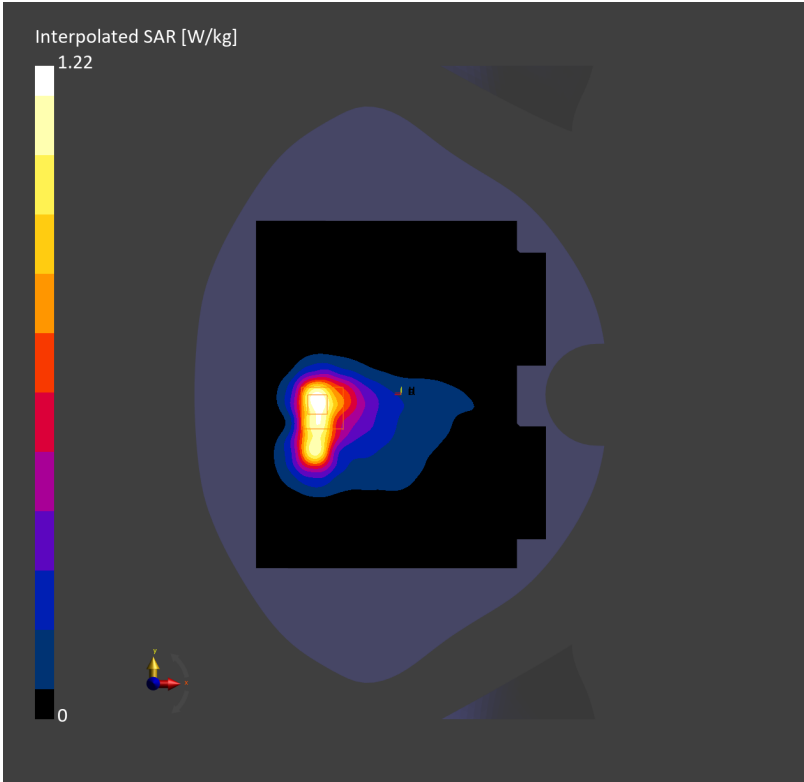

HonorTone NB-IoT Band 5 0.18M QPSK 1RB0 20649CH Back side 0mm


HonorTone

Communication System: Band 5; Frequency: 848.900
Medium: Head Simulating Liquid. Medium parameters used: f= 848.900 MHz; σ = 0.909 S/m; ϵ_r = 42.2

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.624 W/kg; SAR (10g) = 0.388 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.616 W/kg; SAR (10g) = 0.325 W/kg;
M2/M1 [%]=66.1
Dist 3dB Peak [mm]=9.6

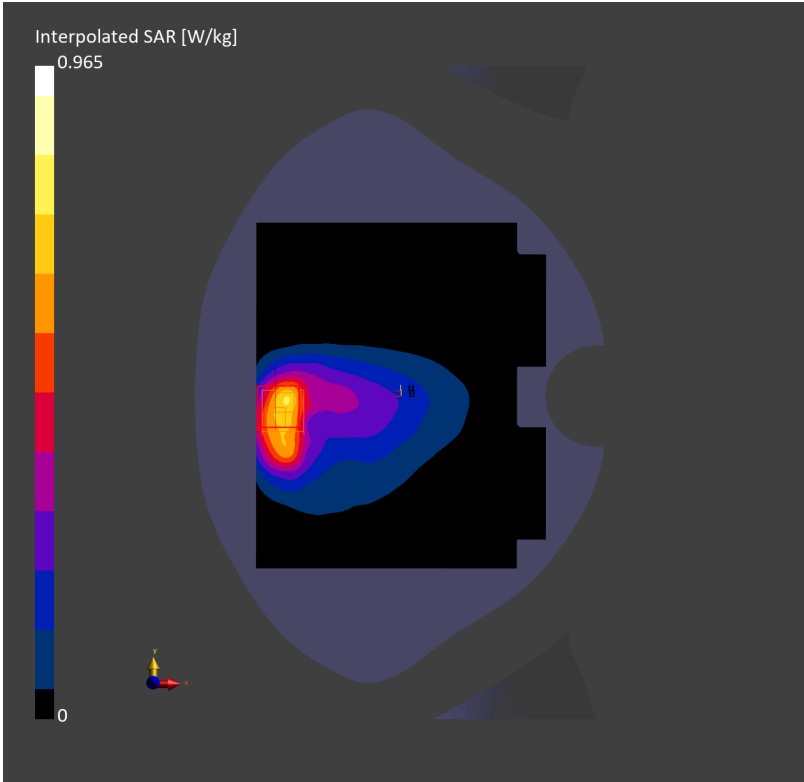

HonorTone NB-IoT Band 8 0.18M QPSK 3RB3 21627CH Back side 0mm


HonorTone

Communication System: Band 8; Frequency: 897.700
Medium: Head Simulating Liquid. Medium parameters used: f= 897.700 MHz; σ = 0.965 S/m; ϵ_r = 42.0

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.229 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.244 W/kg; SAR (10g) = 0.129 W/kg;
M2/M1 [%]=77.7
Dist 3dB Peak [mm]=8.7

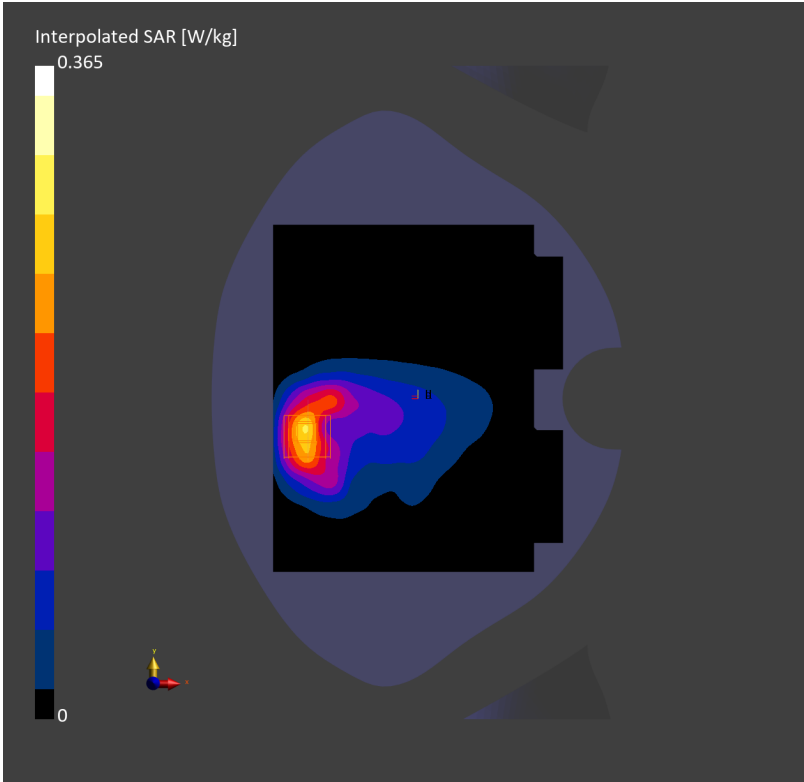

HonorTone NB-IoT Band 12 0.18M QPSK 1RB0 23095CH Back side 0mm


HonorTone

Communication System: Band 12; Frequency: 707.500
Medium: Head Simulating Liquid. Medium parameters used: f= 707.500 MHz; σ = 0.861 S/m; ϵ_r = 43.7

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.230 W/kg; SAR (10g) = 0.147 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.01 dB
SAR (1g) = 0.234 W/kg; SAR (10g) = 0.131 W/kg;
M2/M1 [%]=61.1
Dist 3dB Peak [mm]=11.4

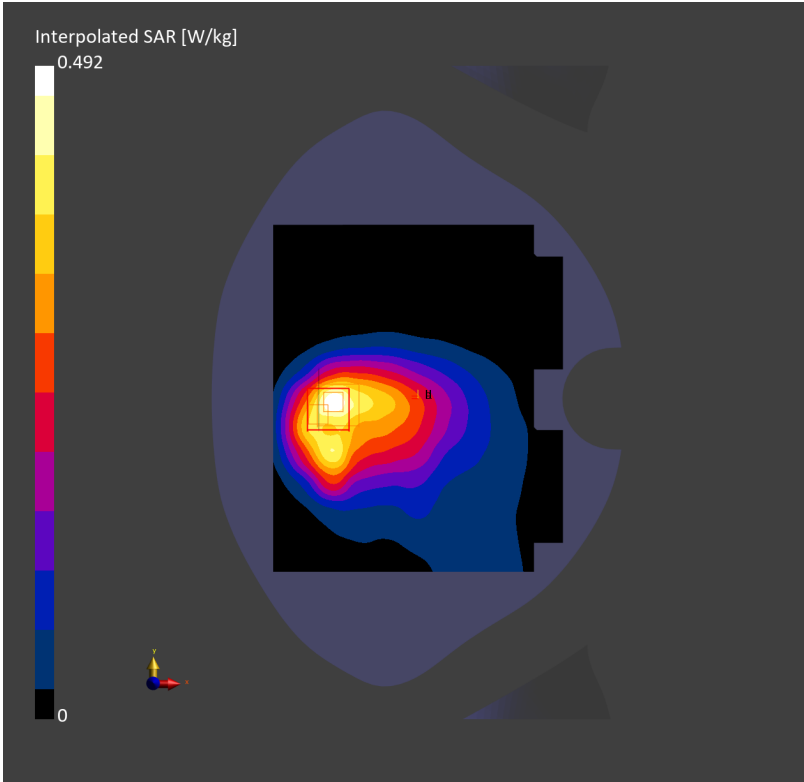

HonorTone NB-IoT Band 13 0.18M QPSK 1RB11 23181CH Back side 0mm


HonorTone

Communication System: Band 13; Frequency: 777.100
Medium: Head Simulating Liquid. Medium parameters used: f= 777.100 MHz; σ = 0.901 S/m; ϵ_r = 42.3

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.378 W/kg; SAR (10g) = 0.232 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.05 dB
SAR (1g) = 0.342 W/kg; SAR (10g) = 0.186 W/kg;
M2/M1 [%]=71.1
Dist 3dB Peak [mm]=9.6

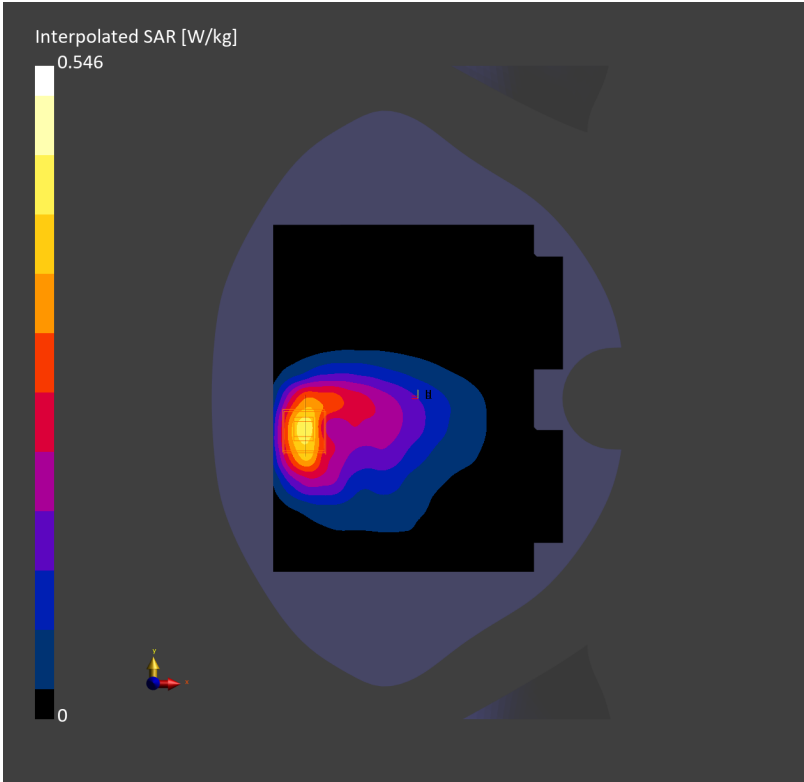

HonorTone NB-IoT Band 17 0.18M QPSK 1RB0 23731CH Back side 0mm


HonorTone

Communication System: Band 12; Frequency: 704.100
Medium: Head Simulating Liquid. Medium parameters used: $f=704.100\text{ MHz}$; $\sigma=0.857\text{ S/m}$; $\epsilon_r=43.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.239 W/kg; SAR (10g) = 0.135 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.06 dB
SAR (1g) = 0.248 W/kg; SAR (10g) = 0.139 W/kg;
M2/M1 [%]=51.5
Dist 3dB Peak [mm]=11.1

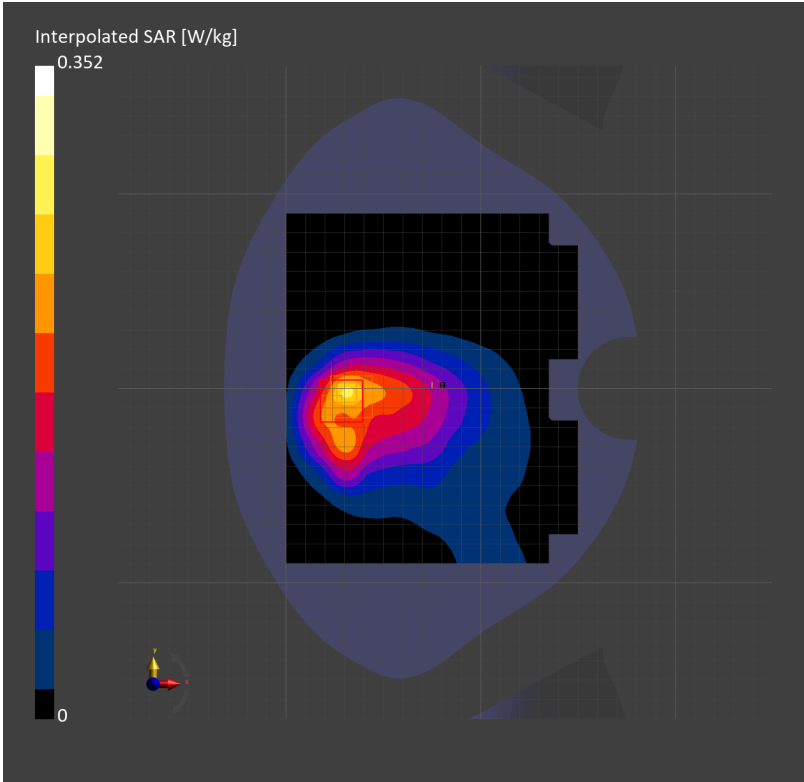

HonorTone NB-IoT Band 25 0.18M QPSK 1RB11 26689CH Back side 0mm


HonorTone

Communication System: Band 25; Frequency: 1914.900
Medium: Head Simulating Liquid. Medium parameters used: $f=1914.900\text{ MHz}$; $\sigma=1.42\text{ S/m}$; $\epsilon_r=40.6$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.86, 7.86, 7.86); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.955 W/kg; SAR (10g) = 0.509 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.04 dB
SAR (1g) = 1.12 W/kg; SAR (10g) = 0.560 W/kg;
M2/M1 [%]=62.6
Dist 3dB Peak [mm]=9.4

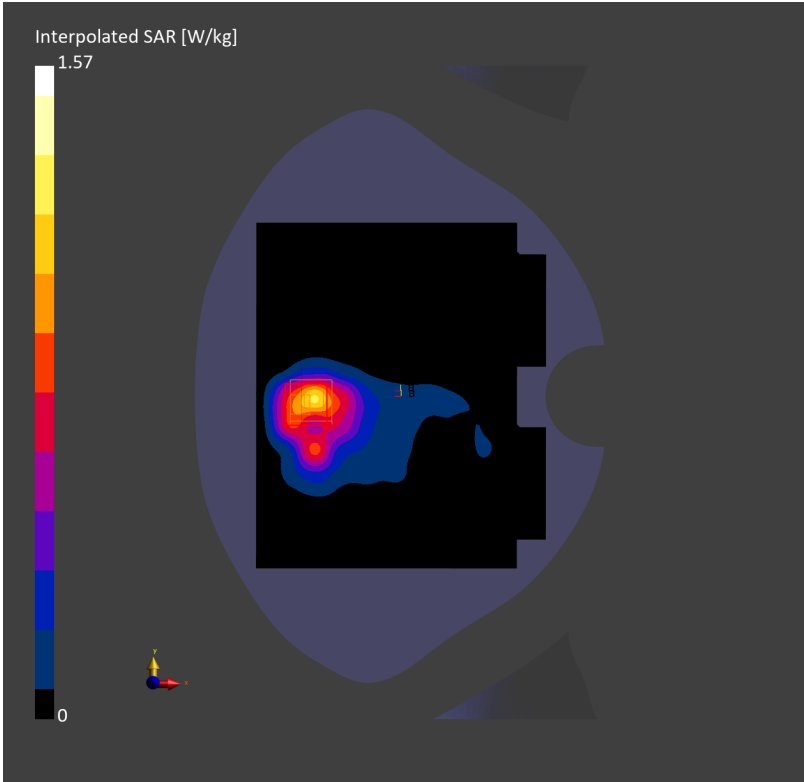

HonorTone NB-IoT Band 26 0.18M QPSK 1RB0 27039CH Back side 0mm


HonorTone

Communication System: Band 26; Frequency: 848.900
Medium: Head Simulating Liquid. Medium parameters used: f= 848.900 MHz; σ = 0.909 S/m; ϵ_r = 42.2

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.6, 9.6, 9.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.604 W/kg; SAR (10g) = 0.372 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.564 W/kg; SAR (10g) = 0.310 W/kg;
M2/M1 [%]=63.4
Dist 3dB Peak [mm]=9.1

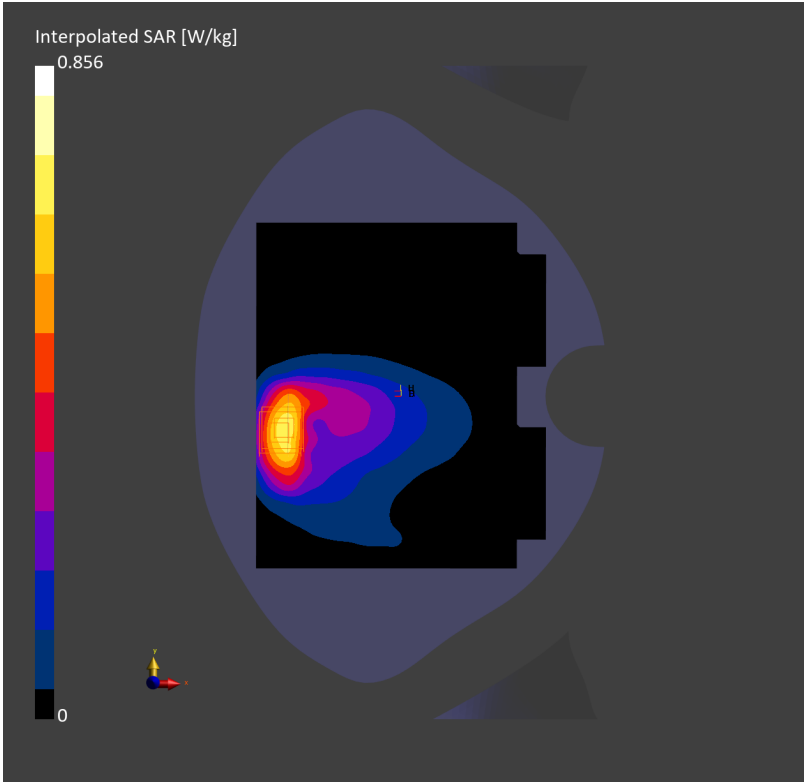

HonorTone NB-IoT Band 65 0.18M QPSK 1RB0 131072CH Back side 0mm


HonorTone

Communication System: Band 25; Frequency: 1920.000
Medium: Head Simulating Liquid. Medium parameters used: $f=1920.000$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.86, 7.86, 7.86); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.942 W/kg; SAR (10g) = 0.481 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.997 W/kg; SAR (10g) = 0.498 W/kg;
M2/M1 [%]=52.8
Dist 3dB Peak [mm]=9.4

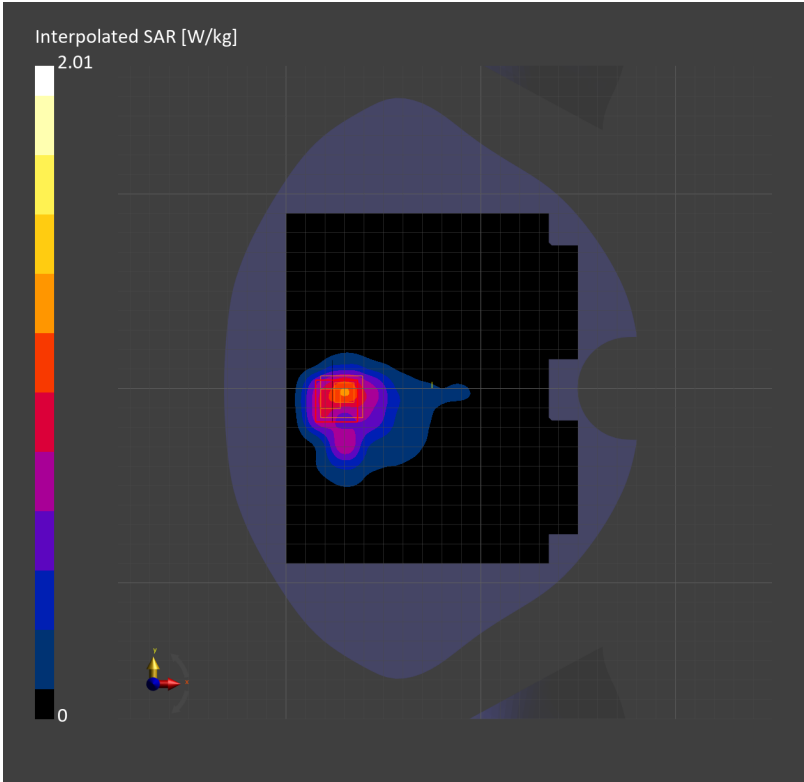

HonorTone NB-IoT Band 66 0.18M QPSK 3RB3 132671CH Back side 0mm


HonorTone

Communication System: Band 66; Frequency: 1779.900
Medium: Head Simulating Liquid. Medium parameters used: $f=1779.900$ MHz; $\sigma=1.36$ S/m; $\epsilon_r=40.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(8.19, 8.19, 8.19); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.612 W/kg; SAR (10g) = 0.338 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.612 W/kg; SAR (10g) = 0.318 W/kg;
M2/M1 [%]=68.8
Dist 3dB Peak [mm]=8.1

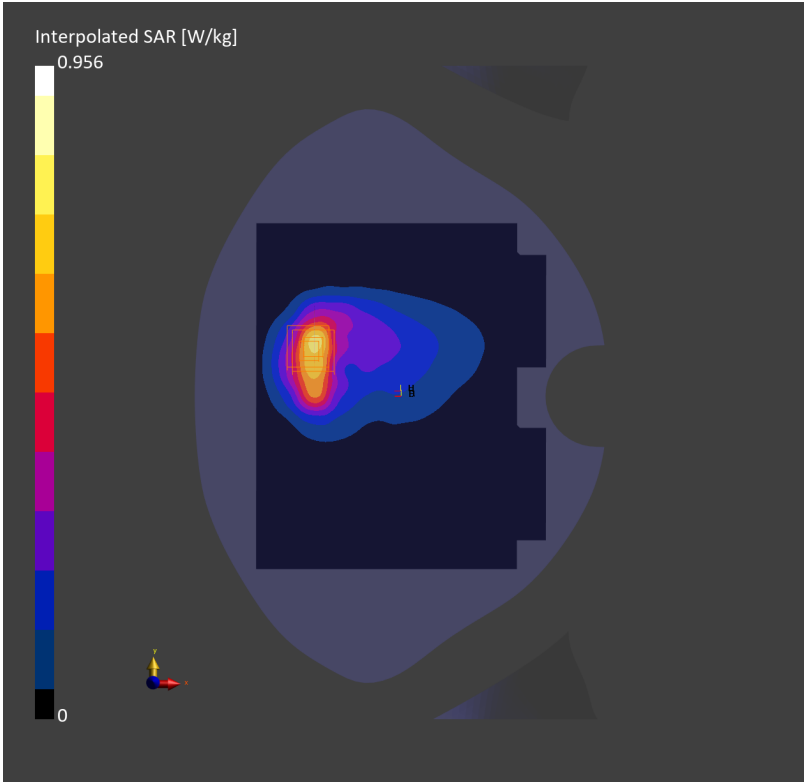

HonorTone NB-IoT Band 85 0.18M QPSK 1RB0 134003CH Back side 0mm

HonorTone

Communication System: Band 85; Frequency: 698.100
Medium: Head Simulating Liquid. Medium parameters used: $f= 698.100$ MHz; $\sigma= 0.856$ S/m; $\epsilon_r = 43.8$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(10.0, 10.0, 10.0); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (150.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.488 W/kg; SAR (10g) = 0.252 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 4.0 mm
Power Drift = 0.06 dB
SAR (1g) = 0.495 W/kg; SAR (10g) = 0.260 W/kg;
M2/M1 [%]=51.2
Dist 3dB Peak [mm]=9.8

