

Appendix B

RF Test Data for BT LE(Conducted Measurement)

Product Name: FUNLOGY Earbuds SE

Test Model: FLU01

Environmental Conditions


Temperature:	24.1°C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Yan Chen
Supervised by:	Fengliu Tang


B.1 DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.508	2401.696	2402.204	0.5	PASS
		2440	0.504	2439.700	2440.204	0.5	PASS
		2480	0.504	2479.700	2480.204	0.5	PASS
BLE_2M	Ant1	2402	0.860	2401.436	2402.296	0.5	PASS
		2440	0.864	2439.436	2440.300	0.5	PASS
		2480	0.856	2479.436	2480.292	0.5	PASS

Test Graphs

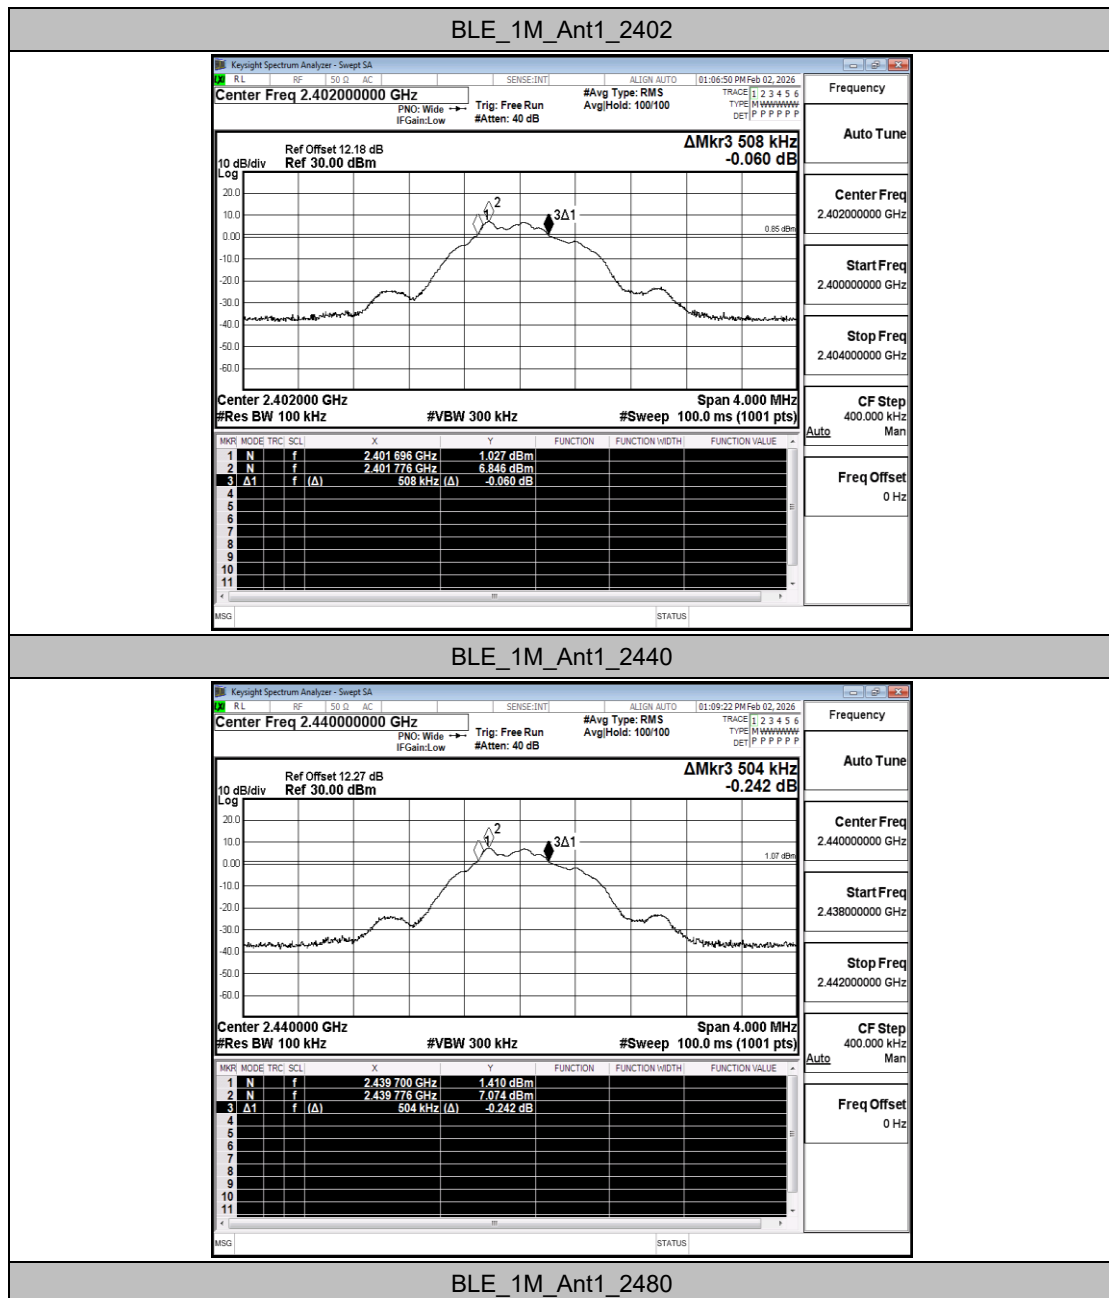

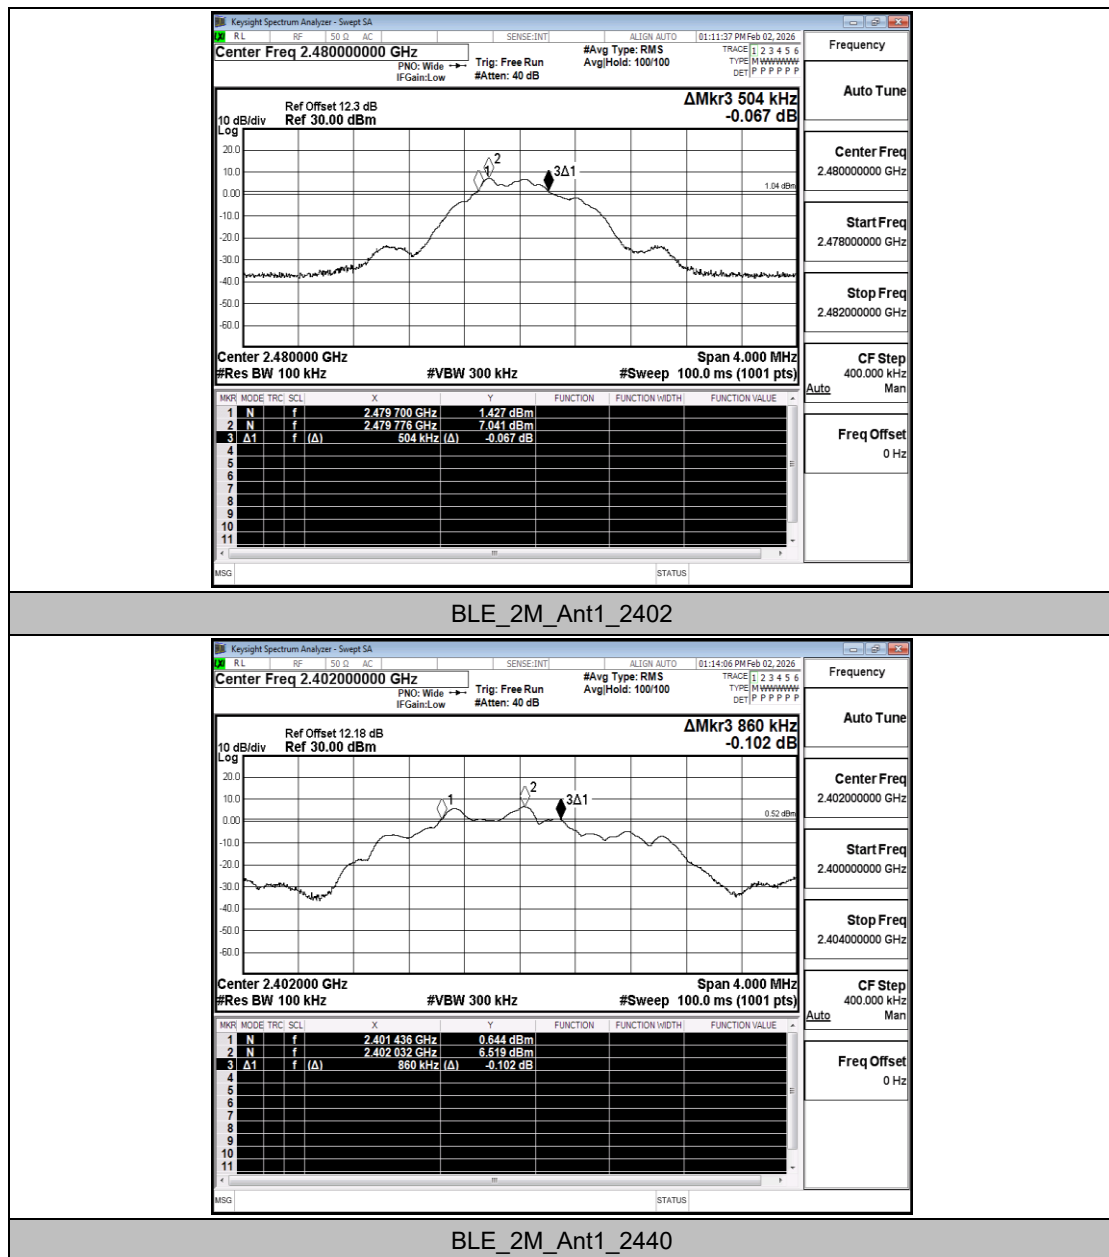

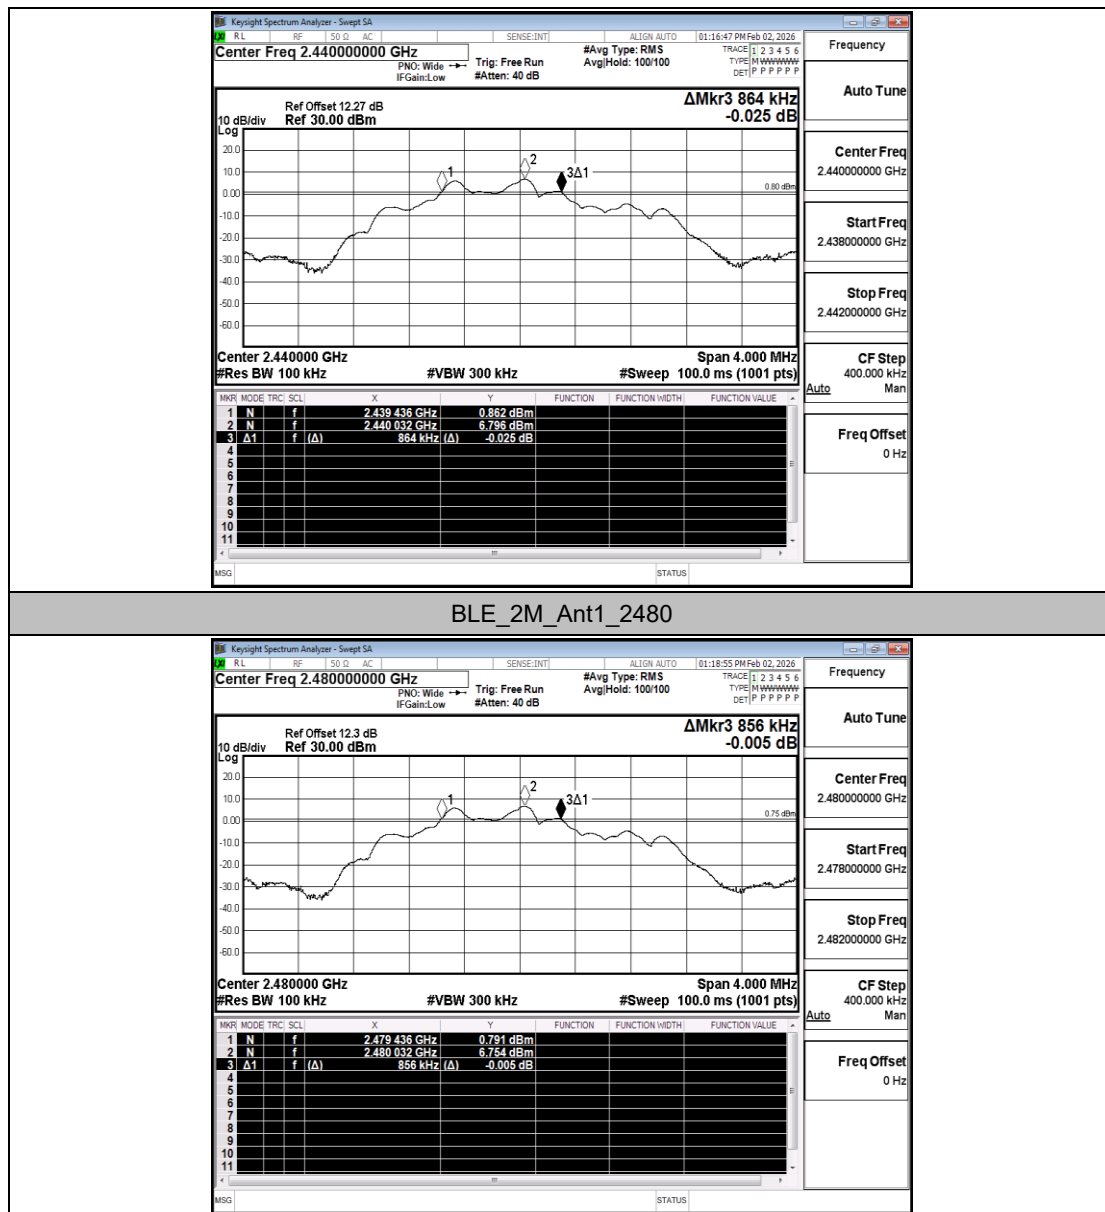



B.2 Maximum Peak conducted output power


Test Result Peak

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.07	≤30	PASS
		2440	7.27	≤30	PASS
		2480	7.24	≤30	PASS
BLE_2M	Ant1	2402	7.12	≤30	PASS
		2440	7.28	≤30	PASS
		2480	7.29	≤30	PASS

Test Graphs Peak

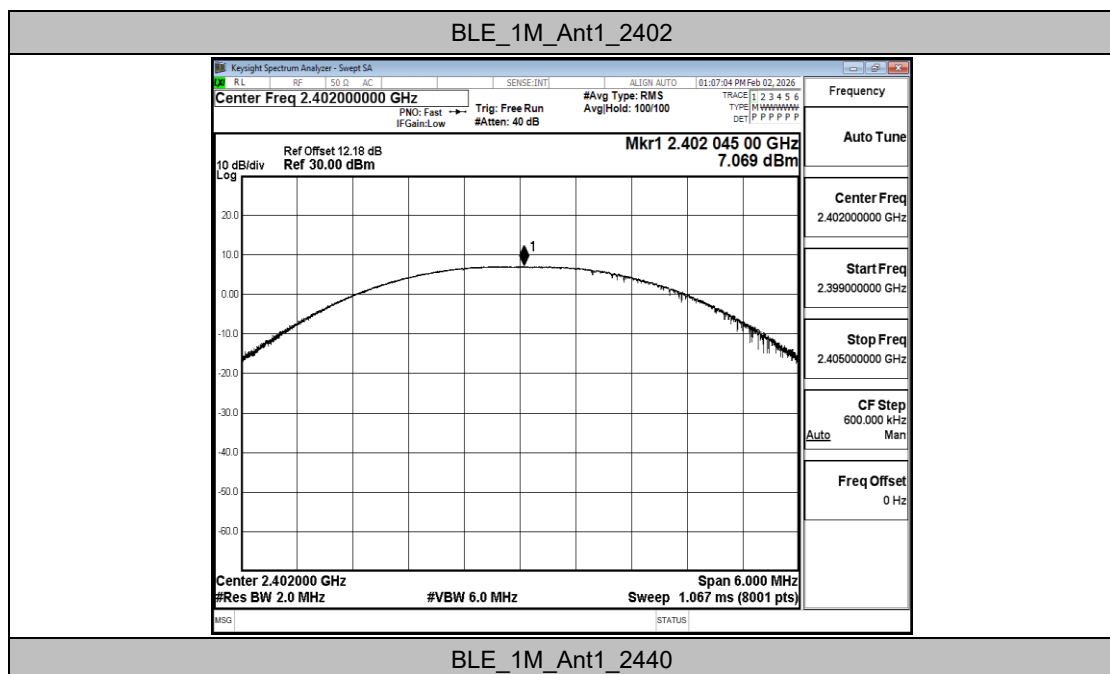

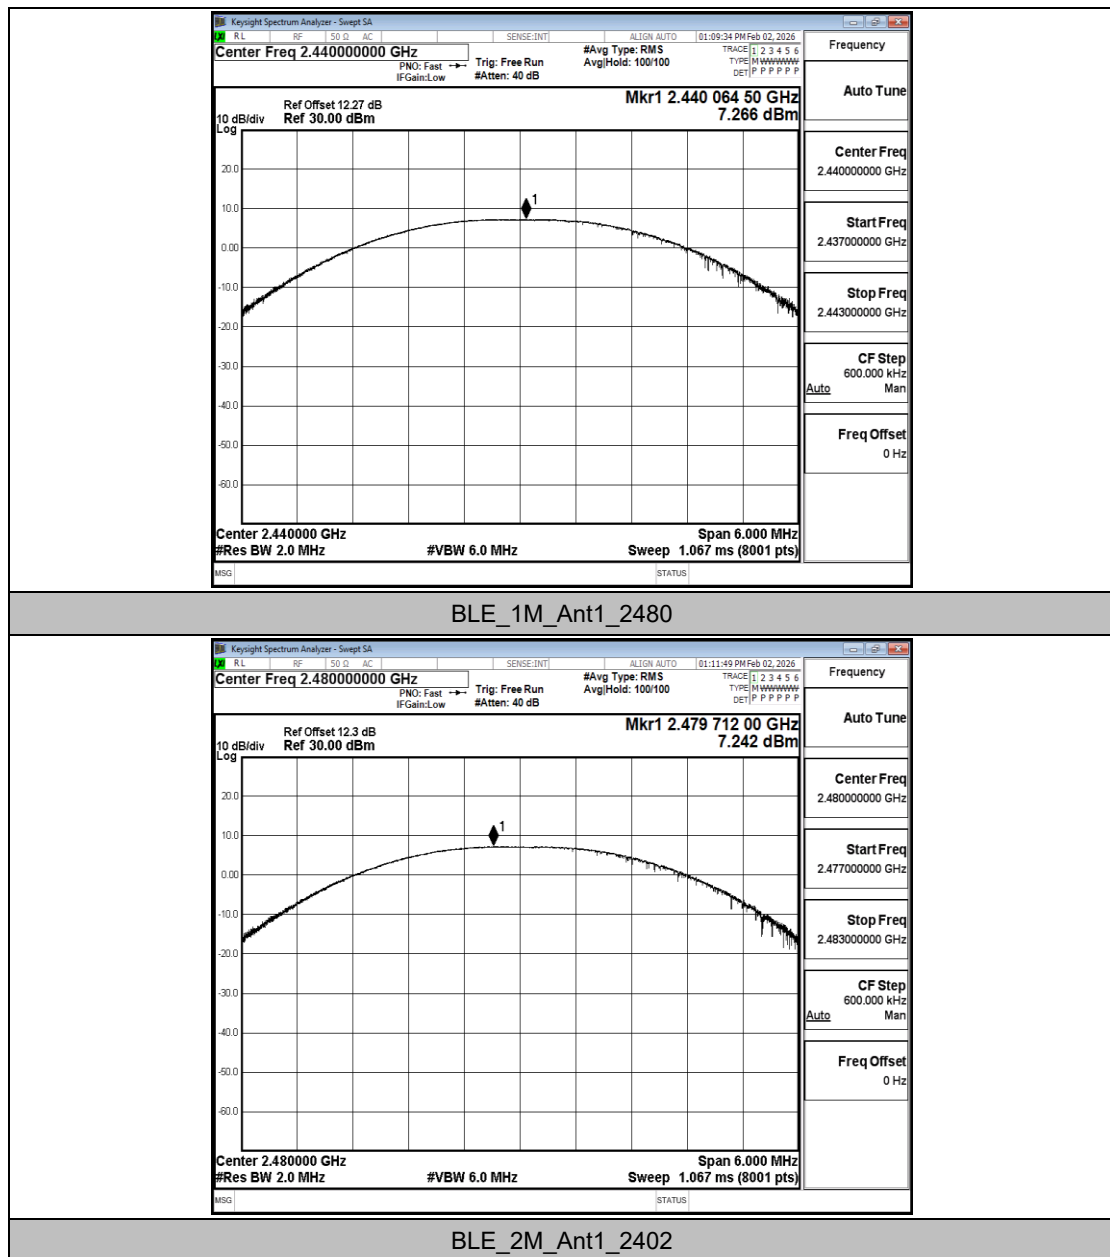

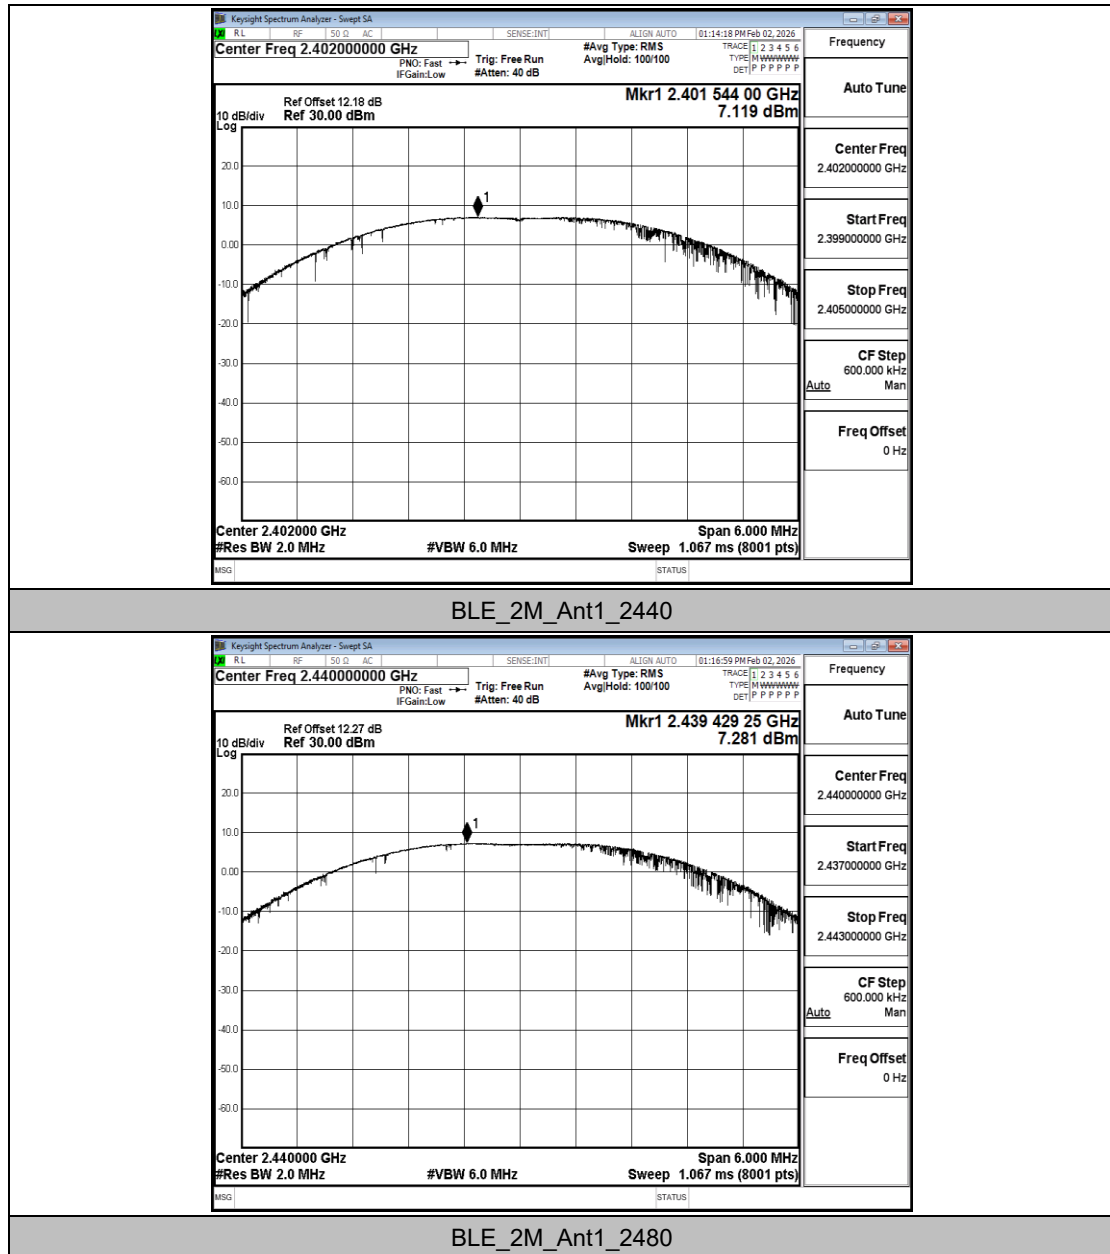



B.3 Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.02	≤8.00	PASS
		2440	-10.97	≤8.00	PASS
		2480	-10.76	≤8.00	PASS
BLE_2M	Ant1	2402	-13.05	≤8.00	PASS
		2440	-12.94	≤8.00	PASS
		2480	-12.84	≤8.00	PASS

Test Graphs

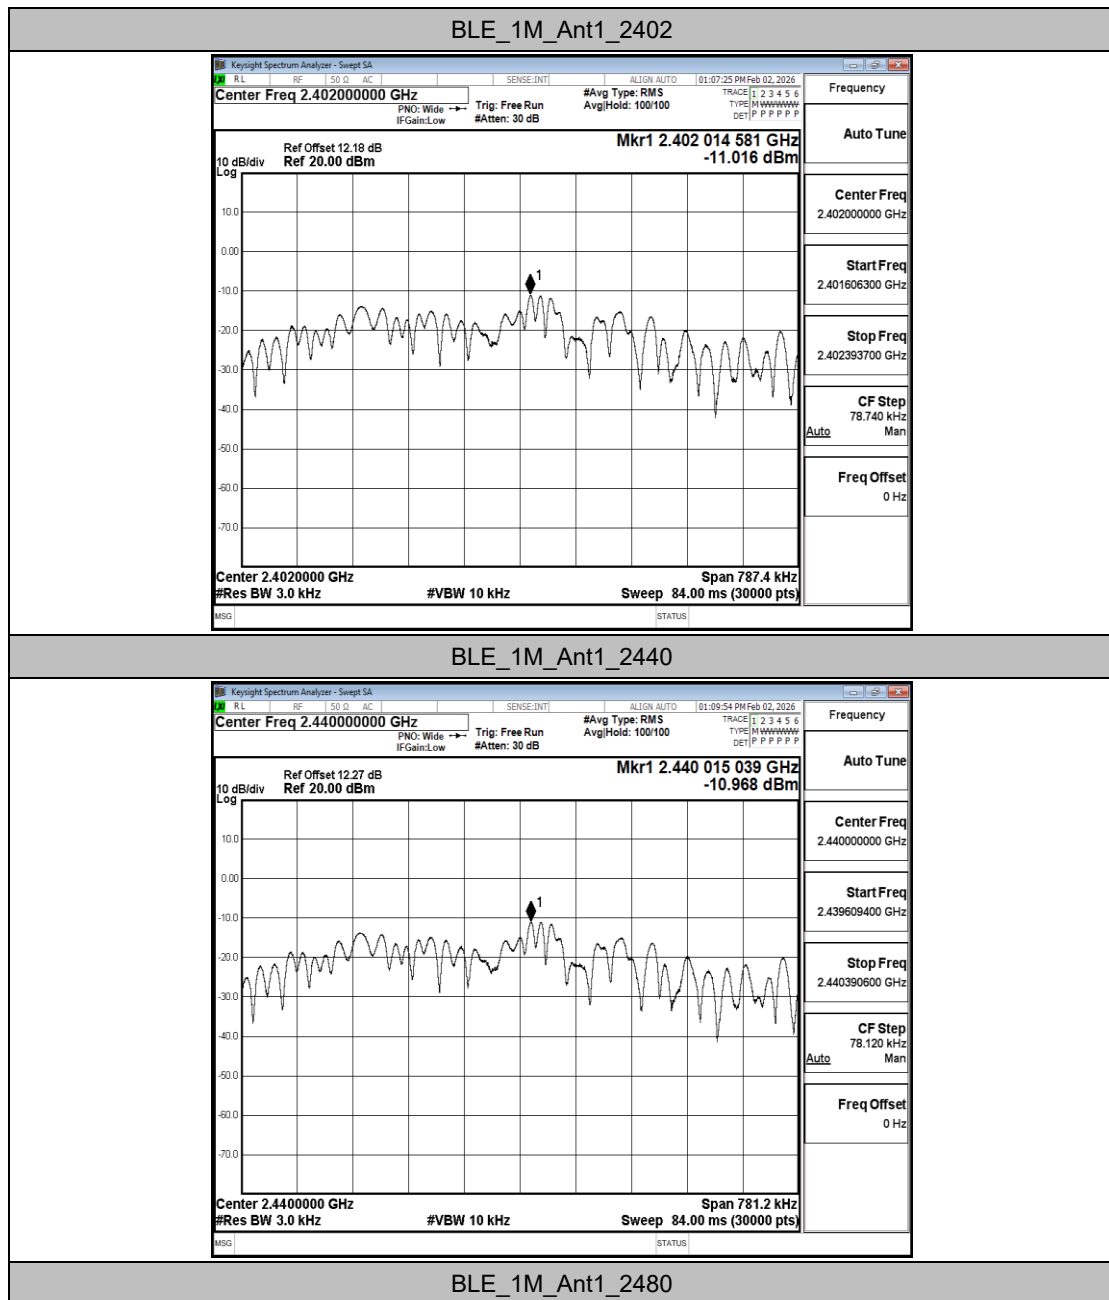

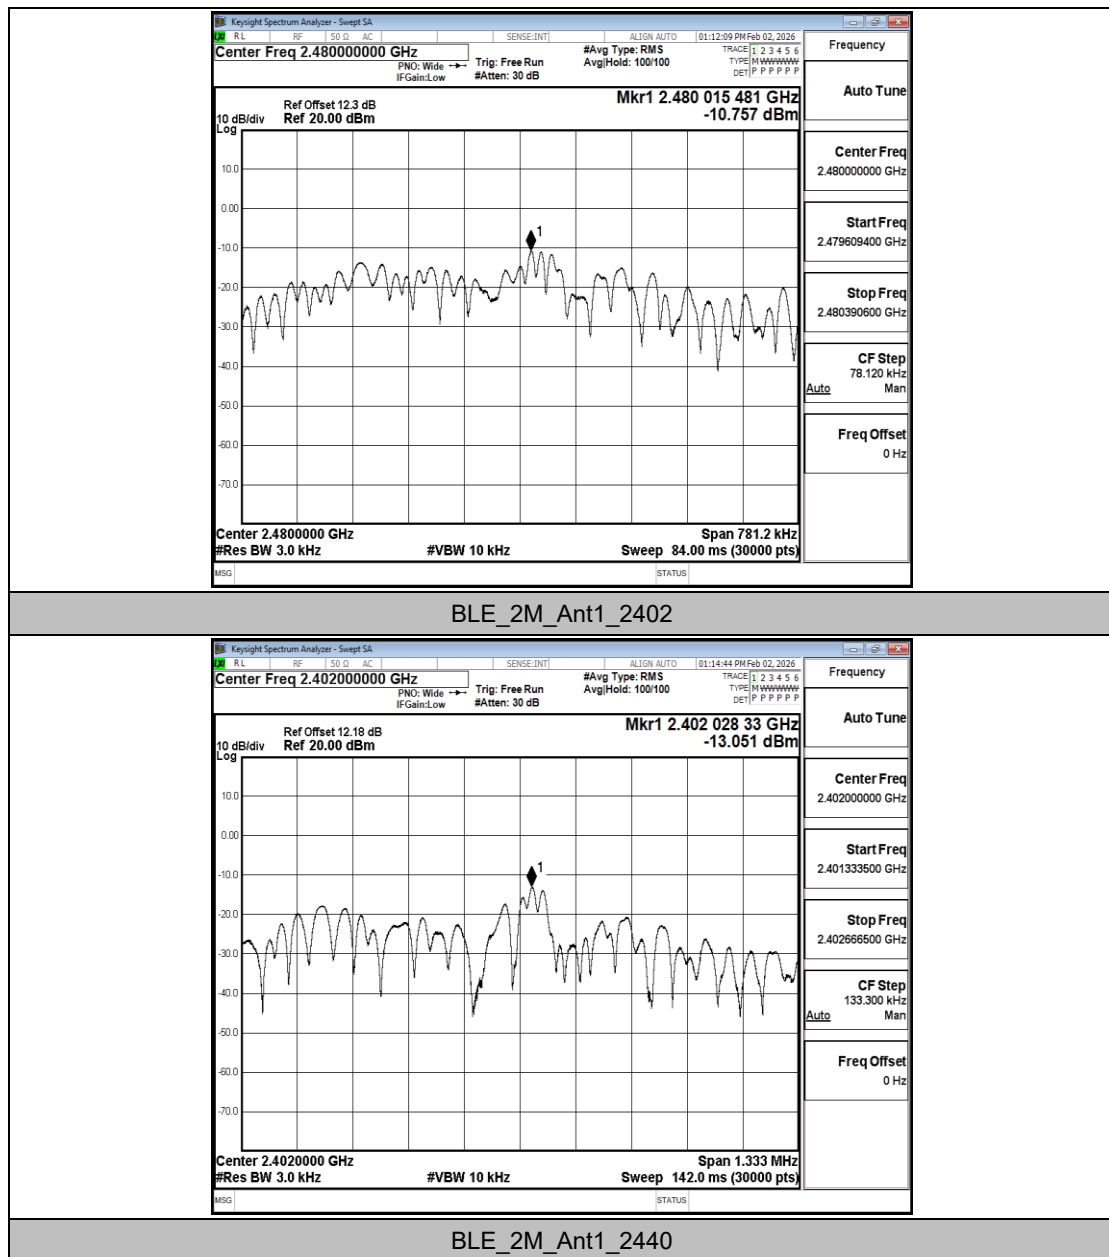

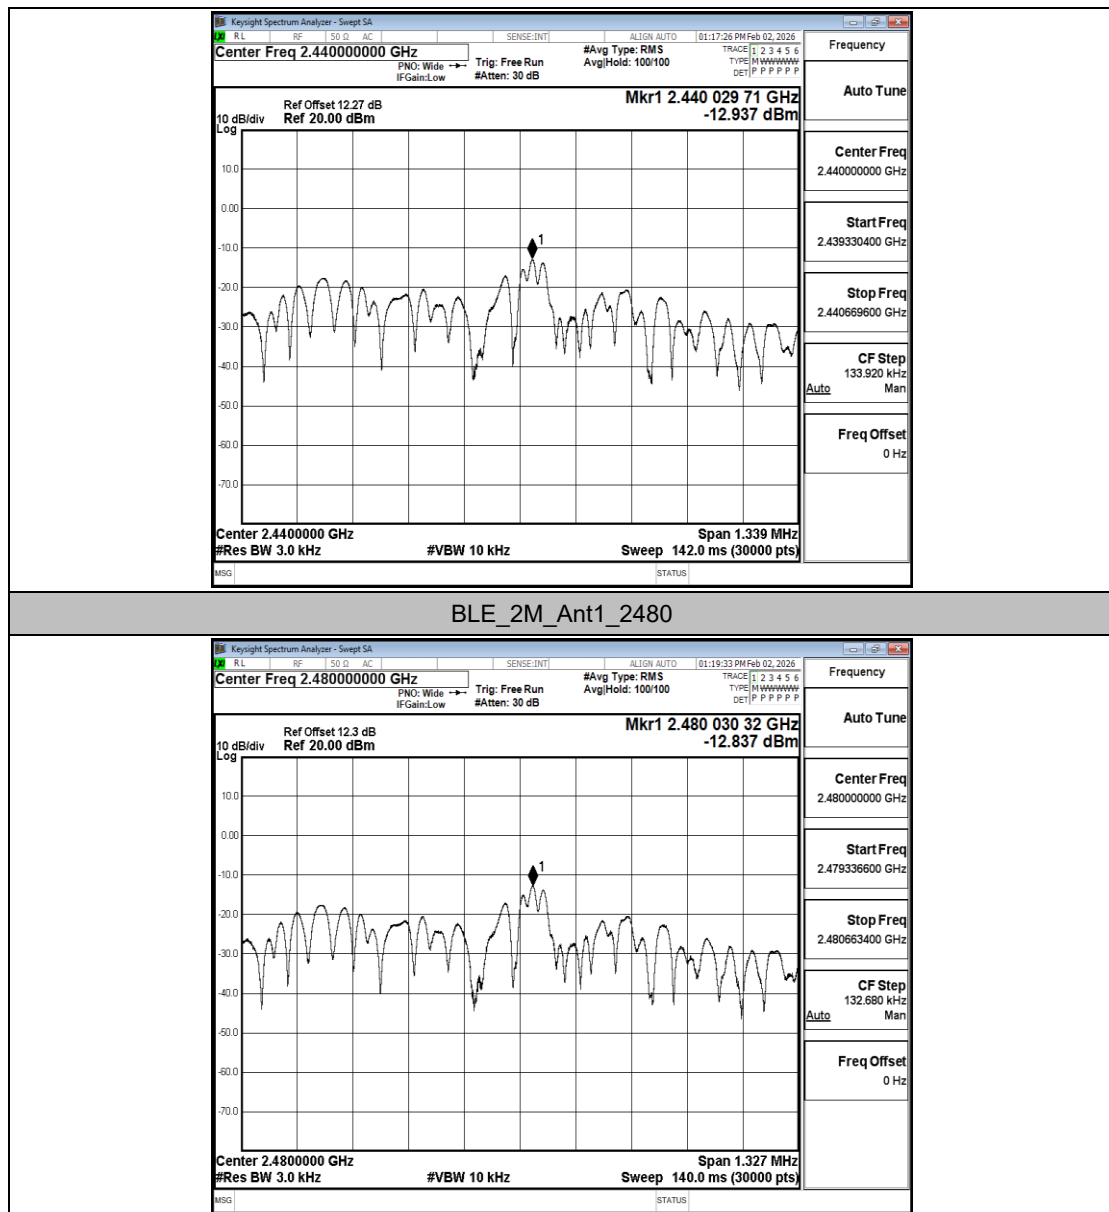



B.4 Band edge measurements

Test Result

TestMode	Antenna	Channel	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	6.84	-44.69	≤-13.17	PASS
		High	2480	7.03	-44.72	≤-12.97	PASS
BLE_2M	Ant1	Low	2402	5.57	-29	≤-14.43	PASS
		High	2480	6.99	-44.66	≤-13.02	PASS

Test Graphs

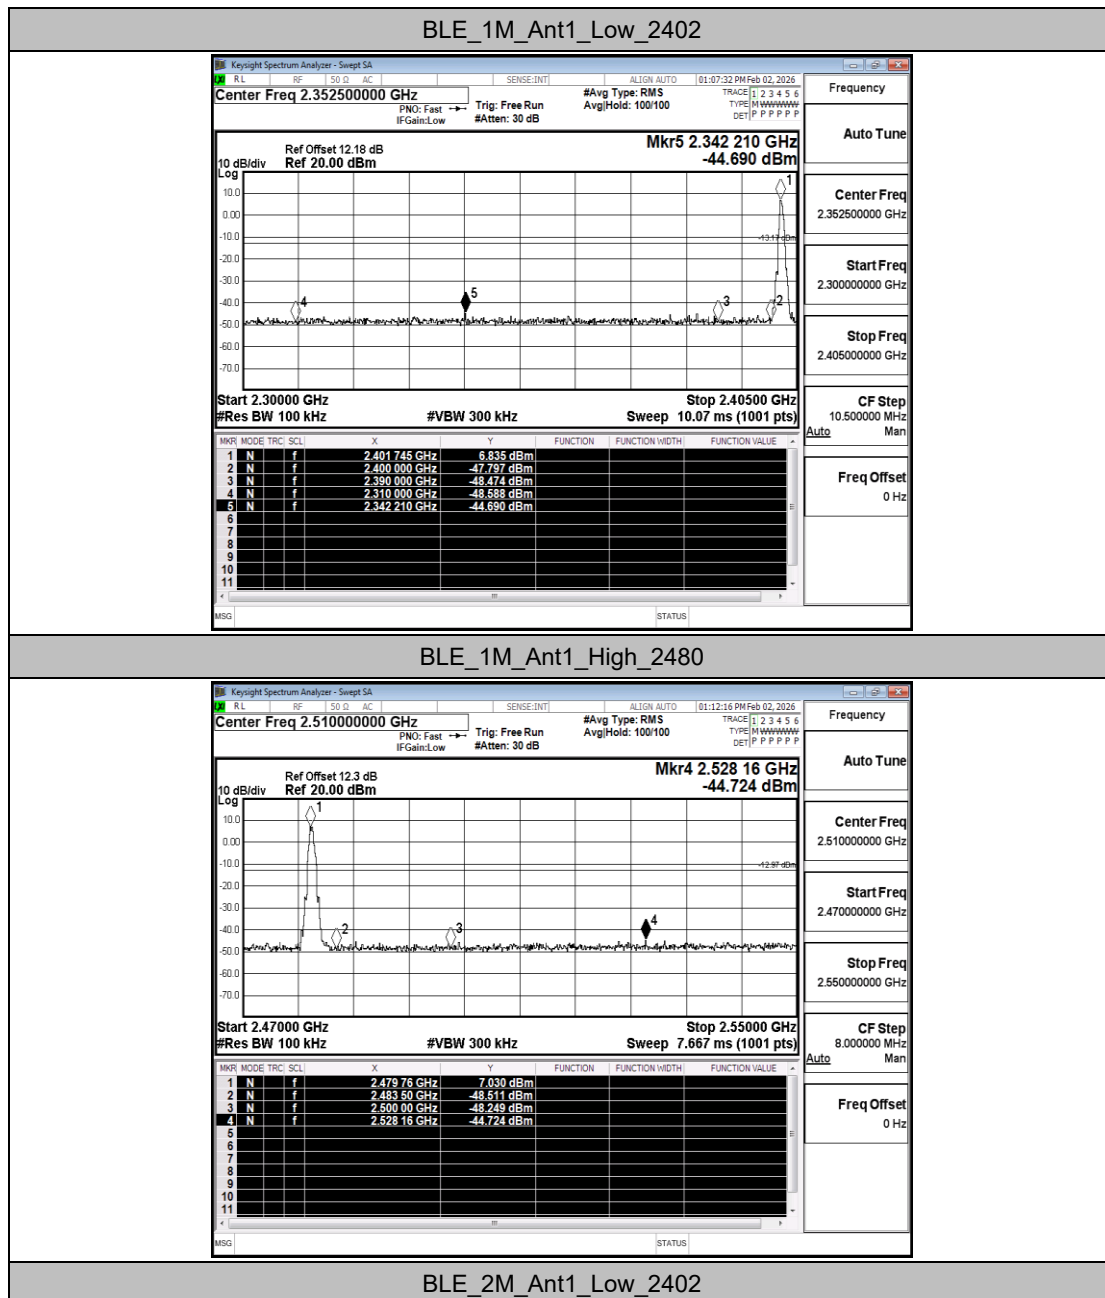

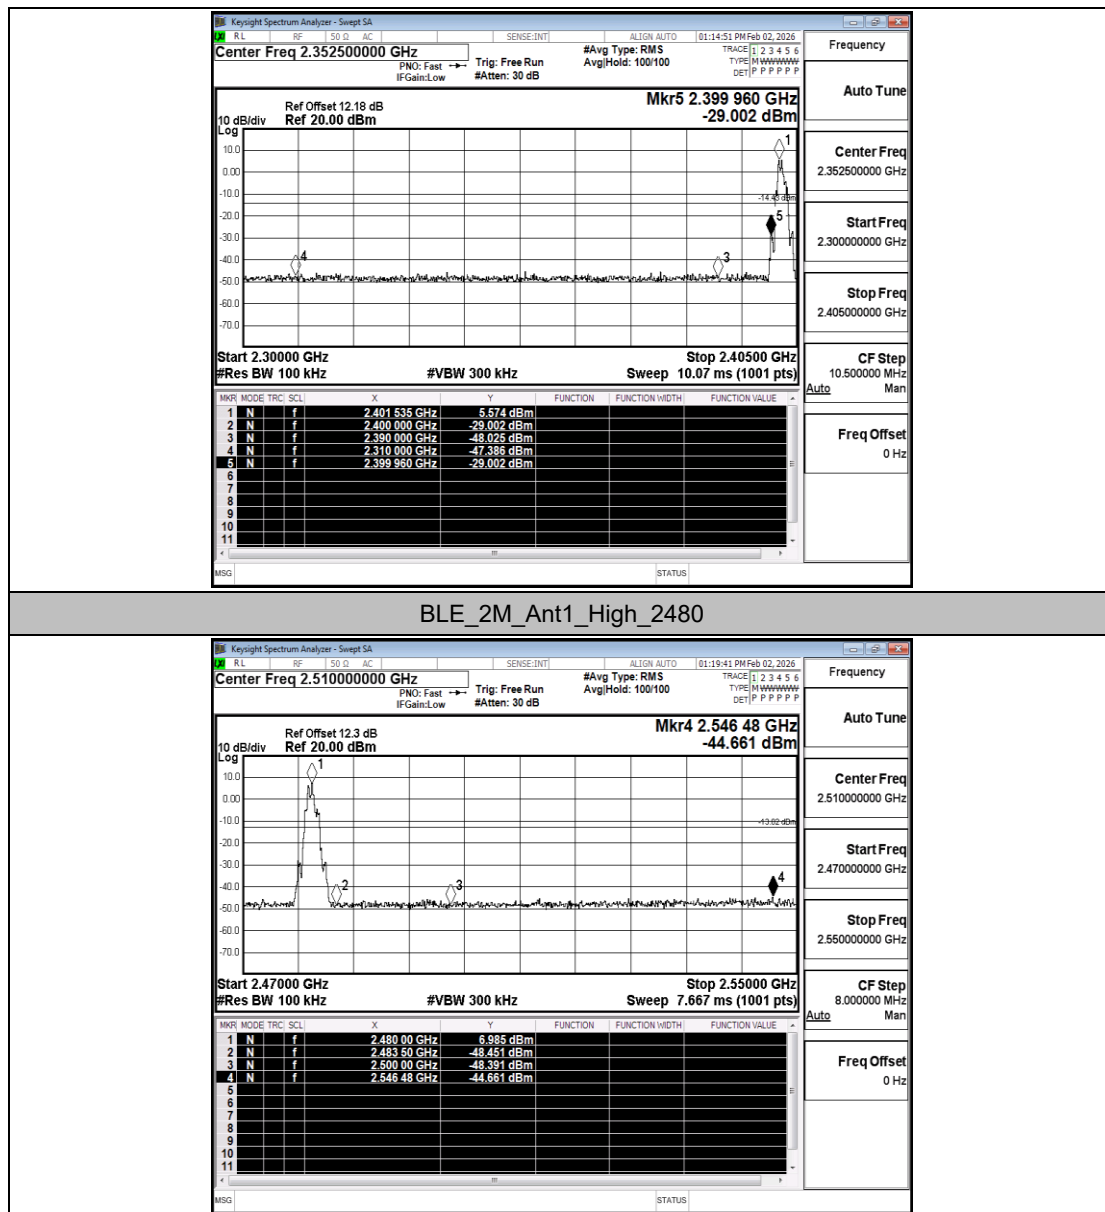



B.5 Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	6.79	6.79	---	PASS
			30~1000	6.79	-67.79	≤-13.21	PASS
			1000~26500	6.79	-24.23	≤-13.21	PASS
		2440	Reference	7.01	7.01	---	PASS
			30~1000	7.01	-66.27	≤-12.99	PASS
			1000~26500	7.01	-18.34	≤-12.99	PASS
		2480	Reference	6.99	6.99	---	PASS
			30~1000	6.99	-67.29	≤-13.01	PASS
			1000~26500	6.99	-17.92	≤-13.01	PASS
BLE_2M	Ant1	2402	Reference	6.49	6.49	---	PASS
			30~1000	6.49	-67.22	≤-13.51	PASS
			1000~26500	6.49	-22.33	≤-13.51	PASS
		2440	Reference	6.70	6.70	---	PASS
			30~1000	6.70	-68.11	≤-13.3	PASS
			1000~26500	6.70	-26.02	≤-13.3	PASS
		2480	Reference	6.67	6.67	---	PASS
			30~1000	6.67	-67.53	≤-13.33	PASS
			1000~26500	6.67	-28.34	≤-13.33	PASS


Test Graphs

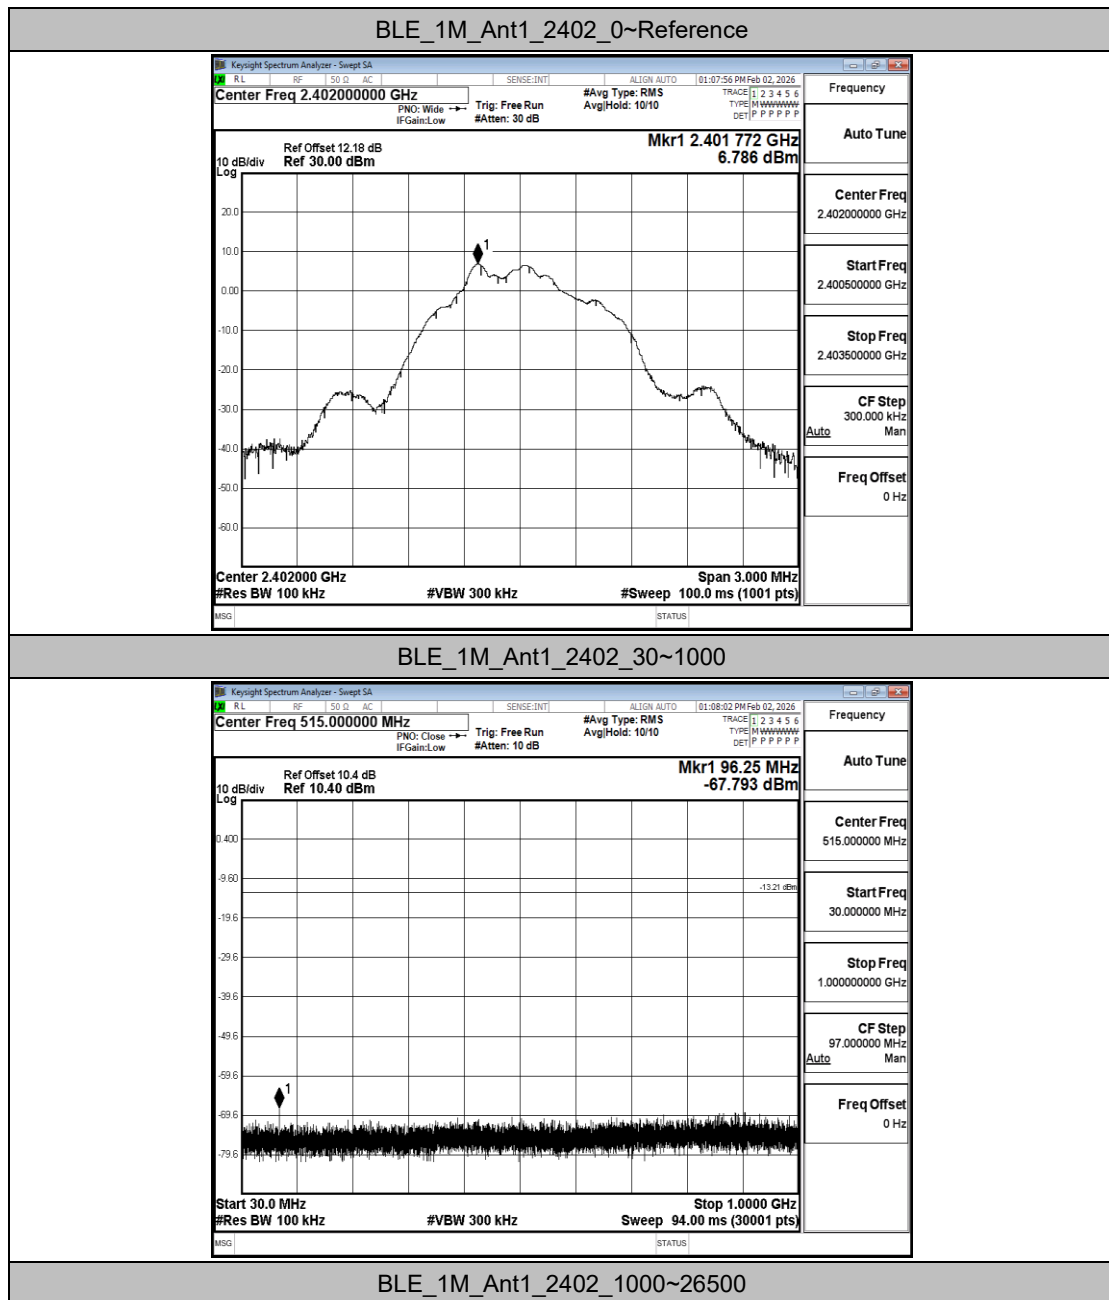


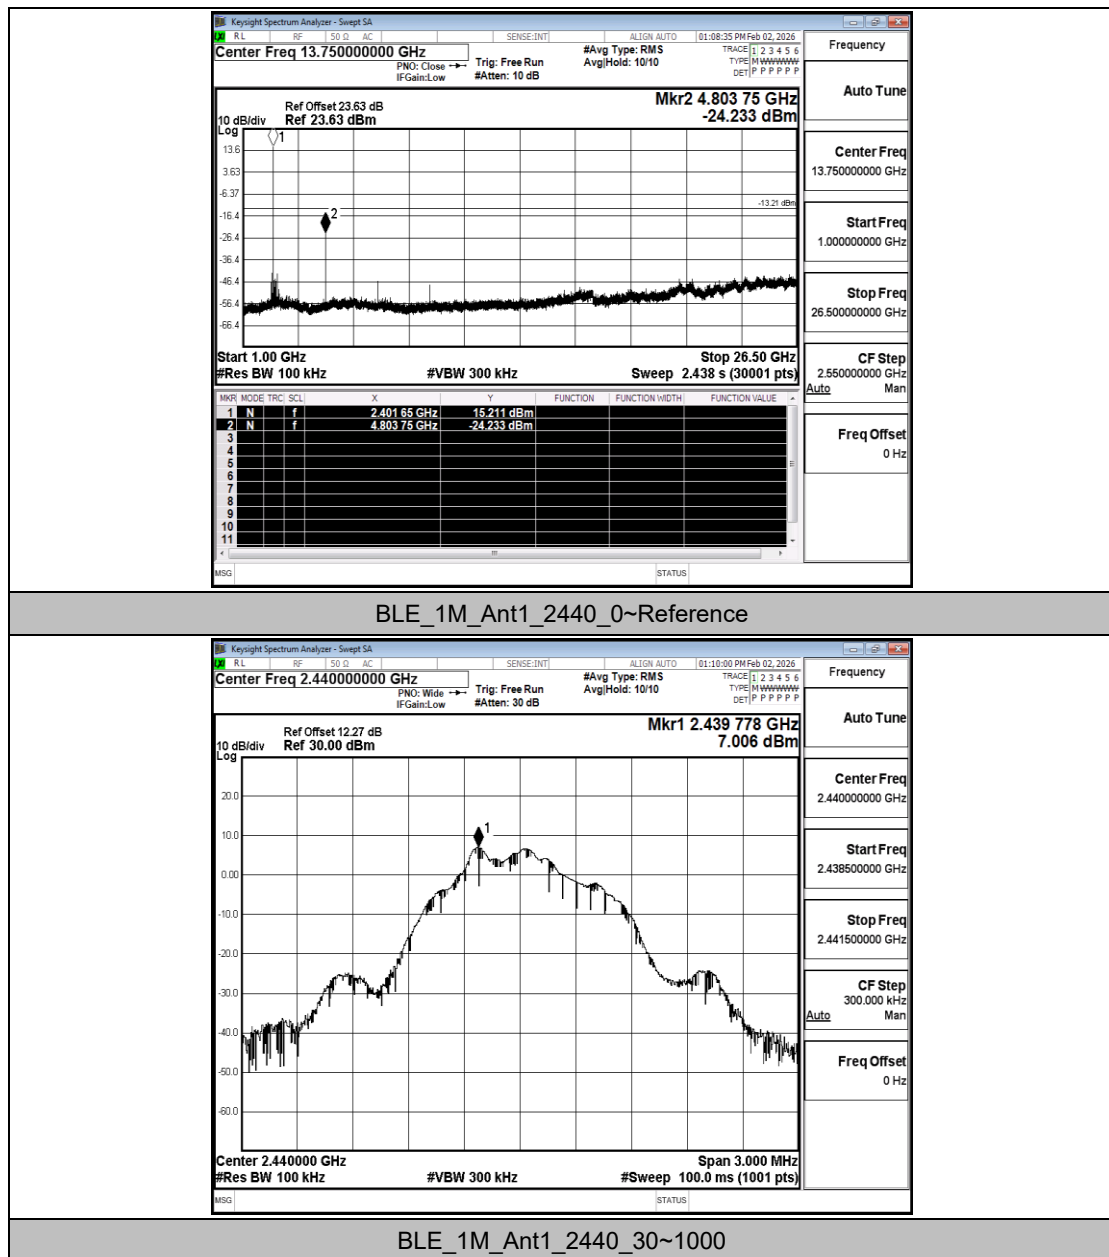


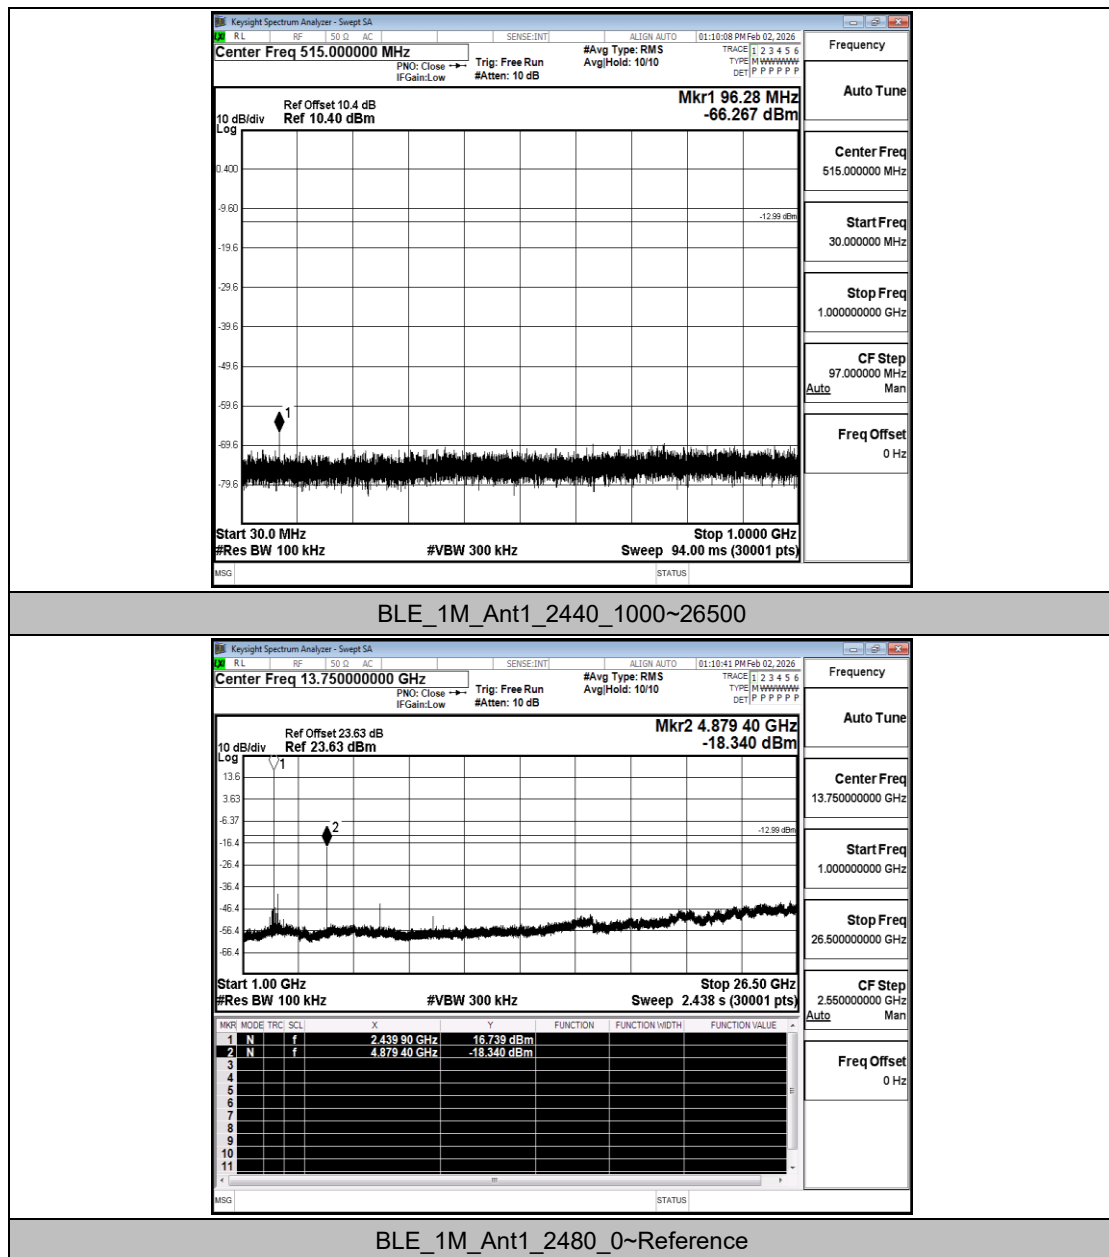


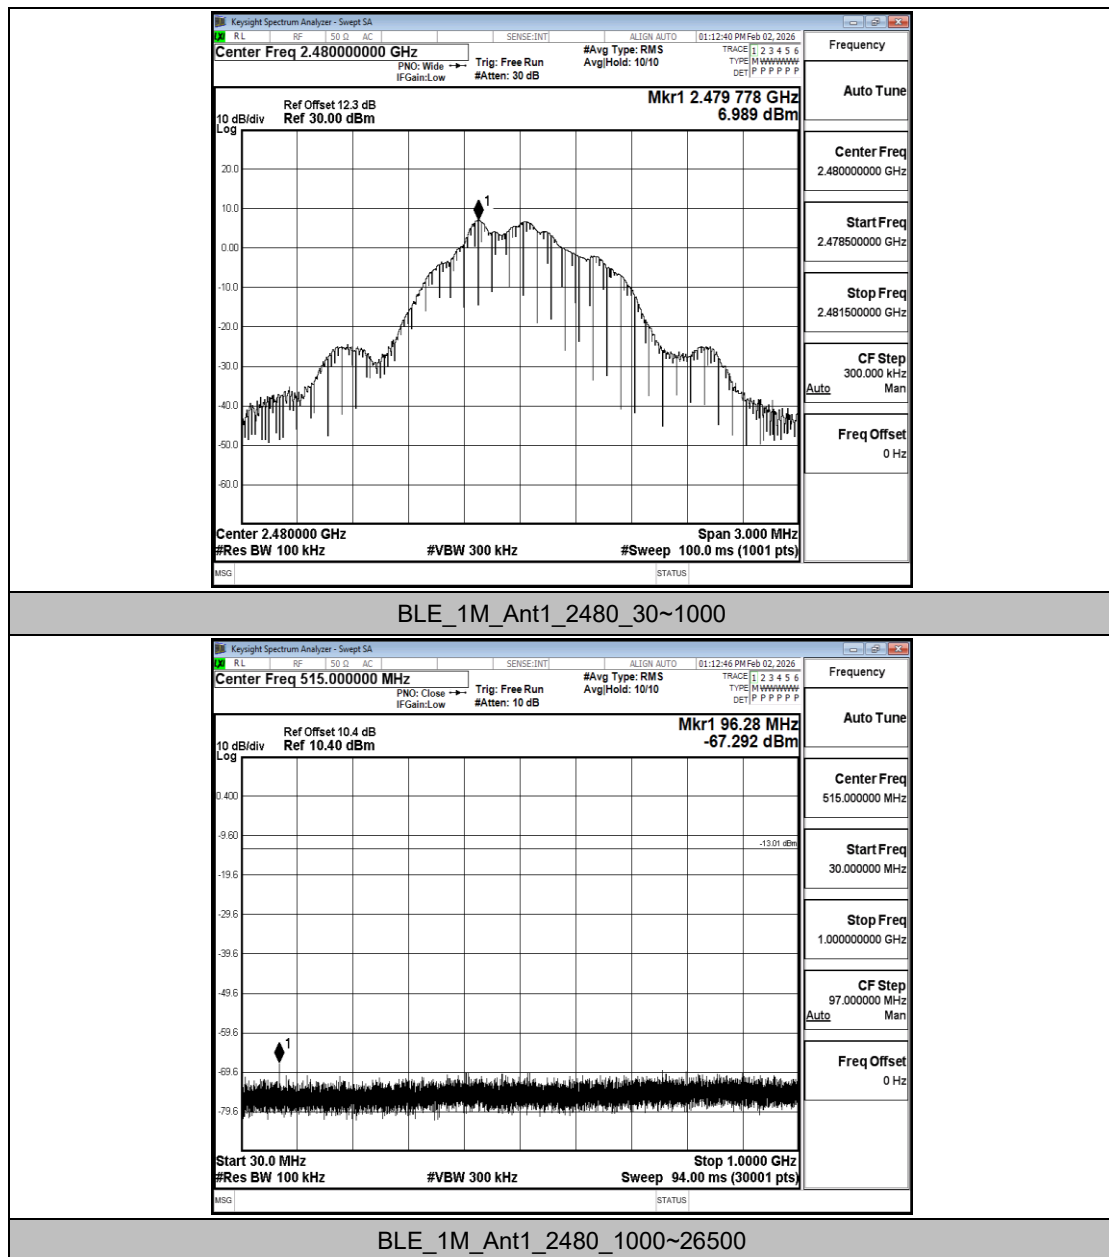


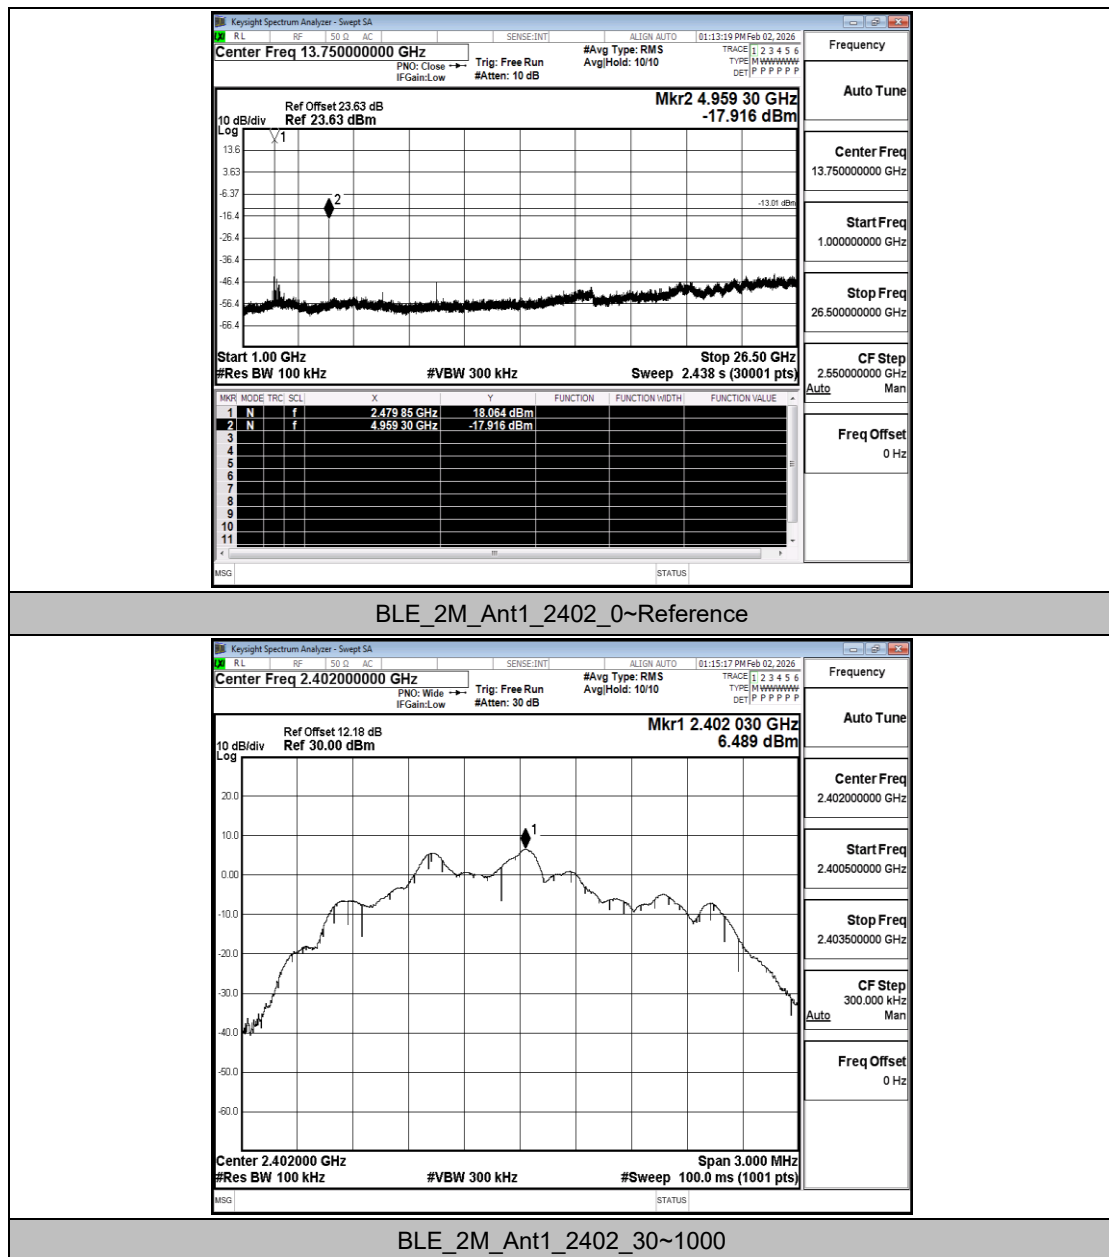

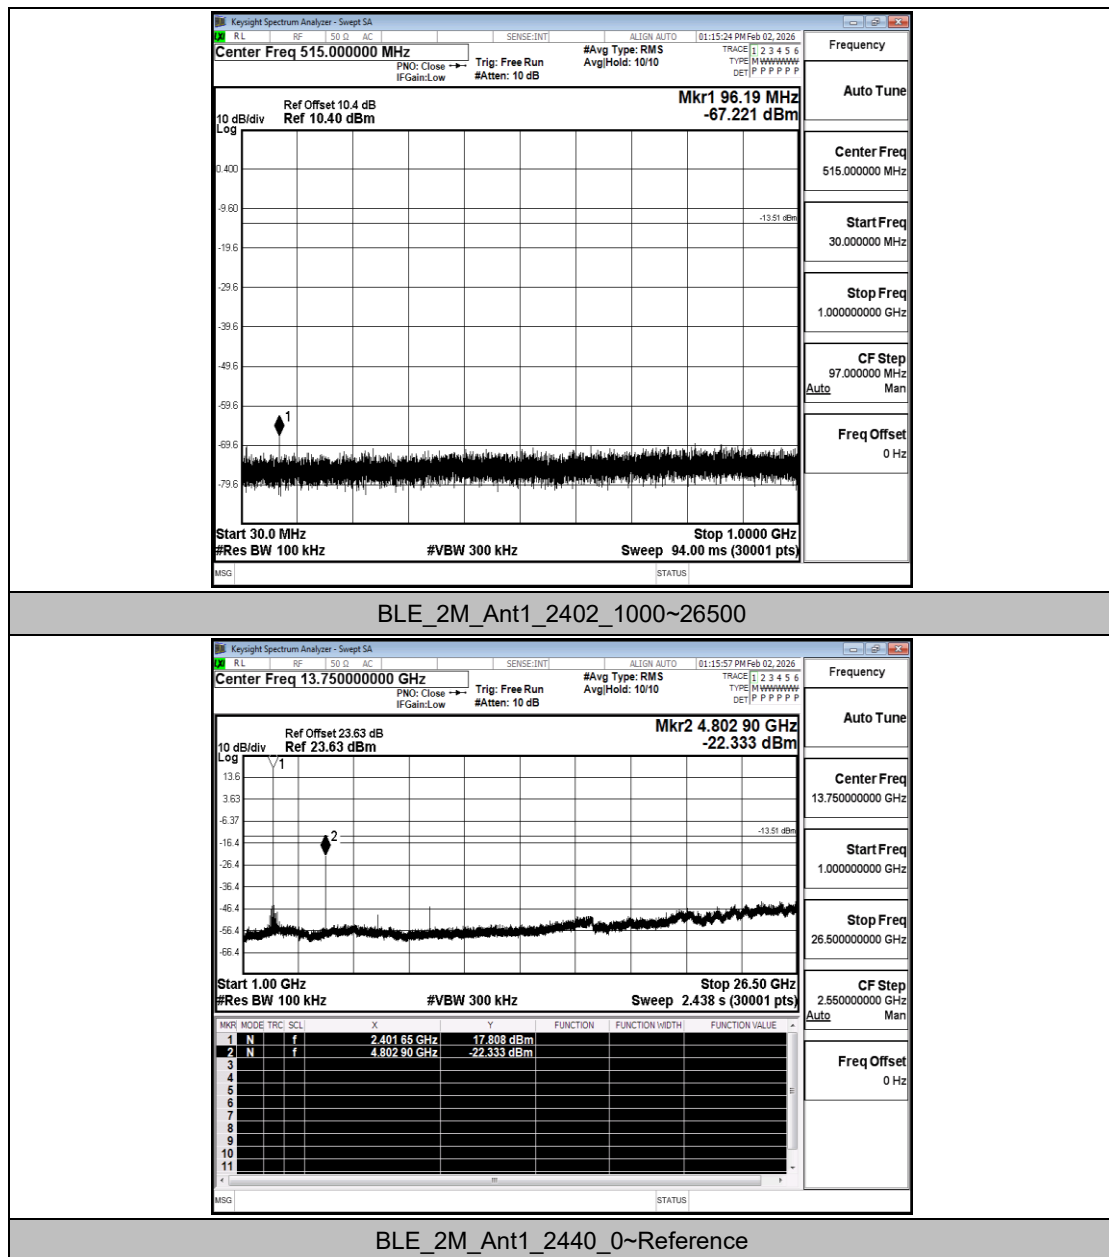

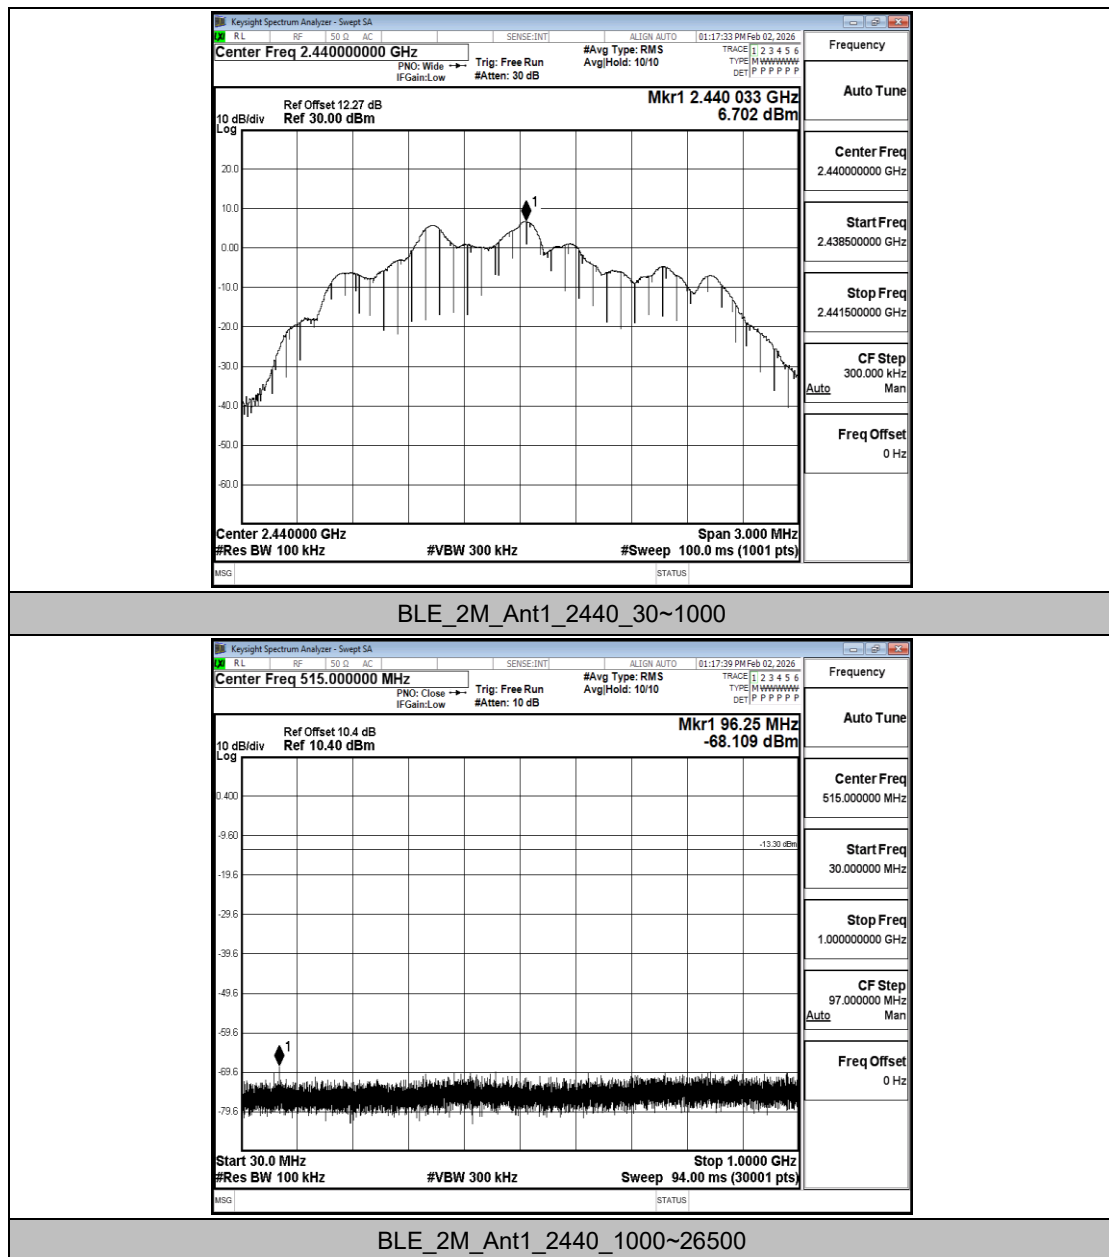

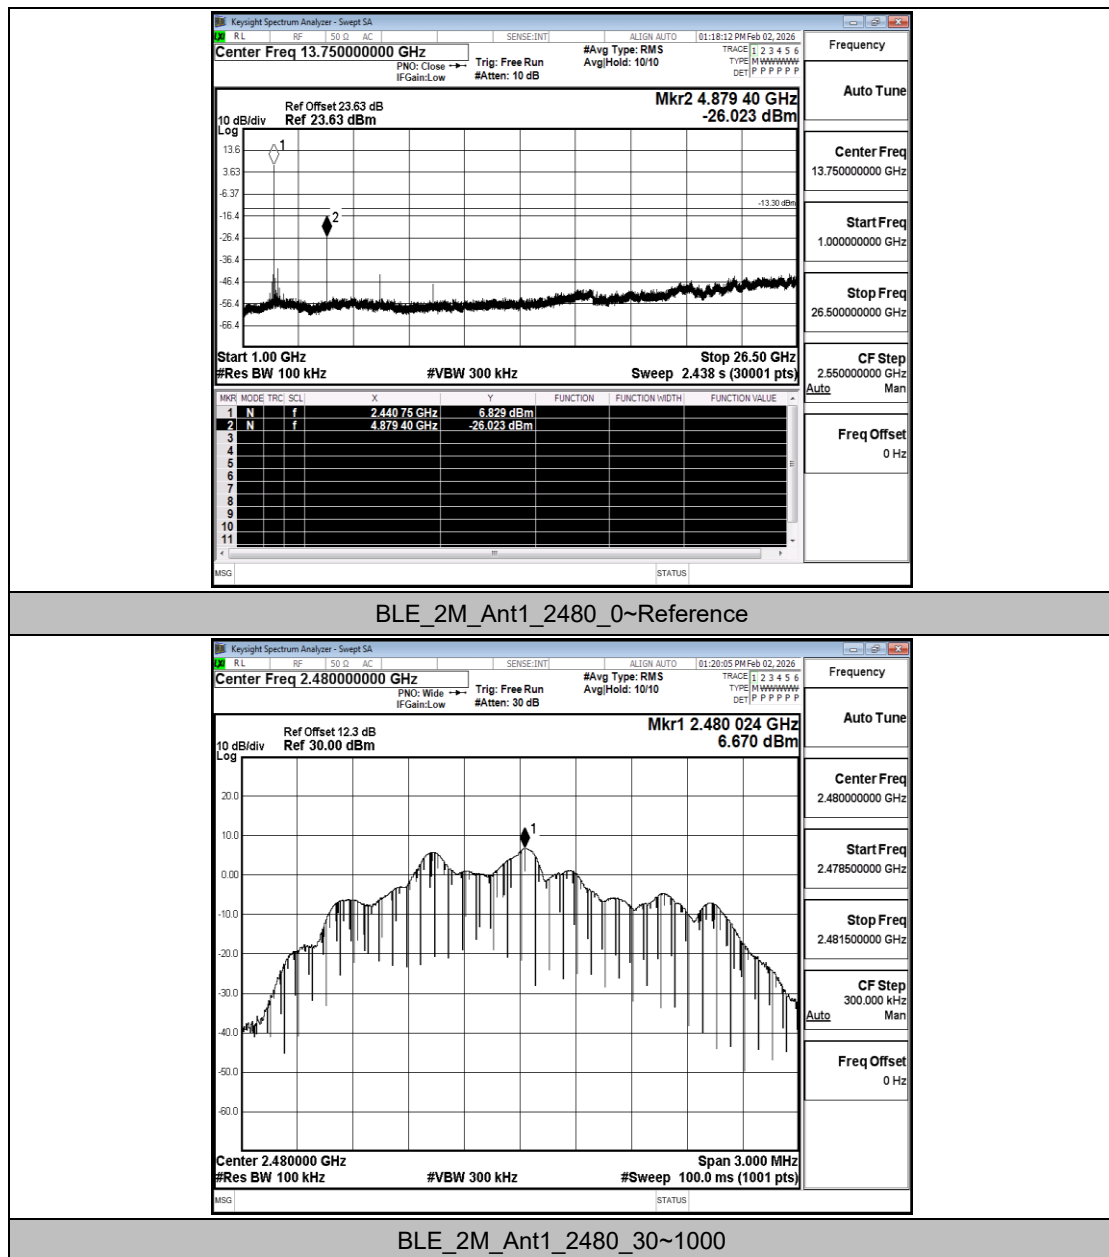

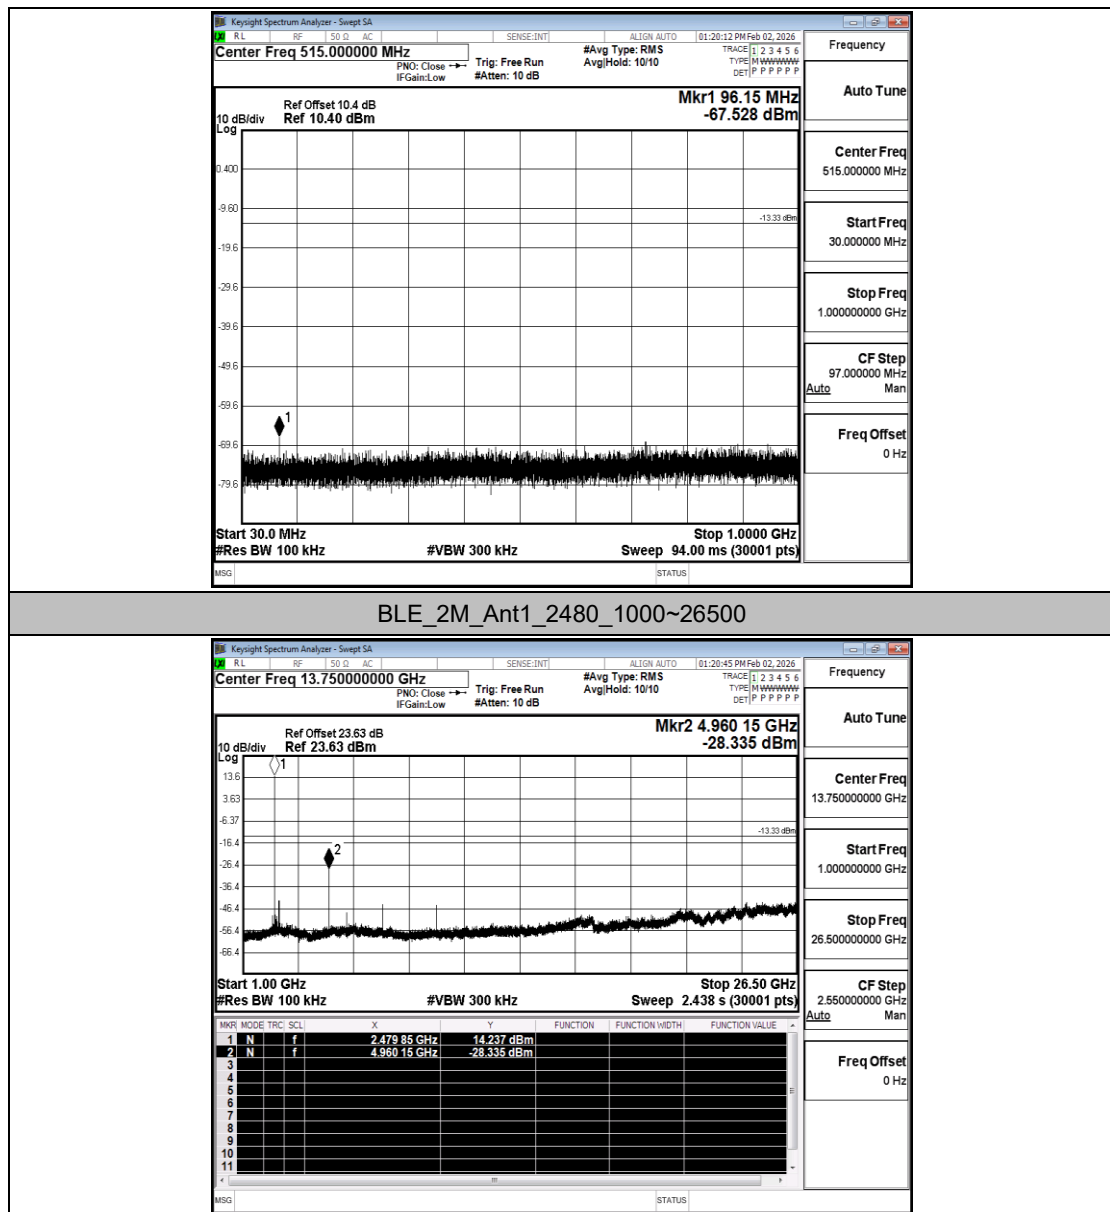



B.6 Duty Cycle


Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	0.09	0.62	0.1452	14.52	8.38	---	---
		2440	0.09	0.62	0.1452	14.52	8.38	---	---
		2480	0.10	0.63	0.1587	15.87	7.99	---	---
BLE_2M	Ant1	2402	0.05	0.62	0.0806	8.06	10.94	---	---
		2440	0.06	0.62	0.0968	9.68	10.14	---	---
		2480	0.06	0.63	0.0952	9.52	10.21	---	---

Test Graphs

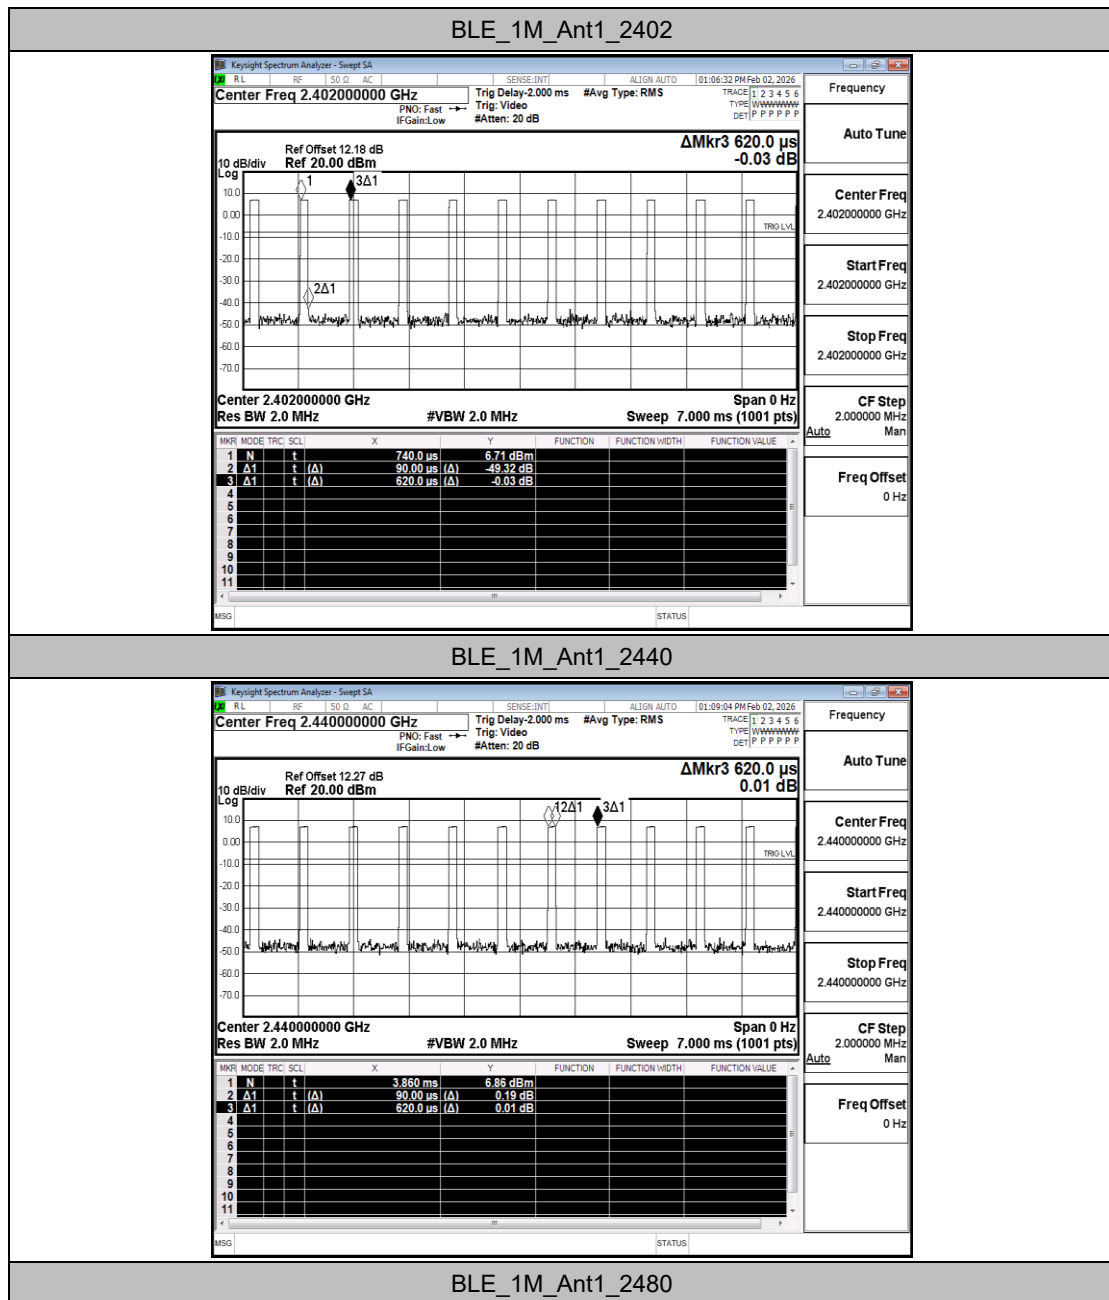

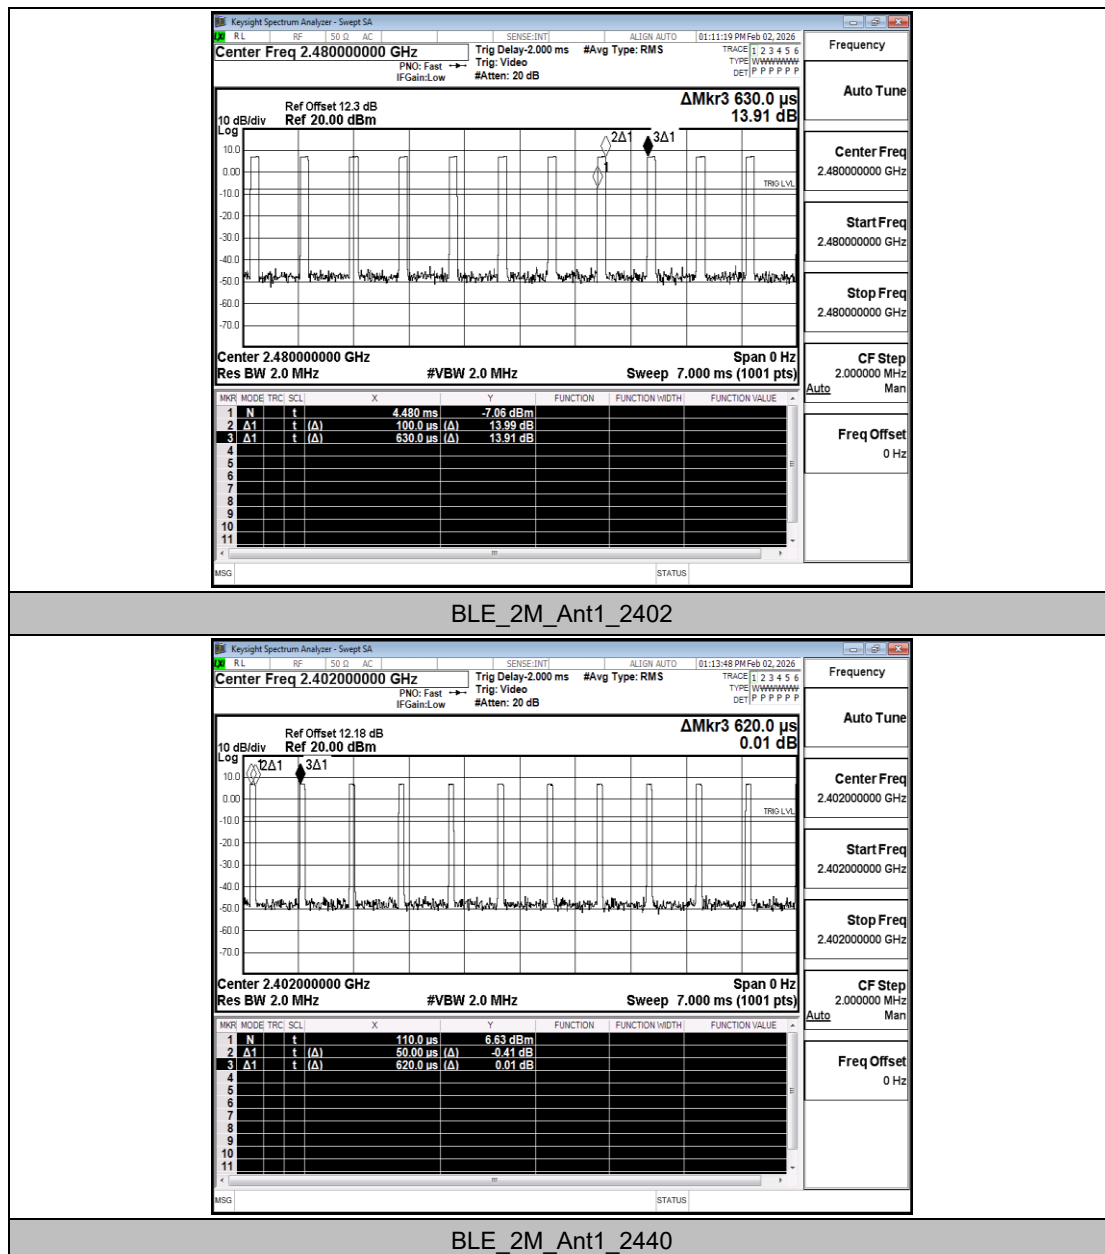

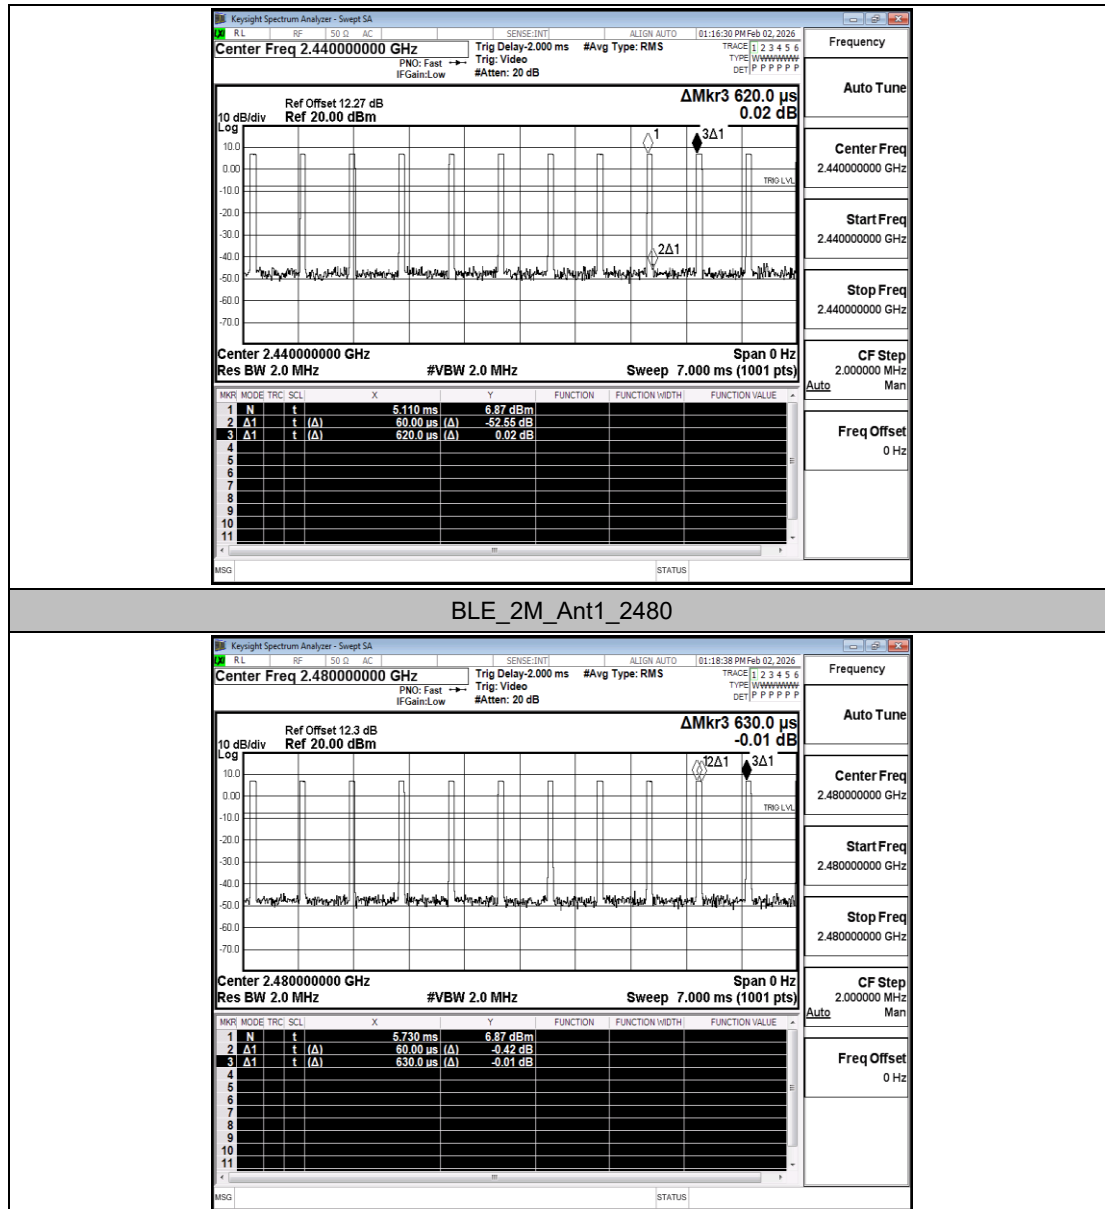

B.7 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-57.16	≤-52.27	2.69	8.38	49.11	≤54	PASS
				AV	2353.970	-55.56	≤-52.27	2.69	8.38	50.71	≤54	PASS
				AV	2390.000	-56.75	≤-52.27	2.69	8.38	49.52	≤54	PASS
				Peak	2310.000	-48.27	≤-23.89	2.69	0.00	49.62	≤74	PASS
				Peak	2354.390	-44.89	≤-23.89	2.69	0.00	53.00	≤74	PASS
				Peak	2390.000	-47.56	≤-23.89	2.69	0.00	50.33	≤74	PASS
		High	2480	AV	2483.500	-56.16	≤-51.88	2.69	7.99	49.72	≤54	PASS
				AV	2483.920	-55.78	≤-51.88	2.69	7.99	50.10	≤54	PASS
				AV	2500.000	-56.24	≤-51.88	2.69	7.99	49.64	≤54	PASS
				Peak	2483.500	-44.6	≤-23.89	2.69	0.00	53.29	≤74	PASS
				Peak	2484.240	-41.19	≤-23.89	2.69	0.00	56.70	≤74	PASS
				Peak	2500.000	-48.86	≤-23.89	2.69	0.00	49.03	≤74	PASS
BLE_2M	Ant1	Low	2402	AV	2310.000	-57.14	≤-54.83	2.69	10.94	51.69	≤54	PASS
				AV	2354.180	-56.26	≤-54.83	2.69	10.94	52.57	≤54	PASS
				AV	2390.000	-56.89	≤-54.83	2.69	10.94	51.94	≤54	PASS
				Peak	2310.000	-48.21	≤-23.89	2.69	0.00	49.68	≤74	PASS
				Peak	2353.340	-44.91	≤-23.89	2.69	0.00	52.98	≤74	PASS
				Peak	2390.000	-47.62	≤-	2.69	0.00	50.27	≤74	PASS

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China

Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

							23.89					
				AV	2483.500	-55.71	≤- 54.10	2.69	10.21	52.39	≤54	PASS
				AV	2483.520	-55.71	≤- 54.10	2.69	10.21	52.39	≤54	PASS
				AV	2500.000	-56.5	≤- 54.10	2.69	10.21	51.60	≤54	PASS
		High	2480	Peak	2483.500	-39.33	≤- 23.89	2.69	0.00	58.56	≤74	PASS
				Peak	2483.520	-39.33	≤- 23.89	2.69	0.00	58.56	≤74	PASS
				Peak	2500.000	-47.16	≤- 23.89	2.69	0.00	50.73	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

