



Photographs of EUT>

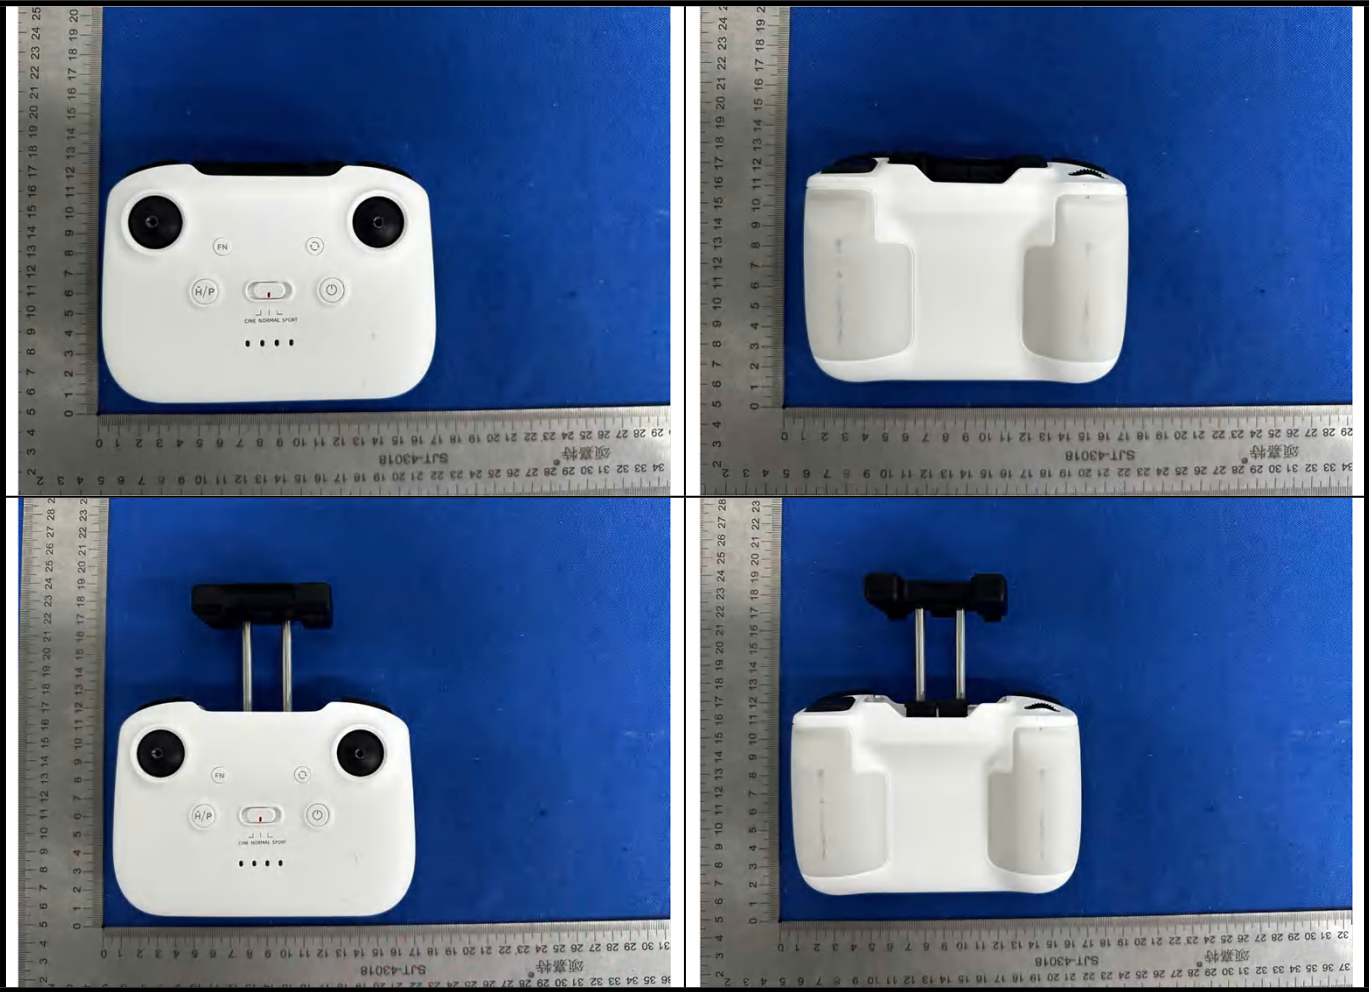

<Antenna Location>

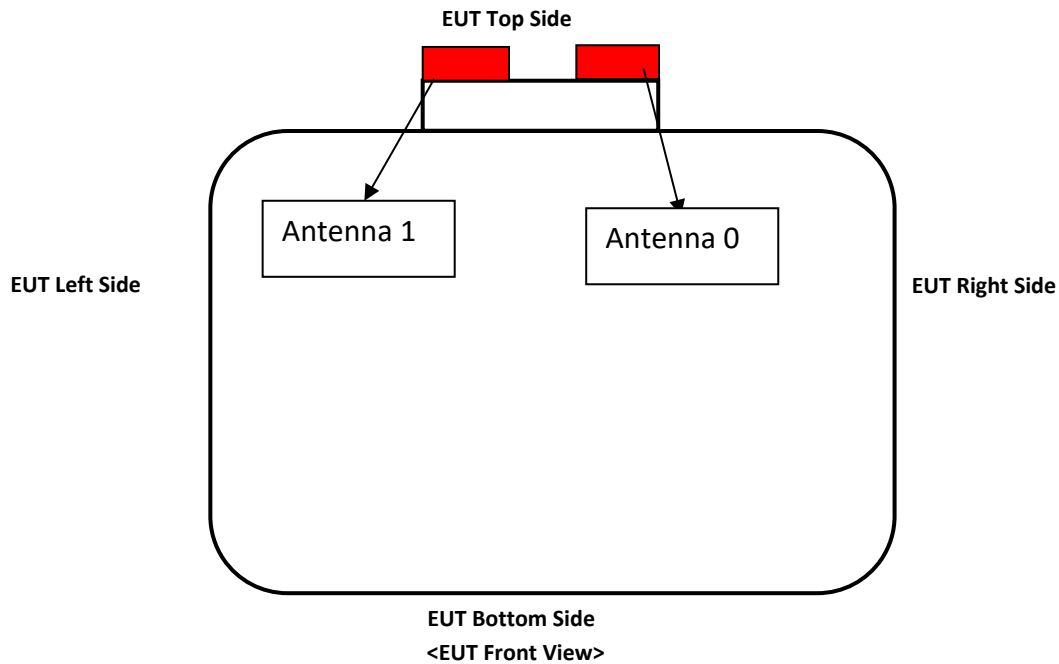

The separation distance for antenna to edge:


Antenna	To Front Face (mm)	To Rear Face (mm)	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
SDR Antenna 0	<5	<5	106	44	<5	92
SDR Antenna 1	<5	<5	44	106	0	92

Note:


1. Limb-worn mode: all sides considered for limb-worn mode with 0mm distance.
2. Body-Worn Mode: When in normal use, the user needs to elongate bracket. Only the bottom and rear sides may have probability to keep towards with body/lap, thus body-SAR considerations needed for bottom and rear sides as well.
3. The sides which are far from the antennas are exempted from test.



Photographs of SAR Setup>

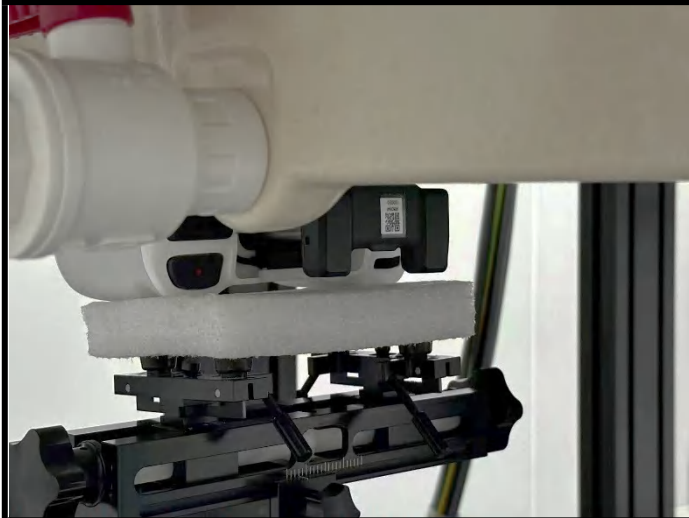

Front Side of EUT + Ant. normal with 0 cm Gap

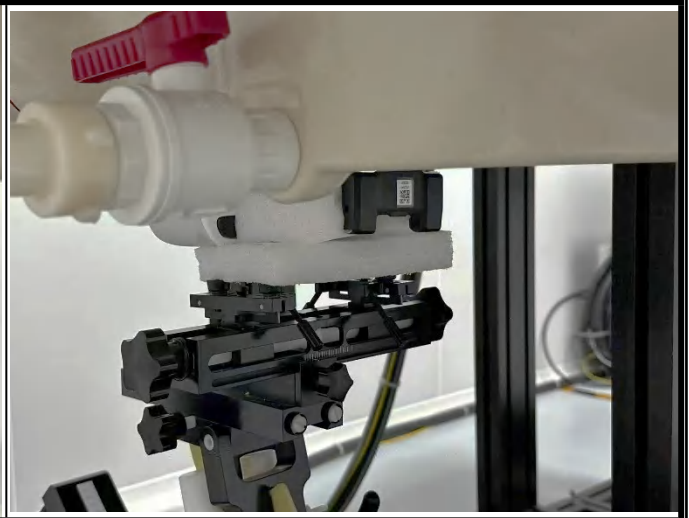


Front Side of EUT + Ant. Longest with 0 cm Gap




Rear Side of EUT + Ant. normal with 0 cm Gap




Rear Side of EUT + Ant. Longest with 0 cm Gap

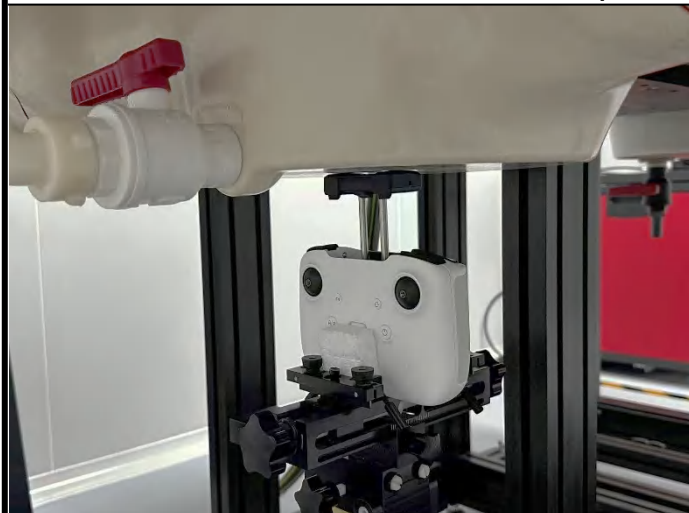


Top Side of EUT + Ant. normal with 0 cm Gap

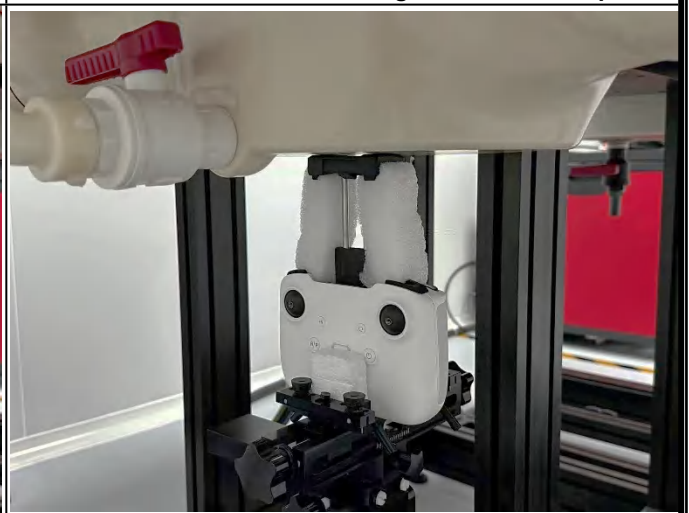

Top Side of EUT + Ant. Longest with 0 cm Gap

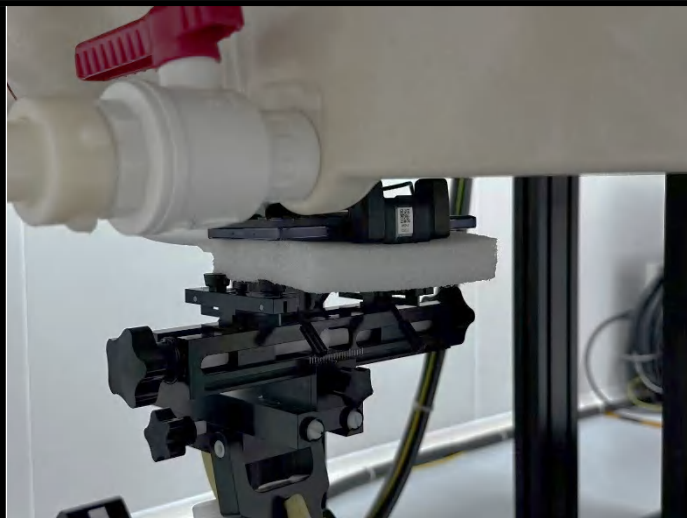

Rear Side of EUT + Ant. + Phone with 0 cm Gap

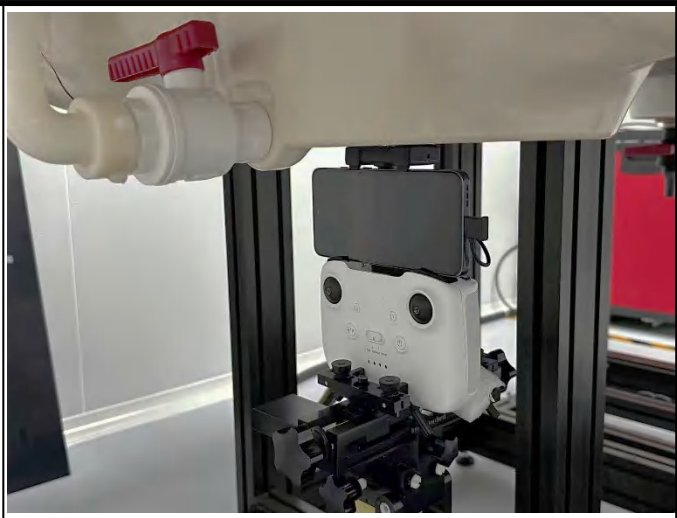

Top Side of EUT + Ant. + Phone with 0 cm Gap