

STRATECH

ST055BW- T2C


SPEC SHEET

V. ST055BW- T2C.01

CONFIDENTIAL


55" PROFESSIONAL BANNER TOUCH DISPLAY WITH SoC WINDOWS PLAYER, STRATECH ST055BW-T2C

PANTALLA TOUCH BANER PROFESIONAL DE 55" CON REPRODUCTOR WINDOWS SoC, STRATECH ST055BW-T2C

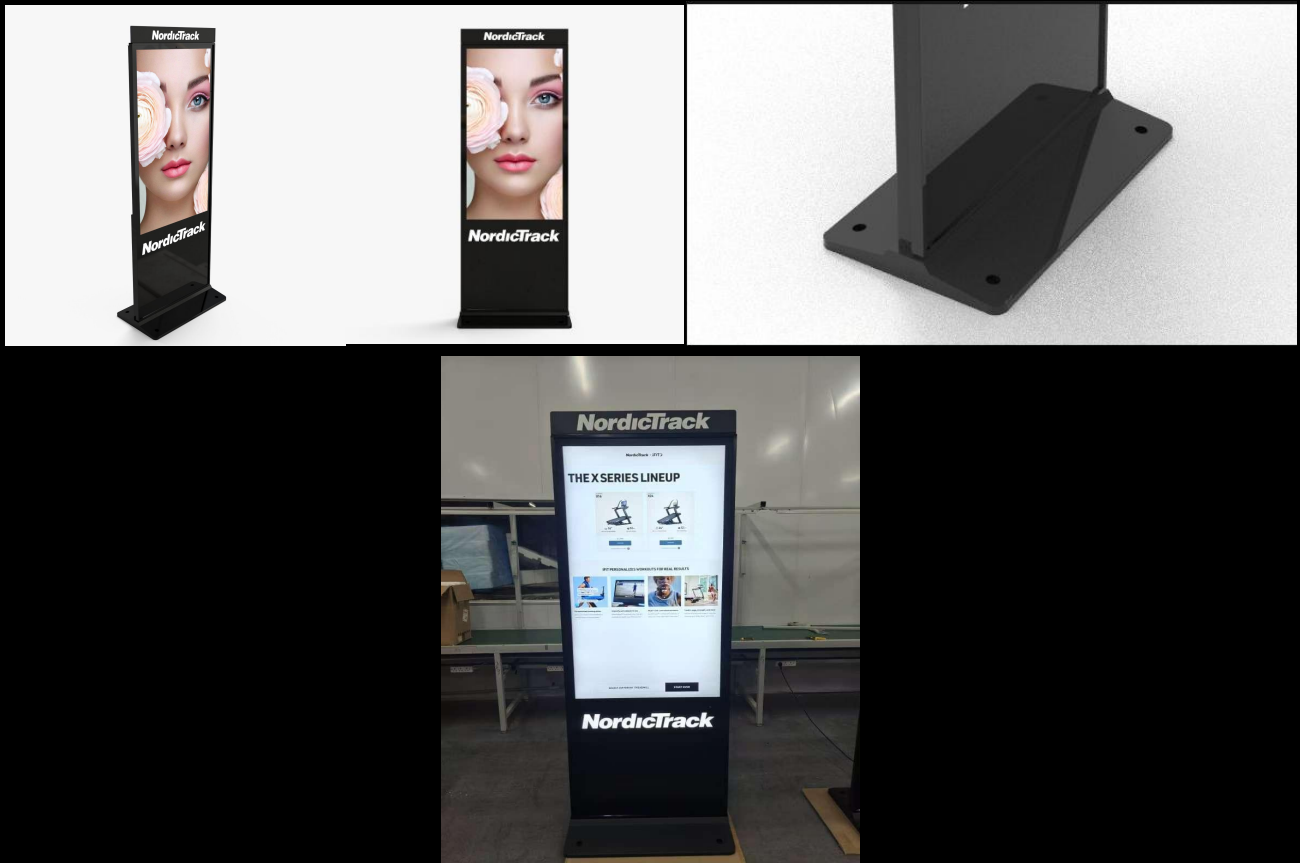

SPECS

Panel Parameters	Diagonal dimensions	55inch
	Backlight type	WLED
	Display area size	680.4mm(H)x1209.6mm(V)
	Touch type	TOUCH 10 POINTS
	Resolution	3840*2160
	Brightness	700cd/m2
	Display ratio	16:09
	Viewing angle	178°/178° full angle
	Display color	16.7M ,72%NTSC
	Refresh rate	60HZ
	Contract	1000:01:00
	Response Time	8ms
Electrical Performance	Applicable places	Indoor
	Power plug(Supports countries)	USA, Mexico, Australia, France and Saudi Arabia etc.,for your choice
	Voltage	AC110-240V
	Standby power	≤1W
	Operating environment	Temperature-0℃~55℃/Humidity 10%RH~90%RH
	Storage environment	Temperature-5℃~60℃/Humidity 10%RH~90%RH
System Configuration	CPU	Intel Core I77th
	RAM	8G
	ROM	256G
	Version	WIN 11(Professional version)
	Internet	LAN、WiFi、Blue-tooth
	Interfaces	DC*1/USB*4/RJ45*1/Audio*2/HDMI*1/VGA*1
System functions	Camera	*2 (top and right sides)
	Decode	Support 1080P video and picture decoding and playback
	APPS	Supporting multi-advertising apps
	TF card	32 GB TF card
	Languages	Chinese、English、Korean、Japanese、Spanish、German etc.
	Boot logo	Supporting video or picture boot logo.
	IR remote	Supporting remote control to operate system
	Audio	Built in 2*speaker 8Ω5W
	Mouse mode	Supporting Wire/Wireless mouse, keyboard to operate
	System upgrade	Supporting local/remotely upgrade
	Supporting display	Audio:MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3 GPP
		Picture : JPG、BMP、PNG etc.
		Video : AVI,,rm , rmvb , MKV , WMV , MOV , MP4 etc.
Packaged & Packing list	Package	Carton box with PE Foam, wooden box as final package
	Screen	*1
	Bracket	*1
	Power cable	*1 (1.2 mete cable)
	Remote control	*1
	WIFI antenna	*1
	Warranty card certificate	*1
	Package dimension	201*17.5*89.5cm 57kgs
	Color	Black frame,enclosure
	Installation method	Floor standing (The stand can be fixed on the ground)
	Material quality	AG glass + SPCC

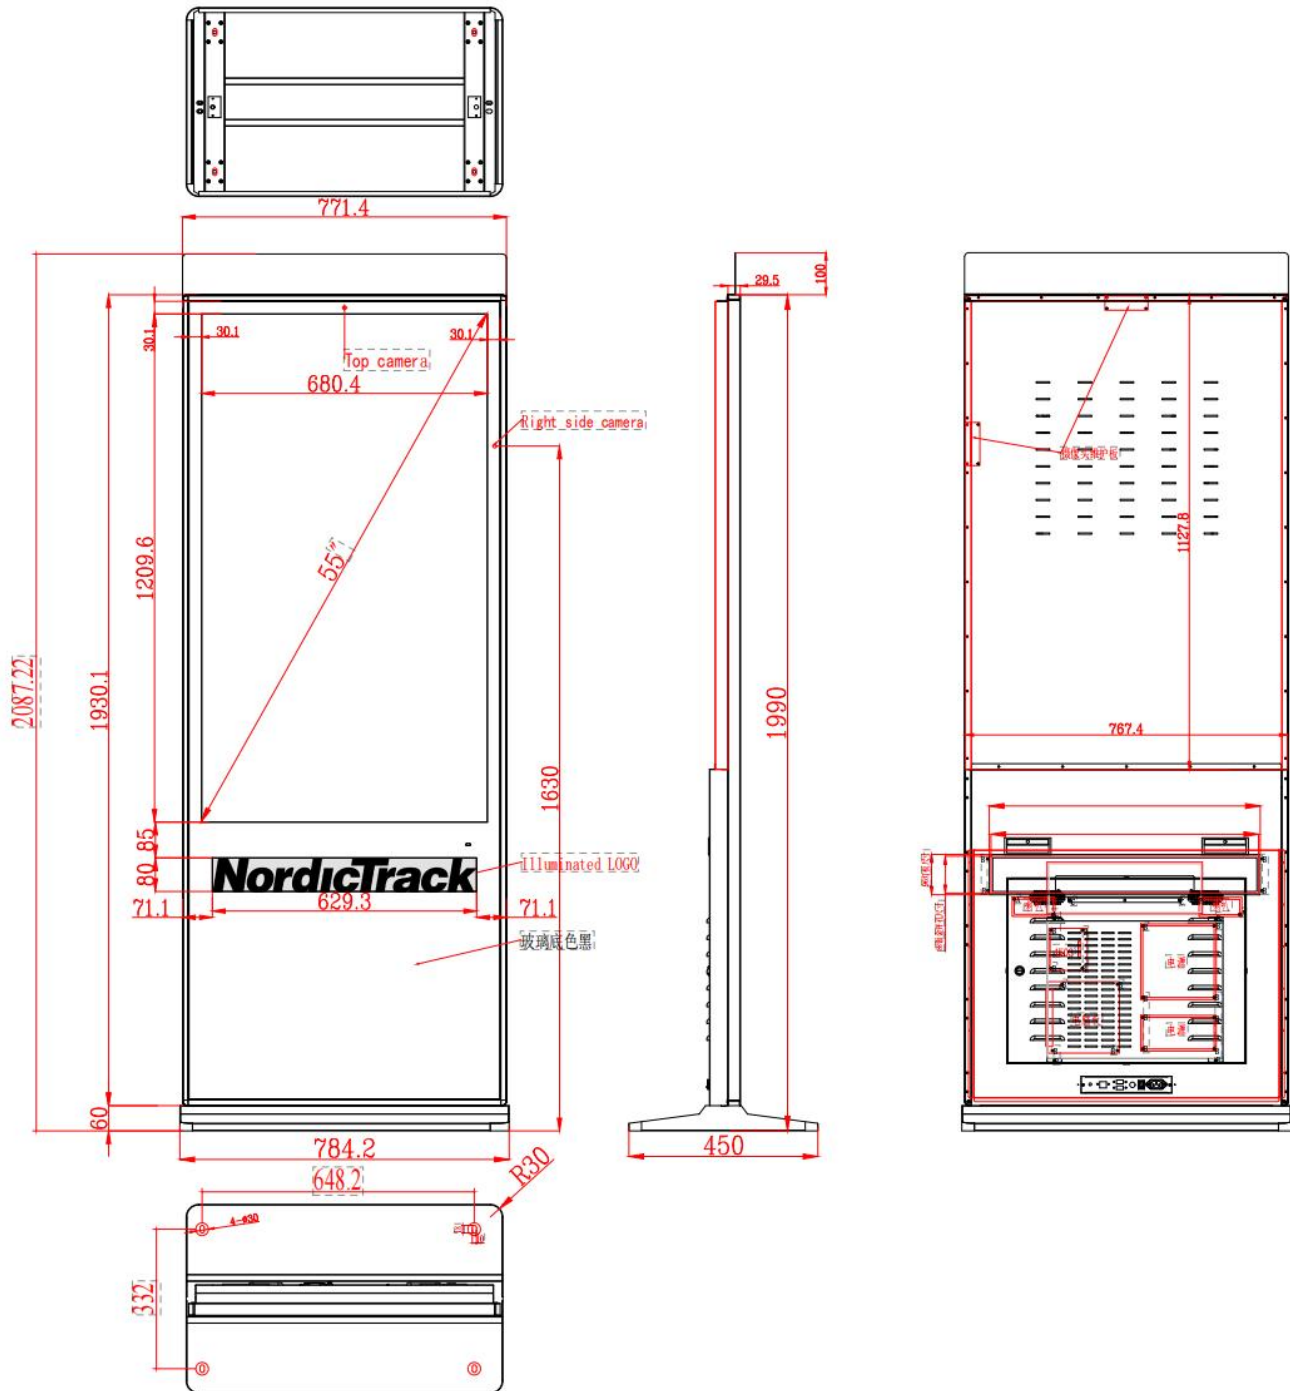

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or

television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and transmitter operating conditions for satisfying RF exposure